

Contents

HMI AND PLC CONNECTING GUIDE	- 1 -
1 SERIAL COMMUNICATION PIN DEFINITION	- 1 -
2 PRINTER CONNECTING CABLE DIAGRAM	- 3 -
2.1 Serial Interface Printer Cable	- 3 -
2.2 Recommend Optional printer	- 6 -
3 DOWNLOAD CABLE DIAGRAM	- 9 -
3.1 Download by Serial Port	- 9 -
3.2 Download by USB	- 9 -
3.3 Download by Network Ethernet.....	- 9 -
4 COMMUNICATION SETTINGS AND GUIDE OF HMI CONNECTING WITH CONTROLLER	- 11 -
4.1 ABB Corporation.....	- 11 -
4.2 Allen-Bradley	- 17 -
4.3 Acrel (Electric power meter)	- 55 -
4.4 ACS-Tech80 Motion Controller	- 56 -
4.5 ADAM.....	- 57 -
4.6 ARESTEK	- 60 -
4.7 AysjNet	- 65 -
4.8 BACnet.....	- 66 -
4.9 Barcode.....	- 72 -
4.10 Baumuller	- 73 -
4.11 Beckhoff	- 74 -
4.12 Bosch Rexroth KVFC+ (Inverter)	- 97 -
4.13 Bosch Rexroth	- 98 -
4.14 Bosch Rexroth Ethernet.....	- 107 -
4.15 CANOpen Node Slave	- 113 -
4.16 CoDeSys Automation Alilance.....	- 118 -
4.17 Cimon	- 131 -
4.18 Danfoss Inverter	- 132 -
4.19 DCCE	- 138 -
4.20 Delta Corporation	- 141 -
4.21 Delta (Temperature Controller)	- 161 -
4.22 DL_T645 2007 Standard (Electric power meter)	- 168 -
4.23 ENDA.....	- 175 -
4.24 Emerson NetWork Power	- 176 -
4.25 Epower	- 181 -
4.26 Fatek Corporation.....	- 183 -
4.27 Fuji	- 189 -
4.28 GE Fanuc Automation Inc.....	- 192 -
4.29 HAIWELL.....	- 203 -
4.30 HanG	- 206 -
4.31 HCFA Corporation	- 207 -
4.31 Hitachi Inverter	- 210 -

4.32 Hitachi IES Co., Ltd.....	212 -
4.33 Hollysys Corporation	219 -
4.34 HuaDA HD-JZ06.....	225 -
4.35 HUATO S500	226 -
4.36 IDEC Corporation	228 -
4.37 IEC 60870-5-104.....	232 -
4.38 IEC 61850 MMS Client	234 -
4.39 Inovance Electric Corporation.....	236 -
4.40 Invt	254 -
4.41 JUNCTECH	259 -
4.42 KDN Corporation.....	261 -
4.43 Kinco Corporation.....	262 -
4.44 Kinco Inverter	270 -
4.45 Kinco EB-MOD2P-01(Kinco Bus Bridge).....	272 -
4.46 Kinco Servo Series	278 -
4.47 Kinco Master & Kinco Slave(Master/Slave Protocol Connection)	281 -
4.48 Keyence Corporation.....	282 -
4.49 Koyo Corporation.....	292 -
4.50 KTC Srdlink	297 -
4.51 KYL Slave.....	299 -
4.52 Leadshine	301 -
4.53 LENZE Inverter.....	305 -
4.54 Liteon Corporation	306 -
4.55 LS Industrial Systems (LG)	309 -
4.56 LUST.....	339 -
4.57 Memory map	344 -
4.58 MEGMEET	345 -
4.59 Mikom	350 -
4.60 Millenium3.....	352 -
4.61 Mitsubishi Electric Corporation	354 -
4.62 Modbus.....	400 -
4.63 MODROL.....	410 -
4.64 MoringStar CX-KZX81	411 -
4.65 Motrona controller.....	412 -
4.66 MyAntenna.....	414 -
4.67 OE MAX	415 -
4.68 Omron Corporation	417 -
4.69 OMRON E5CN/E5EZ/E5ZN (Temperature Controller).....	440 -
4.70 OPTO 22	442 -
4.71 Panasonic Electric Corporation	451 -
4.72 Parker Automation (Servo Controller)	461 -
4.73 PANKONG Corporation	467 -
4.74 PMAC Motion Controller	470 -
4.75 Power-one AURORA Wind Inverter	472 -


4.76 Profibus DP Slave.....	- 473 -
4.77 RF-IC (Card Reader).....	- 477 -
4.78 RKC Instrument INC.....	- 478 -
4.79 Saia-Burgess.....	- 480 -
4.80 Sailors D9 (Temperature Controller)	- 483 -
4.81 Schneider Electric, Ltd.	- 484 -
4.82 SHIMADEN.....	- 506 -
4.83 SIEMENS.....	- 512 -
4.84 SIKO AG05 SIKONETZ5.....	- 554 -
4.85 Sinocon ScIn.....	- 555 -
4.86 TECO TP03/AP Series	- 557 -
4.87 TCM.....	- 559 -
4.88 Toledo DLoadCell	- 564 -
4.89 Toshiba	- 565 -
4.90 Trio motion controller	- 568 -
4.91 Unitronics.....	- 578 -
4.92 Universal Slave	- 582 -
4.93 Vigor Corporation.....	- 584 -
4.94 VEICHI VC	- 587 -
4.95 Wecon.....	- 592 -
4.96 XINJE Controller	- 594 -
4.97 XiLin Inverter.....	- 603 -
4.98 Yamatake Corporation	- 604 -
4.99 Yaskawa Electric Corporation	- 609 -
4.100 Yokogawa Electric Corporation.....	- 622 -
4.101 YuDian AI.....	- 629 -
4.102 ZiGuang Ethernet	- 634 -
4.103 ZHIMEI CB920X.....	- 637 -

HMI and PLC connecting guide

1 Serial Communication Pin definition

- Serial port COM0


COM0 is a 9-pin D-Sub male port, this port supports RS-232C/RS-485/RS-422A communication, the pin definition as follows:



Pin	Signal	Function		
		RS-232C	RS-485	RS-422A
1	RX-(B)	--	RS485B	Receive data
2	RXD	Receive data	--	--
3	TXD	Transmit data	--	--
4	TX-	--	--	Transmit data
5	SG	Signal ground		
6	RX+(A)	--	RS485A	Receive data
7	NC	--	--	--
8	NC	--	--	--
9	TX+	--	--	Transmit data

- Serial port COM1


COM1 is a 9-pin D-Sub male port, this port supports RS-232C/RS-485/RS-422A communication, and the pin definition as follows:



Pin	Signal	Function		
		RS-232C	RS-485	RS-422A
1	RX-(B)	--	RS485B	Receive data
2	RXD	Receive data	--	--
3	TXD	Transmit data	--	--
4	TX-	--	--	Transmit data
5	SG	Signal ground		
6	RX+(A)	--	RS485A	Receive data
7	NC	Clear transmit	--	--
8	NC	Request transmit	--	--
9	TX+	--	--	Transmit data

- Serial port COM2

The COM2 and COM0 use the same physical port, the 9-pin D-Sub male port. This COM port supports the RS232 communication only. The pin definition as follows:




Pin	Signal	Function RS-232C
1	NC	--
2	NC	--
3	NC	--

4	NC	--
5	SG	Signal ground
6	NC	--
7	RXD	Receive data
8	TXD	Transmit data
9	NC	--

The COM2 can be used to download and upload HMI program, and connect to PLC via RS232 as well.COM2.

- Serial port COM3

The COM3 and COM1 use the same physical port, the 9-pin D-Sub male port. This COM port only supports the RS-485 communication . The pin definition as follows:



Pin	Signal	Function RS-485C
1	NC	--
2	NC	--
3	NC	--
4	NC	--
5	SG	Signal ground
6	NC	--
7	RX-(B)	485B
8	RX+(A)	485A
9	NC	--

2 Printer Connecting Cable Diagram

2.1 Serial Interface Printer Cable








2.1.1 Brighttek thermal printer









Users choose the protocol of thermal printer according to the dot-matrix of printer.

16 dots: WH-A62R10 protocol

24 dots: WH-A93RG0-00E825 protocol


2.1.2 Serial Interface Printer Cable of Brighttek printer

Printer Type			Note										
WH4008A31-053:													
	<table><tr><th colspan="2">HMI terminal 9pin D-SUB female</th></tr><tr><td>com0/com1</td><td>com2</td></tr><tr><td>3 TX</td><td>8 TX</td></tr><tr><td>5 GND</td><td>5 GND</td></tr></table>	HMI terminal 9pin D-SUB female		com0/com1	com2	3 TX	8 TX	5 GND	5 GND	<p>Bright Printer 26pin port Note:the red line is the first pin</p> <table><tr><td>19 RXD</td></tr><tr><td>24 GND</td></tr></table>	19 RXD	24 GND	<p>pulling up W1 short circuit block by RS232 level</p> 
HMI terminal 9pin D-SUB female													
com0/com1	com2												
3 TX	8 TX												
5 GND	5 GND												
19 RXD													
24 GND													
WH-A62R10、WH-E461RB01: Support printing of 190 dots width.													
	<table><tr><th colspan="2">HMI terminal 9pin D-SUB female</th></tr><tr><td>com0/com1</td><td>com2</td></tr><tr><td>3 TX</td><td>8 TX</td></tr><tr><td>5 GND</td><td>5 GND</td></tr></table>	HMI terminal 9pin D-SUB female		com0/com1	com2	3 TX	8 TX	5 GND	5 GND	<p>Bright Printer 10 pin port Note:the red line is the first pin</p> <table><tr><td>5 RXD</td></tr><tr><td>9 GND</td></tr></table>	5 RXD	9 GND	<p>Serial port printing mode via RS232 level, short circuit as follows:</p> 
HMI terminal 9pin D-SUB female													
com0/com1	com2												
3 TX	8 TX												
5 GND	5 GND												
5 RXD													
9 GND													
WH-E241Z200-00E00240B5													
	<table><tr><th colspan="2">HMI terminal 9pin D-SUB female</th></tr><tr><td>com0/com1</td><td>com3</td></tr><tr><td>1 RX-</td><td>7 RX-</td></tr><tr><td>6 RX+</td><td>8 RX+</td></tr></table>	HMI terminal 9pin D-SUB female		com0/com1	com3	1 RX-	7 RX-	6 RX+	8 RX+	<p>Printer</p> <table><tr><td>1+</td></tr><tr><td>2-</td></tr></table>	1+	2-	
HMI terminal 9pin D-SUB female													
com0/com1	com3												
1 RX-	7 RX-												
6 RX+	8 RX+												
1+													
2-													
WH-A52Z20-30E125: Support printing of 240 dots width.													
	<table><tr><th colspan="2">HMI terminal 9pin D-SUB female</th></tr><tr><td>com0/com1</td><td>com2</td></tr><tr><td>3 TX</td><td>8 TX</td></tr><tr><td>5 GND</td><td>5 GND</td></tr></table>	HMI terminal 9pin D-SUB female		com0/com1	com2	3 TX	8 TX	5 GND	5 GND	<p>Bright Printer 10 pin port Note:the red line is the first pin</p> <table><tr><td>5 RXD</td></tr><tr><td>9 GND</td></tr></table>	5 RXD	9 GND	<p>Serial port printing mode via RS232 level, short circuit as follows:</p> 
HMI terminal 9pin D-SUB female													
com0/com1	com2												
3 TX	8 TX												
5 GND	5 GND												
5 RXD													
9 GND													
WH-A93RG0-00E825、WH-E393R101: support printing of 384 dots width													



	<div>HMI terminal 9pin D-SUB female</div> <table><tr><td>com0/com1</td><td>com2</td></tr><tr><td>3 TX</td><td>8 TX</td></tr><tr><td>5 GND</td><td>5 GND</td></tr></table>	com0/com1	com2	3 TX	8 TX	5 GND	5 GND	<div>Bright Printer 20 pin port Note:the red line is the first pin</div> <table><tr><td>15 RXD</td></tr><tr><td>19 GND</td></tr></table>	15 RXD	19 GND	<div>Serial port printing mode via RS232 level, short circuit as follows:</div> 																
com0/com1	com2																										
3 TX	8 TX																										
5 GND	5 GND																										
15 RXD																											
19 GND																											
WH-E173R90-00E11720GA: support printing of 192 dots width.																											
	<div>HMI terminal 9pin D-SUB female</div> <table><tr><td>com0/com1</td><td>com2</td></tr><tr><td>3 TX</td><td>8 TX</td></tr><tr><td>5 GND</td><td>5 GND</td></tr></table>	com0/com1	com2	3 TX	8 TX	5 GND	5 GND	<div>Bright Printer 20 pin port Note:the red line is the first pin</div> <table><tr><td>19 RXD</td></tr><tr><td>16 GND</td></tr></table>	19 RXD	16 GND																	
com0/com1	com2																										
3 TX	8 TX																										
5 GND	5 GND																										
19 RXD																											
16 GND																											
WH-E191RB0-00E1182055: support printing of 576 dots width (24).																											
	<div>HMI terminal 9pin D-SUB female</div> <table><tr><td>com0/com1</td><td>com2</td></tr><tr><td>3 TX</td><td>8 TX</td></tr><tr><td>5 GND</td><td>5 GND</td></tr></table>	com0/com1	com2	3 TX	8 TX	5 GND	5 GND	<div>Bright Printer 20 pin port Note:the red line is the first pin</div> <table><tr><td>19 RXD</td></tr><tr><td>16 GND</td></tr></table>	19 RXD	16 GND	<div>Serial port printing mode via RS232 level</div> <table><tr><td>20</td><td>TXD</td><td>RXD</td><td>19</td></tr><tr><td>18</td><td>BUSY</td><td>⊗</td><td>17</td></tr><tr><td>16</td><td>GND</td><td>⊗</td><td>15</td></tr><tr><td></td><td>:</td><td>:</td><td></td></tr></table>	20	TXD	RXD	19	18	BUSY	⊗	17	16	GND	⊗	15		:	:	
com0/com1	com2																										
3 TX	8 TX																										
5 GND	5 GND																										
19 RXD																											
16 GND																											
20	TXD	RXD	19																								
18	BUSY	⊗	17																								
16	GND	⊗	15																								
	:	:																									
WH-C13RA9-00E82B: support printing of 384 dots width, and with automatic cutting function																											
	<div>HMI terminal 9pin D-SUB female</div> <table><tr><td>com0/com1</td><td>com2</td></tr><tr><td>3 TX</td><td>8 TX</td></tr><tr><td>5 GND</td><td>5 GND</td></tr></table>	com0/com1	com2	3 TX	8 TX	5 GND	5 GND	<div>Bright Printer 26 pin port Note:the red line is the first pin</div> <table><tr><td>21RXD</td></tr><tr><td>25GND</td></tr></table>	21RXD	25GND	<div>Serial port printing mode via RS232 level, short circuit as follows:</div> 																
com0/com1	com2																										
3 TX	8 TX																										
5 GND	5 GND																										
21RXD																											
25GND																											
WH-M073R101																											
Use the built-in communication line			Baud: 115200																								
WH-E42KR901																											
Use the built-in usb line																											
WH-E58KRH01																											
	<div>HMI terminal 9pin D-SUB female</div> <table><tr><td>com0/com1</td><td>com2</td></tr><tr><td>3 TX</td><td>8 TX</td></tr><tr><td>5 GND</td><td>5 GND</td></tr></table>	com0/com1	com2	3 TX	8 TX	5 GND	5 GND	<table><tr><td>4 RXD</td></tr><tr><td>3 GND</td></tr></table>	4 RXD	3 GND	 6p																
com0/com1	com2																										
3 TX	8 TX																										
5 GND	5 GND																										
4 RXD																											
3 GND																											

2.1.3 Siupo Printer cable

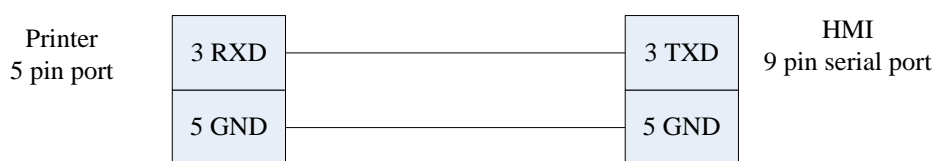



a. SP-E40004SK serial printer supports 240 dots width.



2.1.4 MY POS Printer cable


Printer Type			Note
MY-POS80K: support printing of 240 dots width			
	HMI terminal 9pin D-SUB female		Printer 25 pin
	com0/com1	com2	
	3 TX	8 TX	3 RXD
	5 GND	5 GND	7 GND
MY-IP561: support printing of 384 dots width			
	HMI terminal 9pin D-SUB female		Printer 8 pin
	com0/com1	com2	
	3 TX	8 TX	6 RXD
	5 GND	5 GND	5 GND

2.1.5 SPRT Printer cable

Printer Type			Note											
SP-RMDIIDS: support printing of 384 dots width														
	<table><tr><th colspan="2">HMI terminal 9pin D-SUB female</th></tr><tr><th>com0/com1</th><th>com2</th></tr><tr><td>3 TX</td><td>8 TX</td></tr><tr><td>5 GND</td><td>5 GND</td></tr></table>	HMI terminal 9pin D-SUB female		com0/com1	com2	3 TX	8 TX	5 GND	5 GND	<table><tr><th>Printer 10 pin</th></tr><tr><td>3 RXD</td></tr><tr><td>5 GND</td></tr></table>	Printer 10 pin	3 RXD	5 GND	 <p>232 level</p>
HMI terminal 9pin D-SUB female														
com0/com1	com2													
3 TX	8 TX													
5 GND	5 GND													
Printer 10 pin														
3 RXD														
5 GND														
SPRT SP-TL21N: support printing of 448 dots width														
	<table><tr><th colspan="2">HMI terminal 9pin D-SUB female</th></tr><tr><th>com0/com1</th><th>com2</th></tr><tr><td>3 TX</td><td>8 TX</td></tr><tr><td>5 GND</td><td>5 GND</td></tr></table>	HMI terminal 9pin D-SUB female		com0/com1	com2	3 TX	8 TX	5 GND	5 GND	<table><tr><th>Printer 9 pin</th></tr><tr><td>3 RXD</td></tr><tr><td>5 GND</td></tr></table>	Printer 9 pin	3 RXD	5 GND	
HMI terminal 9pin D-SUB female														
com0/com1	com2													
3 TX	8 TX													
5 GND	5 GND													
Printer 9 pin														
3 RXD														
5 GND														


2.1.6 RD Printer cable

Printer Type	Note
RD-DH32-S5: support printing of 384 dots width	

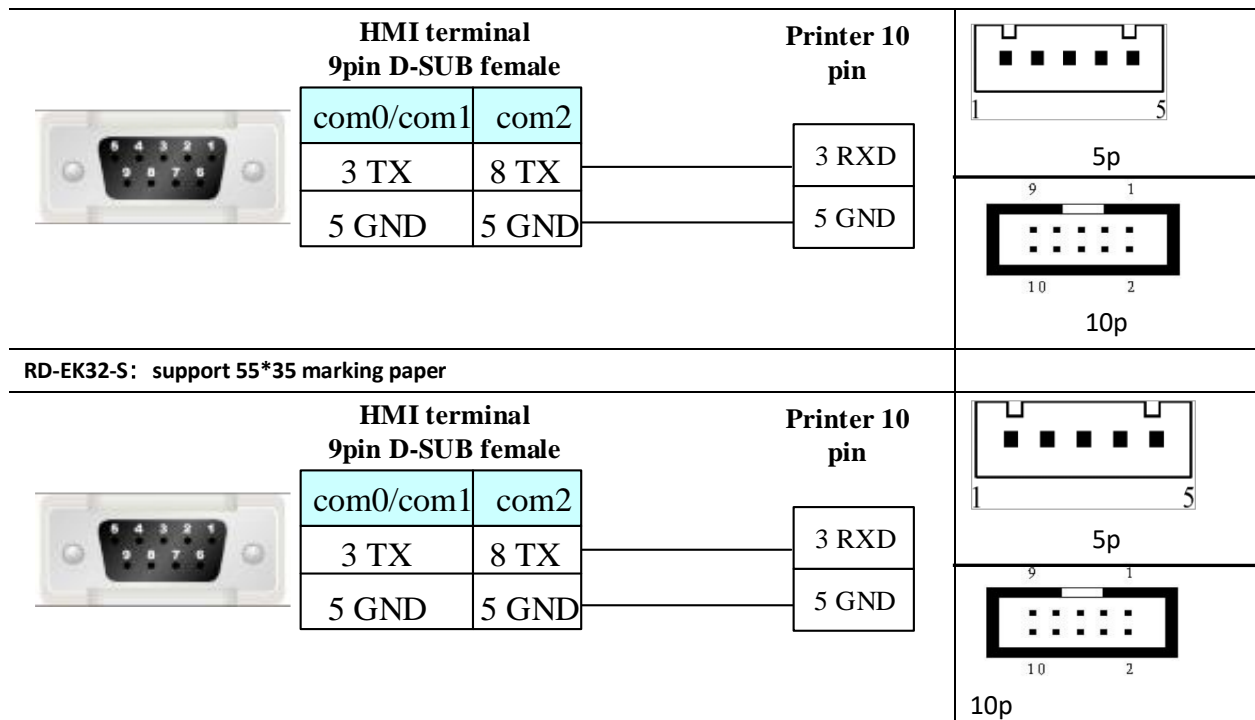

Note: When the Baud rate is higher than 38400, because the printer cache can not be processed, the printed content will not display well

2.1.6 Xprinter Printer cable

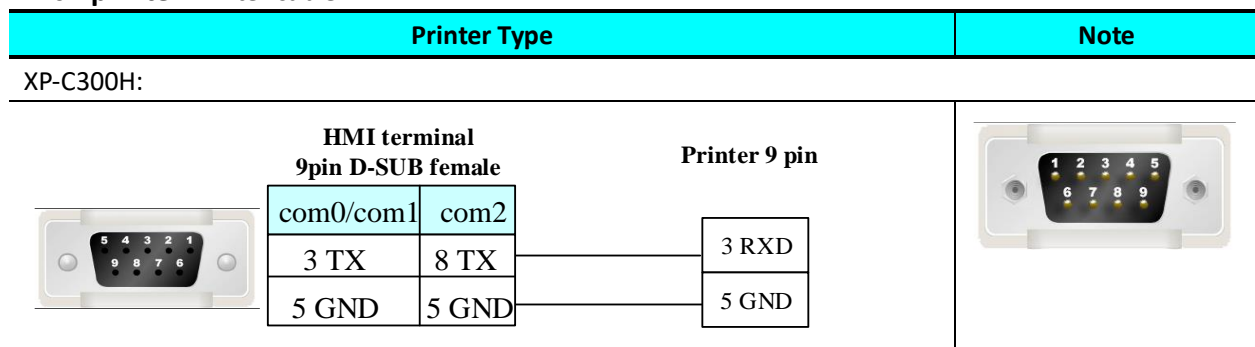

2.2 Recommend Optional printer

Printer Driver	Printer model	Interface	Print Structure	Print format
WH4008A31-053	WH-A52Z20-30E125	serial	Stylus micro printer	240 dots/line
	WH-A52Z20-40E125	serial	Stylus micro printer	240 dots/line
	WH-E20Z20-50E0022T55	serial	Stylus micro printer	240 dots/line
WH-A62R10	WH-A62R10-41E725	Serial	thermal	192 dots/line
	WH-A93RG0-00E725	Serial	thermal	192 dots/line
	WH-E173R90-00E11720GA	Serial	thermal	192 dots/line
	WH-E241Z200-00E00240B5	Serial	thermal	192 dots/line
WH-A93RG0-00E825	WH-A93RG0-00E825	Serial	thermal	384 dots/line
	WH-T2AR10-30E82B	Serial	Thermal POS	384 dots/line
WH-E58KRH01	WH-E58KRH01-43A00BU0BA	Serial /USB	thermal	384 dots/line
WH-E191RB0-00E1182055	WH-E191RB0-00E1182055	Serial	thermal	576 dots/line

WH-E393R101	WH-E393R101-00A00B2TBA	Serial	thermal	
WH-E461RB01	WH-E461RB01-00A00B2UBA WH-E46KRB01-00A00B2UBA	Serial	thermal	576 dots/line
WH-M073R101	WH-M073R101-00E00C20BA	USB host	thermal	
WH-E42KR901	WH-E42KR901	USB	thermal	384 dots/line
Siupo SP-M, D, E, F	SP-E4004SK	Serial	Stylus micro printer	240 dots/line
Siupo SP-E4004SK	SP-E4004SK	Serial	Stylus micro printer	240 dots/line
SP-RMDIIIDSH	SP-RMDIIIDSH_S13AS	Serial	thermal	384 dots/line
SPRT SP-TL21N	SPRT SP-TL21N	Serial /USB	Thermal POS	448 dots/line
MY-POS80K	MY-POS80K	Serial	thermal POS	240 dots/line
MY-IP561	MY-IP561	Serial	thermal	384 dots/line
HP LaserJet P1108	HP LaserJet P1108	USB host	Laser	A4
HP LaserJet 1020 plus	HP LaserJet 1020 plus	USB host	Laser	A4
EPSON ESC/P2	LQ-310 LQ-630K	USB host	Dot Matrix Strike	A4
EPSON LX-310	EPSON LX-310	USB host	Dot Matrix Strike	A4
Gainscha	Gainscha GP-1124T	USB host	Ink-jet	---
RD-DH32-S5	RD-DH32-S5_545xcjb2v1	Serial	Thermal icro-printer	384 dots/line
RD-EK32-S	RD-EK32-S	Serial	Thermal icro-printer	384 dots/line
Zebra ZPL	GK888t GX420t	USB 主	thermal	
Xprinter XP-C300H	XP-C300H	Serial /USB	Thermal POS	576 dots/line 512 dots/line

Note: 1.MY-IP561 PLC control page printing page setting recommended 440 width * 240 height, otherwise print out paper, print alignment easily abnormal. The actual printed page content is controlled at X 0, Y: 1, Width: 416, height: 220, as shown below:

Position

☐ Lock

X 0

Y 1


Width 416


Height 220


2.RD-SK32-S PLC control page printing page setting recommended 385 width * 230 height, actual print range 380*225, as shown below:


Position

☐ Lock

X 0 

Y 0 


Width 380 

Height 225 

3 Download Cable Diagram


3.1 Download by Serial Port

The COM2 port on the back of the case can be used to connect PLC RS-232 devices and can also be used to connect with the programming interface and setting interface of a PC.

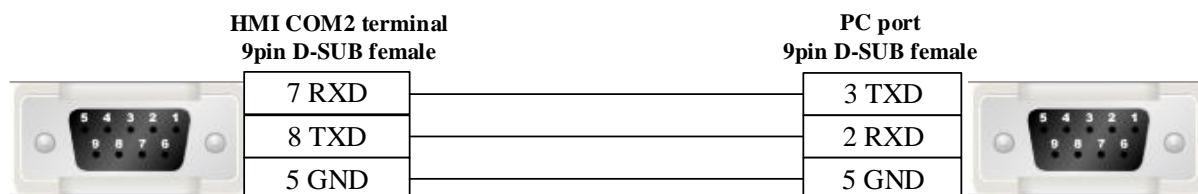


3.2 Download by USB

USB Type B:

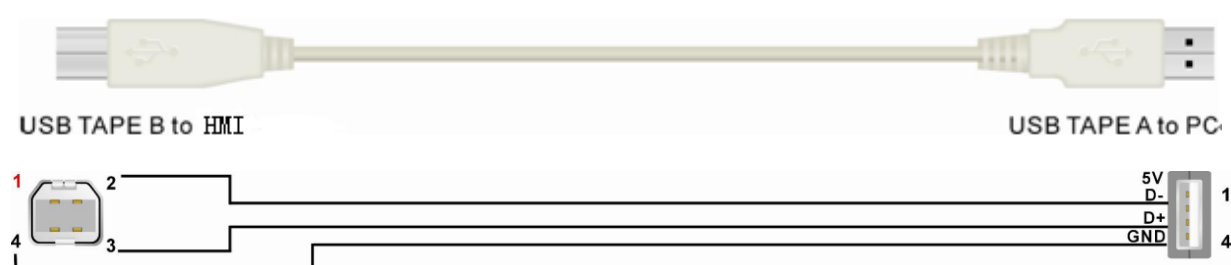

Micro USB

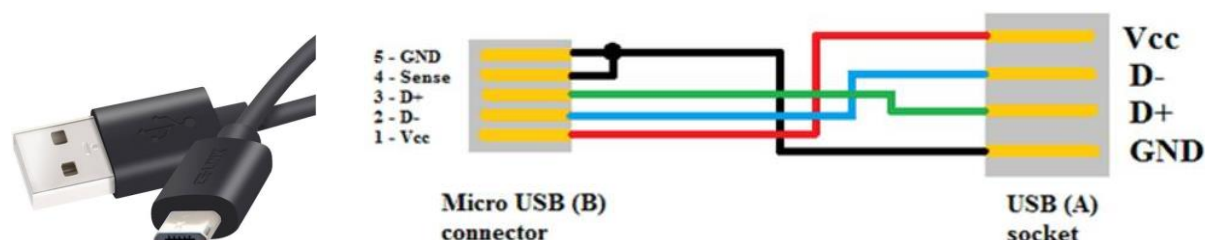


USB Type	HMI MODE
USB Type B	GH043/GH043E/ GH070/GH070E/GH070EW
	GL104E/G104/GH104E
	CZ6/CZ10
Micro USB	GH150E
	G070/G070E/G070E-CAN/ G121E
	GL043/GL043E/GL070/GL070E/GL100/GL100E/GL150E
	GT070/GT070E/GT070HE/GT070E-4G/GT070E-WIFI
	GT100/GT100E/GT100HE /GT100E-4G/GT100E-WIFI
	GW01/GW01-WIFI/GW01-4G
	GR043/GR070E/GR100E
	F070E

3.3 Download by Network Ethernet


Connecting PC and HMI use cross-ruling; communicating with hub or switch use Cross-over cable or

cross-ruling.

A. cross-ruling cable diagram:

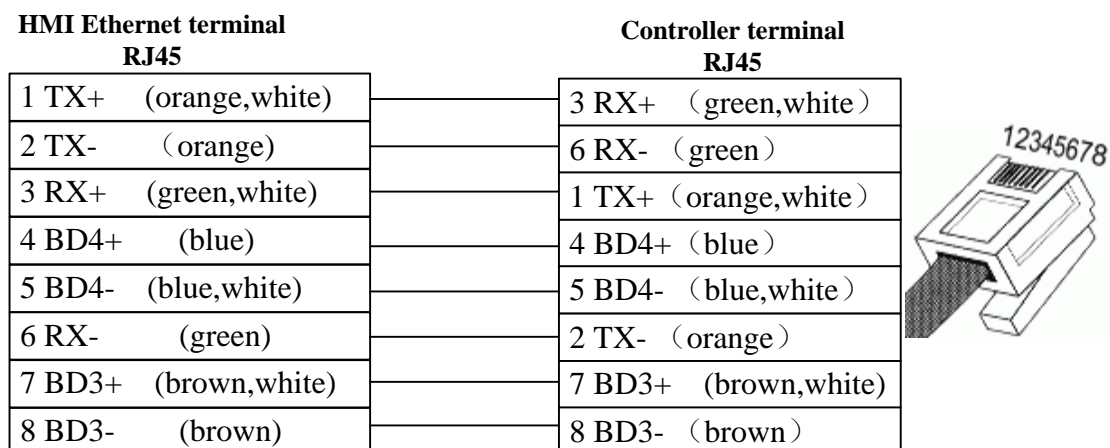

B. cross-over cable diagram:

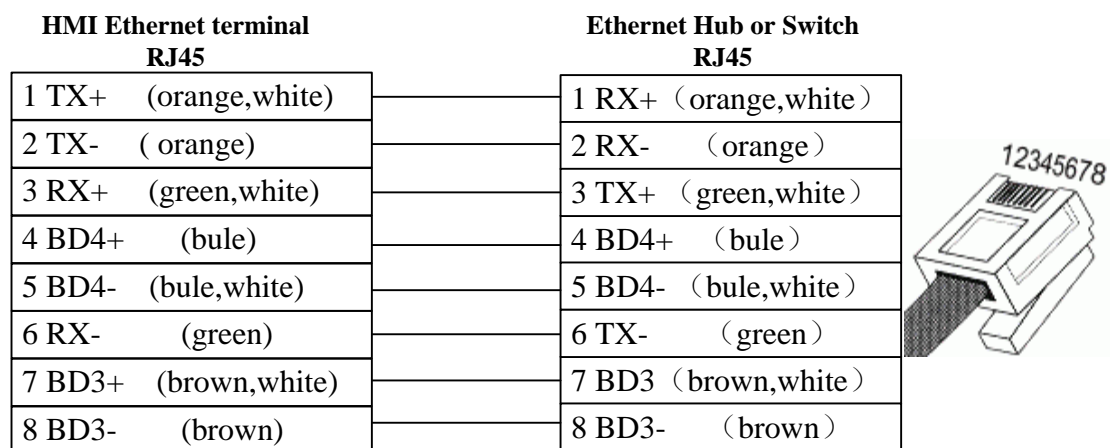

4 Communication Settings and guide of HMI connecting with Controller

Note: Do not hot plug !

4.1 ABB Corporation

◎ Serial Communication

Series	CPU	Link Module	Driver
ABB AC31	O7KR51-V3.6	RS232 on the CPU unit	ABB AC31 Modbus RTU
		RS485	
ABB AC500	PM571 PM581 PM591	RS232 on the CPU unit	ABB AC500
ABB	NextMove ES	RS232 on the CPU unit	ABB NextMove ES

◎ Network Communication

Series	CPU	Link Module	Driver
ABB AC500	PM583	CPU Direct	ABB AC500 Modbus TCP Slave

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
ABB AC31	O7KR51-V3.6	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485	RS485	Setting	Your owner cable
ABB AC500	PM571 PM581 PM591	RS232 on the port 1	RS232	Setting	Your owner cable
		RS232 on the port 2	RS232	Setting	Your owner cable
ABB	NextMove ES	RS232 on the CPU unit	RS232	Setting	Your owner cable

◎ Network Communication Settings

Series	CPU	Link Module	Connect Type	Parameter	Cable
ABBCPU	PM583	CPU Direct	Ethernet	Setting	Your owner cable


◎ Serial Communication Settings

HMI Setting


ABB AC31 Modbus RTU protocol:

Default communication parameters 9600, 8, none, 1; station No. : 1

[RS232](#)

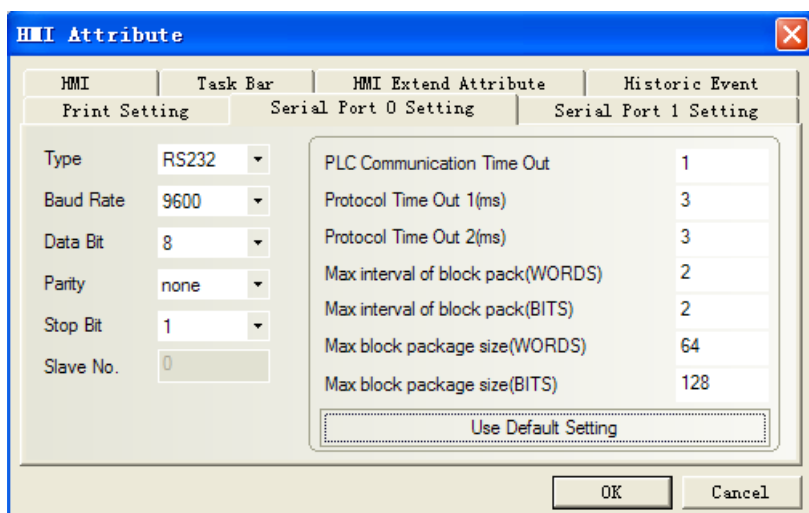


RS485

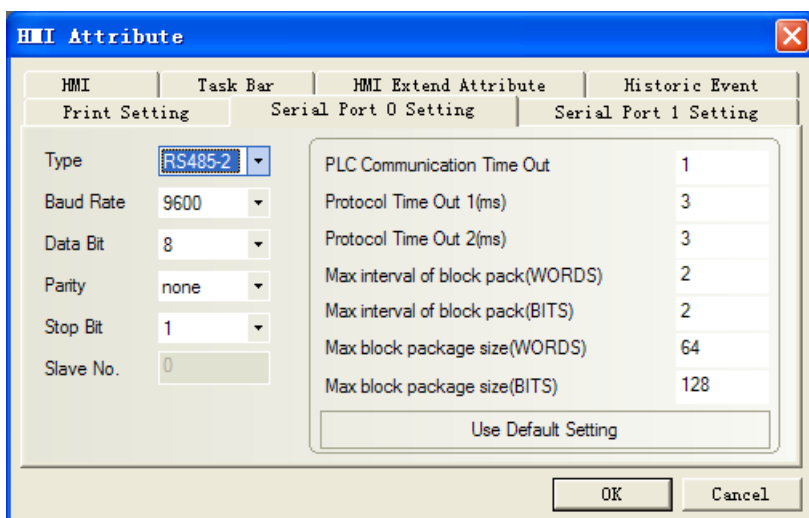**ABB AC500 protocol:**

Default communication parameters 9600, 8, none, 1; station No. : 1

RS232

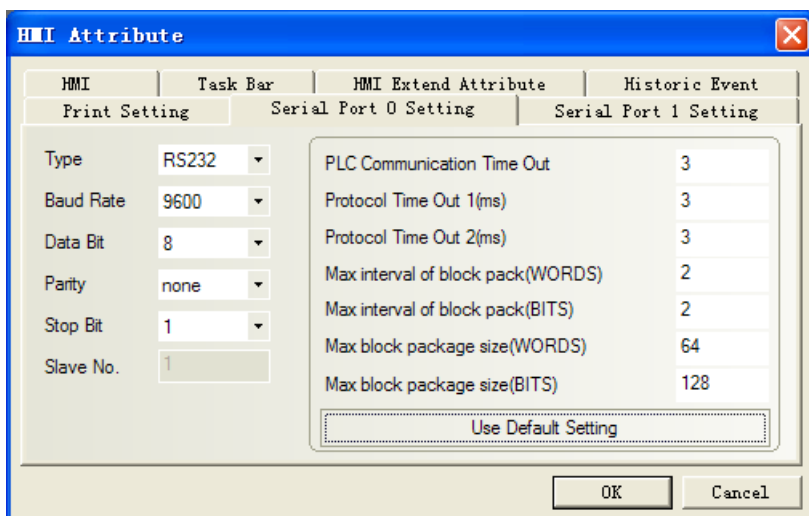


PLC Settings

Related parameters settings refer to the communication equipment specifications.


ABB NextMove ES protocol:


HMI Setting

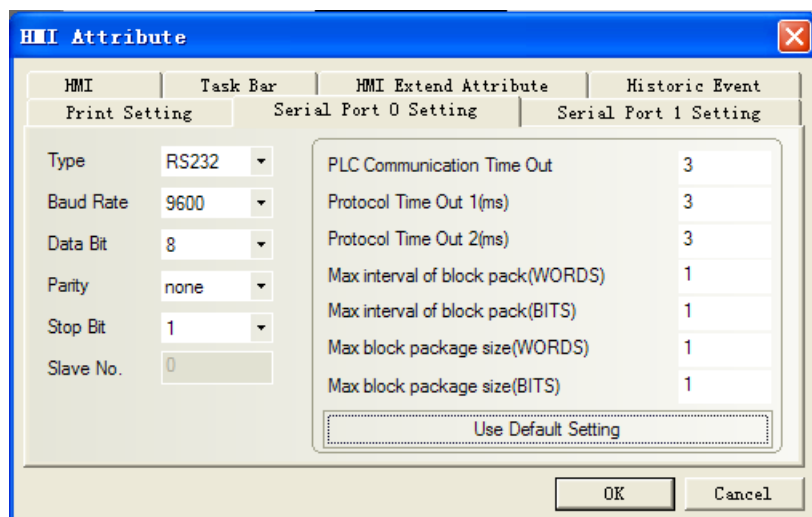

PLC Setting



Use the guide of the Workbench software

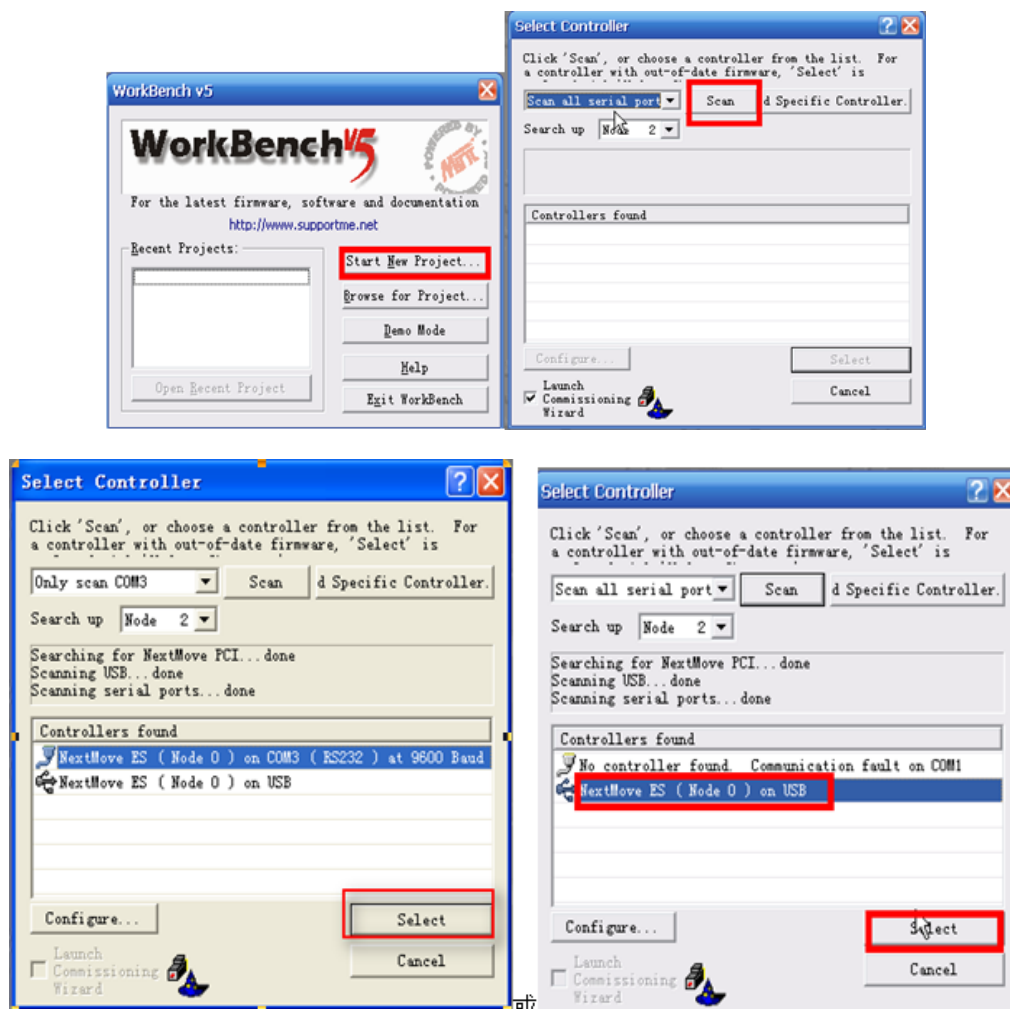

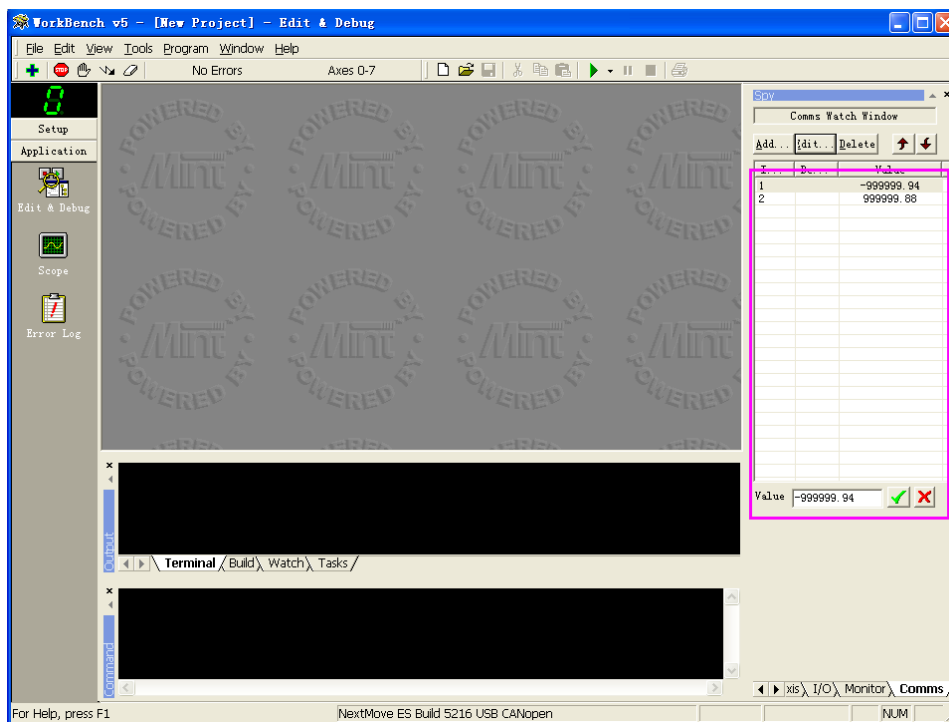

Network Communication parameters Settings

HMI Settings

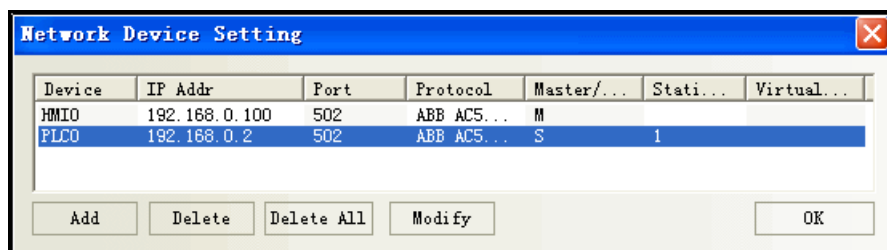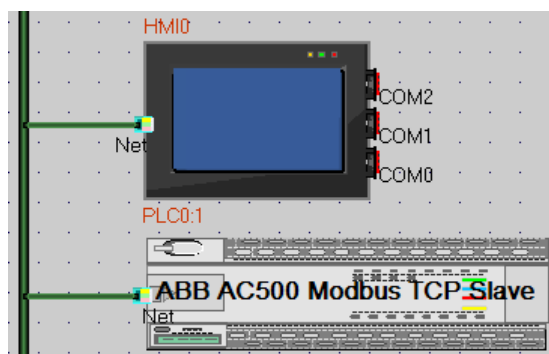

PLC 设置

IP setting can use control builder plus or panel setting, specific reference to ABB help.

© Supported Device

ABB AC31

Device	Bit Address	Word Address	Format
Input bit	I00.00-624.15	-----	DD.DD

Output bit	O00.00-624.15	-----	DD.DD
Internal Relay	M(0.0--99.15)U(233.00-255.15)	-----	DDD.DD
Link Relay	S000.00-624.15	-----	DDD.DD
Input Register	-----	IW00.00-624.15	DD.DD
Output Register	-----	OW00.00-624.15	DD.DD
Internal Register	-----	MW(0.0--99.15)U(233.00-255.15)	DDD.DD
Indirect Register	-----	KW01.00-624.15	DD.DD
Internal Register (Double words)	-----	MD0.00-624.15	D.DD
Indirect Register (Double words)	-----	KD0.00-624.15	D.DD

ABB AC500

Device	Bit Address	Word Address	Format
PLC Register	MB0.0—12499.7	-----	DDDD.O
Internal Register	-----	MW0.0—3.01695	D.DDDDD
Internal Register (Double words)	-----	MD0.0—6.01695	D.DDDDD

Note:

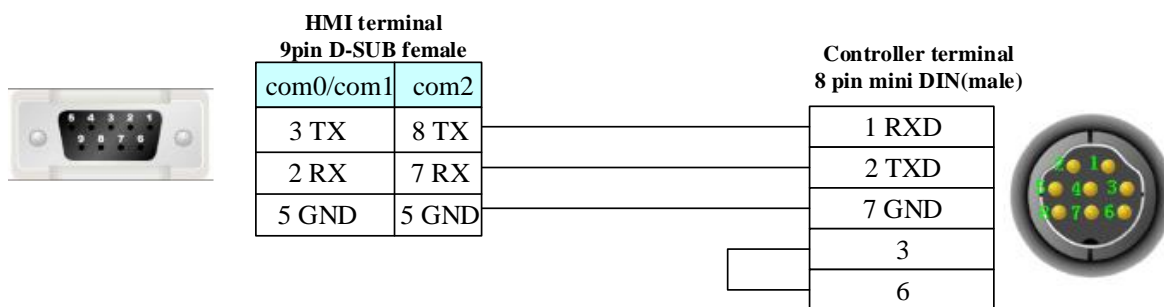
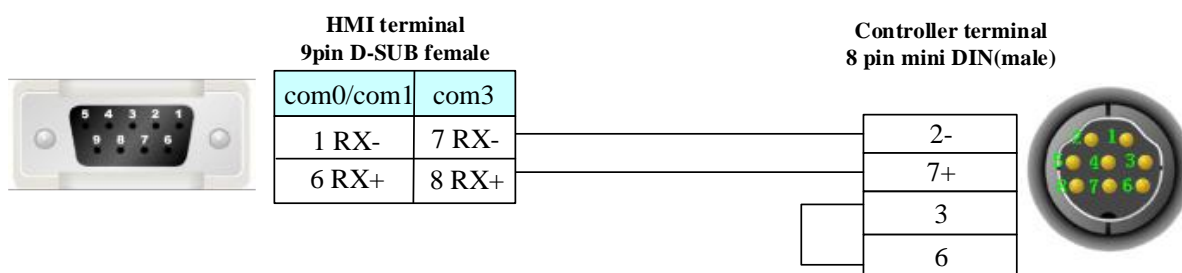
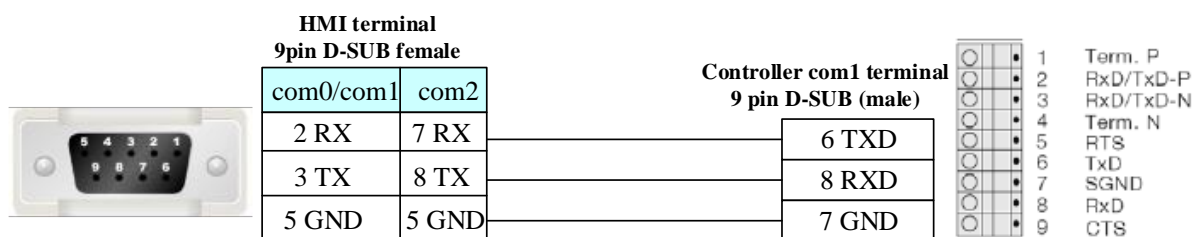
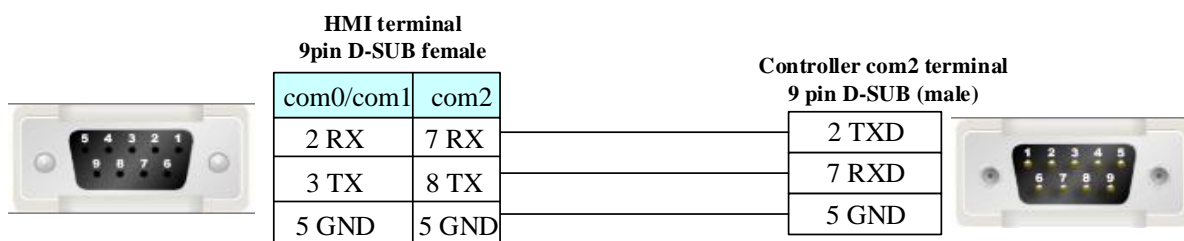
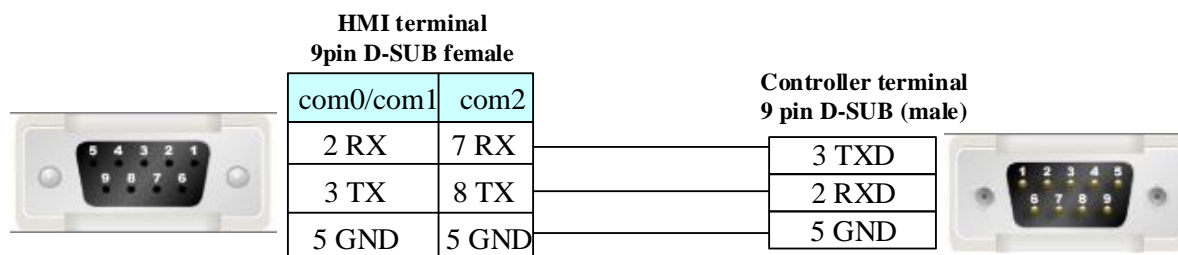
- 1) Select “**MODBUS**” mode in the ABB AC500 programming software;
- 2) If selecting “COM1 MODBUS”, serial communication setting must be “**slave**” in the 15th “**Operation mode**”. Other parameters match the touch-screen.
- 3) Example: **MB address: 0.0.1**, please input **0.1 in the HMI**.

ABB NextMove ES

(Only data of comms can be monitored, some address greater than or equal to 100 are read only. Please pay attention to matching the controller software configuration.)

Device	Bit Address	Word Address (Parameter symbol)	Format	Notes
BitData	1.00-255.31	-----	DDD.DD	
IntegerData	-----	1-255	DDD	
FloatData	-----	1-255	DDD	Float Data type

© Cable Diagram**ABB AC31 RS232**

**ABB AC31 RS485****ABB AC500 port1 RS232****ABB AC500 port2 RS232****ABB NextMove ES****RS232 communication cable of HMI connecting to controller**

4.2 Allen-Bradley

◎ Serial Communication

Series	CPU	Link Module	Driver
MicroLogix	MicroLogix 1500 (1764-LRP)	Channel 1	AB SLC500/PLC5/MicroLogix Series(DF1)* ¹ AB DH485 (Channel 1)
	MicroLogix 1000 MicroLogix 1200 MicroLogix 1500 (1764-LSP,1764-LRP)	Channel 0	
		AIC+ Advanced Interface Converter	
		1761-NET-AIC	
	MicroLogix 1400 (1766-L32BWAA)	Channel 0	
		Channel 2	
SLC500	SLC 5/03 SLC 5/04 SLC 5/05	Channel 0	
		1770-KF3	
		2760-RB	
		1775-KA	
		5130-RM	
PLC-5	PLC-5/11 PLC-5/20 PLC-5/30 PLC-5/40 PLC-5/40L PLC-5/60 PLC-5/60L	1771-KGM	
		Channel 1	
		Channel 0	
		Channel 0	
		Channel 0	
CompactLogix	1769-L20 1769-L30 1769-L31 1769-L32E 1769-L35E	Channel 0 Channel 1	AB CompactLogix/ControlLogix Series(DF1)* ² AB CompactLogix_ControlLogix(Free tag Names)
ControlLogix	1756-L61 1756-L63	CPU Direct	
Micro850	2080-LC50-24AWB 2080-LC50-24QBB 2080-LC50-24QVB 2080-LC50-24QWB 2080-LC50-24QBB 2080-LC50-24QBB 2080-LC50-24QBB	CPU Direct	AB Micro850 Series* ³

*¹ Suitable for the PLC that uses RSLinx500 program software

*² Suitable for the PLC that uses RSLinx5000 program software

*³ Suitable for the CCW program software.

◎ Ethernet Communication (Direct Online Simulation disable)

Series	CPU	Link Module	Driver
MicroLogix	MicroLogix 1100	CPU Direct (channel 1)	AB SLC500/PLC5/MicroLogix Series Ethernet(TCP Slave) *1
	MicroLogix 1400		
	MicroLogix 1000	1761-NET-ENI	
	MicroLogix 1100		
	MicroLogix 1200		
	MicroLogix 1400		
	MicroLogix 1500		
SLC500	SLC5/05	CPU Direct (channel 1)	
	SLC5/03	1761-NET-ENI	
	SLC5/04		
	SLC5/05		
PLC-5	ALL CPUs that support the link I/F on the right	1761-NET-ENI	
CompactLogix	1769-L30ER 1769-L32E 1769-L35E	CPU Direct	AB CompactLogix/ControlLogix Series Ethernet(TCP Slave) *2
	All CPUs which support the link I/F on the right	1761-NET-ENI	AB CompactLogix/ControlLogix Series Ethernet(Free Tag Names)(TCP Slave)
Micro850	2080-LC50-24AWB 2080-LC50-24QBB 2080-LC50-24QVB 2080-LC50-24QWB 2080-LC50-24QBB 2080-LC50-24QBB 2080-LC50-24QBB	CPU Direct	AB Micro850 Ethernet(TCP Slave)

*1 Suitable for the PLC that uses RSLinx500 program software

*2 Suitable for the PLC that uses RSLinx5000 program software

◎ Serial System Communication

Series	CPU	Link Module	COMM Type	Parameter	Cable
MicroLogix	1500 (1764-LRP)	Channel 1	RS232C	Setting	Your owner cable
	MicroLogix 1000 MicroLogix 1200 MicroLogix 1500	Channel 0	RS232C	Setting	Your owner cable
		AIC+ Advanced Interface Converter 1761-NET-AIC			
		Channel 0	RS232C	Setting	Your owner cable
	MicroLogix 1400	Channel 2			Your owner cable
	SLC 5/03 SLC 5/04	Channel 0	RS232C	Setting	Your owner cable
		1770-KF3			

	SLC 5/05	2760-RB 1775-KA 5130-RM			
		1771-KGM			
		Channel 1			
			RS485	Setting	Your owner cable
PLC-5	PLC-5/11 PLC-5/20 PLC-5/30 PLC-5/40 PLC-5/40L PLC-5/60 PLC-5/60L	Channel 0	RS232C	Setting	Your owner cable
CompactLogix	1769-L20 1769-L30	Channel 0	RS232C	Setting	Your owner cable
	1769-L31 1769-L32E 1769-L35E	Channel 1			
ControlLogix	1756—L61	CPU Direct	RS232C	Setting	Your owner cable
Micro850	2080-LC50-24Q WB	CPU Port	RS232C	Setting	Your owner cable

◎ Ethernet System Communication

Series	CPU	Link Module	Connect Type	Parameter	Cable
MicroLogix	MicroLogix 1100	CPU Direct	Ethernet	Setting	Your owner cable
	MicroLogix 1400	(channel 1)			
	MicroLogix 1000 MicroLogix 1100 MicroLogix 1200 MicroLogix 1500	1761-NET-ENI			
	SLC5/05	CPU Direct(channel 1)			
	SLC5/03 SLC5/04 SLC5/05	1761-NET-ENI			
PLC-5	ALL CPUs that support the link I/F on the right	1761-NET-ENI			
CompactLogix	1769-L30ER 1769-L32E 1769-L35E	CPU Direct	Ethernet	Setting	Your owner cable
	All CPUs which support the link I/F on the right	1761-NET-ENI			
Micro850	2080-LC50-24AWB 2080-LC50-24QBB 2080-LC50-24QVB 2080-LC50-24QWB	CPU Direct	Ethernet	Setting	Your owner cable

	2080-LC50-24QBB				
	2080-LC50-24QBB				
	2080-LC50-24QBB				

◎ Serial Communication Setting

AB SLC500/PLC5/MicroLogix Series protocol

HMI Setting

Default communication parameters 19200, 8, none, 1; station No. : 0

The HMI Attribute dialog box is shown with the 'Serial Port 0 Setting' tab selected. The settings are as follows:

Parameter	Value
Type	RS232
Baud Rate	19200
Data Bit	8
Parity	none
Stop Bit	1
Slave No.	1
PLC Communication Time Out	3
Protocol Time Out 1(ms)	3
Protocol Time Out 2(ms)	3
Max interval of block pack(WORDS)	16
Max interval of block pack(BITS)	32
Max block package size(WORDS)	64
Max block package size(BITS)	64

Buttons: OK, Cancel, Use Default Setting

PLC Setting

RSLogix500 software setting

The Channel Configuration dialog box is shown with the 'General' tab selected for Channel 0. The settings are as follows:

Parameter	Value
Driver	DF1 Full Duplex
Baud	19200
Parity	NONE
Source ID	1 (decimal)
Control	No Handshaking
Error Detection	CRC
Embedded Responses	Auto Detect
ACK Timeout (x20 ms)	50
NAK Retries	3
ENQ Retries	3

Buttons: 确定, 取消, 应用(A), 帮助

NOTE: Driver: DF1 Full Duplex; Error Detection: CRC.

AB DH485 protocol

HMI Setting

Default communication parameters 19200, 8, even, 1; station No. : 1

HMI Attribute

User Permissions Setting		Historical Events Storage		Print Setting	
HMI	Task Bar	HMI License Setting	HMI Extended Attributes	HMI System Information Text	Security Levels
Internet Time Synchronization/summer time		COM0 Setting		COM2 Setting	Extended Mem

Type: **RS485**

Baud Rate: 19200

Data Bit: 8

Parity Check: even

Stop Bit: 1

☐ Broadcast 65535

Advanced Settings

PLC Setting

RSLogix500 software setting

RSLogix 500 Pro - 无标题.RSS

File Edit View Search Comms Tools Window Help

OFFLINE Forces Install Forces Enable

DriverAB_DF1-1 Node : 1d

Channel Configuration

General **Chan. 1 - System** Chan. 0 - System Chan. 0 - User

Driver: **DH485**

Baud: 19200

Node Address: **1** (decimal)

Protocol Control


Token Hold Factor: 1

Max. Node Address: 1

AB CompactLogix/ControlLogix Series protocol

HMI Setting

Default communication parameters 19200, 8, none, 1; station No. : 0

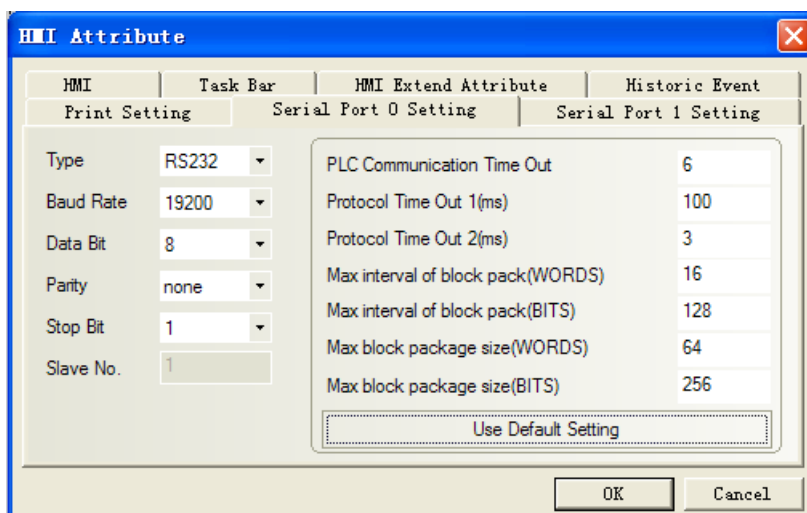



PLC Setting

RSLogix5000 software setting

NOTE: Protocol: DF1 Point to Point; Error Detection: CRC; Enable Duplicate Detection: Disabled.

- (1) **Set the communication parameters:** Controller properties

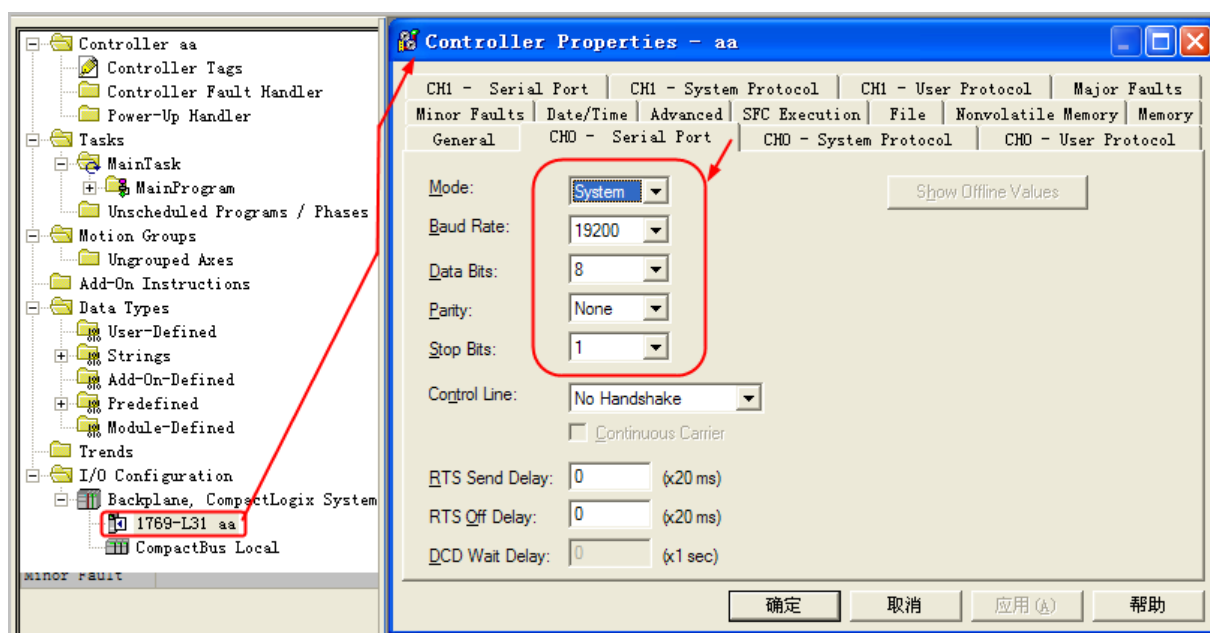

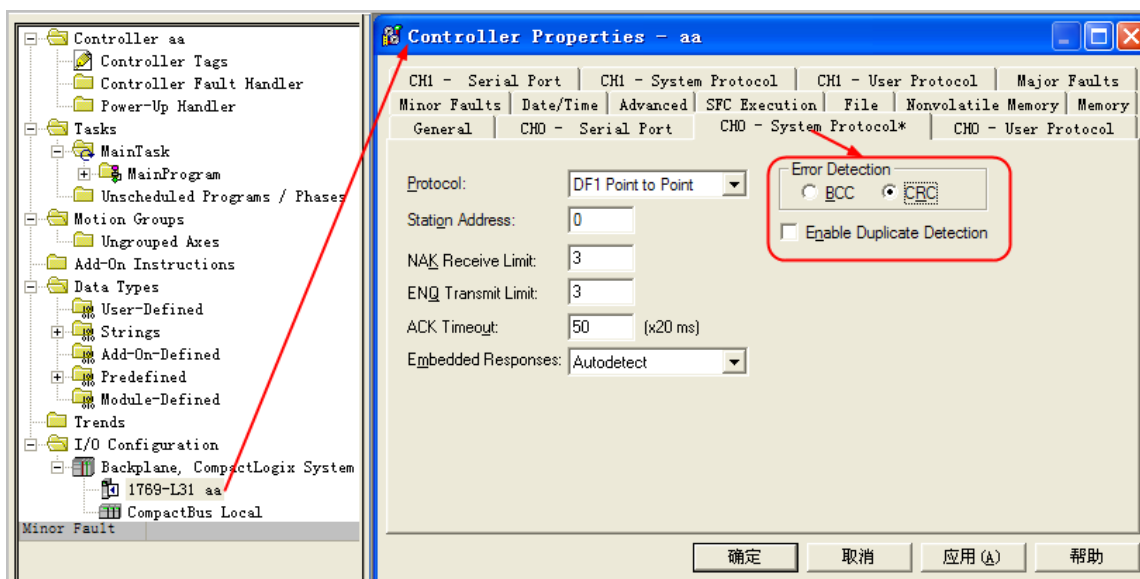


NOTE: Define the new device in the RSLogix5000 before using the register in the HMI.


(2) **Define Tags and Data type:** Select “Controller Tags” right-click→”New Tag”, set up tag:

NOTE:

1. The controller registers that HMI needs to visit should be defined in the RSLogix5000 in advance.
2. Controller Tags are suitable for all routines in controller, they are global, so the tag should be built in Controller Tags

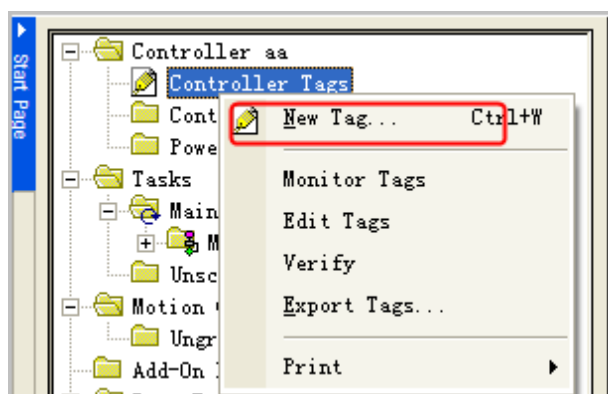


(3) **Tag Name and File Number mapping:** Select “Logic”→”Map PLC/SLC Messages”. (Note: the software should be in offline mode)

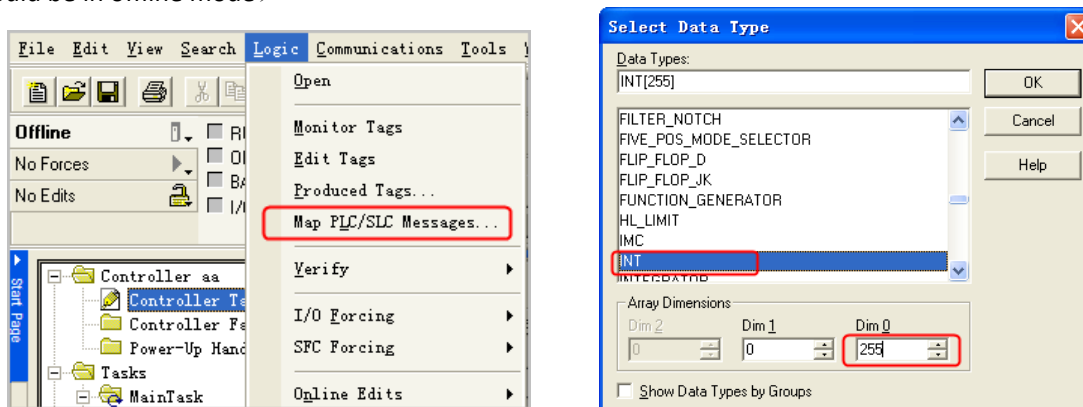

Example:

Build a new tag whose name is a, the Data Type is INT:

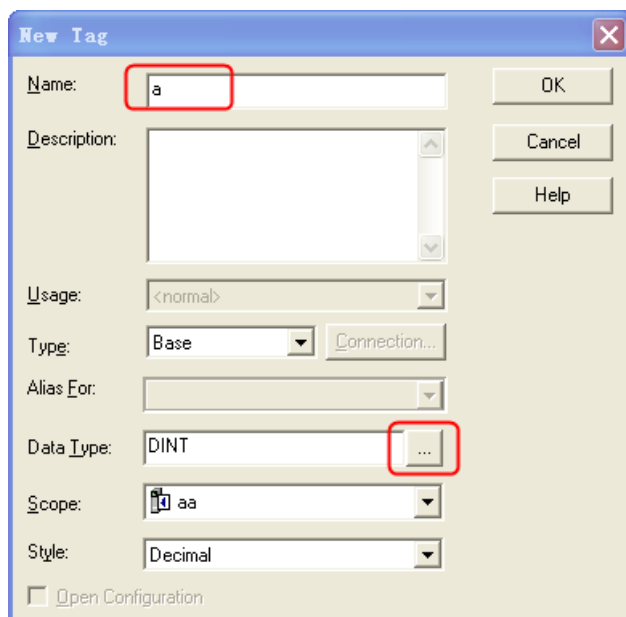**Note:**

1. For the Data Type, the CompactLogix/ControlLogix supports the INT, BOOL, REAL data type only.
2. This driver does not support Multi-dimensional array, so you can define the range of Dim0 only.
3. In this driver, the INT range is 0~254; REAL range is 0~254, and the BOOL range is 0~999.


Besides, build two new tags whose Names are b and c, Data Type are REAL and BOOL.

Scope:

Name	Value	Force Mask	Style	Data Type	Description
+ a	{...}	{...}	Decimal	INT[255]	
+ b	{...}	{...}	Float	REAL[255]	
+ c	{...}	{...}	Decimal	BOOL[1024]	

The BOOL variable address range is 0~1024 in PLC, but this driver only supports 0~999. So the HMI can only visit the BOOL register from to 999.

After the tags are defined, map the Name to the File Number:

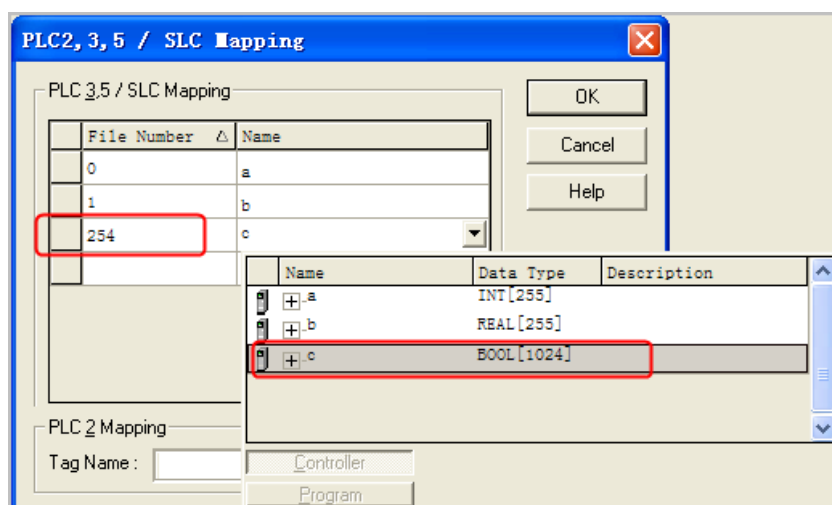**Note:**

1. The File Number is unique, a same File Number cannot map to different Names
2. The range of File Number in this driver is 0~254.



The HMI mapping addresses are as follows:

Tag Name	Data Type	Support Range	Mapping File Number	Mapping HMI address
a	INT[255]	0~254	0	INT 000000~000254
a	BOOL	000.0~254.15	0	N_BOOL 000000.00~000254.15
b	REAL[255]	0~254	1	REAL 001000~001254
c	BOOL[1024]	0~999	254	B_BOOL 254000~254999




AB CompactLogix/ControlLogix (Free tag Names) protocol:

HMI Setting


Default communication parameters 19200, 8, none, 1; station No. : 0

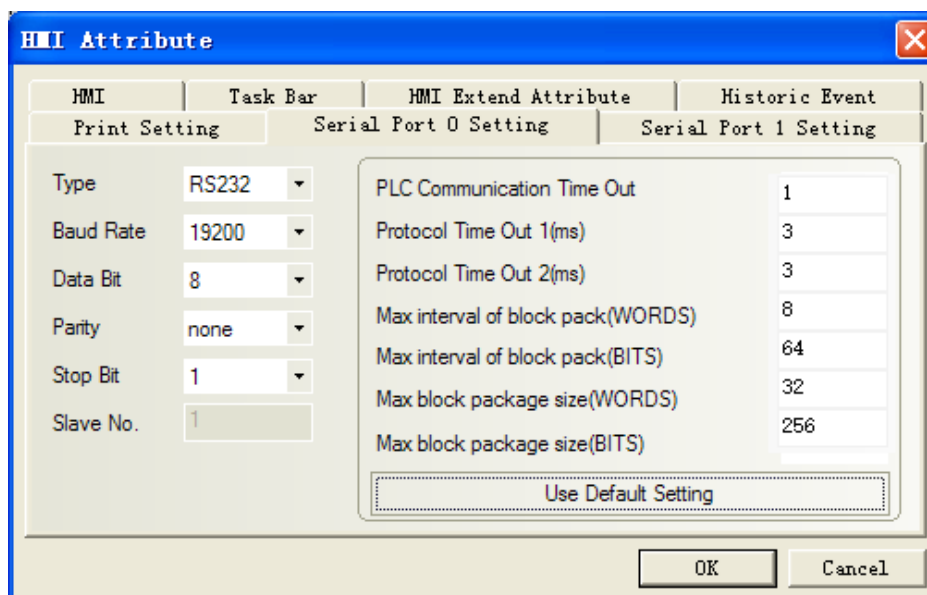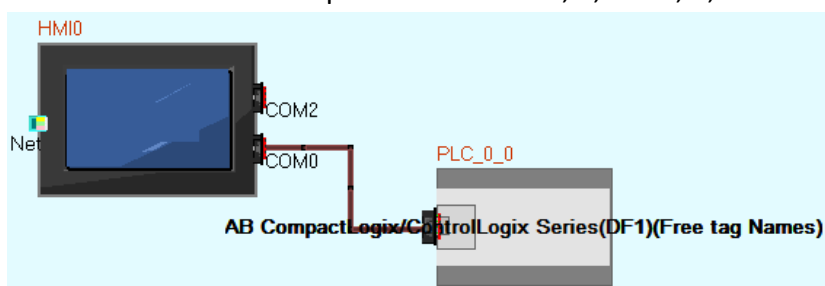

Double click "Label Editor", chose import tags

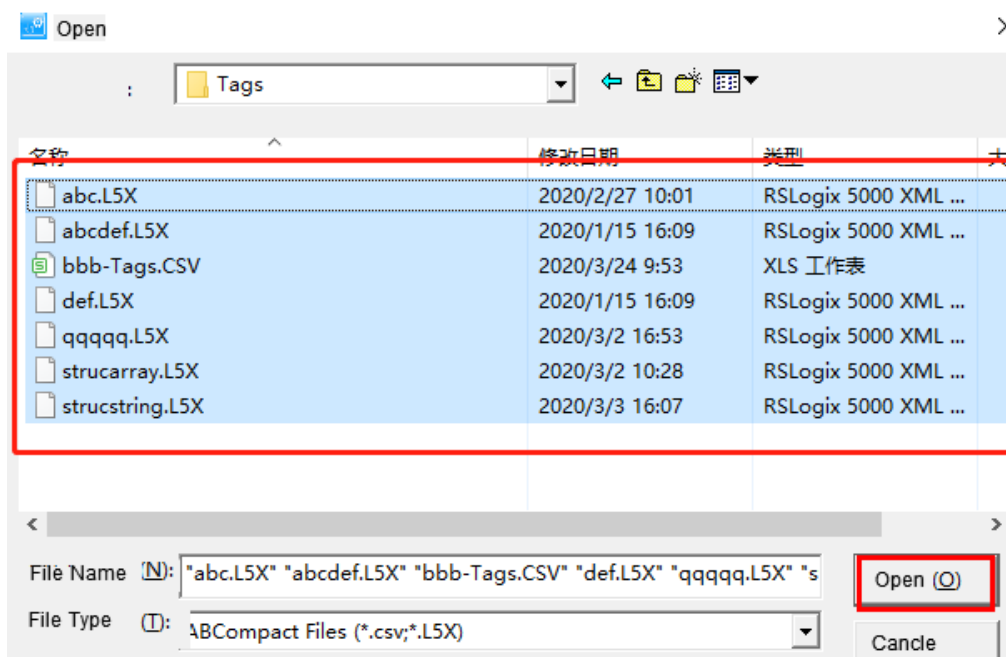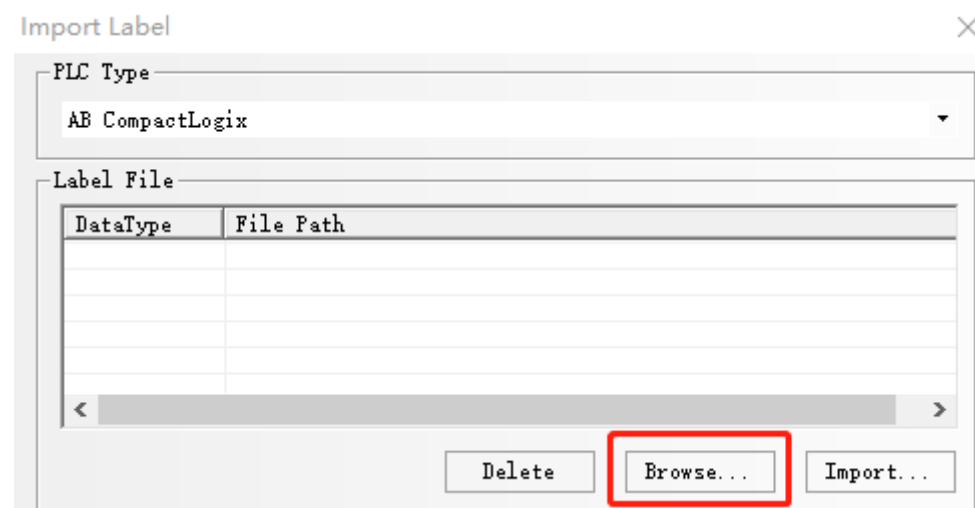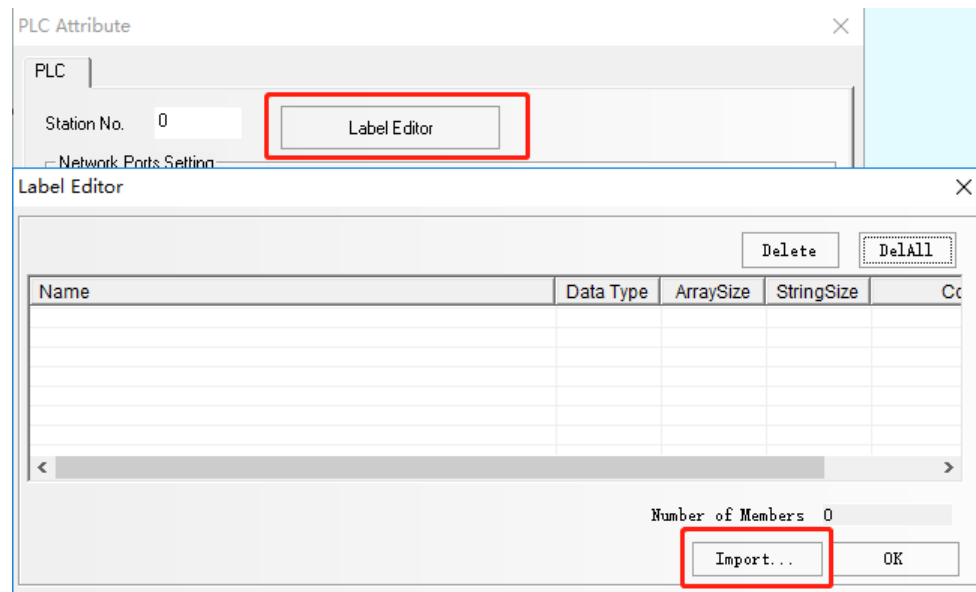


Batch import label CSV and L5X label files exported by PLC software (2 files generated by PLC programming software: L5X is a structure type file, and CSV is a label file)

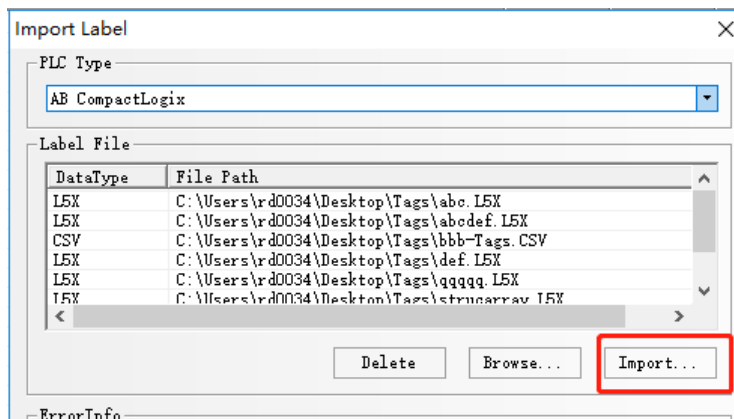


PLC Setting

RSLogix5000 Software settings:


- 1) **Set the communication parameters:** Controller Properties

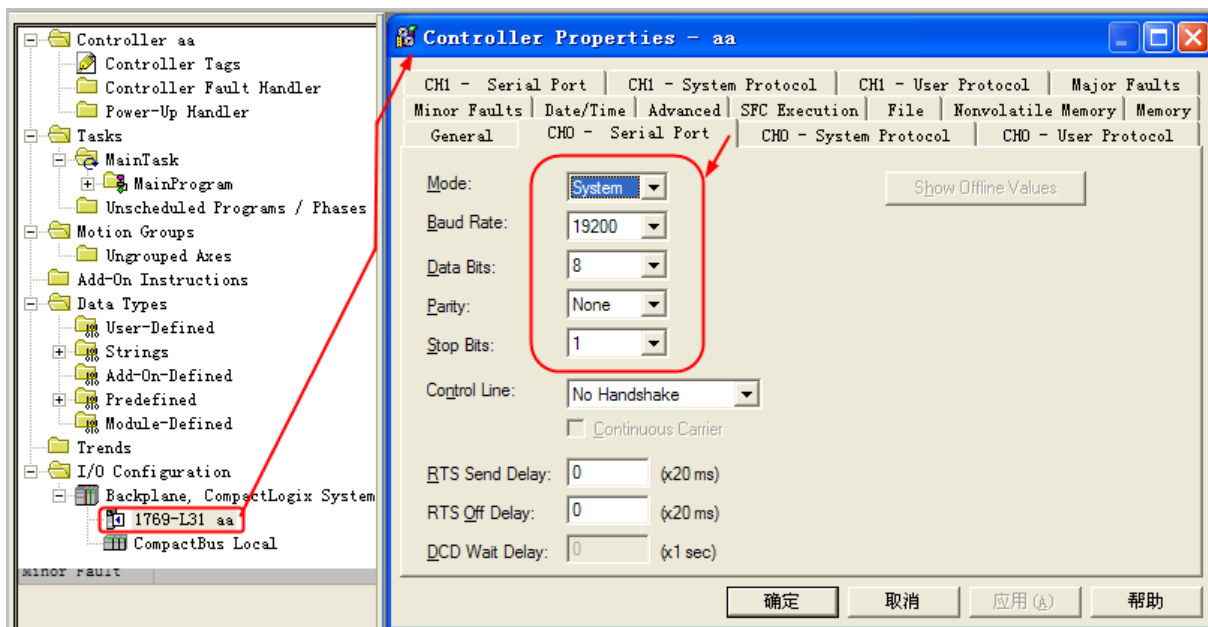

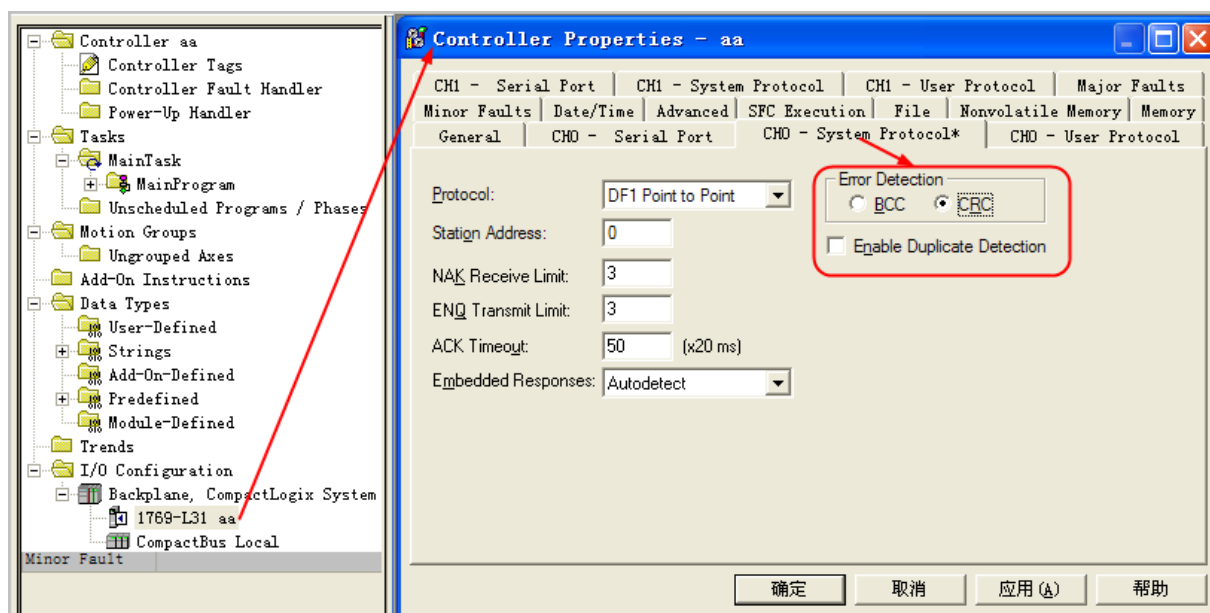


注意设置：Protocol：DF1 Point to Point；Error Detection：CRC；Enable Duplicate Detection：不勾选

(2) Label setting：Controller Tags

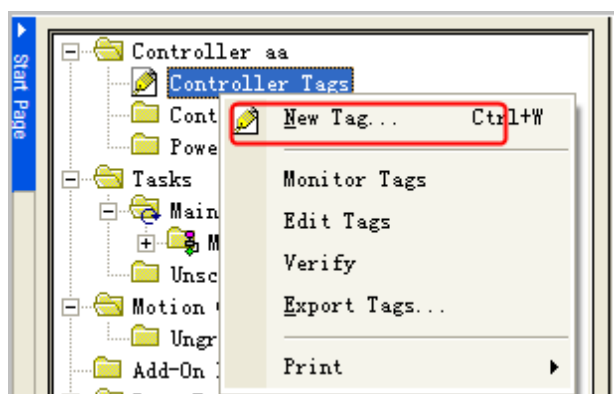

1. Common label

Create a new tag directly in the tag editor. This only needs to export the CSV to communicate directly with the screen.

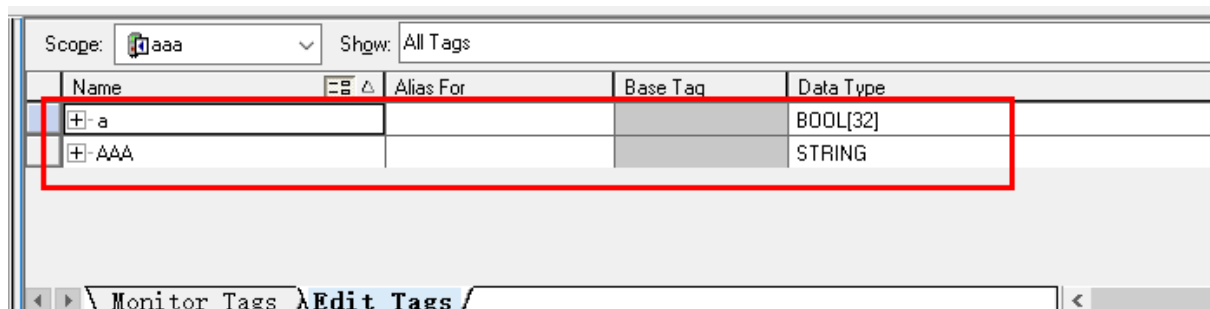

2. User-Defined tag (Structure tag)

As shown: Structure type "abc": After creating the data type "abc", you need to add a tag in the tag editor and reference the type. For example, add a new tag named "strucabc" to reference the structure type "abc".

Name: abc

Description: userdefinedabc

Members: Data Type Size: 12 byte(s)

Name	Data Type	Style	Description	External Access
a	BOOL	Decimal	a	Read/Write
b	INT	Decimal	b	Read/Write
c	REAL[2]	Float	c	Read/Write

Scope: aaa Show: All Tags

Name	Alias For	Base T	Data Type
struc11			qqqqq[10]
strucabc			abc

Select Data Type

Data Types:

abc

OK

Cancel

Help

Name	Alias For	Base T	Data Type	External Access
strucabc			abc	userdefinedabc
strucabc.a			BOOL	userdefinedabc a
strucabc.b			INT	userdefinedabc b
strucabc.c			REAL[2]	userdefinedabc c

For this type of structure type label, you need to import not only the label CSV to the project of the screen, but also the structure L5X file:

Rightclick "abc" to export data type

Data Types

User-Defined

abc

abc

def

qqqqq

struc

struc

Strings

Add-On

Predef

Modul

Trends

I/O Config

1769 B

Open

Cut Ctrl+X

Copy Ctrl+C

Paste Ctrl+V


Delete Del

Monitor Tags



Cross Reference Ctrl+E

Print

Export Data Type...


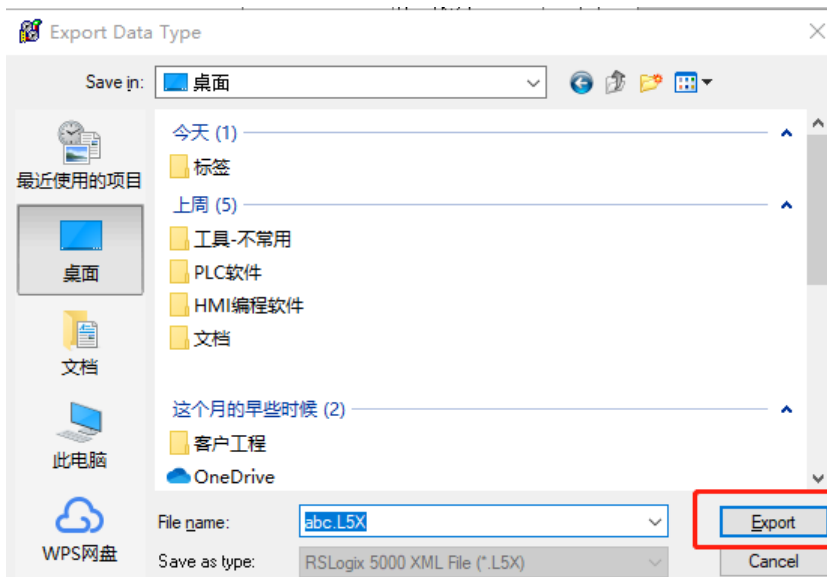


After editing all tags, click Tools-export-tags and logic comments to export the tags CSV file

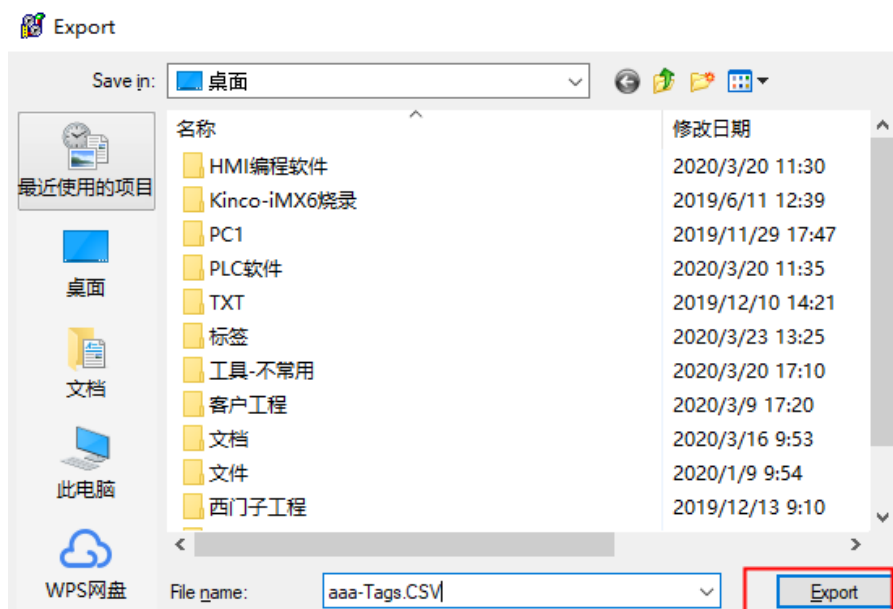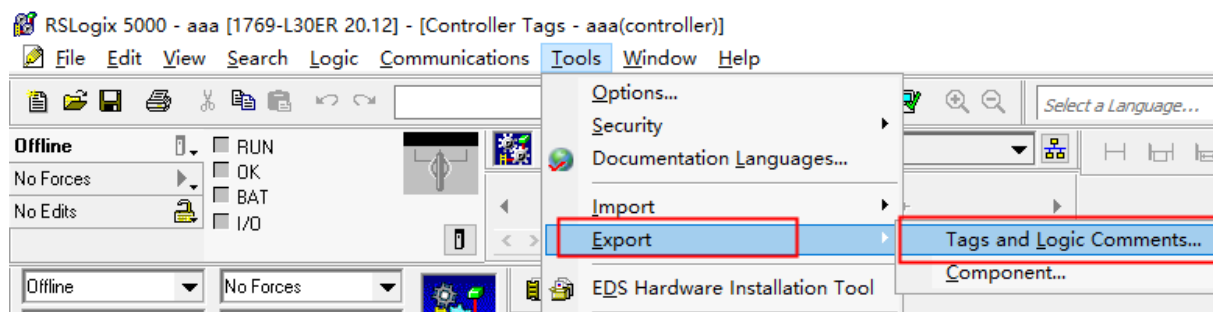


Notice: The bit label corresponding to a word needs to create a new label to point to the bit of the word, for example:

Create a new label "on" and point to the first bit in the address of the previous label "a"

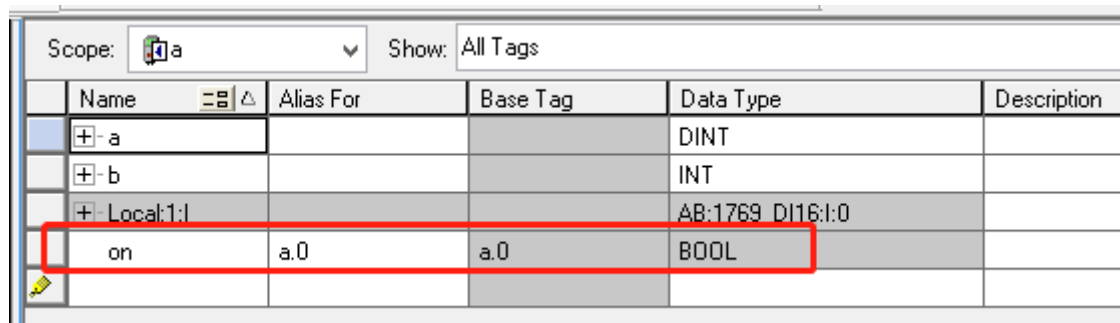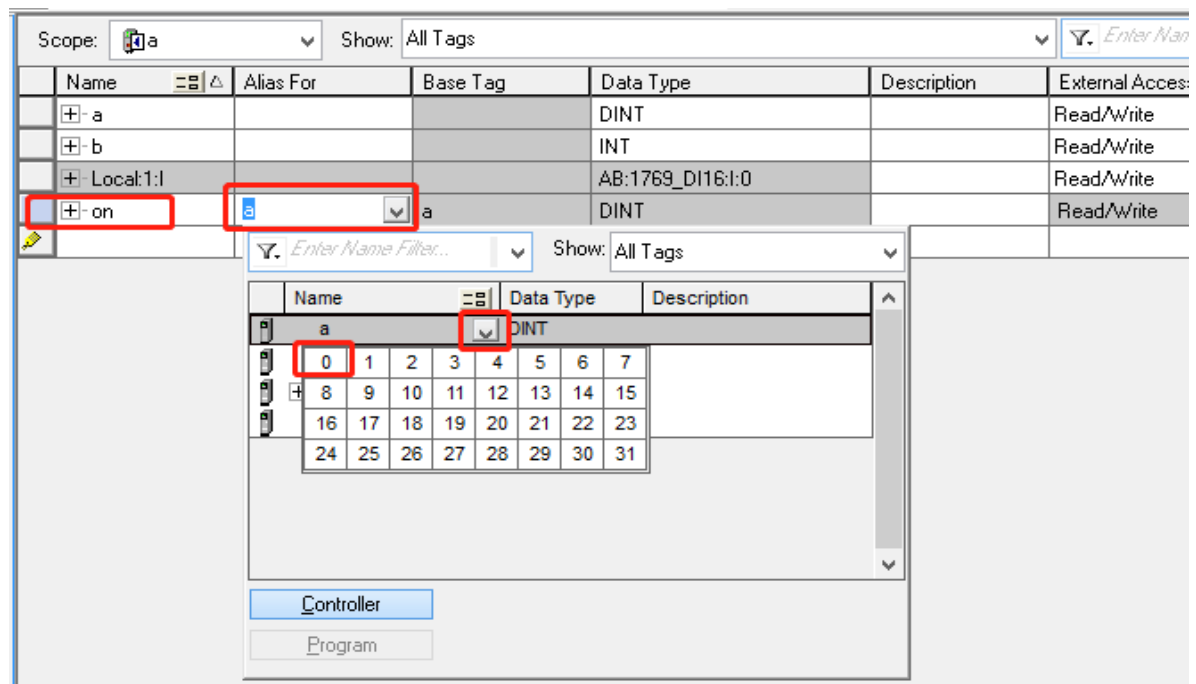

Similarly, you can create a new label "off" to point to a bit of the word address in the IO module

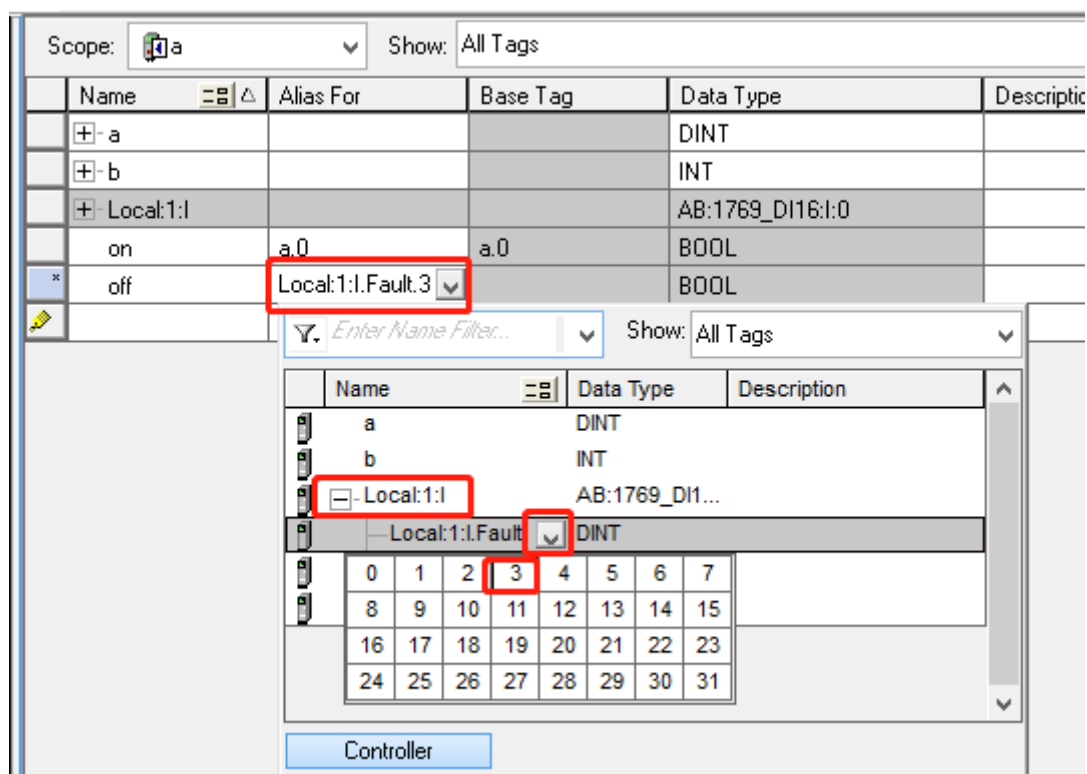

Scope:	a	Show:	All Tags	
Name	Alias For	Base Tag	Data Type	Description
+ a			DINT	
+ b			INT	
+ Local:1:I			AB:1769_DI16:I:0	
on	a.0	a.0	BOOL	
x off	Local:1:I.Fault.3		BOOL	

AB Micro850 Series protocol:

HMI Setting

HMI Attribute

Security Levels Setting		User Permissions Setting		Historical Events Storage	
HMI	Task Bar	HMI License Setting	HMI Extended Attributes	HMI Syst	
Internet Time Synchronization		COM0 Setting	COM1 Setting	COM2 Setting	
Type	RS232	PLC Communication Time Out(s)	3		
Baud Rate	38400	Protocol Time Out 1(ms)	4		
Data Bit	8	Protocol Time Out 2(ms)	3		
Parity Check	none	Max interval of word block pack	8		
Stop Bit	1	Max interval of bit block pack	64		
<input type="checkbox"/> Broadcast	0	Max word block package size	16		
		Max bit block package size	128		
Use Default Setting					

PLC Setting

CCW software set as follows:

- 1.Set the serial port

Controller - Serial Port

Common Settings

Driver: CIP Serial

Baud Rate: 38400

Parity: None

Station Address: 1

Protocol Control

DF1 Mode: DF1 Full-Duplex

Control Line: No Handshake

Error Detection: CRC

Embedded Responses: After One Received

☒ Duplicate Packet Detection

ACK Timeout (x20ms): 50

ENQ Retries: 3

NAK Retries: 3

Transmit Retries: 3


- 2.Add some global tags

zi_array		WORD	[0..5]
zi_array[0]		WORD	
zi_array[1]		WORD	
zi_array[2]		WORD	
zi_array[3]		WORD	
zi_array[4]		WORD	
zi_array[5]		WORD	
int1		INT	
weiyuan		BOOL	
fudian		REAL	
szw		BOOL	[0..2]
szw[0]		BOOL	
szw[1]		BOOL	
szw[2]		BOOL	
zi		WORD	


3. Select them and right click to copy.




4. Open the PLC address tag editor in HMI software

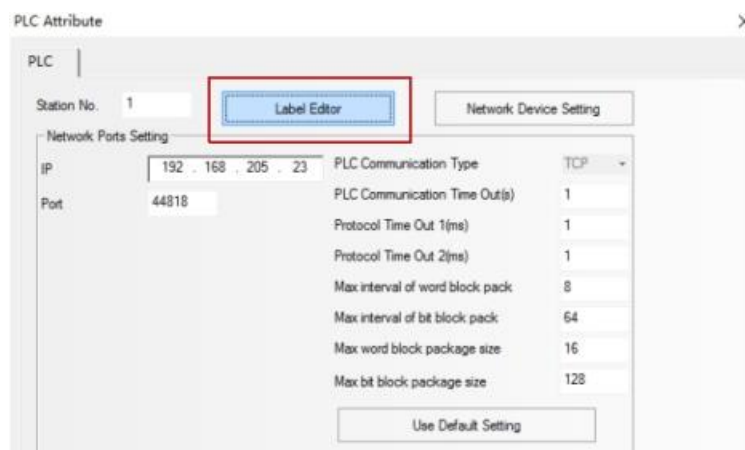



Click paste

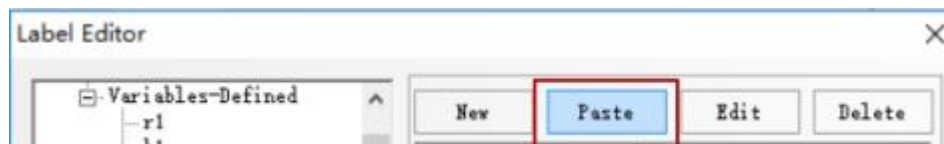

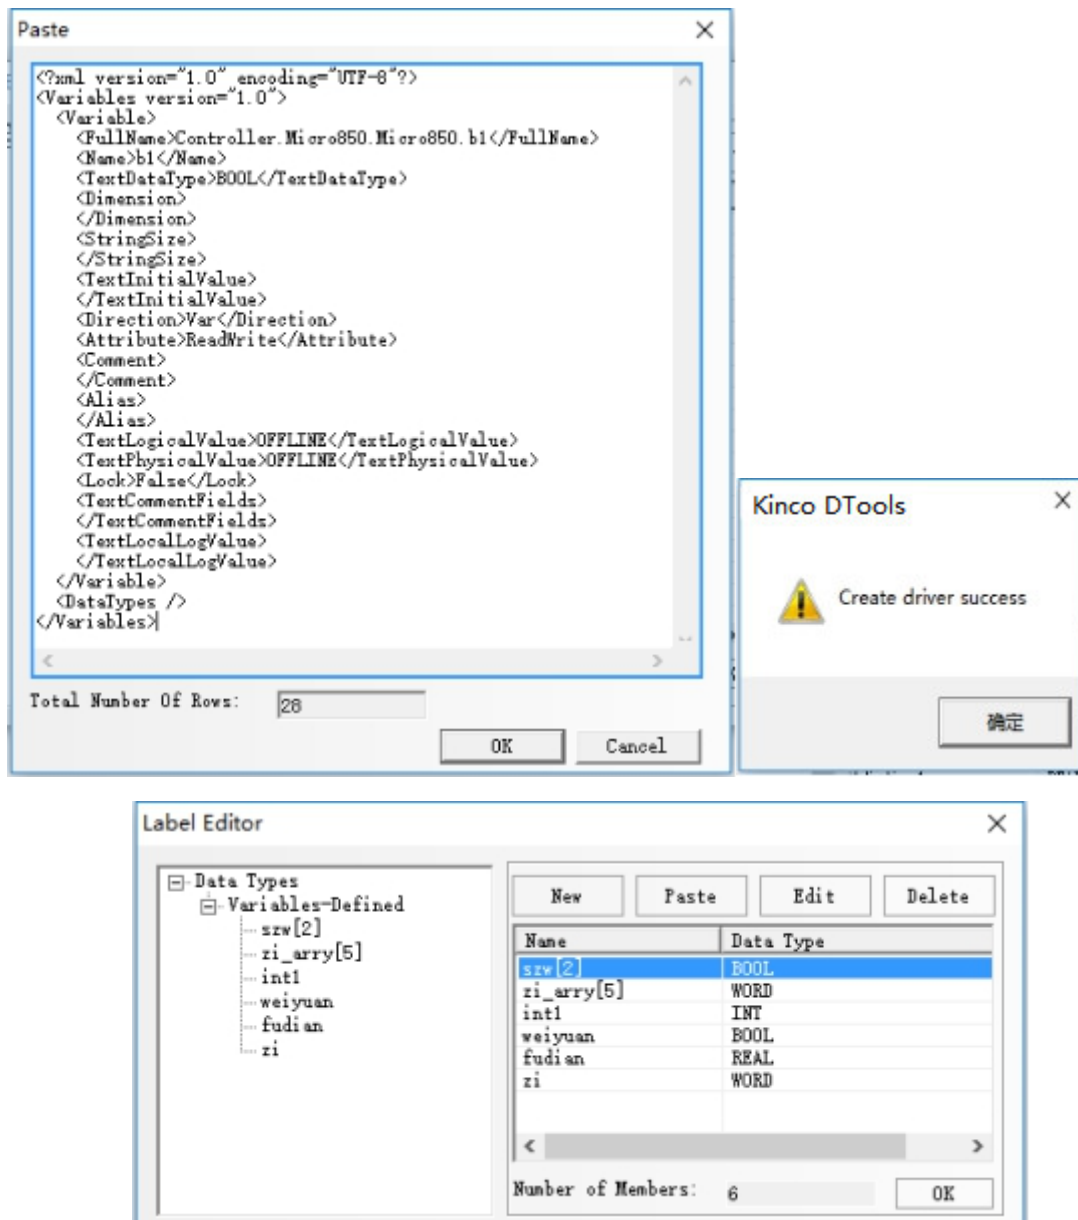


5. You can also click "New" to add a new register corresponding to your PLC

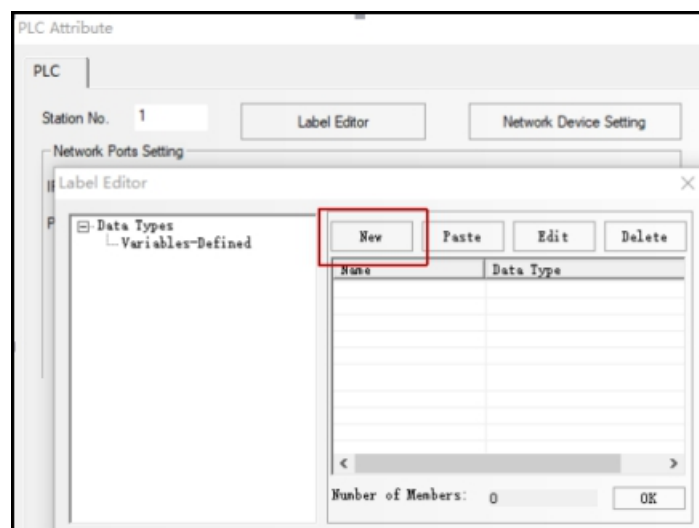

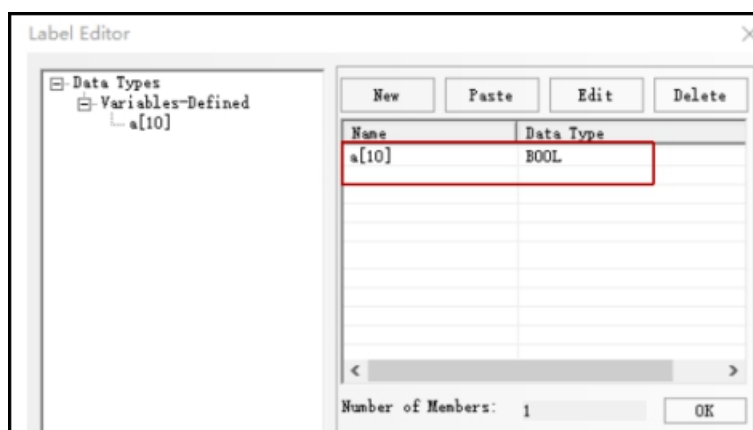


Note: When Kinco DTools V3.4 or higher version open kinco HMIware2.5 or lower than Kinco DToolsV3.4 's project, you must open the label editor and click OK (regenerate the label), as shown in the figure:

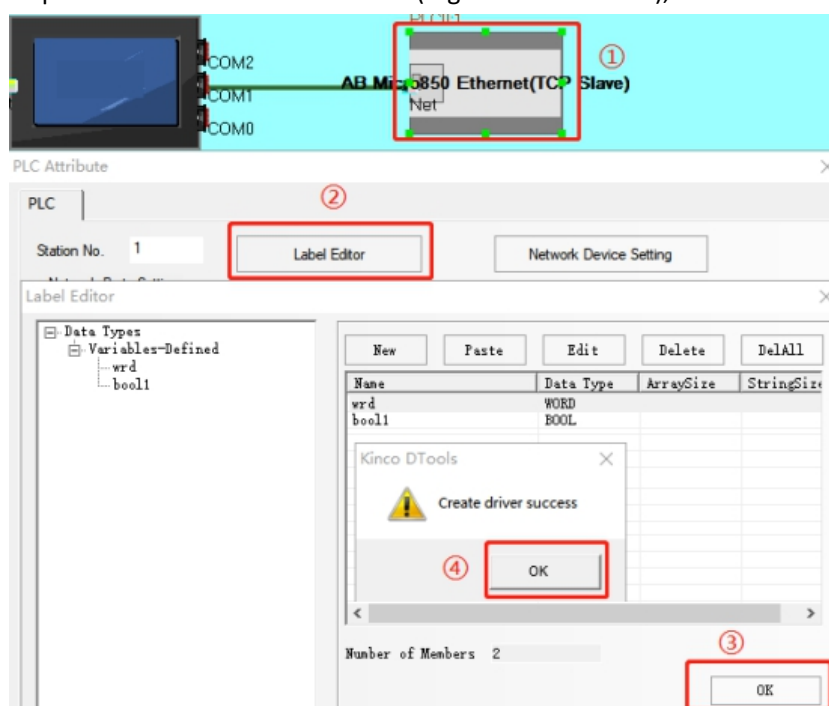


© Ethernet Communication Setting


AB SLC500/PLC5/MicroLogix Series Ethernet(TCP Slave) protocol

HMI Setting

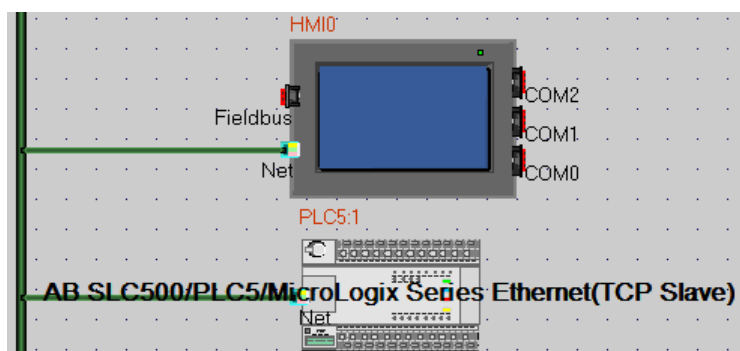


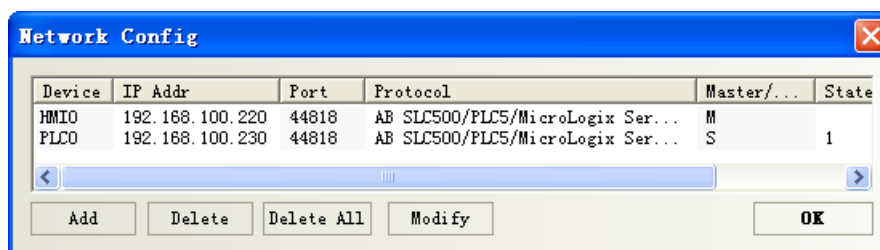


PLC Setting

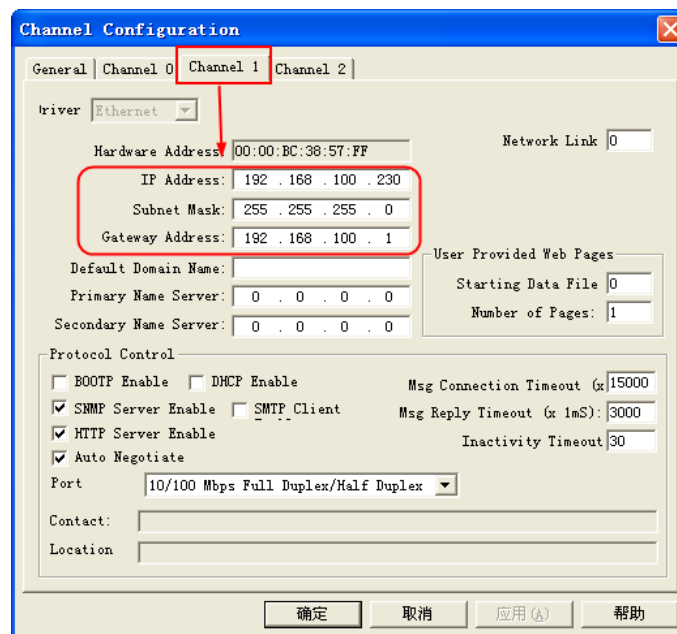


AB CompactLogix/ControlLogix Series Ethernet(TCP Slave) protocol

HMI Setting

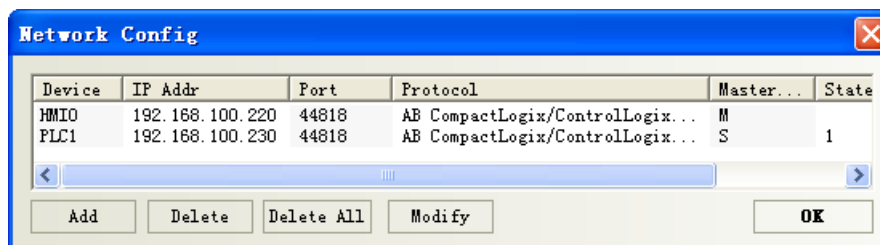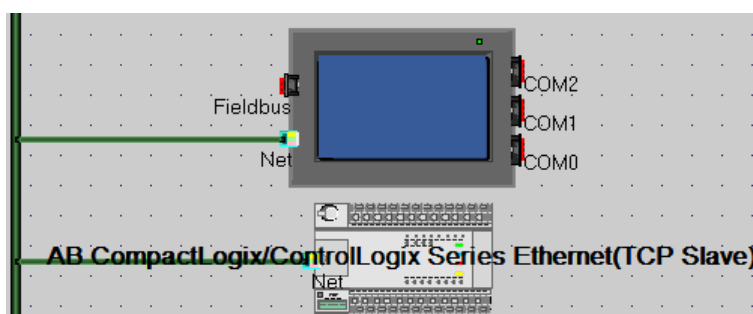

PLC Setting


(1) Set IP address in the module properties

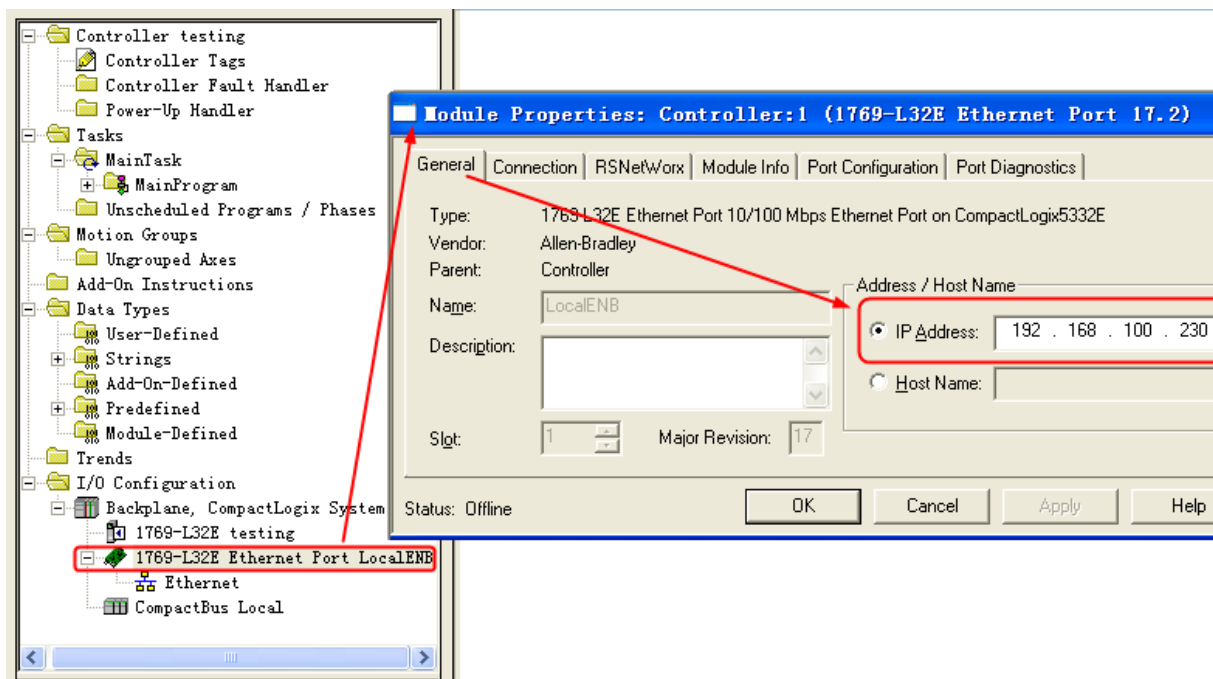


(2) **Define Tags and Data type:** Select “Controller Tags” right-click→”New Tag”, set up tag:

NOTE:

1. The controller registers that HMI needs to visit should be defined in the RSLogix5000 in advance.
2. Controller Tags are suitable for all routines in controller, they are global, so the tag should be built in Controller Tags

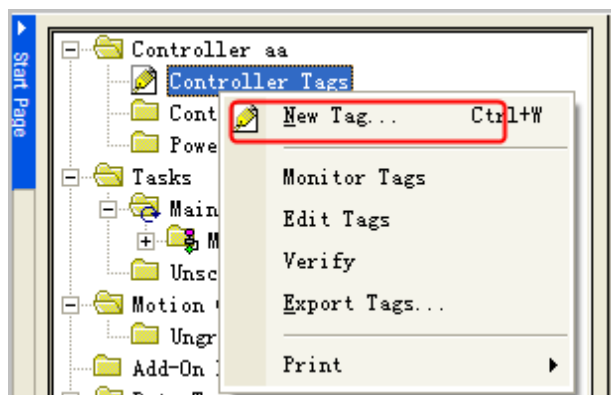

(3) **Tag Name and File Number mapping:** Select “Logic”→”Map PLC/SLC Messages”. (Note: the software should be in offline mode)

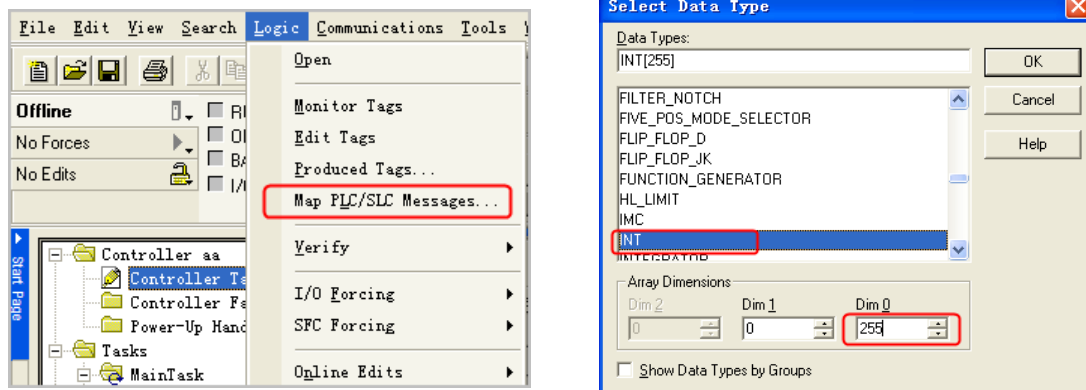

Example:

Build a new tag whose name is a, the Data Type is INT:

Note:

1. For the Data Type, the CompactLogix/ControlLogix supports the INT, BOOL, REAL data type only.
2. This driver does not support Multi-dimensional array, so you can define the range of Dim0 only.
3. In this driver, the INT range is 0~254; REAL range is 0~254, and the BOOL range is 0~999.

Besides, build two new tags whose Names are b and c, Data Type are REAL and BOOL.


Name	Value	Force Mask	Style	Data Type	Description
+ a		{...}	Decimal	INT[255]	
+ b		{...}	Float	REAL[255]	
+ c		{...}	Decimal	BOOL[1024]	

The BOOL variable address range is 0~1024 in PLC, but this driver only supports 0~999. So the HMI can only visit the BOOL register from to 999.



After the tags are defined, map the Name to the File Number:


Note:

1. The File Number is unique, a same File Number cannot map to different Names
2. The range of File Number in this driver is 0~254.

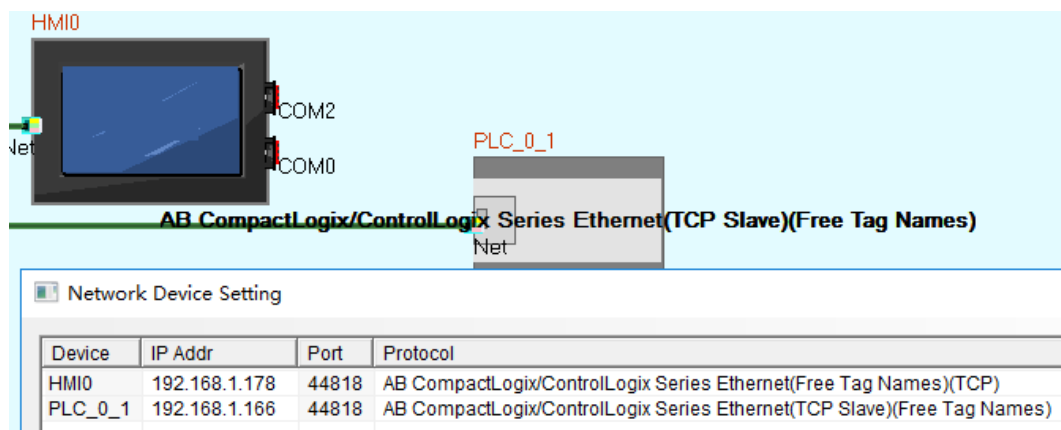
AB CompactLogix/ControlLogix Series Ethernet (TCP Slave) (Free Tag Names) protocol:
HMI setting


Double click PLC to import label

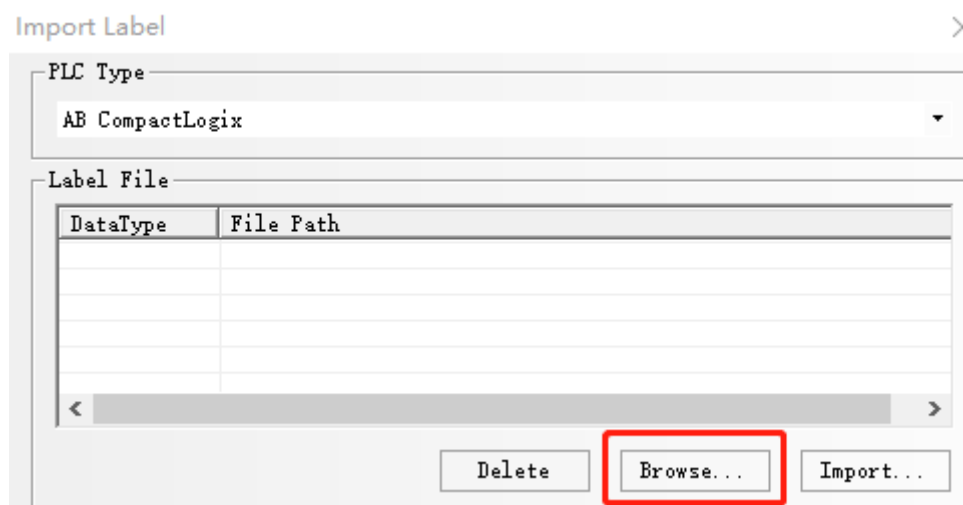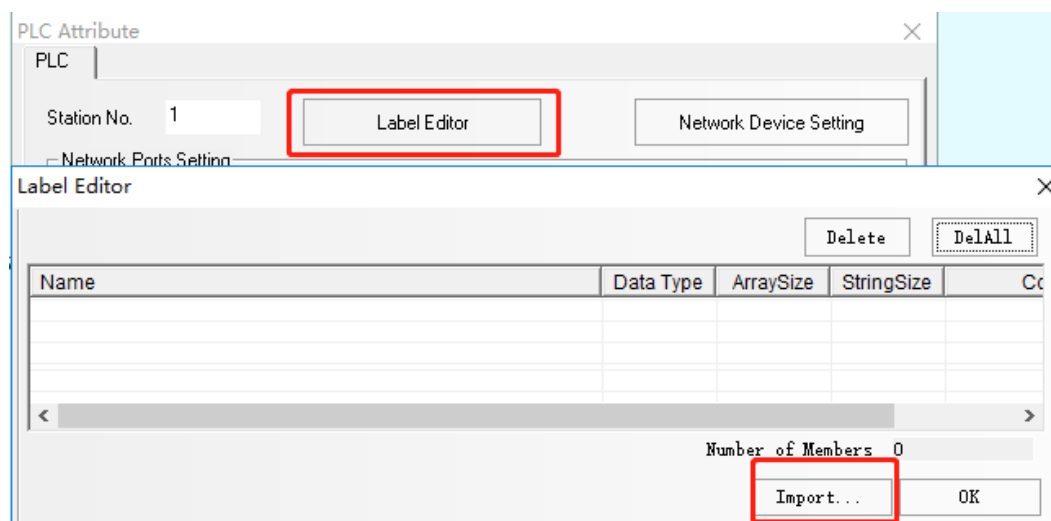

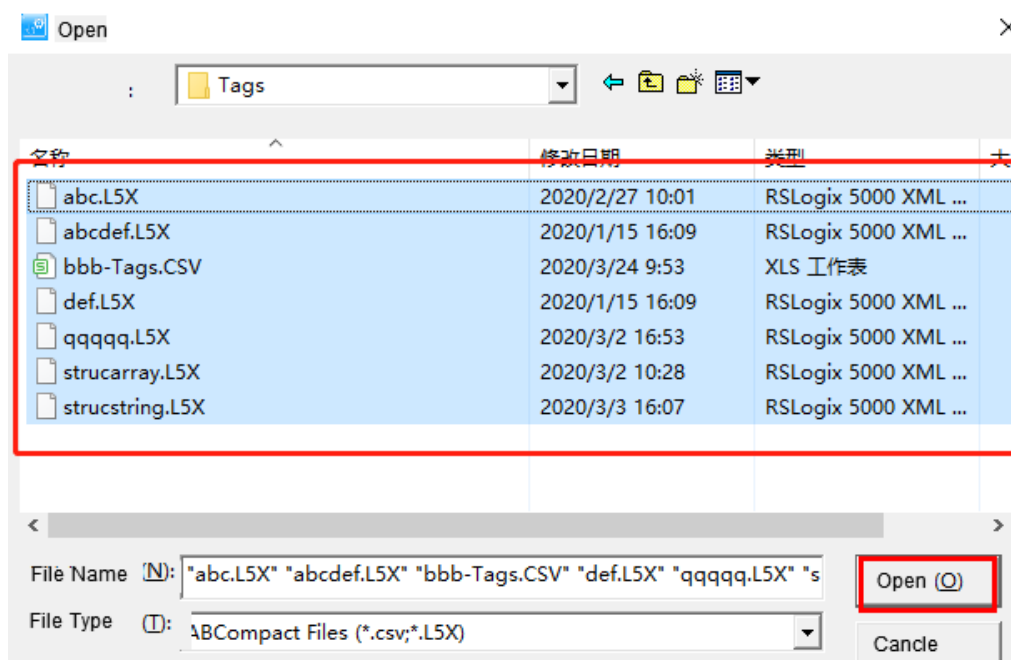


Batch import label CSV and L5X label files exported by PLC software (2 files generated by PLC programming software: L5X is a structure type file, and CSV is a label file)

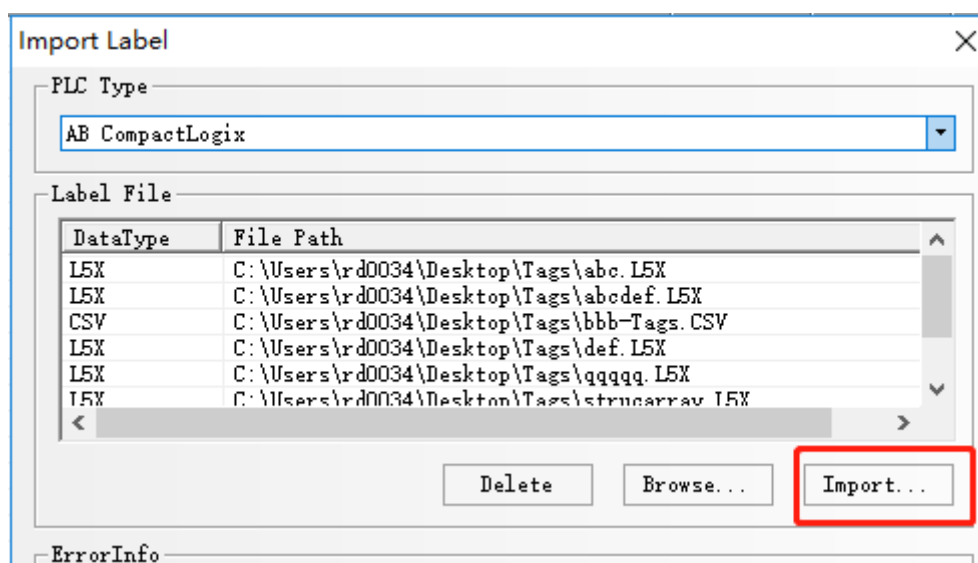

PLC Setting


RSLogix5000Software settings:

Label setting: Controller Tags

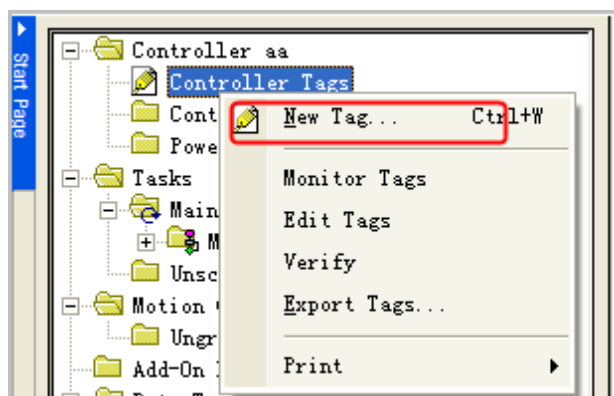


1. Common label


Create a new tag directly in the tag editor. This only needs to export the CSV to communicate directly with the screen.

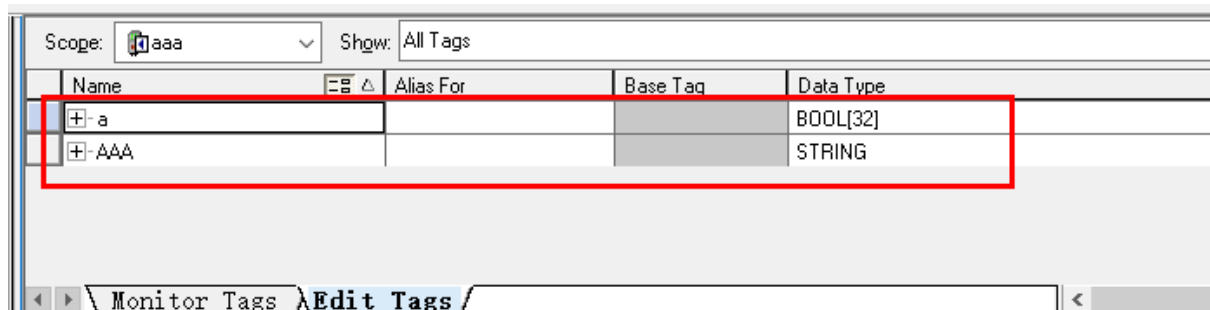

2. User-Defined label (Structure tag)


As shown: Structure type "abc": After creating the data type "abc", you need to add a tag in the tag editor and reference the type. For example, add a new tag named "strucabc" to reference the structure type "abc".

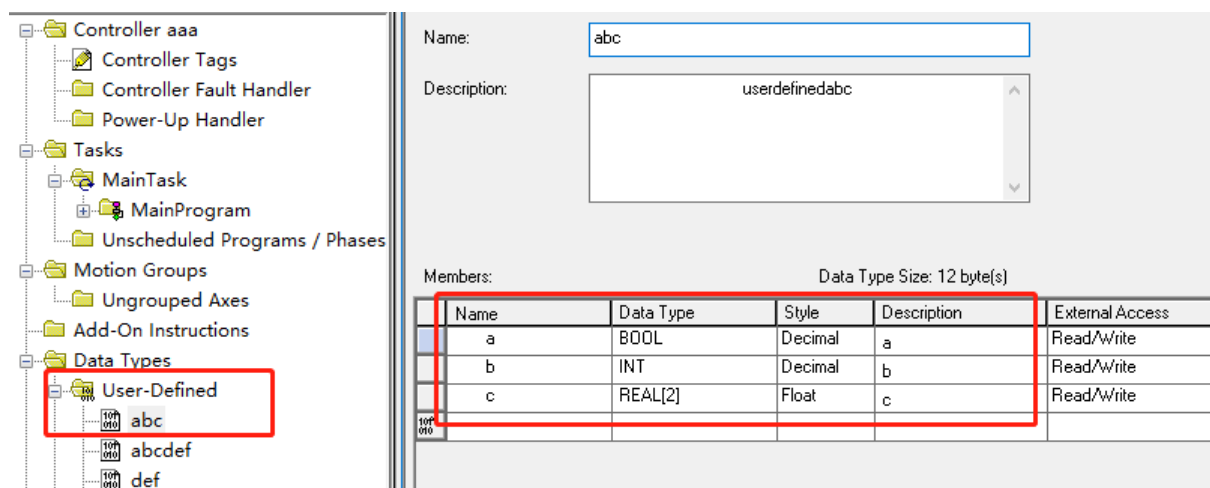

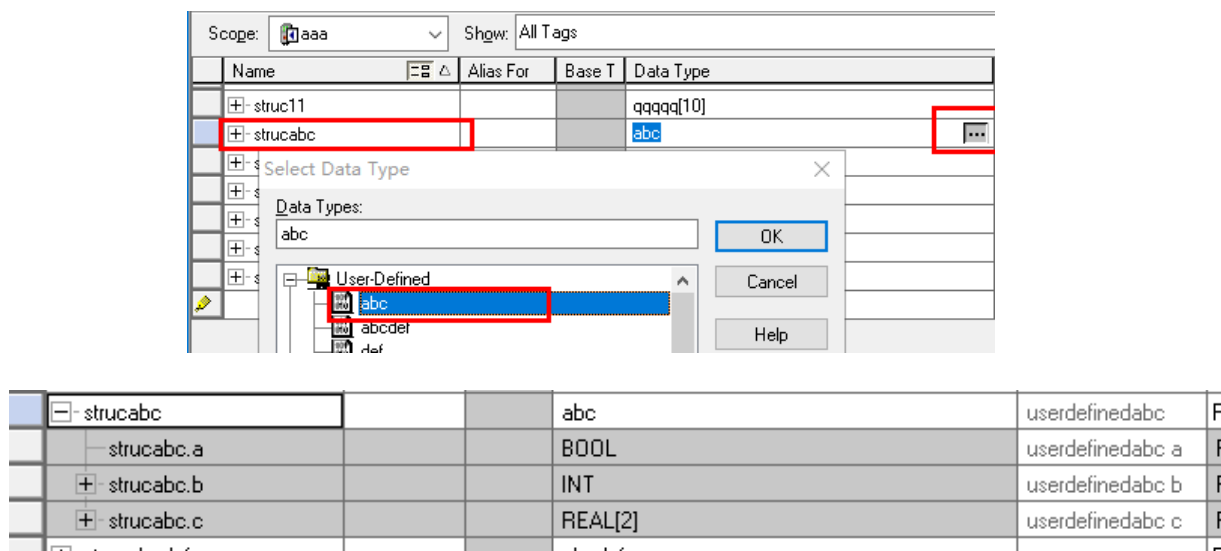


For this type of structure type label, you need to import not only the label CSV to the project of the screen, but also the structure L5X file:

Rightclick"abc"to export data type

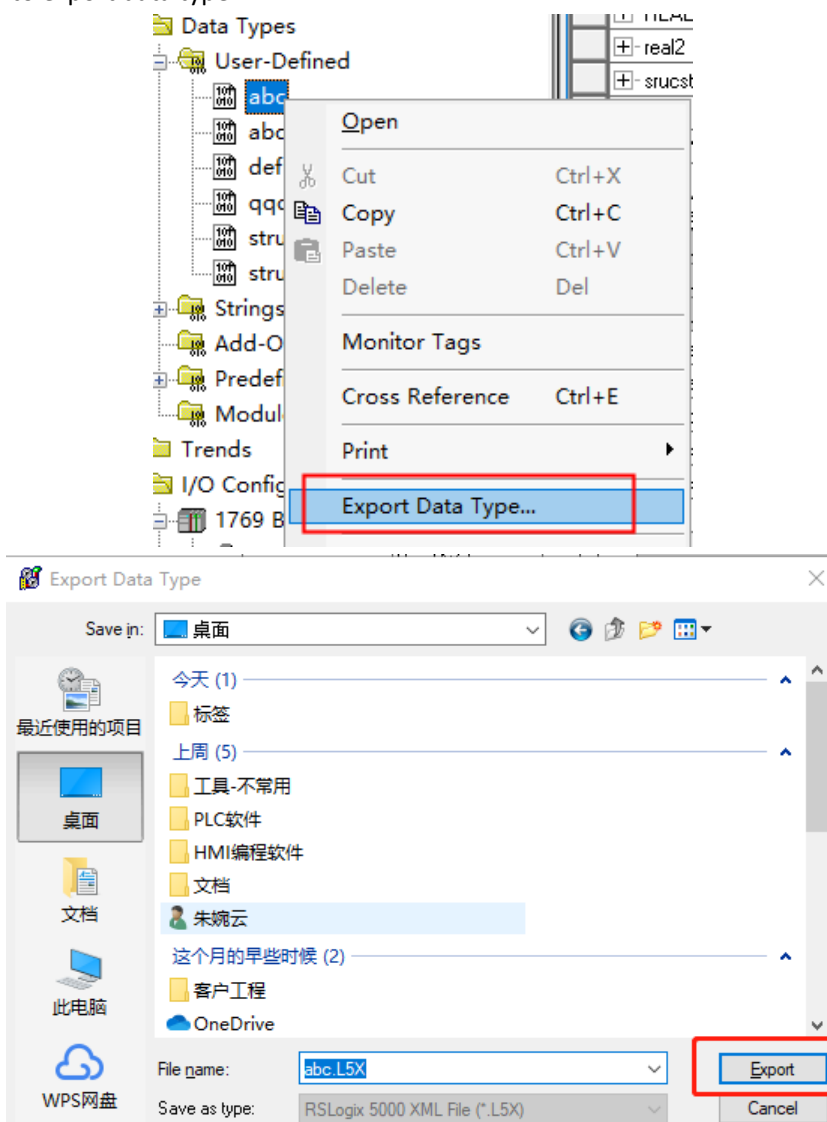


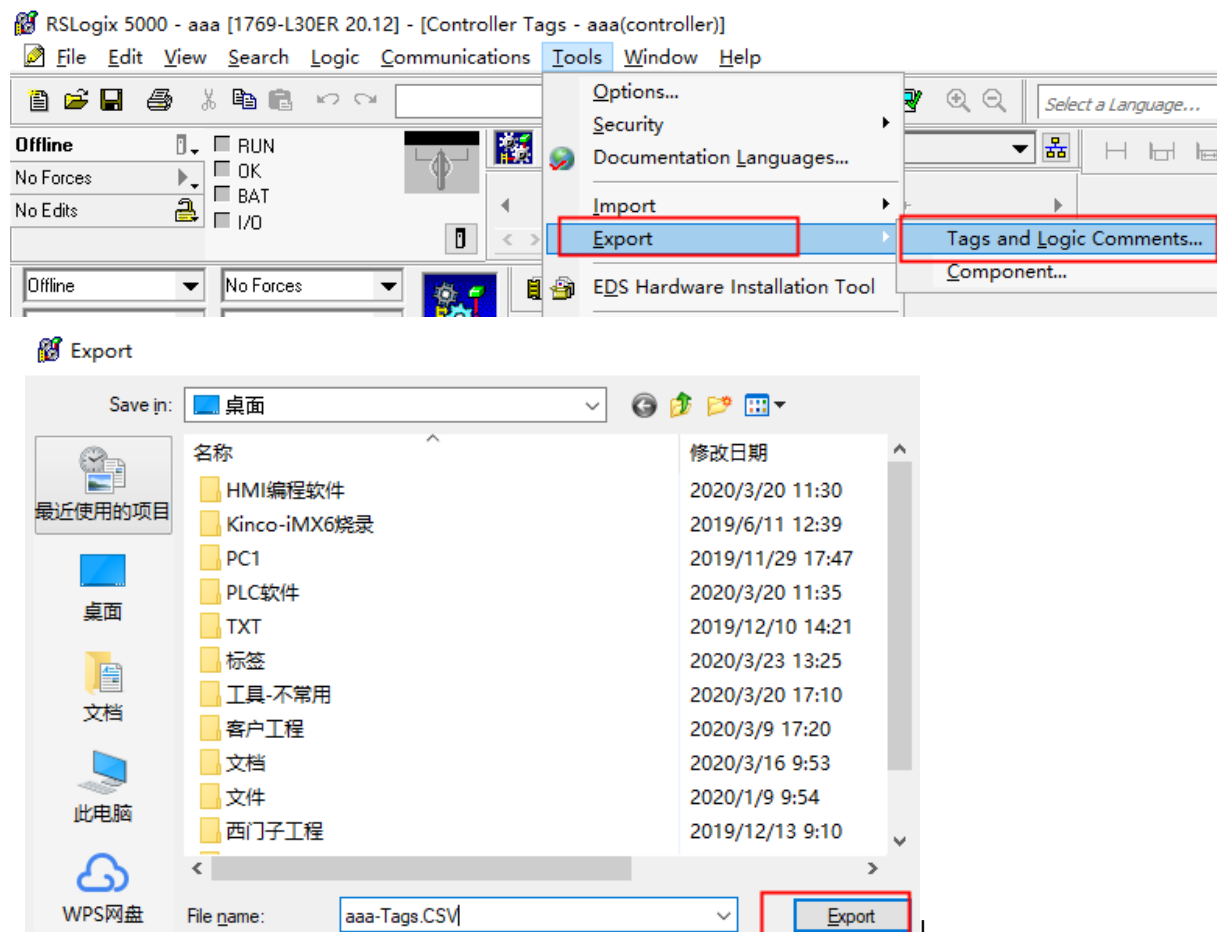

After editing all tags, click Tools-export-tags and logic comments to export the tags CSV file







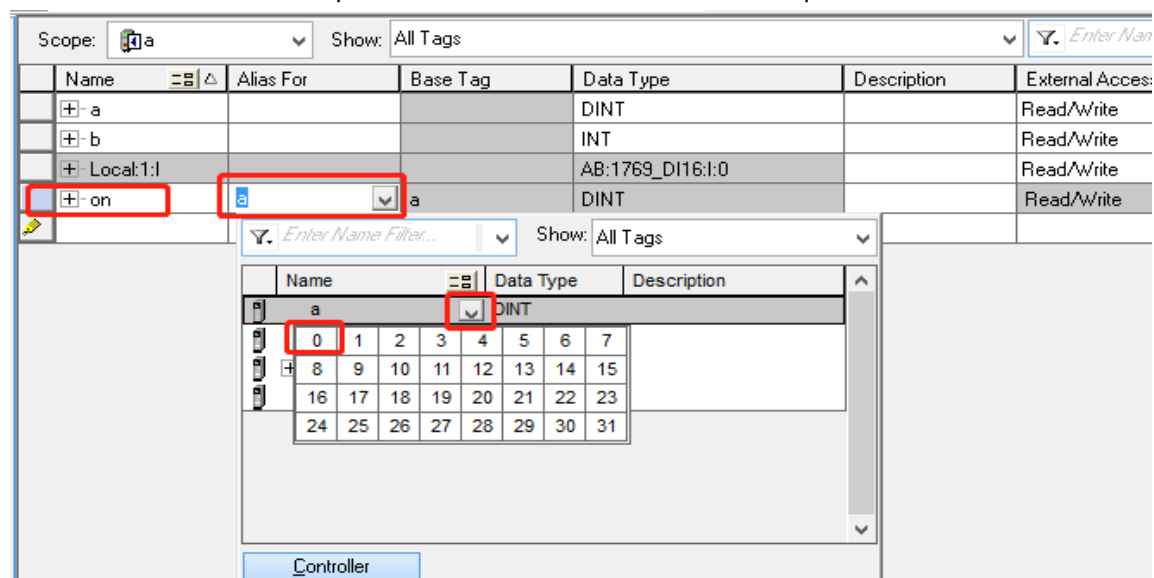

Notice: The bit label corresponding to a word needs to create a new label to point to the bit of the word, for example:

Create a new label "on" and point to the first bit in the address of the previous label "a"



Scope:  a  Show: All Tags

	Name  	Alias For	Base Tag	Data Type	Description
	- a			DINT	
	- b			INT	
	- Local:1:I			AB:1769_DI16:I:0	
	on	a.0	a.0	BOOL	

Similarly, you can create a new label "off" to point to a bit of the word address in the IO module










Scope: a Show: All Tags

Name	Alias For	Base Tag	Data Type	Description
+ a			DINT	
+ b			INT	
+ Local:1:I			AB:1769_DI16:I:0	
on	a.0	a.0	BOOL	
off	Local:1:I.Fault.3		BOOL	

Enter Name Filter... Show: All Tags


Name	Data Type	Description
a	DINT	
b	INT	
Local:1:I	AB:1769_DI1...	
Local:1:I.Fault	DINT	

Controller

Scope:		 a	▼		Show:	All Tags	▼	
	Name	 	Alias For		Base Tag		Data Type	Description
	 a						DINT	
	 b						INT	
	 Local:1:I						AB:1769_DI16:I:0	
	on		a.0		a.0		BOOL	
	off		Local:1:I.Fault.3				BOOL	

AB Micro850 Ethernet (TCP Slave) protocol

HMI setting

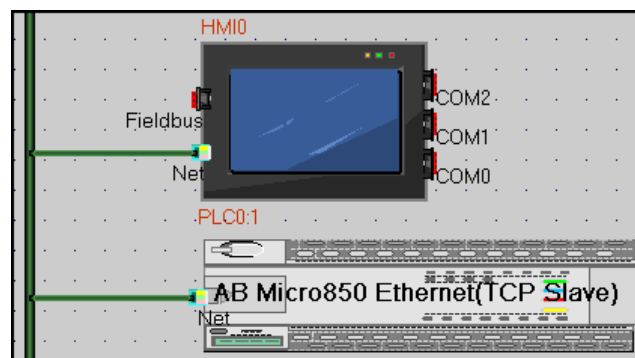

Network Device Setting						
Device	IP Addr	Port	Protocol	Master/...	Stati...	Virtual...
HMI0	192.168.205.110	44818	AB Micr...	M		
PLC0	192.168.205.23	44818	AB Micr...	S	1	

PLC Setting

1. Set the IP address of PLC, consistent with the configuration in HMI software.

Controller - Ethernet

Ethernet Settings

Internet Protocol (IP) Settings

☐ Obtain IP address automatically using DHCP

☒ Configure IP address and settings

IP Address: 192 . 168 . 205 . 23

Subnet Mask: 255 . 255 . 255 . 0

Gateway Address: 192 . 168 . 205 . 1

☒ Detect duplicate IP address

Port Settings

Port State: ☒ Enabled ☐ Disabled

☒ Auto-Negotiate Speed and Duplex Mode

2. Setting the required types and addresses of registers in your PLC software, such as below:

zi_array : An array of bool elements with a dimension of 6

int1: int type

weiyuan: bool type


fudian: float\real type

szw: An array of word elements with a dimension of 3


zi: word type

zi_array		WORD	[0..5]
zi_array[0]	WORD		
zi_array[1]	WORD		
zi_array[2]	WORD		
zi_array[3]	WORD		
zi_array[4]	WORD		
zi_array[5]	WORD		
int1	INT		
weiyuan	BOOL		
fudian	REAL		
szw	BOOL	[0..2]	
szw[0]	BOOL		
szw[1]	BOOL		
szw[2]	BOOL		
zi	WORD		


3. Select the established variables and copy them.
4. Open the PLC address tag editor in HMI software:

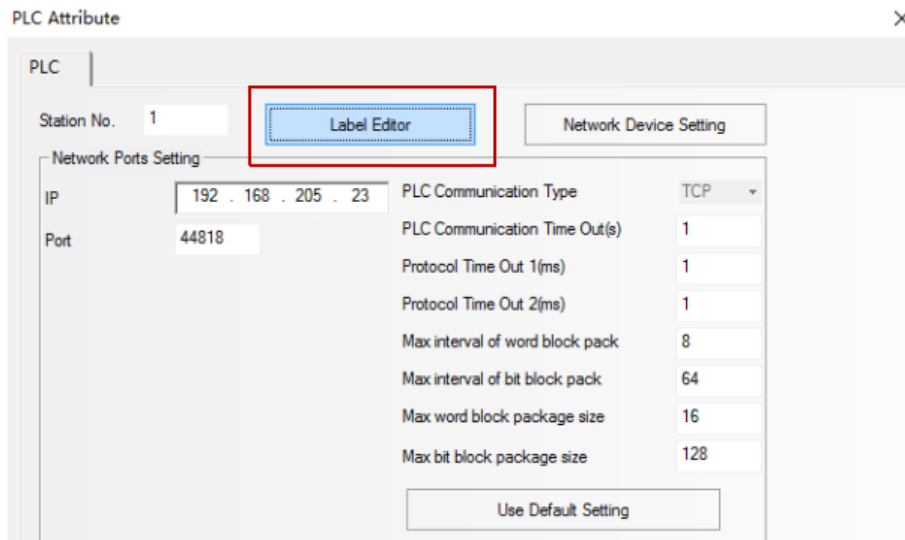



5.Right click to add data type

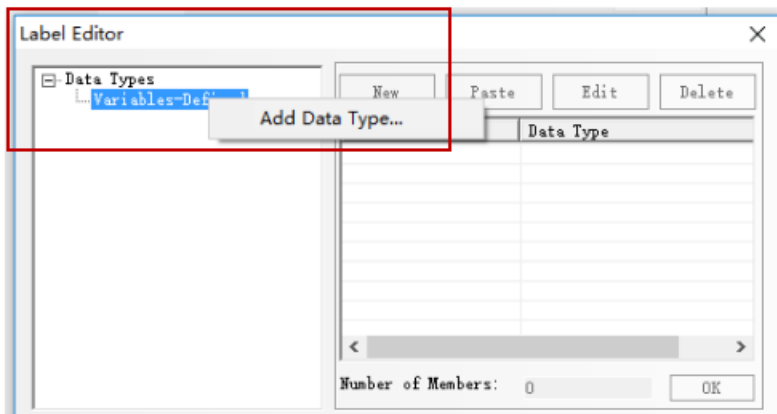


6. Click paste

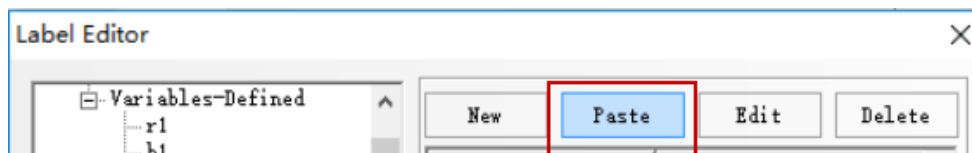


7. Start paste, and click" OK"

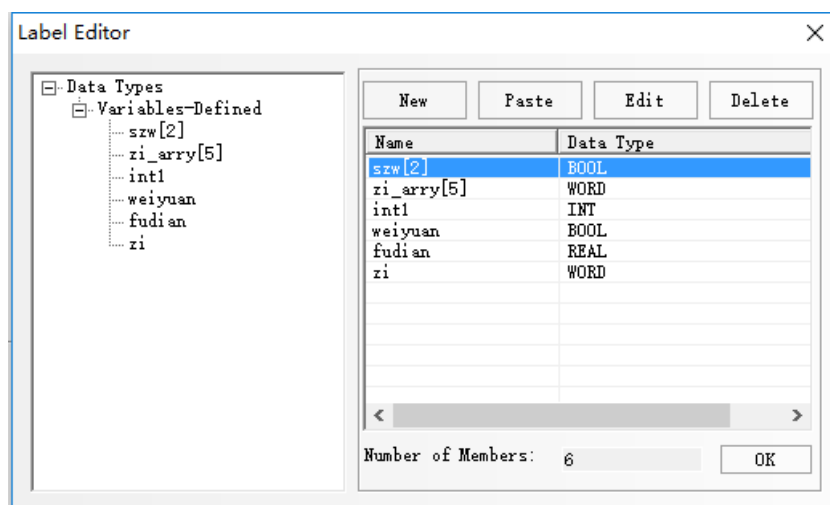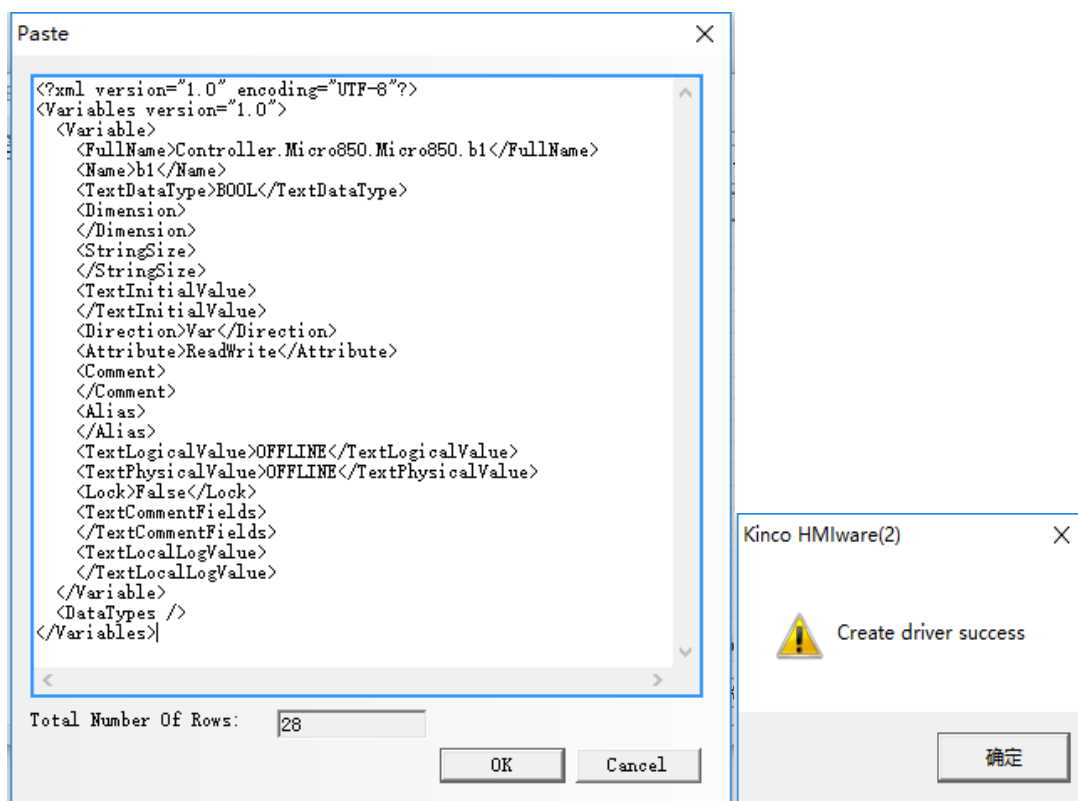

8.You can also click “New”to add a new register corresponding to your PLC,and be sure to double click when you chose the data type ,or it will prompt “error:data type doesn’t exist!”

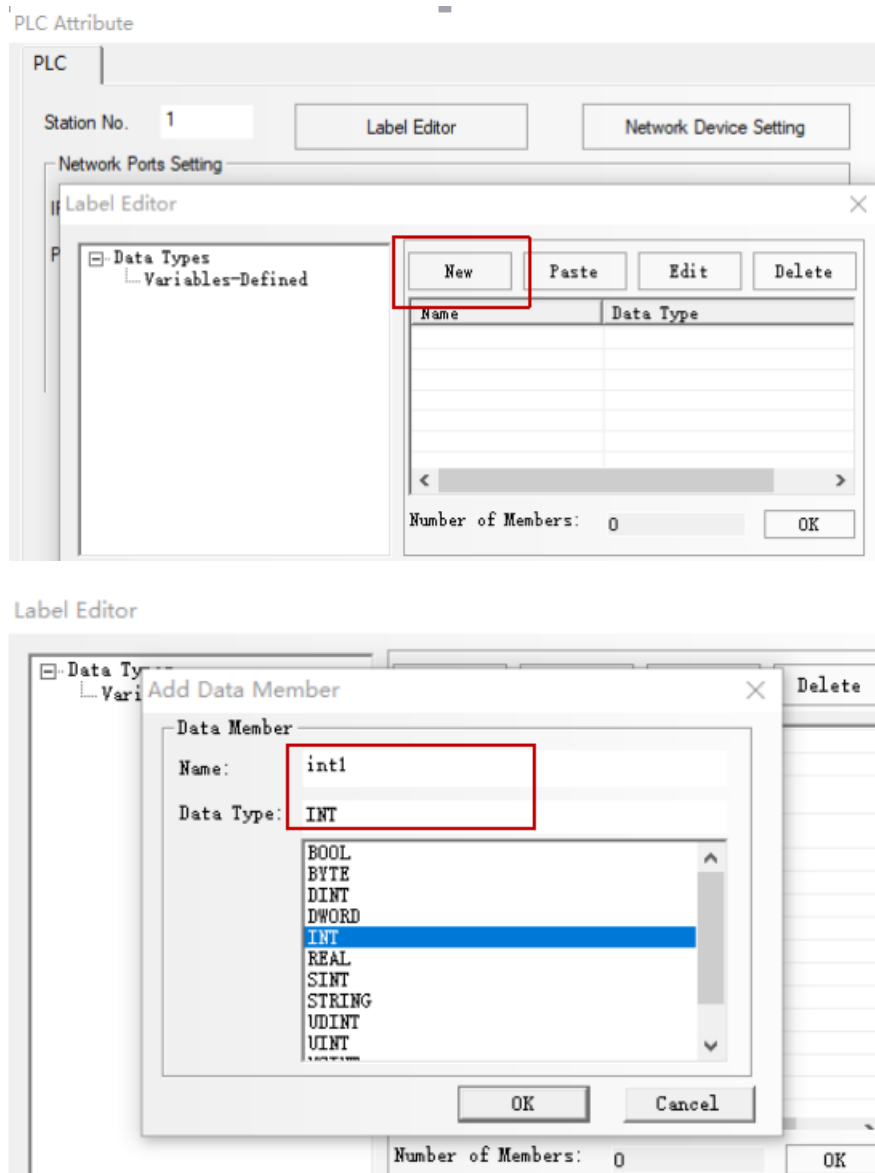

9. Add array:

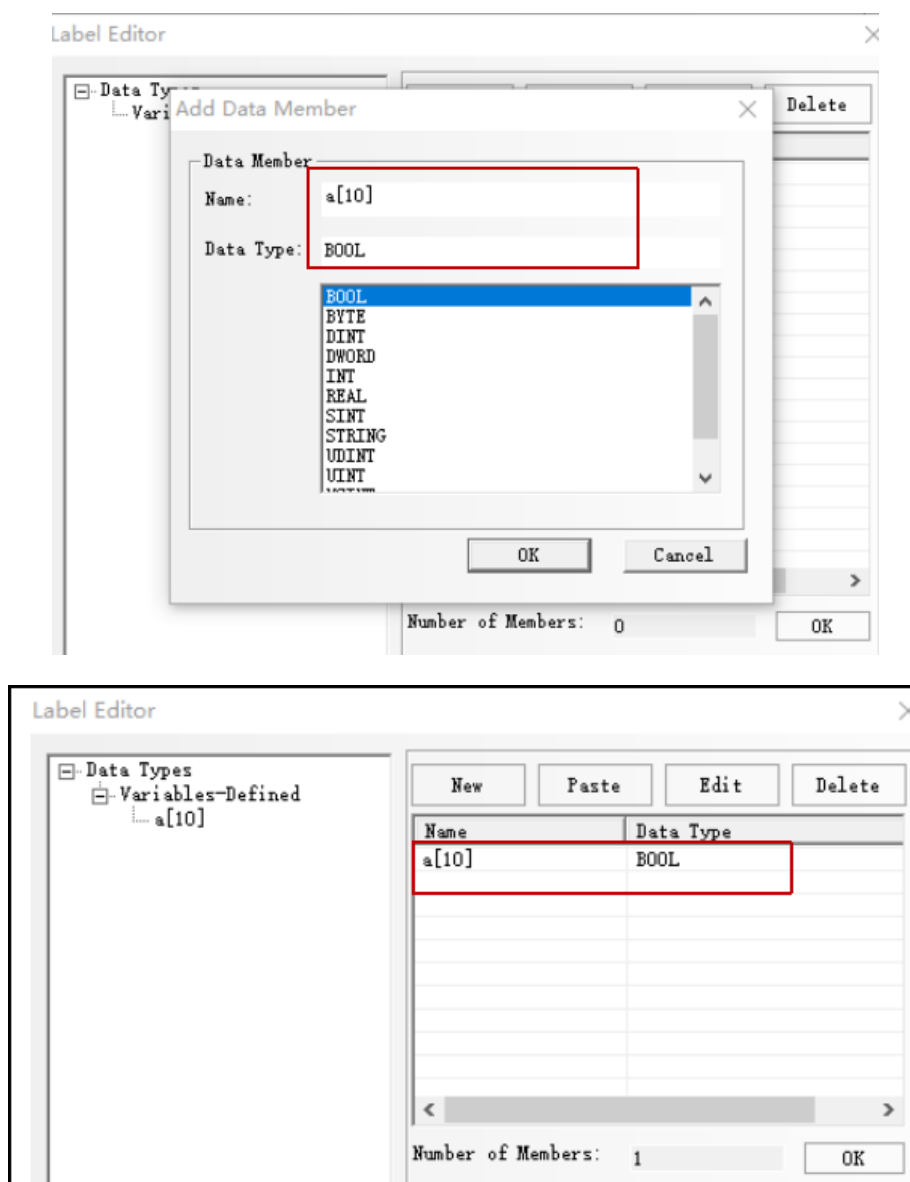

10. After setting up the variables, you can set the corresponding components in the configuration.

©Supported Register

AB SLC500/PLC5/MicroLogix Series(DF1)

Device	Bit Address	Word Address	Format	Notes
Bit data file	B3: 0.0-255.15	-----	DDD.DD	
Bit data file	B10: 0.0-255.15	-----	DDD.DD	
Bit data file	B11: 0.0-255.15	-----	DDD.DD	
Bit data file	B12: 0.0-255.15	-----	DDD.DD	
Bit data file	B13: 0.0-255.15	-----	DDD.DD	
Bit data file	Bf:n: 0.0-255.255.15	-----	DDDDDD.DD	*1
Output data file	O0: 0.0-255.15	-----	DD.DD	
Input data file	I1: 0.0-255.15	-----	DD.DD	
Integer data file	-----	N15: 0-255	DDD	
Integer data file	-----	N14: 0-255	DDD	

Integer data file	-----	N13: 0-255	DDD	
Integer data file	-----	N12: 0-255	DDD	
Integer data file	-----	N11: 0-255	DDD	
Integer data file	-----	N10: 0-255	DDD	
Integer data file	-----	N7: 0-255	DDD	
Integer data file	-----	Nf:n: 0-255255	DDDDDD	*1
Floating point data file	-----	F8: 0-255	DDD	
Counter Accumulator Value	-----	C5PV: 0-255	DDD	
Counter Preset Value	-----	C5SV: 0-255	DDD	
Timer Accumulator Value	-----	T4PV: 0-255	DDD	
Timer Preset Value	-----	T4SV: 0-255	DDD	

Note:

The format of I/O address is I/O e.s/b, and the e is slot number, s is variable number and b is bit number.

For example:

The PLC address is **00 0.0/11**, mapping address in HMI is **00 0.11**;

The PLC address is **00 0.1/8**, mapping address in HMI is **00 1.8**.

The I/O address in HMI is continuous when different AB CPU use the I/O modules.

Take Micrologix 1400 + output module 1762-OW16 for example, **00 1.3/3** maps the **00 6.3** in HMI.

**Note:**

*1 Variable less than three address the need to fill the former 0

The correct format example as follow:

Bf:n 113087.12, file number is 113, variable address is 87.12, and mapping address in PLC is **B113: 87/12**;

Nf:n 9002, file number 9, variable address 2, and mapping address in PLC is **F9:2**.

AB CompactLogix/ControlLogix Series(DF1)

Device	Bit Address	Word Address	Format
Integer data file bit level	N_BOOL000000.00~254254.15	-----	DDDDDD.DD*1
Bit data file	B_BOOL000000~254991	-----	DDDDDD*1
Floating point data file	-----	REAL000000~254254	DDDDDD*1

Integer data file	-----	INT000000~254254	DDDDDD*1
DInteger data file	-----	DINT000000~254254	DDDDDD*1

Note:

*1 Variable less than three address the need to fill the former 0

The correct format example as follow: file number is 112, variable address is 87.12, format is **112087.12**.

2. Users can define the File Number.

AB SLC500/PLC5/MicroLogix Series Ethernet(TCP Slave)

Device	Bit Address	Word Address	Format	Notes
Bit data file	B13: 0.0-255.15	-----	DDD.DD	
Bit data file	B12: 0.0-255.15	-----	DDD.DD	
Bit data file	B11: 0.0-255.15	-----	DDD.DD	
Bit data file	B10: 0.0-255.15	-----	DDD.DD	
Bit data file	B3: 0.0-255.15	-----	DDD.DD	
Bit data file	Bf:n: 0.0-255255.15	-----	DDDDDD.DD	*1
Output bit data file	O0: 0.0-255.15	-----	DD.DD	
Input bit data file	I1: 0.0-255.15	-----	DD.DD	
Output data file	-----	OW0: 0-255	DDD	
Input data file	-----	IW1: 0-255	DDD	
Integer data file	-----	N15: 0-255	DDD	
Integer data file	-----	N14: 0-255	DDD	
Integer data file	-----	N13: 0-255	DDD	
Integer data file	-----	N12: 0-255	DDD	
Integer data file	-----	N11: 0-255	DDD	
Integer data file	-----	N10: 0-255	DDD	
Integer data file	-----	N7: 0-255	DDD	
Integer data file	-----	Nf:n: 0-255255	DDDDDD	*1
Floating point data file	-----	F8: 0-255	DDD	
Floating point data file	-----	Ff:n: 0-255255	DDDDDD	*1
Counter Accumulator Value	-----	C5PV: 0-255	DDD	
Counter Preset Value	-----	C5SV: 0-255	DDD	
Timer Accumulator Value	-----	T4PV: 0-255	DDD	
Timer Preset Value	-----	T4SV: 0-255	DDD	

Note:

*1 Variable less than three address the need to fill the former 0

The correct format example as follow:

Bf:n 113087.12, file number is 113, variable address is 87.12, and mapping address in PLC is **B113: 87/12**;

Ff:n 9002, file number 9, variable address 2, and mapping address in PLC is **F9:2**.

AB DH485

Device	Bit Address	Word Address	Format	Notes
Bit data file	B13: 0.0-255.15	-----	DDD.DD	
Bit data file	B12: 0.0-255.15	-----	DDD.DD	
Bit data file	B11: 0.0-255.15	-----	DDD.DD	
Bit data file	B10: 0.0-255.15	-----	DDD.DD	
Bit data file	B3: 0.0-255.15	-----	DDD.DD	
Bit data file	Bf:n: 0.0-255255.15	-----	DDDDDD.DD	*1
Output bit data file	O0: 0.0-255.15	-----	DDD.DD	
Input bit data file	I1: 0.0-255.15	-----	DDD.DD	
Integer data file	-----	N15: 0-255	DDD	
Integer data file	-----	N14: 0-255	DDD	
Integer data file	-----	N13: 0-255	DDD	
Integer data file	-----	N12: 0-255	DDD	
Integer data file	-----	N11: 0-255	DDD	
Integer data file	-----	N10: 0-255	DDD	
Integer data file	-----	N7: 0-255	DDD	
Integer data file	-----	Nf:n: 0-255255	DDDDDD	*1
Floating point data file	-----	F8: 0-255	DDD	
Counter Accumulator Value	-----	C5PV: 0-255	DDD	
Counter Preset Value	-----	C5SV: 0-255	DDD	
Timer Accumulator Value	-----	T4PV: 0-255	DDD	
Timer Preset Value	-----	T4SV: 0-255	DDD	

Note:

*1 Variable less than three address the need to fill the former 0

The correct format example as follow:

Bf:n 113087.12, file number is 113, variable address is 87.12, and mapping address in PLC is **B113: 87/12**;

Ff:n 9002, file number 9, variable address 2, and mapping address in PLC is **F9:2**.

AB CompactLogix/ControlLogix Series Ethernet(TCP Slave)

Device	Bit Address	Word Address	Format
Integer data file bit level	N_BOOL000000.00~254255.15	-----	DDDDDD.DD*1
Bit data file	B_BOOL000000~254999	-----	DDDDDD*1
Floating point data file	-----	REAL000000~254255	DDDDDD*1
Integer data file	-----	INT000000~254255	DDDDDD*1
DInteger data file	-----	DINT000000~254255	DDDDDD*1

NOTE:

1. Variable less than three address the need to fill the former 0

The correct format example as follow: file number is 112, variable address is 87.12, format is **112087.12**.

3. Users can define the File Number.

AB CompactLogix/ControlLogix Series Ethernet (TCP Slave) (Free Tag Names)

&AB CompactLogix_ControlLogix (Free tag Names)


Device	Type	Address	Format
Bit	BOOL	-	D
SINT	SINT	-	D
INT	INT	-	D
DINT	DINT	-	D
REAL	REAL	-	D
STRING	STRING	-	D

AB Micro850 Series \Ethernet (TCP Slave)


Device	Type	Address	Format
Bit Register	BOOL	-	D
Byte Register	BYTE	-	D
SINT	SINT	-	D
USINT	SINT	-	D
WORD	WORD	-	D
INT	INT	-	D
Unsigned INT	UINT	-	D
Double Word	DWORD	-	D
Double INT	DINT	-	D
Float	REAL	-	D
Unsigned Double INT	UDINT	-	D
String	STRING	-	D





◎ Cable Diagram**MicroLogix \AB800 RS232 cable diagram**

1. 8 pin Mini port

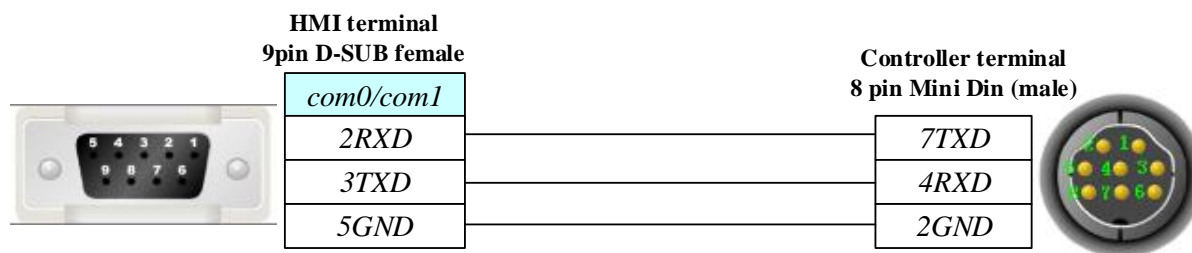

2. Communication module AIC+ (Part No. 1761-NET-AIC) RS232

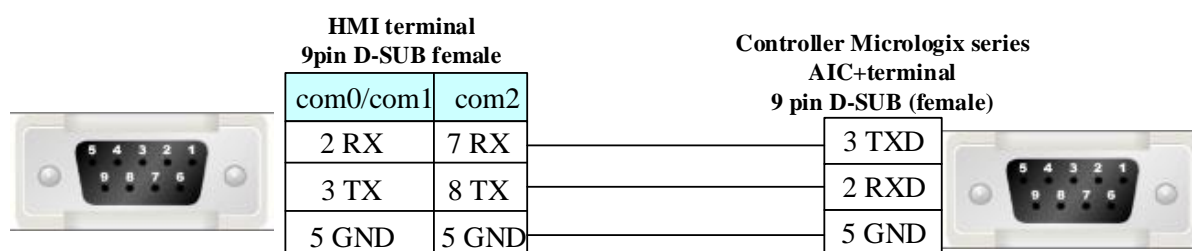

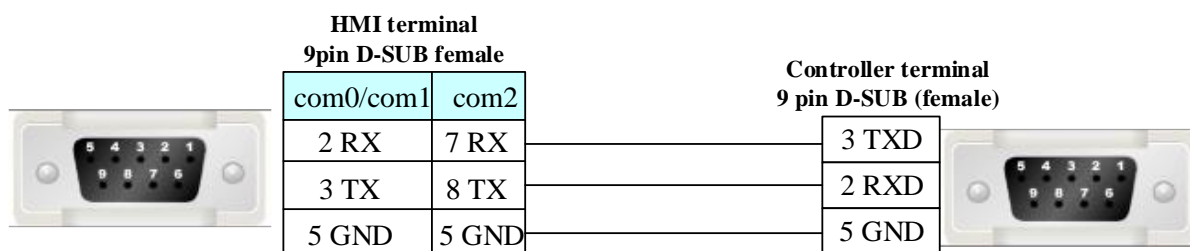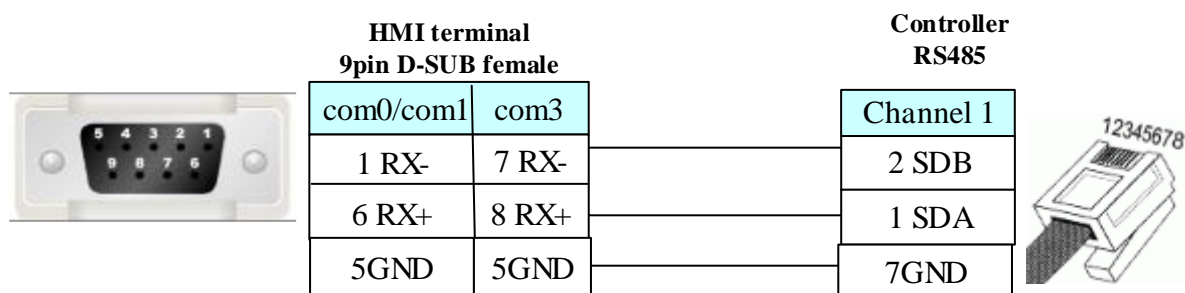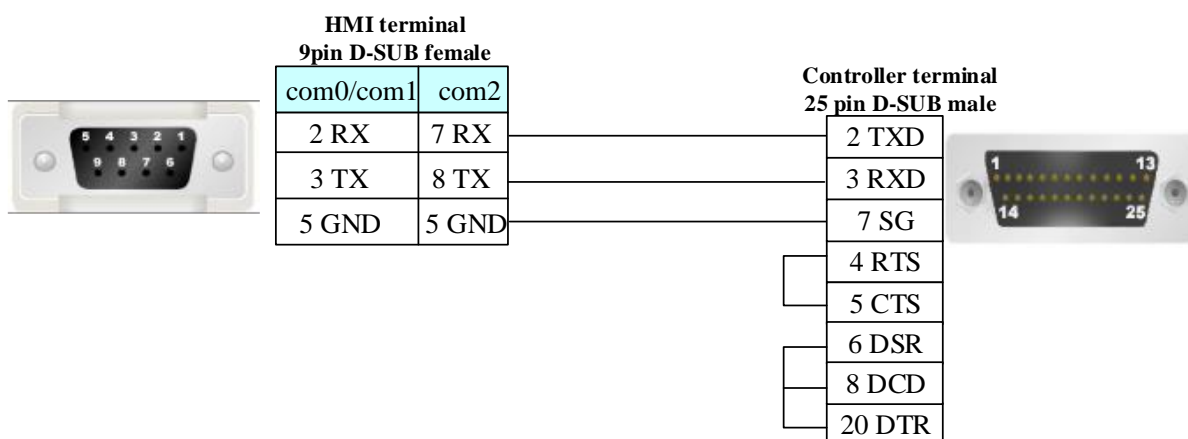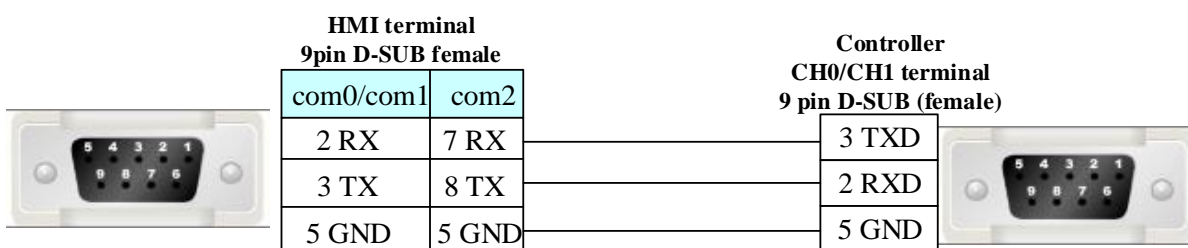SLC 5/03 RS232 cable diagram**SLC 5/03 RS485 cable diagram****PLC-5 RS232 cable diagram****CompactLogix/ ControlLogix RS232 cable diagram****Ethernet cable**

Connecting PC and HMI use cross-ruling; communicating with hub or switch use cross-over cable or cross-ruling.

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.3 Acrel (Electric power meter)

◎ Serial Communication


Series	Link Module	Driver
Acrel 210E devices	RS485 on the CPU unit	Acrel 210E RTU

◎ System configuration

Series	Link Module	COMM Type	Parameter	Cable
Acrel 210E devices	RS485 on the CPU unit	RS485	Setting	Your owner cable

◎ Communication Setting

Default communication: 9600, 8, 1, none; station: 1

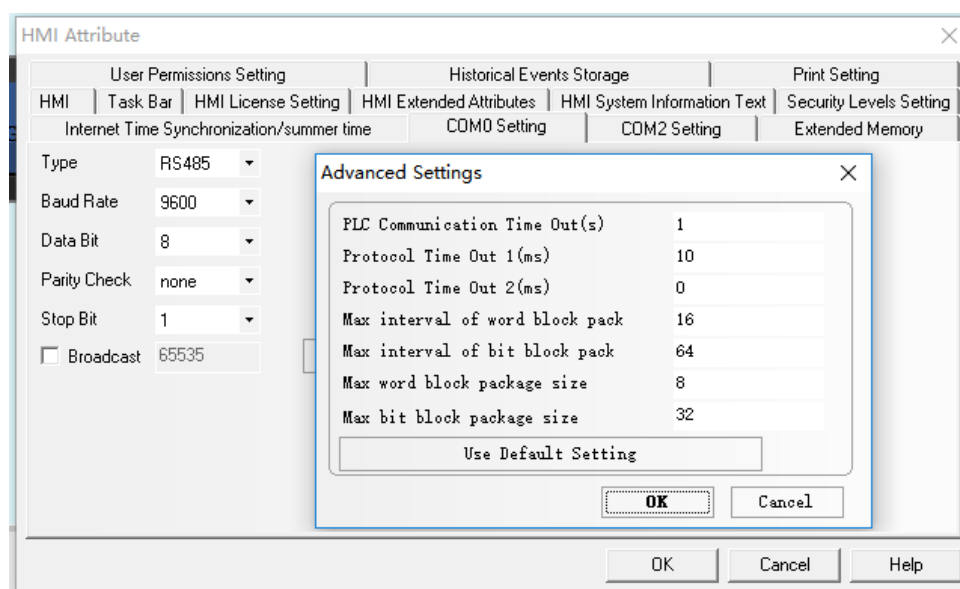

地址 address	参数 parameter	读写 r/w	数值范围 value range	数据 type of data
0000H	保护密码	R/W	0001-9999	word
0001H	通讯地址	R/W	0001-0247	word
高字节 high byte	mailing address			
0001H	通讯波特率	R/W	0-3: 38400、19200、9600、 4800bps	
低字节 low byte	communication baud rate			

station number setting

baud rate setting


◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
--------	-------------	--------------	--------	-------

Output Relay	0X 1-65535	-----	DDDDD	----
Input Relay	1X 1-65535	-----	DDDDD	read only
Input Register	-----	3X 1-65535	DDDDD	read only
Output Register	-----	4X 1-65535	DDDDD	----

◎ Cable Diagram

RS485 communication cable

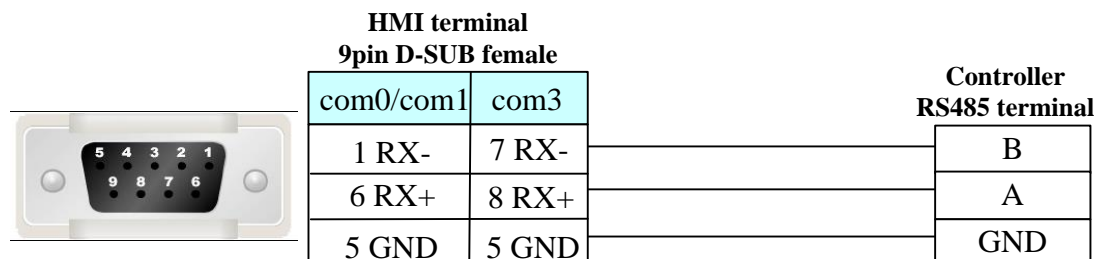

4.4 ACS-Tech80 Motion Controller

◎ Serial Communication


Series	CPU	Link Module	Driver
SA2103	SB214SA	RS232 on the CPU unit	ACS-Tech80

◎ System configuration

Series	CPU	Link Module	COM Type	Parameter	Cable
SA2103	SB214SA	RS232 on the CPU unit	RS232	Setting	Your owner cable

◎ Communication Setting

RS232 communication

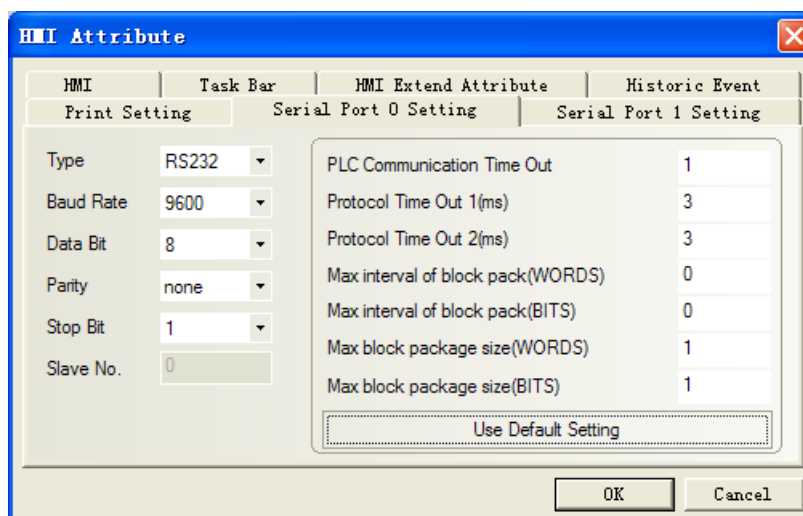

◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
Linear Deceleration (LD)	-----	LD 0~3	D	R/W
Linear Acceleration(LA)	-----	LA 0~3	D	R/W
Linear Velocity(LV)	-----	LV 0~3	D	R/W
Next trgt Abs Pos(AP)	-----	AP 0~3	D	R/W
Next Motion Mode(MM)	-----	MM 0~3	D	R/W
Functions Avail.(FA.1)	-----	FA.1 0~3	D	Read Only
Array Offset(AO)	-----	AO 0~3	D	R/W
Array's Upper Index(UI)	-----	UI 0~3	D	R/W
Array's Low Index(LI)	-----	LI 0~3	D	R/W
Path Gen.mode(PG)	-----	PG 0~3	D	R/W
Motor enabled(MO)	MO 0~3	-----	D	Write Only
CLEAR	CLEAR 0	-----	D	Write Only
RESET	RESET 0	-----	D	
B	B 0~3	-----	D	


Note: R: Readable, W: Writable。

Register instructions:

- LD、LA、LV、AP、MM、FA.1、AO、UI、LI、PG
Main address: Axis parameter number (X、Y、Z、T)
- MO、B (Operating instructions)
Main address: Axis parameter number (X、Y、Z、T)
- CLEAR、RESET (Operating instructions)

◎ Cable Diagram

RS232 communication cable

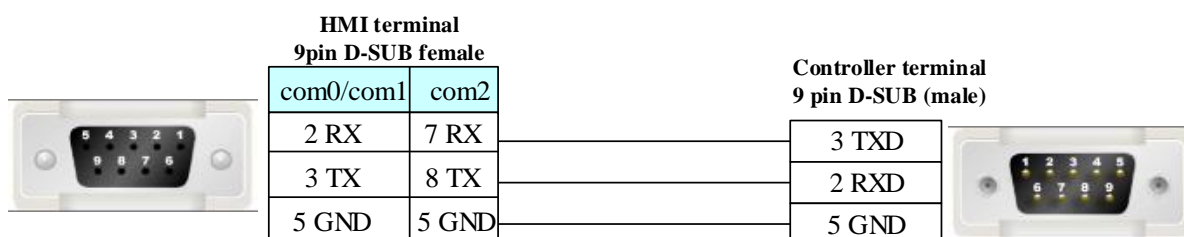

4.5 ADAM

◎ Serial Communication

Series	CPU	Link Module	Driver
ADAM	ADAM-4017	RS485 on the CPU unit	ADAM-4017
	ADMA-4015	RS485 on the CPU unit	ADMA-4015


◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
ADAM	ADAM-4017	RS485 on the CPU unit	RS485	Setting	Your owner cable
	ADMA-4015	RS485 on the CPU unit	RS485	Setting	Your owner cable

◎ Communication Setting


HMI Setting

ADAM-4017 default communication: 9600, 8, none, 1; station: 255

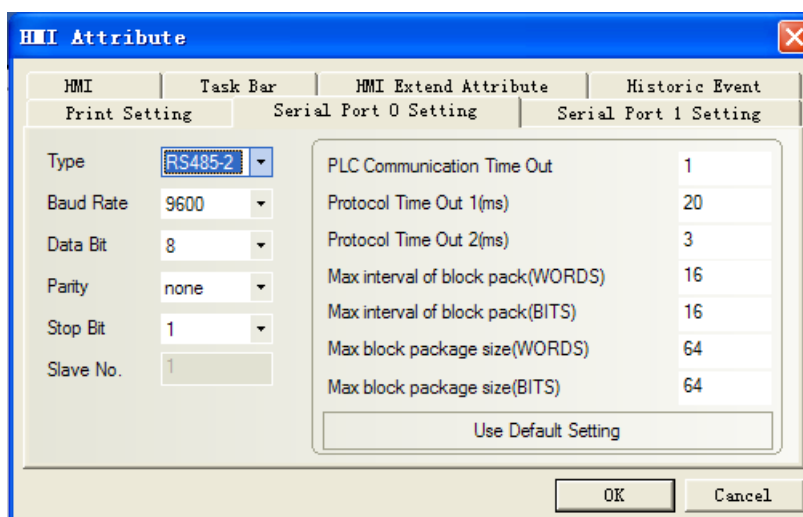

- Note:**
- To allow the "Check Code";
 - Direct online simulation disables.


ADAM-4015 default communication: 9600, 8, none, 1; station: 1

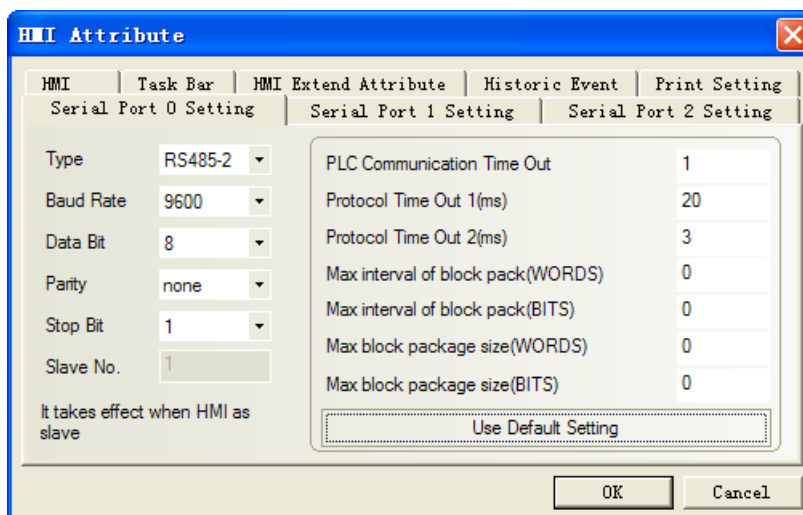

Note: PLC station must match with the ADAM-4015 configuration.

PLC Setting

Connect "INIT" with "GND", and reset the device, then set the communication of ADMA-4015.

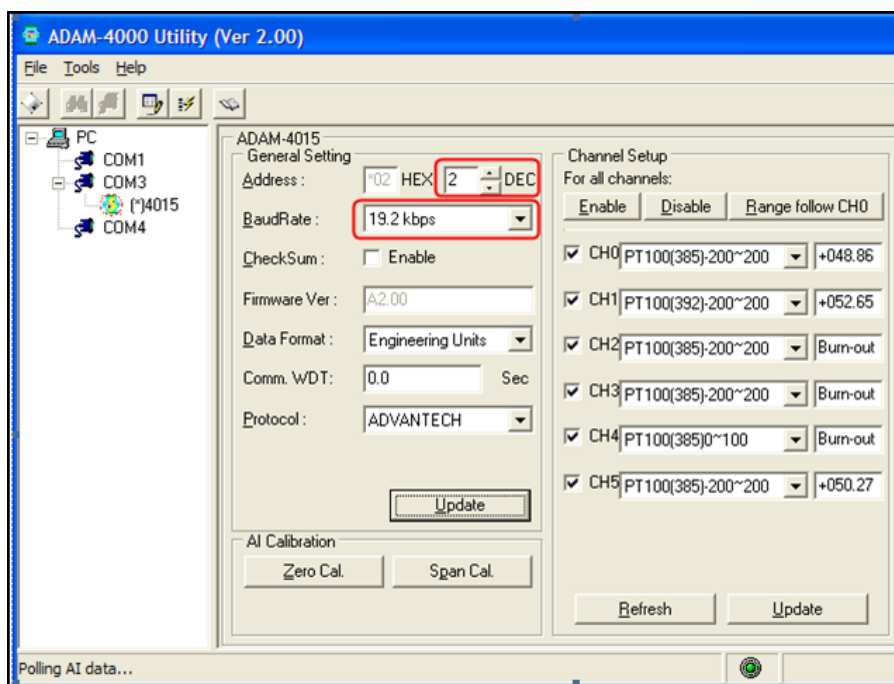

Set OK, then Update.

© Supported Device


ADAM-4017

Device	Bit Address	Word Address	Format
Read Analog Input form Channel N	-----	S_Channel 0-65535	DDDDD
Read Analog Input from all Channel	-----	A_Channel 0-7	D
Configuration Status	-----	Status 0-65535	DDDDD
Enable/disable Channels for Multiplexing	-----	M_channel 0-65535	DDDDD
Read Channel Status	-----	Channel_Status 0-65535	DDDDD
Read Version	-----	Version 0-65535	DDDDD
Read Module Name	-----	Name 0-65535	DDDDD

Note: Order code refer to the ADAM-4107 manual

- 1、“Data type” of S_Channel and A_Channel is signed integer. Decimal digits is 2 when the power supply is 500mv or 150mv, other conditions is 3.
- 2、“Data type” of other registers is HEXING
- 3、M_channel (\$AA5VV) : At the same time allow multiplexing.

Enter the decimal value in the range of 0 to 255, mapping hexadecimal (00-FF)

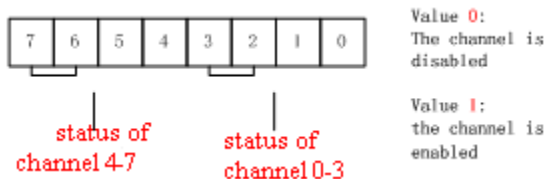

255 (FF) : 0-7 channel show.


127 (7F) : 0-6 channel show, 7 Channel does not show.

ADAM-4015

Device	Bit Address	Word Address	Format	Notes
Channel	-----	Channel 0-5	D	Floating

Note: Channel 0-5 data type is floating.

◎ **Cable Diagram**

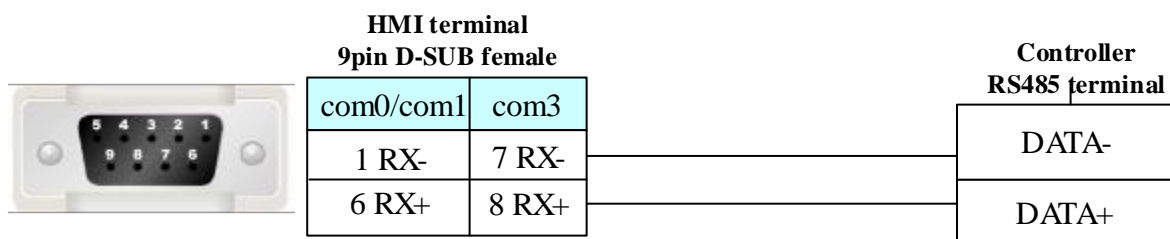

4.6 ARESTEK

◎ **Serial Communication**

Series	CPU	Link Module	Driver
ARS-010	32T	RS232 on the CPU unit	ARESTEK ARS-010 RTU
		RS485 on the CPU unit	
ARS-010E	32T	RS232 on the CPU unit	ARESTEK ARS-010E RTU
AR1000			
AR3000			
AR5000			
ARmotion		RS485 on the CPU unit	

◎ **Ethernet Communication**

Series	CPU	Link Module	Driver
ARS-010E	32T	Ethernet interface on CPU	ARESTEK ARS-010E TCP
AR1000	32T		
AR3000	32T		
AR5000	32T		
ARmotion	32T		

◎ **System configuration**

Series	CPU	Link Module	COMM Type	Parameter	Cable
--------	-----	-------------	-----------	-----------	-------

ARS-010	32T	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS232 on the CPU unit	RS485	Setting	Your owner cable
ARS-010E	32T	RS232 on the CPU unit	RS232	Setting	Your owner cable
AR1000					
AR3000					
AR5000		RS485 on the CPU unit	RS485	Setting	Your owner cable
ARmotion					

◎ Network Communication Settings

Series	CPU	Link Module	Connect Type	Parameter	Cable
ARS-010E	32T		Ethernet	Setting	Your owner cable
AR1000					
AR3000					
AR5000					
ARmotion					


◎ Serial Communication Settings

ARESTEK ARS-010 RTU/ ARESTEK ARS-010E RTU protocol


HMI Setting

Default communication parameters 38400, 8, even, 1; station No. : 1


RS232

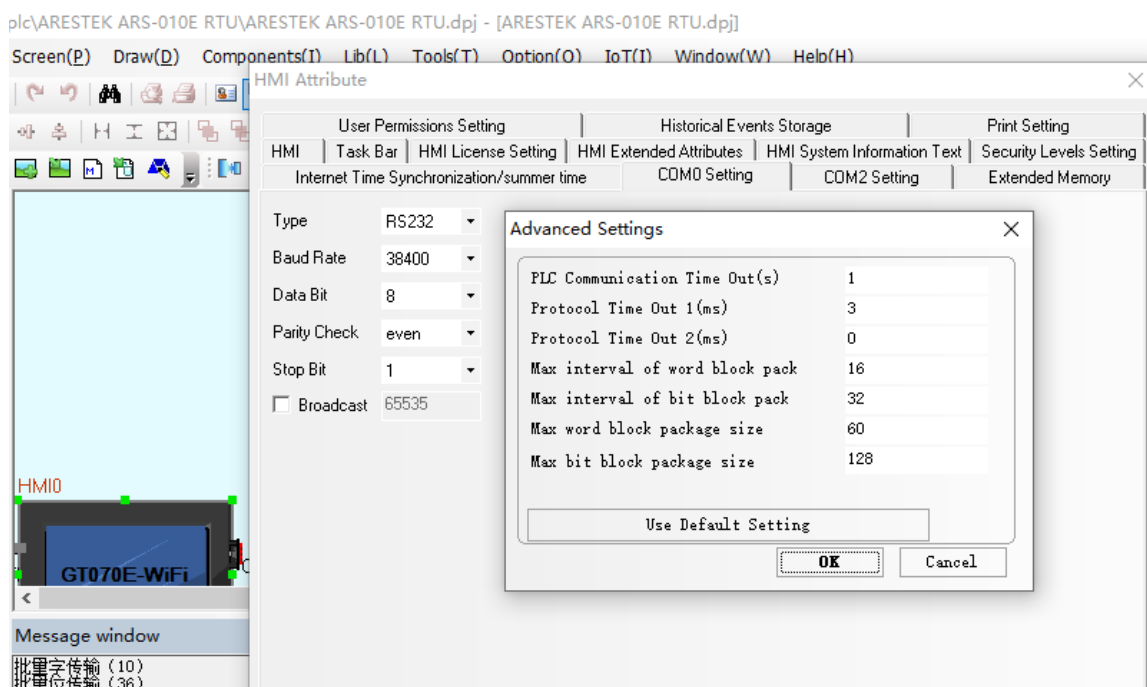


RS485



- 62 -

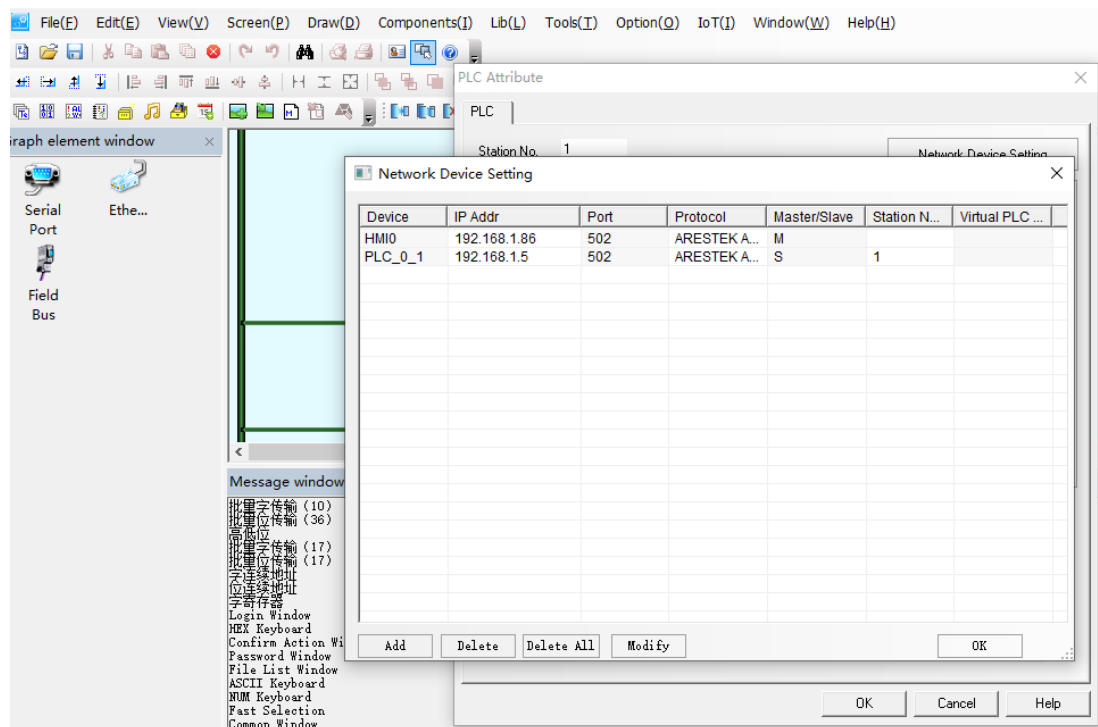

PLC Setting

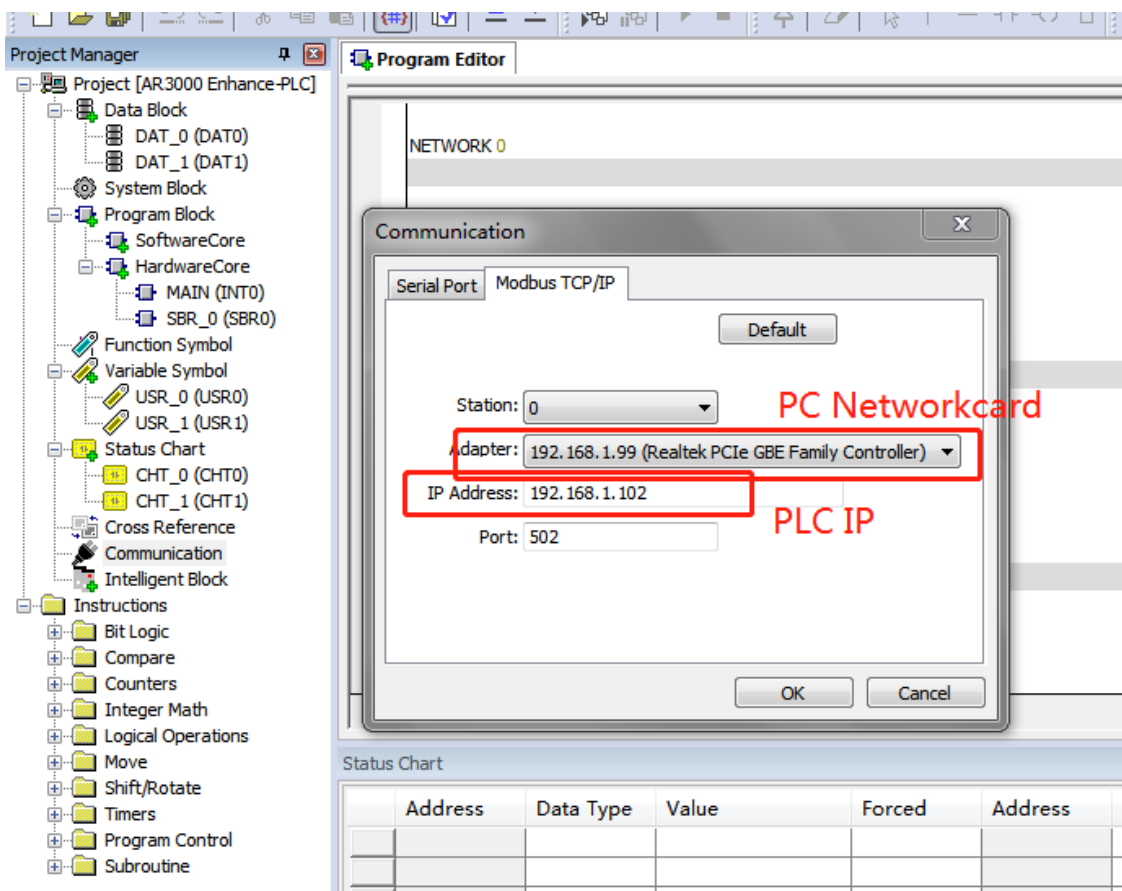

©Supported Device

ARESTEK ARS-010 RTU

Device	Bit Address	Word Address	Format	Notes
Input Relay	I 0.0-127.15	-----	DDD.DD	
Output Relay	Q 0.0-127.15	-----	DDD.DD	
Data Contact	R 0.0-3999.15	-----	DDDD.DD	
Internal Relay	M 0.0-127.15	-----	DDD.DD	
Timer Value	-----	T 0-127	DDD	
Counter Value	-----	C 0-127	DDD	
Input Register	-----	IW 0-127	DDD	
Output Register	-----	QW 0-127	DDD	
Internal Register	-----	MW 0-127	DDD	
Data Register		RW 0-3999	DDDD	
Data Register		RD 0-3998	DDDD	

ARESTEK ARS-010E RTU

Device	Bit Address	Word Address	Format	Notes
Input Relay	I 0.0-255.15	-----	DDD.DD	
Output Relay	Q 0.0-255.15	-----	DDD.DD	
Data Contact	R 0.0-9999.15	-----	DDDD.DD	
Internal Relay	M 0.0-255.15	-----	DDD.DD	
Timer Value	-----	T 0-511	DDD	
Counter Value	-----	C 0-255	DDD	
Input Register	-----	IW 0-255	DDD	
Output Register	-----	QW 0-255	DDD	
Internal Register	-----	MW 0-255	DDD	
Data Register		RW 0-9999	DDDD	
Data Register		RD 0-9998	DDDD	

ARESTEK ARS-010E TCP

Device	Bit Address	Word Address	Format	Notes
Input Relay	I 0.0-255.15	-----	DDD.DD	
Output Relay	Q 0.0-255.15	-----	DDD.DD	
Data Contact	R 0.0-9999.15	-----	DDDD.DD	
Internal Relay	M 0.0-255.15	-----	DDD.DD	
Timer Value	-----	T 0-511	DDD	
Counter Value	-----	C 0-255	DDD	
Input Register	-----	IW 0-255	DDD	
Output Register	-----	QW 0-255	DDD	
Internal Register	-----	MW 0-255	DDD	
Data Register		RW 0-9999	DDDD	

Data Register		RD 0-9998	DDDD	
---------------	--	-----------	------	--

◎ Cable Diagram


ARESTEK ARS-010 RTU/ARESTEK ARS-010E RTU protocol

RS232 cable diagram

The standard serial port type adopts ARESTEK cable and the internal diagram is as follows:



RS485 cable diagram

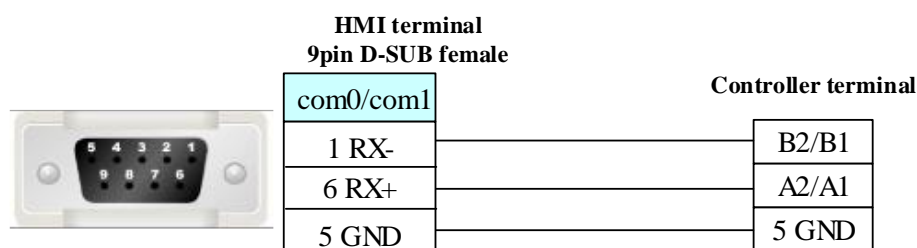

ARESTEK ARS-010E TCP protocol

Ethernet cable

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.7 AysjNet


◎ Serial Communication

Series	CPU	Link Module	Driver
Compressor Controller	KYK3-K	RS485 on port	AysjNet

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
Compressor Controller	KYK3-K	RS485 on port	RS485	Setting	Your owner cable


◎ Communication Setting

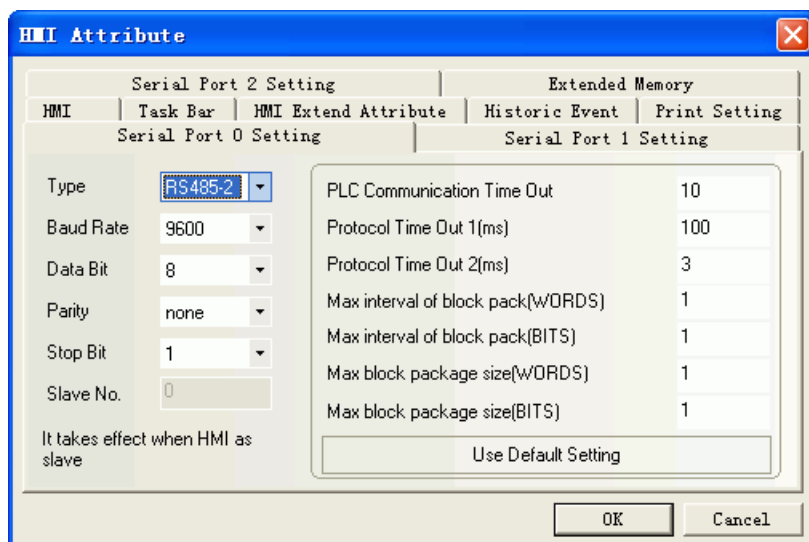

◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
control	CTL (0~5) &128&150	-----	DDD	Write only
set	-----	SET (0~51)&128	DDD	
state	-----	STATUS 0.0~17.2	DD.D	Read only

◎ Cable Diagram

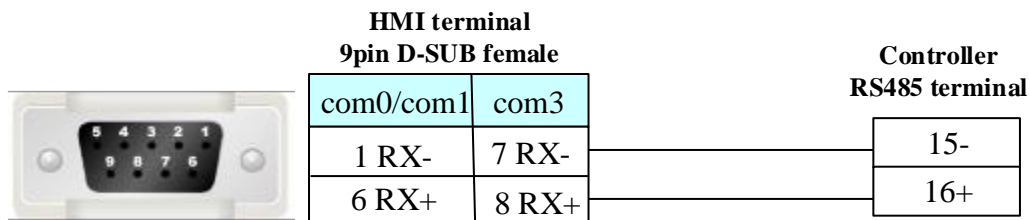

4.8 BACnet

◎ Serial Communication

Series	CPU	Link Module	Driver
BACnet MS/TP	VLC-660R Johnson FC BUS	Port on CPU unit	BACnet MS/TP
BACnet MS/TP Extend	ALERTON VLC-660R	Port on CPU unit	BACnet MS/TP Extend

◎ Ethernet Communication

Series	CPU	Link Module	Driver
BACnet IP		Ethernet interface on CPU	BACnet IP

BACnet IP Slave		Ethernet interface on CPU	BACnet IP Slave
-----------------	--	---------------------------	-----------------

◎ Serial System configuration

Series	CPU	Link Module	COM Type	Parameter	Cable
BACnet MS/TP	VLC-660R Johnson FC BUS	CPU Direct	RS485	Setting	Your owner cable
BACnet MS/TP Extend	ALERTON VLC-660R	Port on CPU unit	RS485	Setting	Your owner cable

◎ Ethernet System configuration


Series	CPU	Link Module	COMM Type	Parameter	Cable
BACnet IP		Ethernet interface on CPU	Ethernet	Setting	Your owner
BACnet IP Slave		Ethernet interface on CPU	Ethernet	Setting	cable

◎ Serial Communication Setting

BACnet MS/TP protocol

HMI Setting

Default communication parameters 38400, 8, none, 1; station No. : 1

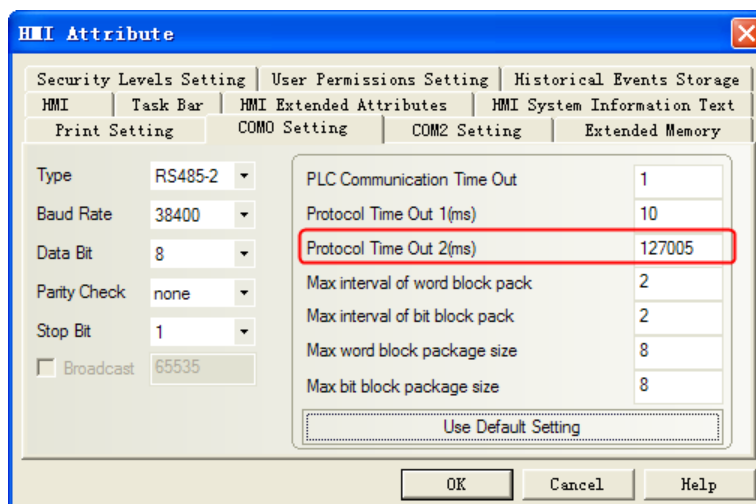

NOTE:


MAX Master setting:

Protocol Time Out 2 (ms) high three is MAX Master, default 127.

MAC address setting:

Protocol Time Out 2 (ms) low three is HMI MAC address, Range is 0-127. And it must be different from others which one in the token-ring.

PLC MAC address is setting in [PLC Attribute]-[Station No.], Range is 0~255.

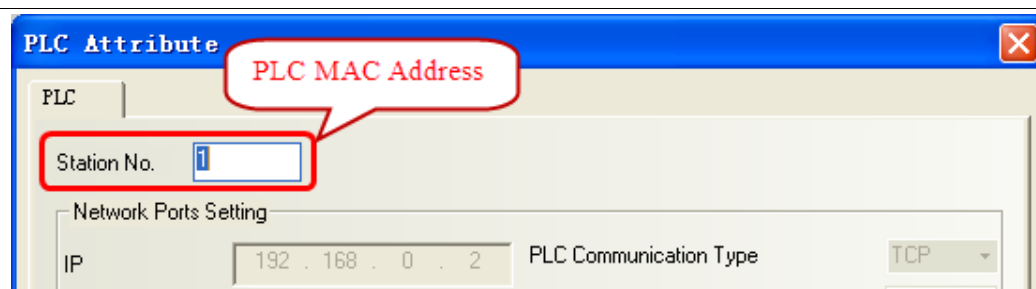


PLC Setting

Please refer to the communication equipment related documentation to set the parameter.

BACnet MS/TP Extend Protocol:

HMI Setting

Default communication: 38400bps, 8, none, 1; station: 1

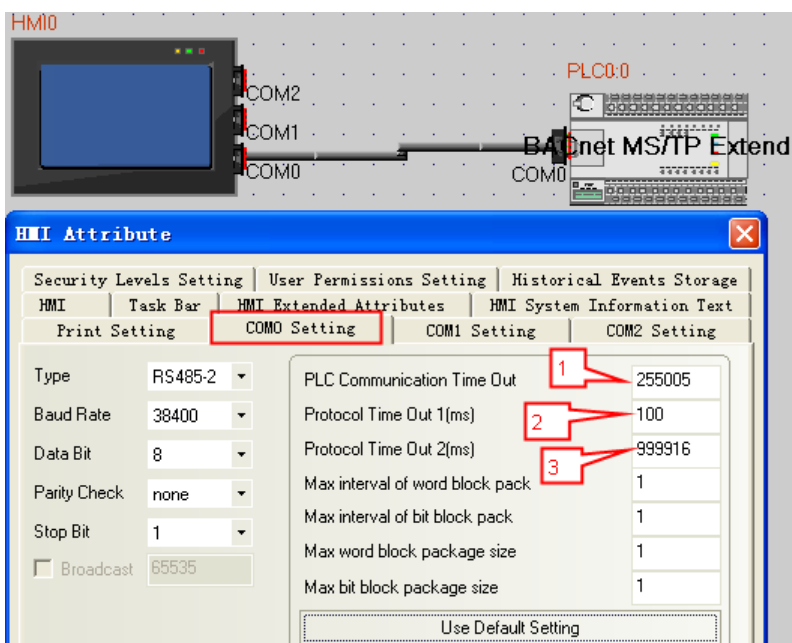

Note:

1. Table one:
 - a. PLC Communication Time Out: 255 stands for HMI's ID number;
 - b. 005 stands for HMI's MAC address, Range is 0~127. And it must be different from others which one in the token-ring.
2. Table three:
 - a. Protocol Time Out 2: 16 stands for register read and writer priority, range is 1~16;
 - b. 9999 stands for offset address; Range is 0~4194303;
 - c. PLC's ID number = Offset address + The setting in [PLC Attribute] - [Station No.];



3. Use this protocol , the hmi must be updated kernel and rootfs by the kinco HMIware v2.2(build140805) or later.
4. This protocol only support new 4000 series and 5020 series HMI.


PLC Setting

Please refer to the communication equipment related documentation to set the parameter.

◎ Network Communication Setting

BACnet IP protocol

HMI Setting

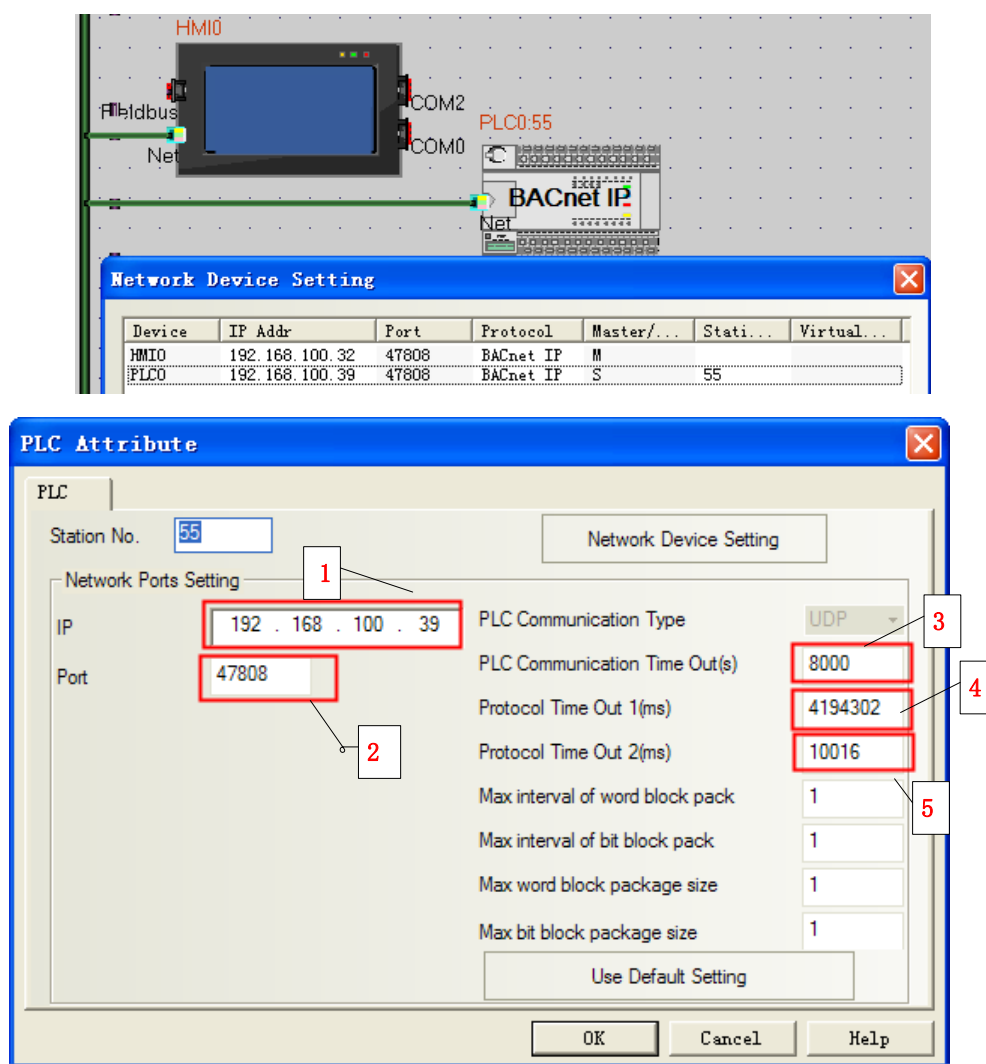

NOTE:


1. BACnet controller IP Address;
2. Port ID: 47808, This the standard communication port of BACnet protocol.
3. HMI ID: 8000, If there are more than two HMIs, user must set the different HMI ID for each HMI.
4. Device ID: 4194302, the ID is the same as the actual device.
5. The protocol time out: 100; register read and writer priority :16 range (1~16) ;
6. Use this protocol, the HMI must be update kernel and rootfs by the kinco HMIware v2.2 (build141210) or later.
7. This protocol only supports new 4000 series and 5020 series HMI.

PLC Setting

Please refer to the communication equipment related documentation to set the parameter.

BACnet IP Slave protocol

HMI Setting

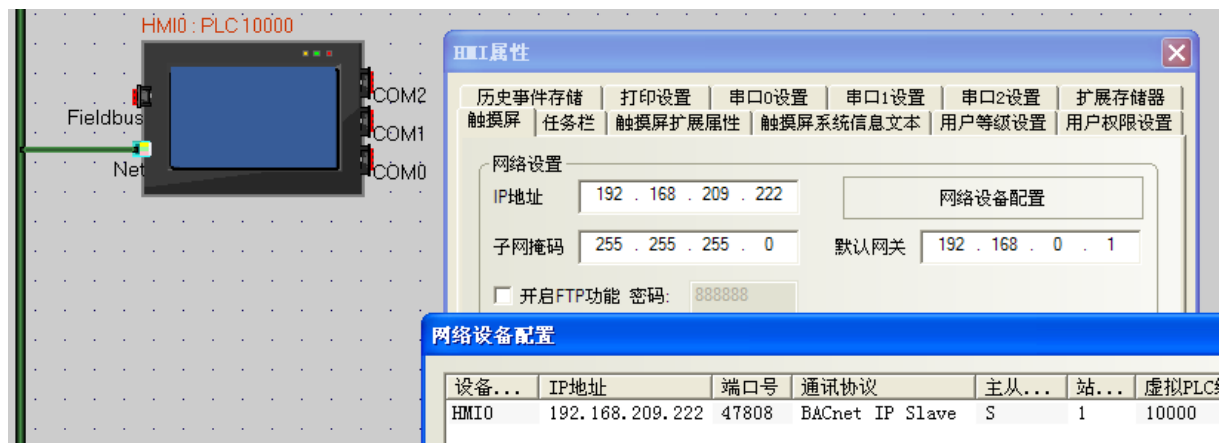

PLC Setting

Please refer to the communication equipment related documentation to set the parameter.

©Supported Device

BACnet MS/TP Protocol

Device	Bit Address	Word Address	Format	Notes
Binary Input	BI 0-65535	-----	DDDDDD	
Binary Output	BO 0-65535	-----	DDDDDD	
Binary Value	BV 0-65535	-----	DDDDDD	
Analog Input	-----	AI 0-65535	DDDDDD	Float
Analog Output	-----	AO 0-65535	DDDDDD	Float
Analog Value	-----	AV 0-65535	DDDDDD	Float
	-----	MI 0-65535	DDDDDD	Float
	-----	MO 0-65535	DDDDDD	Float
	-----	MV 0-65535	DDDDDD	Float

BACnet MS/TP Extend Protocol

Device	Bit Address	Word Address	Format	Notes
AI	-----	0-65535	DDDDDD	Float
AO	-----	0-65535	DDDDDD	Float
AV	-----	0-65535	DDDDDD	Float
BI	0-65535	-----	DDDDDD	
BO	0-65535	-----	DDDDDD	
BV	0-65535	-----	DDDDDD	

MI	-----	0-65535	DDDDD	
MO	-----	0-65535	DDDDD	
MV	-----	0-65535	DDDDD	

Note

1. AI、AO、AV is float data;
- 2.This protocol does not support direct online simulation;
3. Bit register transfer is recommended to use a timer to achieve.

BACnet IP Protocol

Device	Bit Address	Word Address	Format	Notes
Binary Input	BI 0-65535	-----	DDDDD	
Binary Output	BO 0-65535	-----	DDDDD	
Binary Value	BV 0-65535	-----	DDDDD	
Analog Input	-----	AI 0-65535	DDDDD	Float
Analog Output	-----	AO 0-65535	DDDDD	Float
Analog Value	-----	AV 0-65535	DDDDD	Float
	-----	MI 0-65535	DDDDD	
	-----	MO 0-65535	DDDDD	
	-----	MV 0-65535	DDDDD	

BACnet IP Slave Protocol


Device	Bit Address	Word Address	Format	Notes
BI	RB 600.0-600.F	-----	DDDDD	
BO	RB 610.0-610.F	-----	DDDDD	
BV	RB 620.0-620.F	-----	DDDDD	
AI	-----	RW 0-9	DDDDD	Float
AO	-----	RW 100-109	DDDDD	Float
AV	-----	RW 200-209	DDDDD	Float
MI	-----	RW 300-309	DDDDD	
MO	-----	RW 400-409	DDDDD	
MV	-----	RW 500-509	DDDDD	

注意

- 1.AI、AO、AV is float data;
- 2.This protocol does not support direct online simulation;
3. Bit register transfer is recommended to use a timer to achieve.

©Cable Diagram

RS485

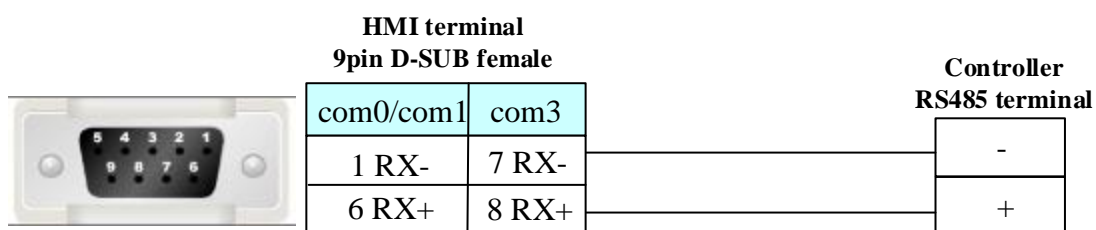

Ethernet cable

Connecting PC and HMI use cross-ruling; communicating with hub or switch use cross-over cable or cross-ruling.

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.9 Barcode


◎ Serial Communication

Series	CPU	Link Module	Driver
Barcode	3800LTP-12E	RS232	Barcode
	MLJ-MS9590		
	SYMBOL LS4208-SR200007 ZZR		
	Flashcode LS3042		

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
Barcode	3800LTP-12E	RS232	RS232	Setting	Your owner cable
	MLJ-MS9590				
	SYMBOL LS4208-SR200007 ZZR				
	Flashcode LS3042				

◎ Communication Setting

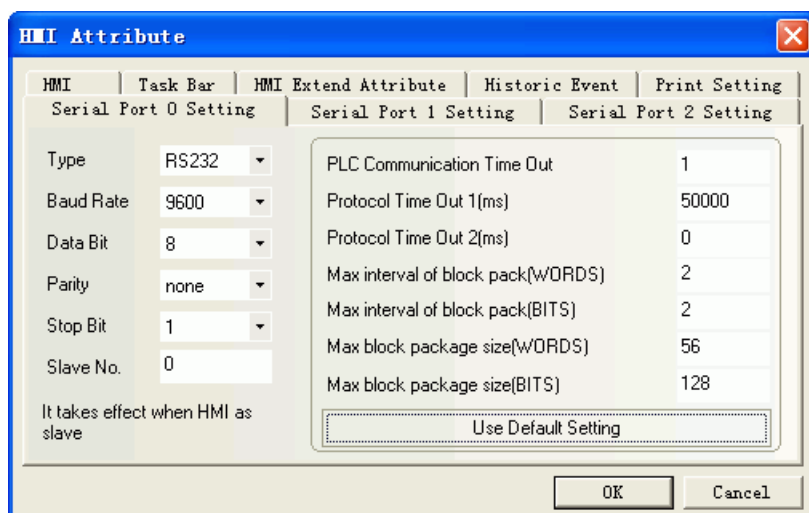

◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
Word	-----	LW 8900-8999	DDDD	
Bit	-----	LB 8999	DDDD	

NOTE:

1. LW 8900-8999: the character after scanning, text and note book parts can display it.
2. LB 8999: the state of barcode is received or not. LB 8999=1 means the data is received.

◎ Cable Diagram

Connect the scanner and the COM port of HMI directly.

4.10 Baumuller


◎ Serial Communication

Series	CPU	Link Module	Driver
Baumuller	BM4413-ST0-02200-03	RS422 on the CPU unit	Baumuller

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
Baumuller	BM4413-ST0-02200-03	RS422 on the CPU unit	RS422	Setting	Your owner cable

◎ Communication Setting

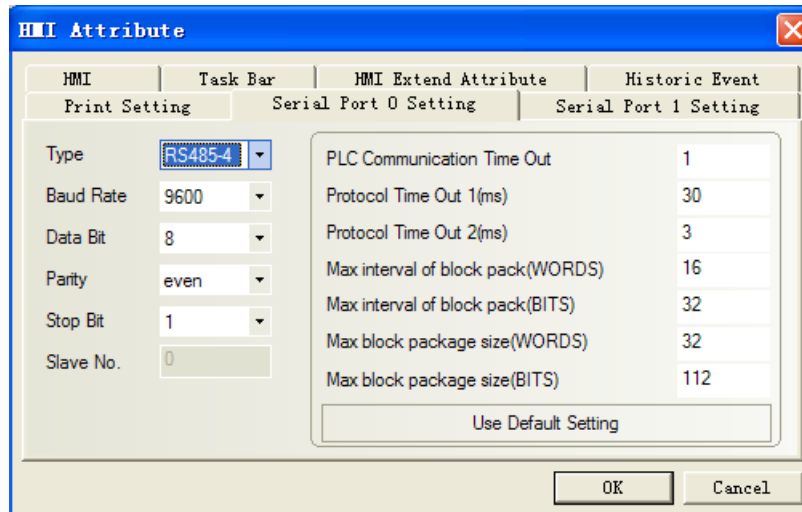

◎ Supported Device


Device	Bit Address	Word Address	Format	Notes
Bit type	DB_BIT0. 00-255. F	-----	DDD.H	
Word type	-----	DB0-255	DDD	

Example: DB2_BIT address please input 0.F in the EV5000 software.

DB2 address please input 11 in the EV5000 software.

◎ Cable Diagram

RS422 communication cable

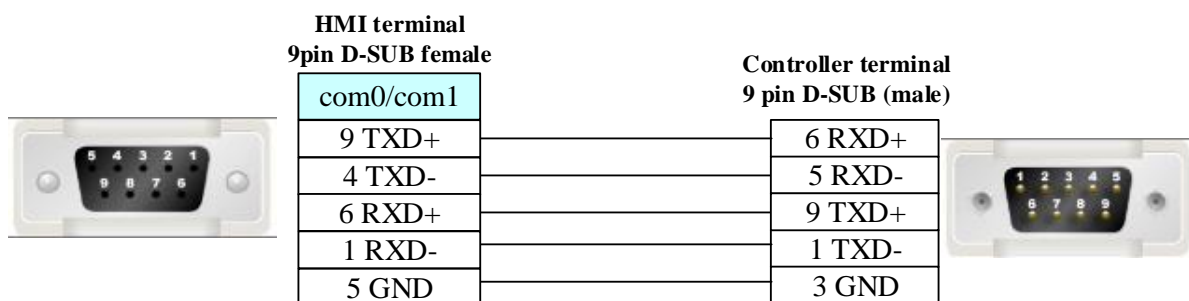

4.11 Beckhoff

◎ Network communication (support indirect online and direct online)

Series	CPU	Link Module	Driver
Embedded PC	CX9020 CX2030	Ethernet interface on CPU	Beckhoff TwinCAT 3 ADS_AMS (Ethernet)
TwinCAT 2	CX9020	Ethernet interface on CPU	Beckhoff TwinCAT 2 ADS_AMS (Ethernet)
TwinCAT2/ TwinCAT3	CX9020	Ethernet interface on CPU	Beckhoff TwinCAT PLC _Free Tag Names (Ethernet)


◎ Ethernet System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
Embedded PC	CX9020 CX2030	Ethernet interface on CPU	Ethernet	Setting	Your owner cable
TwinCAT 2	CX9020	Ethernet interface on CPU	Ethernet	Setting	Your owner cable
TwinCAT2/ TwinCAT3	CX9020	Ethernet interface on CPU	Ethernet	Setting	Your owner cable

◎ Network Communication Setting

Beckhoff TwinCAT 2 ADS_AMS(Ethernet) protocol


HMI Setting

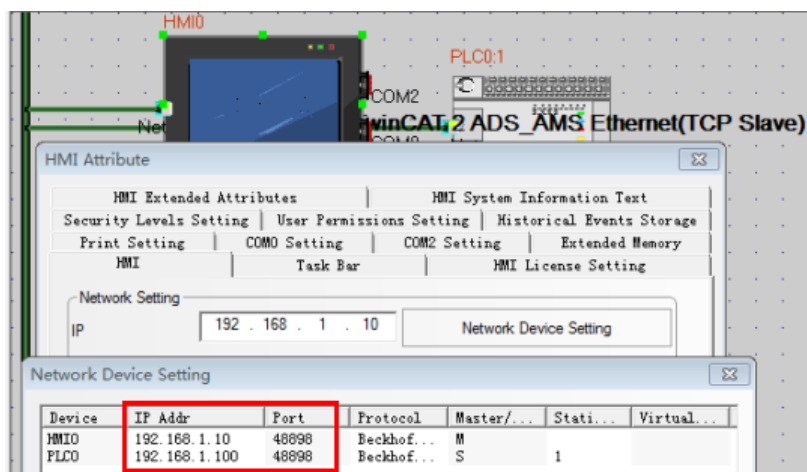


PLC Setting

1.Add routing table


Open System Manage ,and click Choose Target System

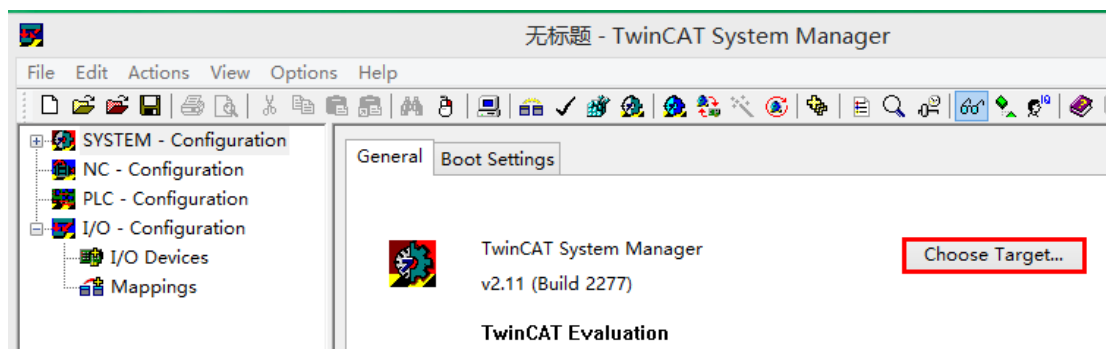


Pop up the Choose Target System form, and click Search Ethernet

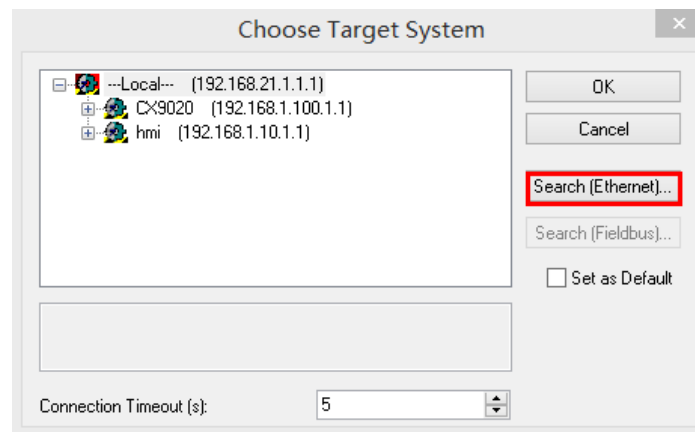


Then click Broadcast Search

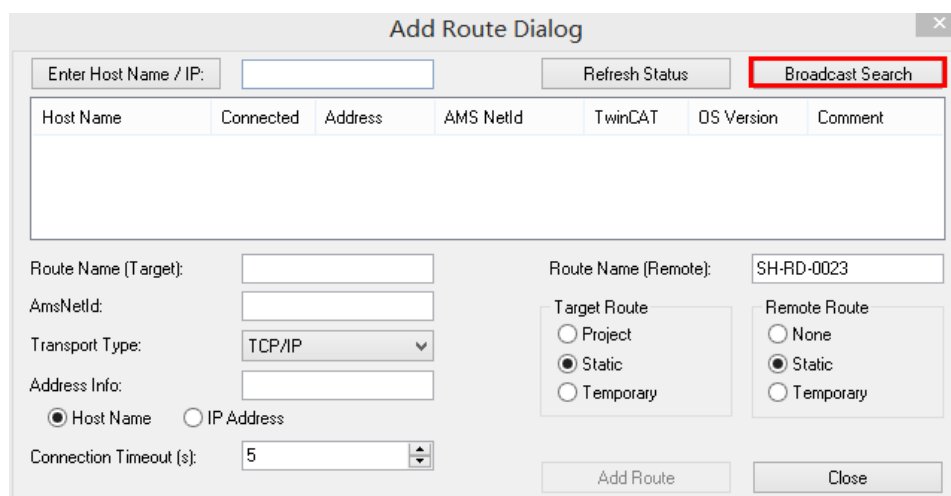

Select target controller

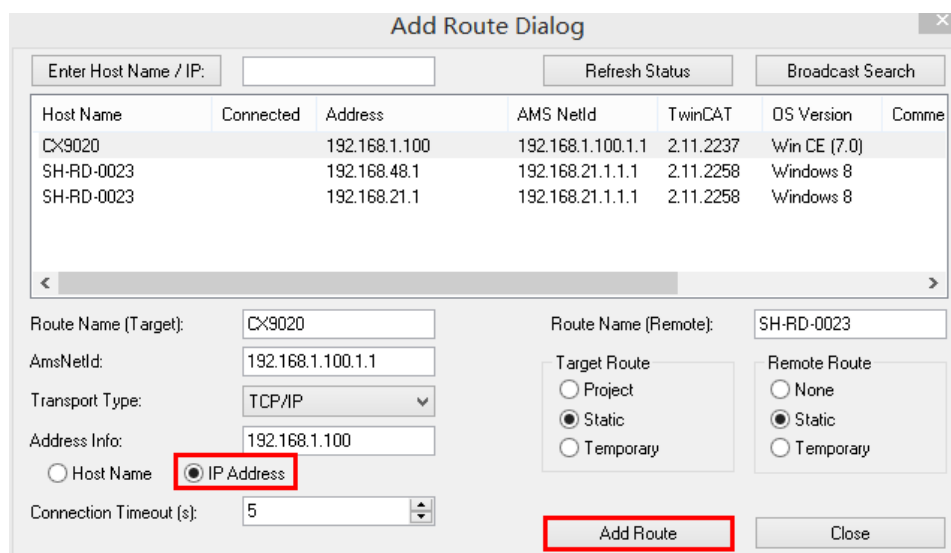

Click Add Route to enter the user login screen

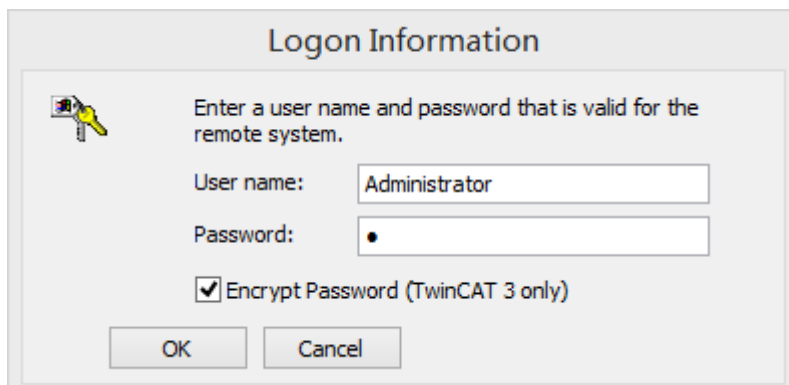

Login Information

Enter a user name and password that is valid for the remote system.

User name: Administrator

Password:

☒ Encrypt Password (TwinCAT 3 only)


OK Cancel

Enter user name and password

Factory settings: non CE system, user name: Administrator, password: 1

Factory settings: CE system, user name and password are blank

After you click OK, if successful communication, as shown below, the X tag will appear, click Close, and return to the previous form

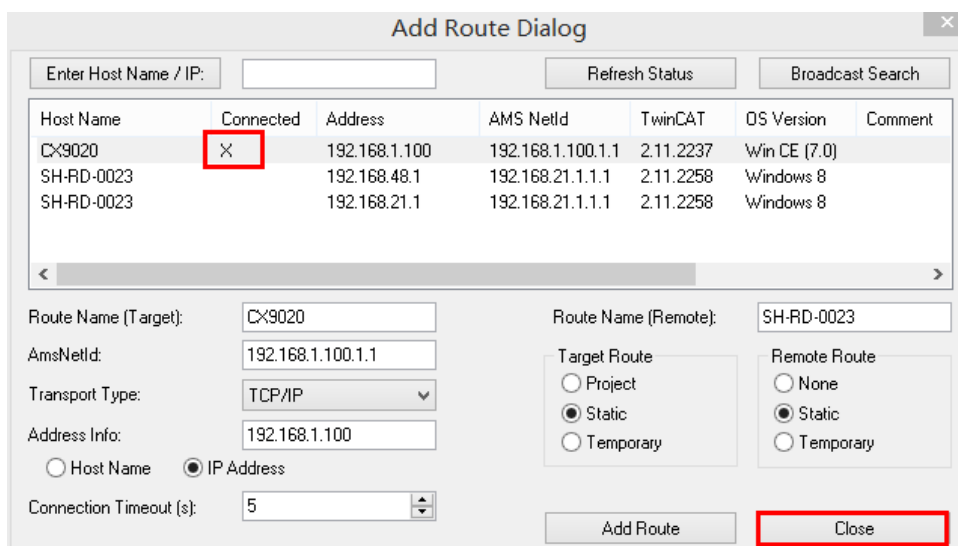

Add Route Dialog

Enter Host Name / IP: Refresh Status Broadcast Search

Host Name	Connected	Address	AMS NetId	TwinCAT	OS Version	Comment
CX9020	X	192.168.1.100	192.168.1.100.1.1	2.11.2237	Win CE (7.0)	
SH-RD-0023		192.168.48.1	192.168.21.1.1.1	2.11.2258	Windows 8	
SH-RD-0023		192.168.21.1	192.168.21.1.1.1	2.11.2258	Windows 8	

Route Name (Target): CX9020 Route Name (Remote): SH-RD-0023

AmsNetId: 192.168.1.100.1.1

Transport Type: TCP/IP

Address Info: 192.168.1.100

☐ Host Name ☒ IP Address


Connection Timeout (s): 5

Target Route: ☐ Project ☒ Static ☐ Temporary

Remote Route: ☐ None ☒ Static ☐ Temporary

Add Route Close

You can see that the routing table items that you just added appear in the list, select the controller you want to configure, and then click OK

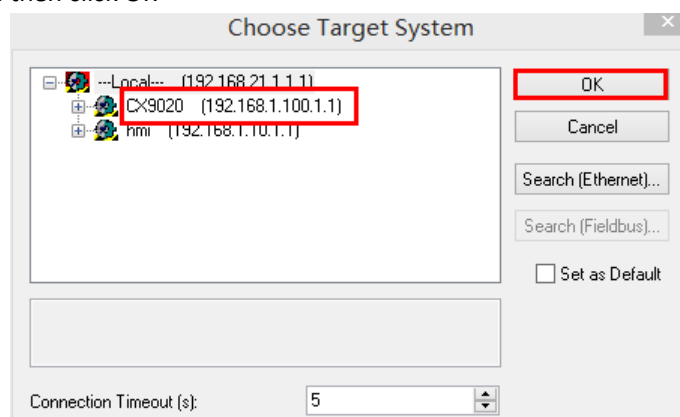

Choose Target System

Local... (192.168.21.1.1.1)

CX9020 (192.168.1.100.1.1)

hmi (192.168.1.10.1.1)

OK Cancel

Search (Ethernet)...


Search (Fieldbus)...

☐ Set as Default


Connection Timeout (s): 5

2. Add HMI static routing

Click Routes, then click Add to enter the add static routing interface

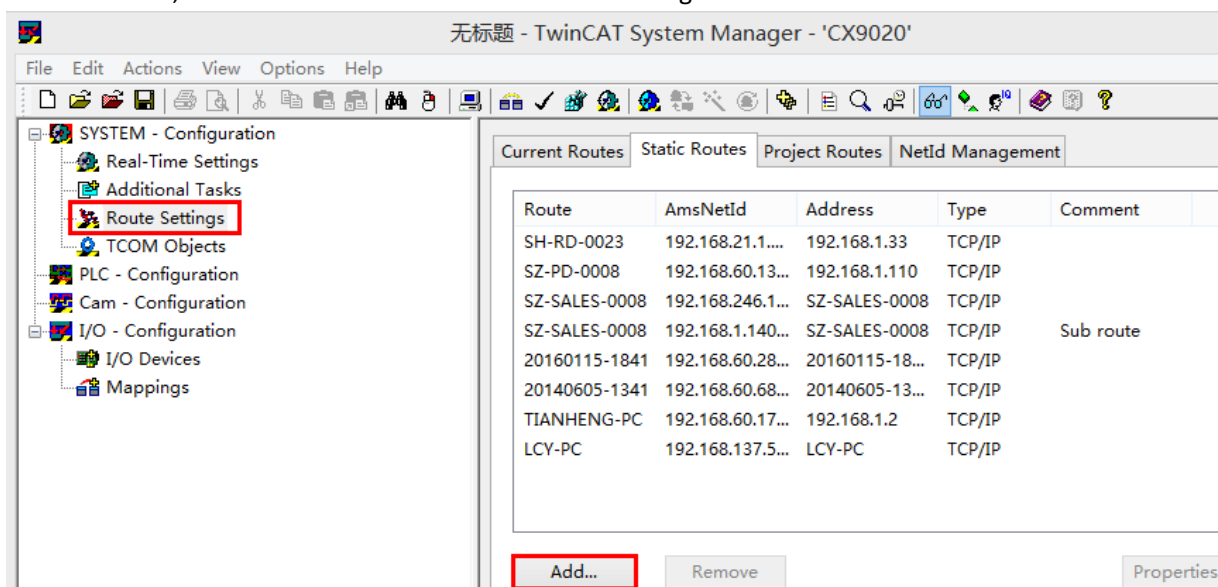


Go to the static routing interface and add HMI's static route (IP address is consistent with the IP address of the HMI), click Add Route, and then click Close

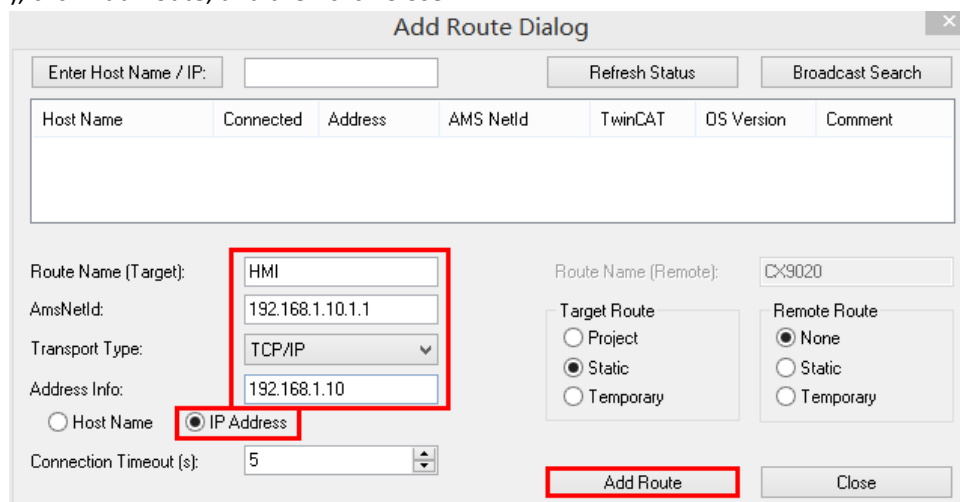


3. Modify PLC's AmsNetID number

If the first four of the PLC's AmsNetID numbers do not correspond to the IP address of the PLC, it needs to be modified to make it consistent

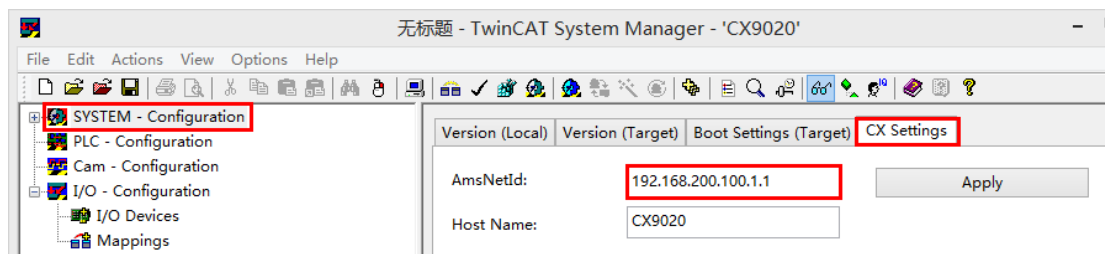


Click Apply, and then click Activate Configuration to download the parameters to PLC

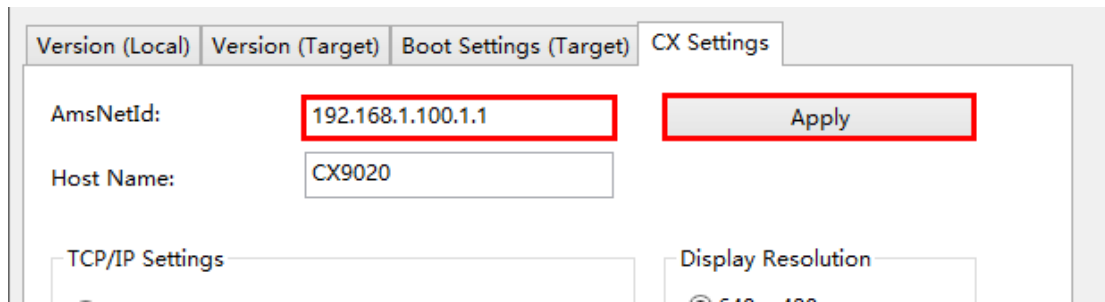


Note: the HMI's ADS port defaults to 801; the first four bits of the AMS NetID number of the PLC controller must be consistent with the IP address of the PLC controller

4.add address variables

Open PLC Control, right-click POU's, add New POU, and then click OK

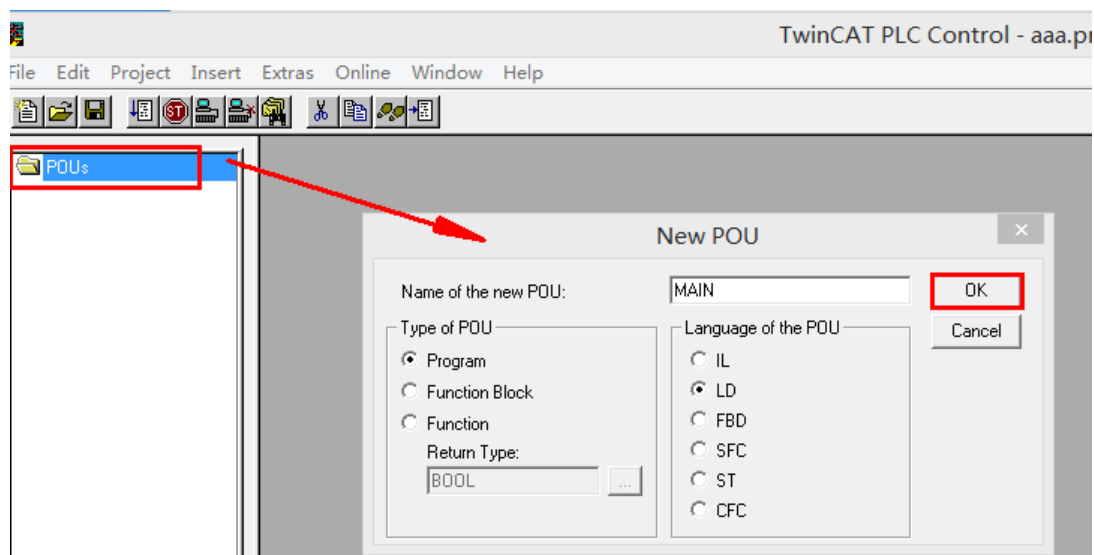



Pop up the "MAIN" dialog box, add variable declarations, and write programs


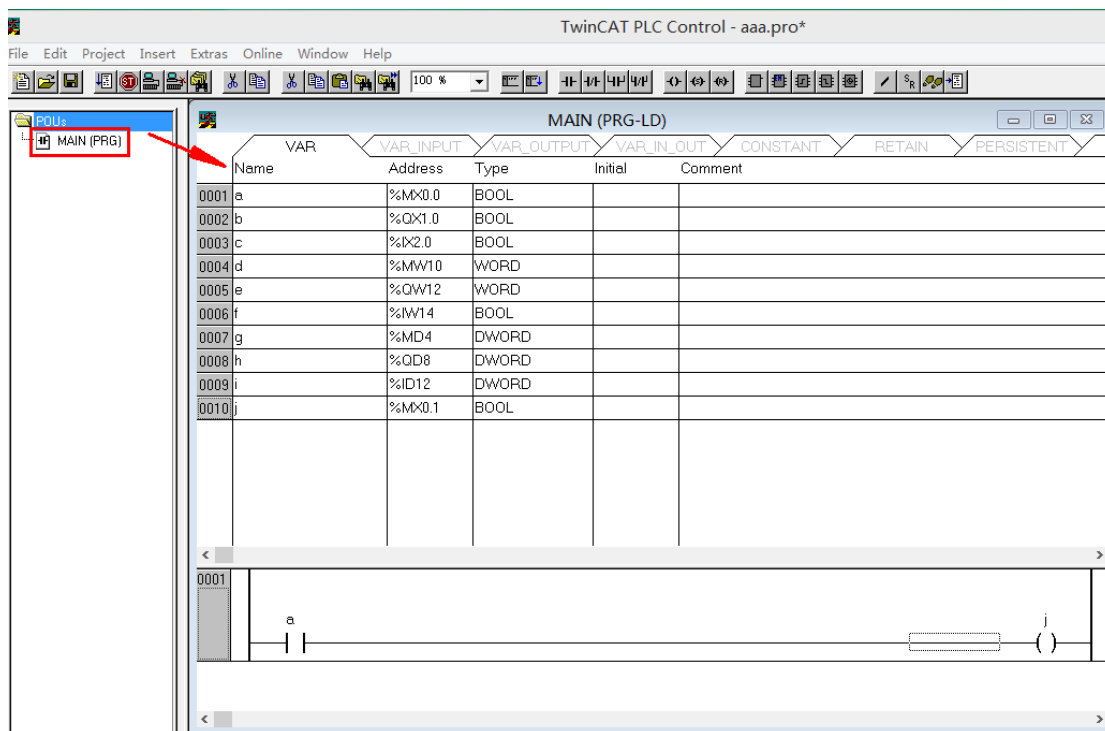


Add variable declaration formats: %MX0.0、%MW2、%MD4

After completing the compilation, you need to activate the configuration and download the program to the PLC.

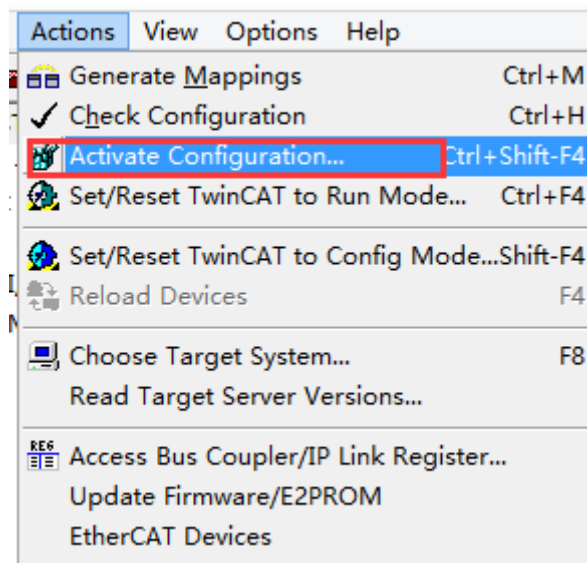


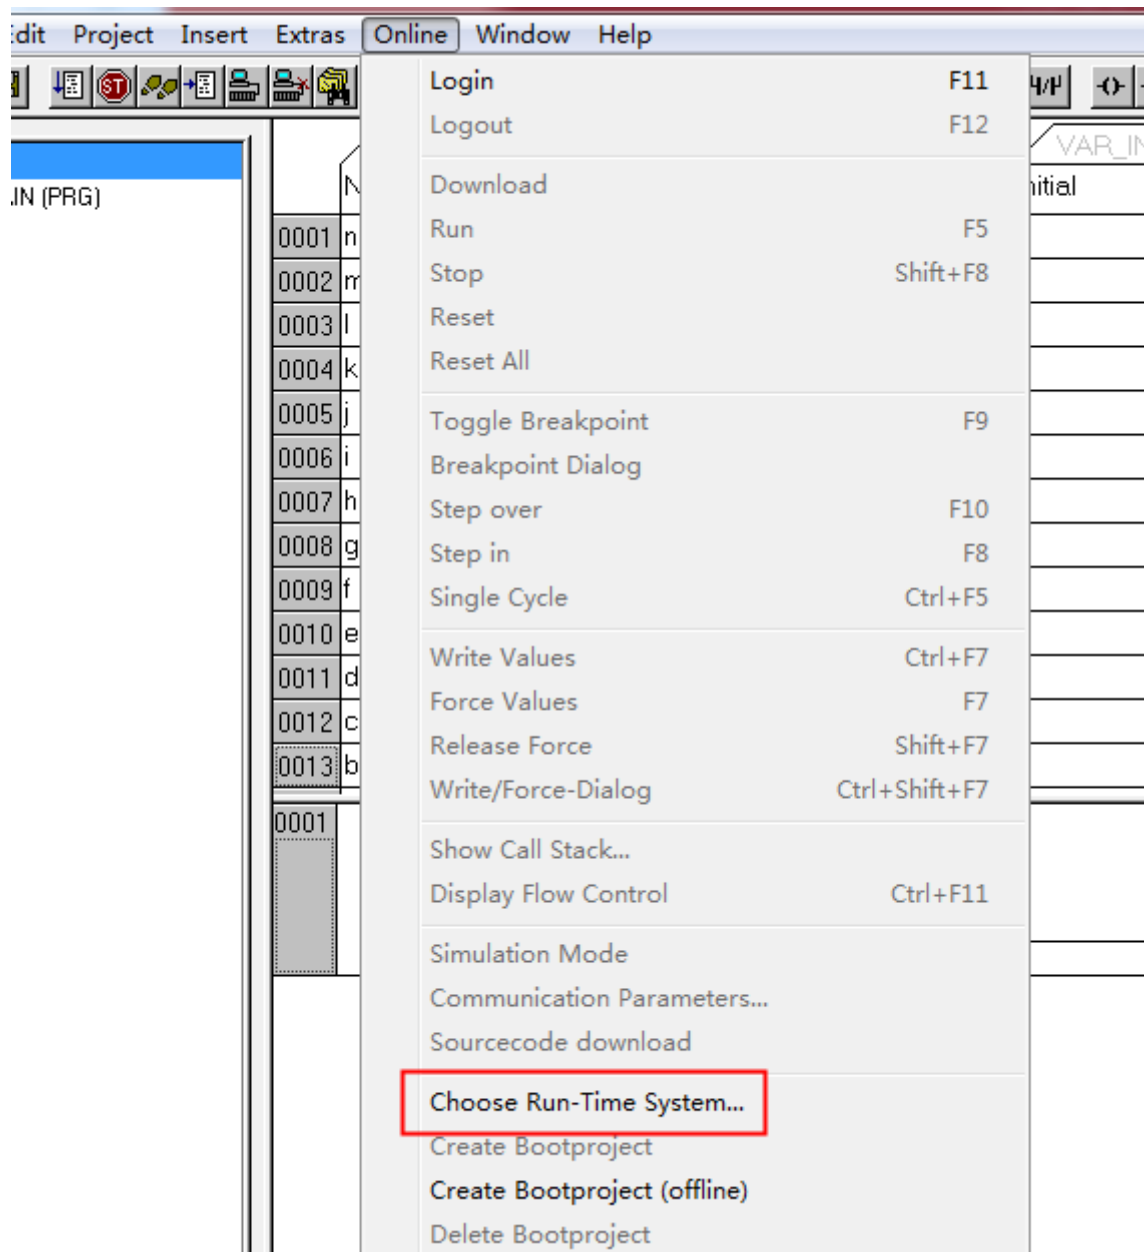


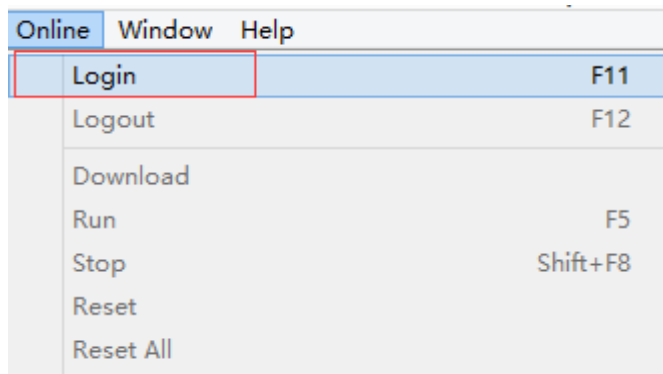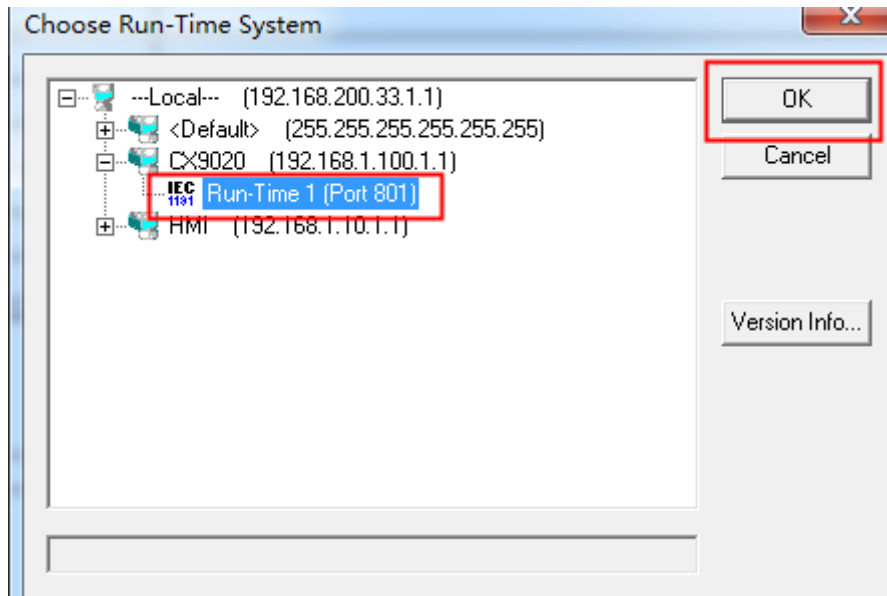

Beckhoff TwinCAT 3 ADS_AMS(Ethernet) protocol

HMI Setting

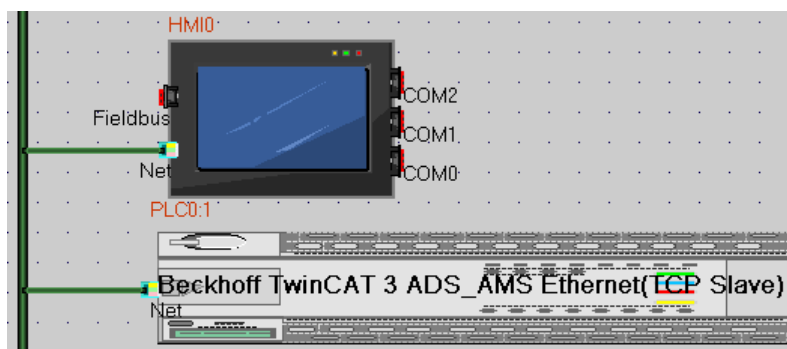

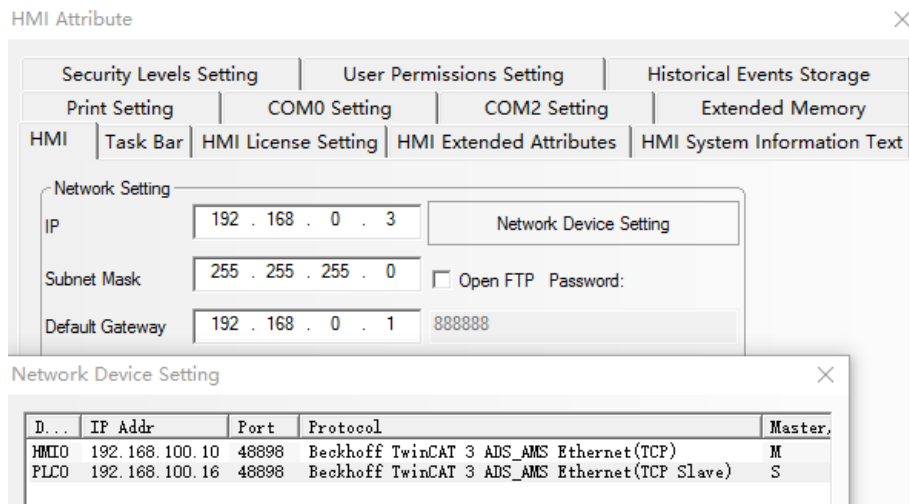

NOTE: Because of the structure limitation in HMI software, this protocol only supports the controller with the ADS port, number 851.

PLC Setting

1. Setting IP address

Connecting the X200 DVI port with computer monitor, the IP address of PLC can be modified in network device settings in HMI Attribute, and the screen must be in the same network with PLC.


2. Setting NetID

NetID is a 6-segment numeric code and the last two sections of the TwinCAT controller NetID are always "1" while the first 4 sections can be customized. Because of the structure limitation in Kinco HMI software, it must be required the first four NetID are consistent with PLC IP address. For example, the IP address is 192.168.100.16, so NetID must be set to 192.168.100.16.1.1.

1) Modify the NetID number of PLC. If the first four of the NetID of PLC is inconsistent with the IP address of PLC, it needs to be modified to make it consistent.




2) Click "Apply", and then click "Activate Configuration", and then download it to PLC.

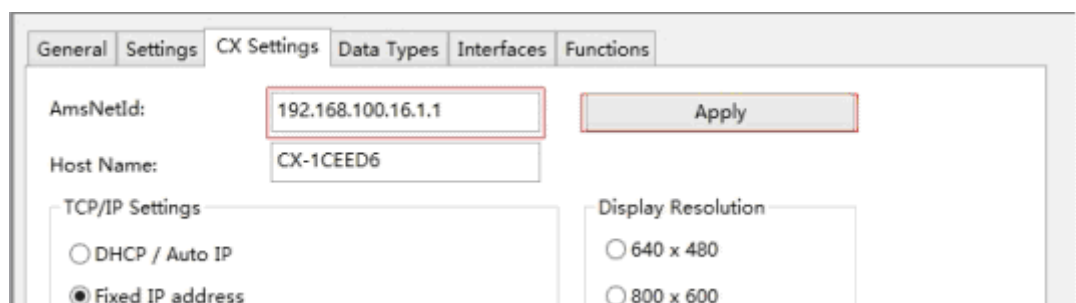


3. Add Routes to the TC3 System | Routes.

After setting up the IP address and NetID, you can add the routing table.


1) Click "Choose Target System"

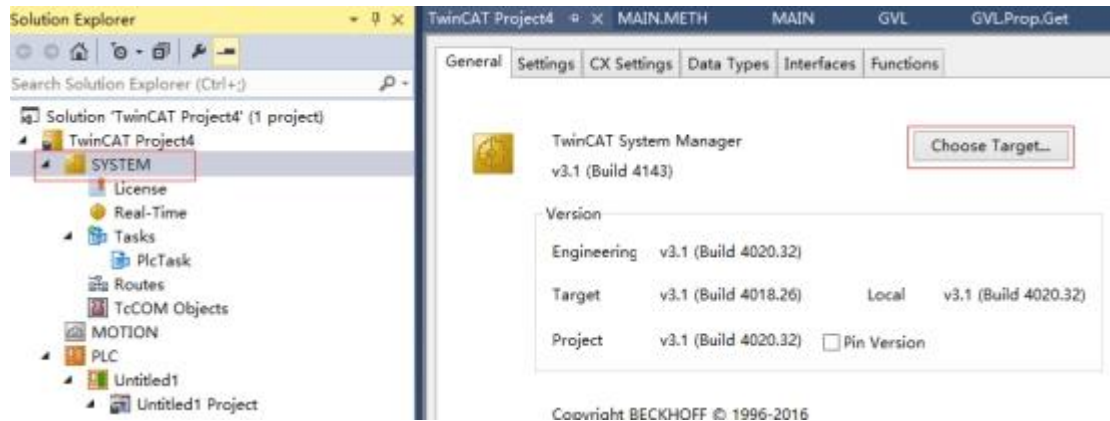

2) After popping up the "Choose Target System" form and click "Search Ethernet"

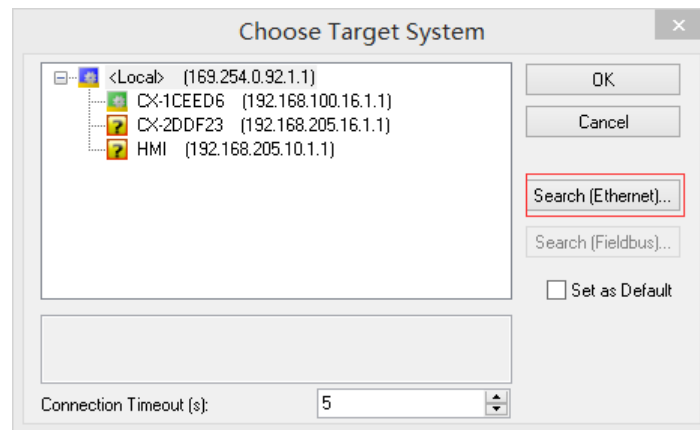

3) Click "Broadcast Search" in popping window

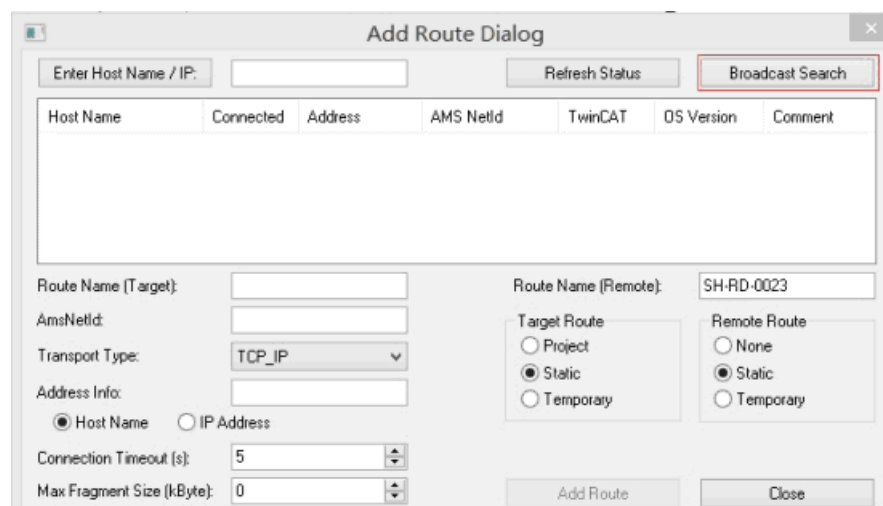

4) Select the target controller and the IP Address mode.

Enter Host Name / IP: Refresh Status Broadcast Search

Host Name	Connected	Address	AMS NetId	TwinCAT	OS Version	Comment
CX-1CEED6		192.168.100.16	192.168.100.16...	3.1.4018	Windows 7	
SH-RD-0023		192.168.100.55	169.254.0.92.1.1	3.1.4020	Windows [6.3]	

Route Name (Target): CX-1CEED6
 AmsNetId: 192.168.100.16.1
 Transport Type: TCP_IP
 Address Info: CX-1CEED6
☐ Host Name ☒ IP Address
 Connection Timeout (s): 5
 Max Fragment Size (kByte): 0

Route Name (Remote): SH-RD-0023
 Target Route: ☐ Project ☒ Static ☐ Temporary
 Remote Route: ☐ None ☒ Static ☐ Temporary

Add Route Close

5) Click "Add Route" to user login screen.

Enter a user name and password that is valid for the remote system.

User name: Administrator
 Password:
☒ Encrypt Password (TwinCAT 3 only)

OK Cancel

Enter the username and password

Factory setting: non-CE system, user name: Administrator, password: 1.

Factory setting: CE system, user name and password are blank.

After clicking OK, if communicate successfully, the X mark will appear as shown in the following figure,

Enter Host Name / IP: Refresh Status Broadcast Search


Host Name	Connected	Address	AMS NetId	TwinCAT	OS Version	Comment
CX-1CEED6	X	192.168.100.16	192.168.100.16...	3.1.4018	Windows 7	
SH-RD-0023		192.168.100.55	169.254.0.92.1.1	3.1.4020	Windows [6.3]	

Route Name (Target): CX-1CEED6
 AmsNetId: 192.168.100.16.1
 Transport Type: TCP_IP
 Address Info: 192.168.100.16
☐ Host Name ☒ IP Address
 Connection Timeout (s): 5
 Max Fragment Size (kByte): 0

Route Name (Remote): SH-RD-0023
 Target Route: ☐ Project ☒ Static ☐ Temporary
 Remote Route: ☐ None ☒ Static ☐ Temporary


Add Route Close

Click "Close" to return to the previous form. You can see the newly added routing table item appears in the list, and then select the controller to be configured, and then clicks "OK"

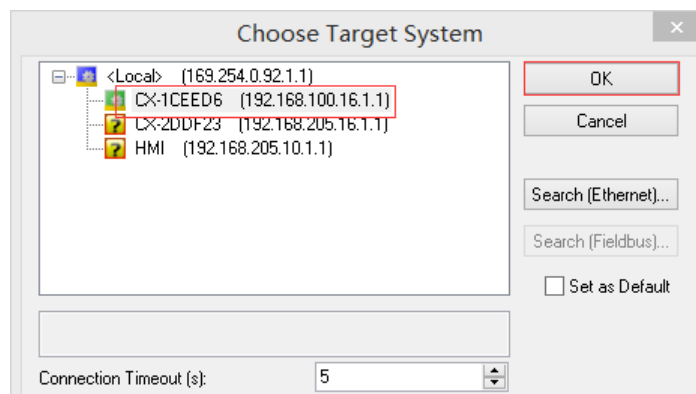


2. Add static routing for HMI.

1) Click "Routes", then click "Add" to enter the static routing interface.

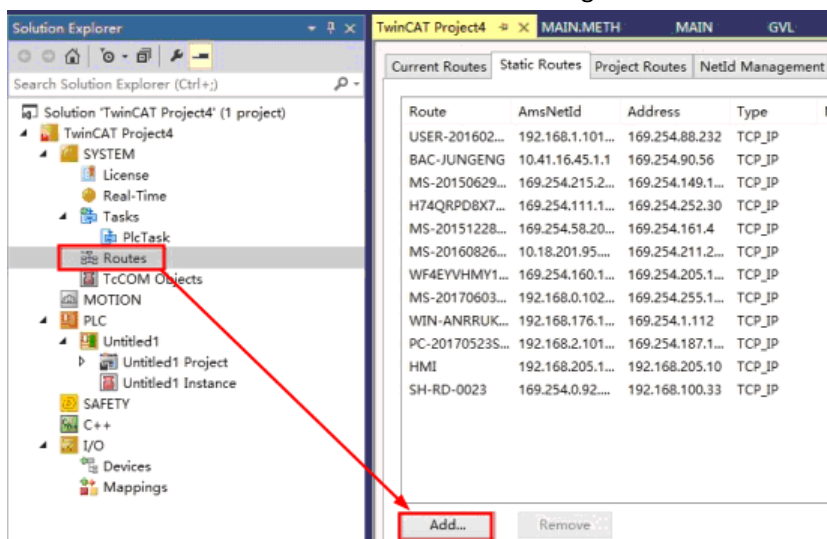


2) Enter the static routing interface, Add the static Route of HMI (the IP address is consistent with the IP address of the touch screen), click "Add Route", then click "Close".

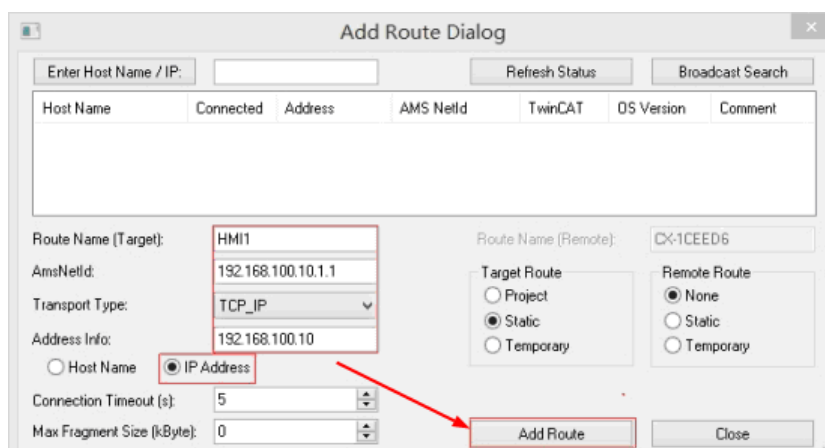


3. Add PLC communication variable.

1) Right click "PLC" and select "Add New Item"

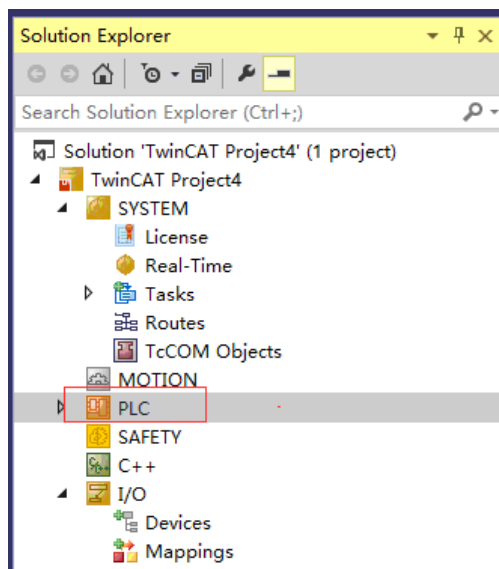


2) After popping up the "Add New Item" dialog box and select "Add"

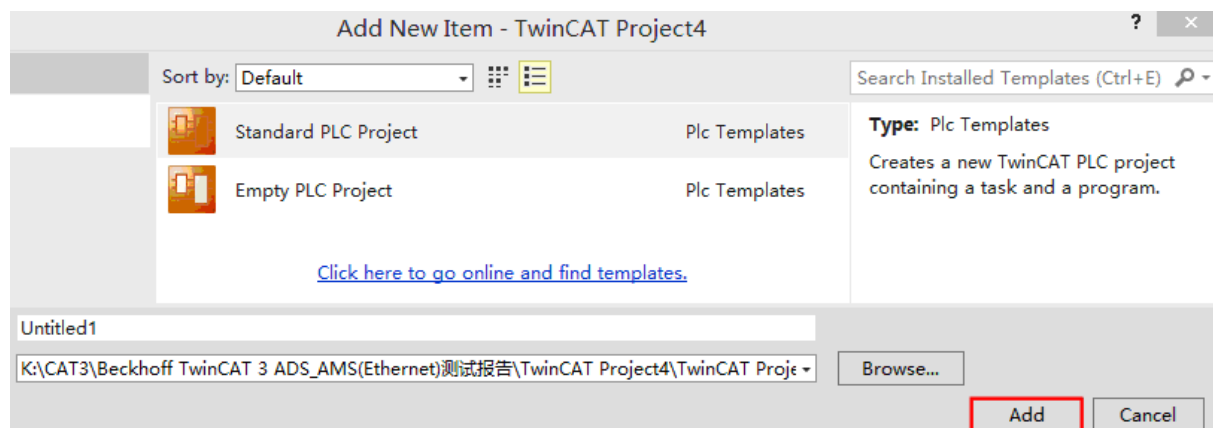

3) Right click "GVLs", select "Add" -- "Global Variable List", then Add the Variable address.



(variable address add format : AT %MW1:WORD;With the AT % MX0.15: BOOL)

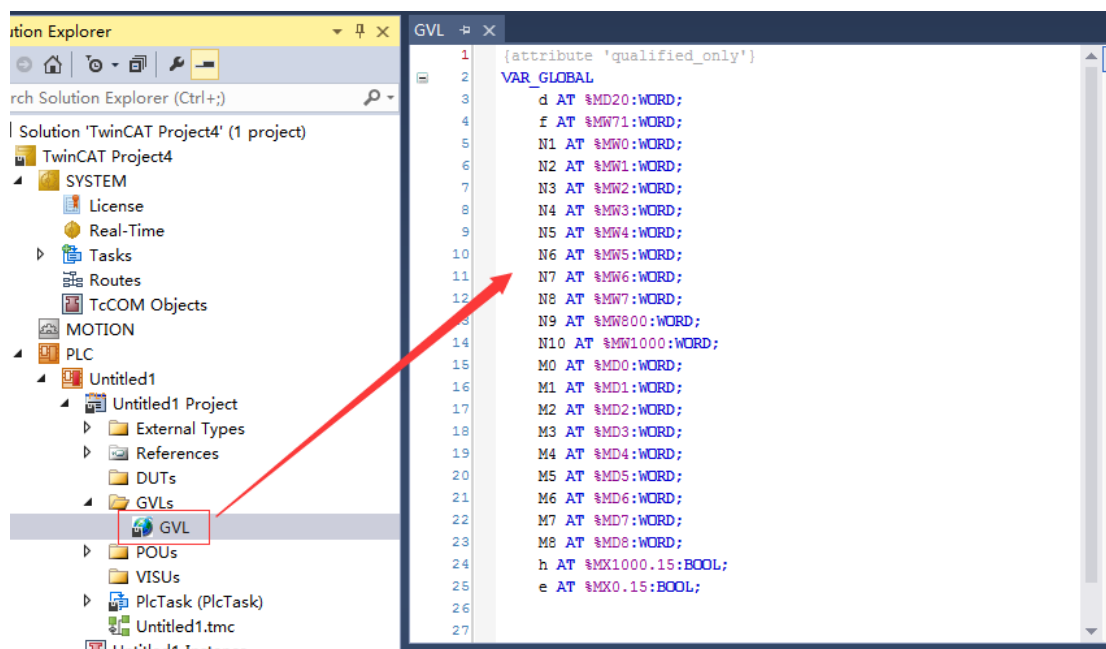

Beckhoff TwinCAT PLC_Free Tag Names (Ethernet) protocol

HMI Setting

Port must be 48898, please don't change it.

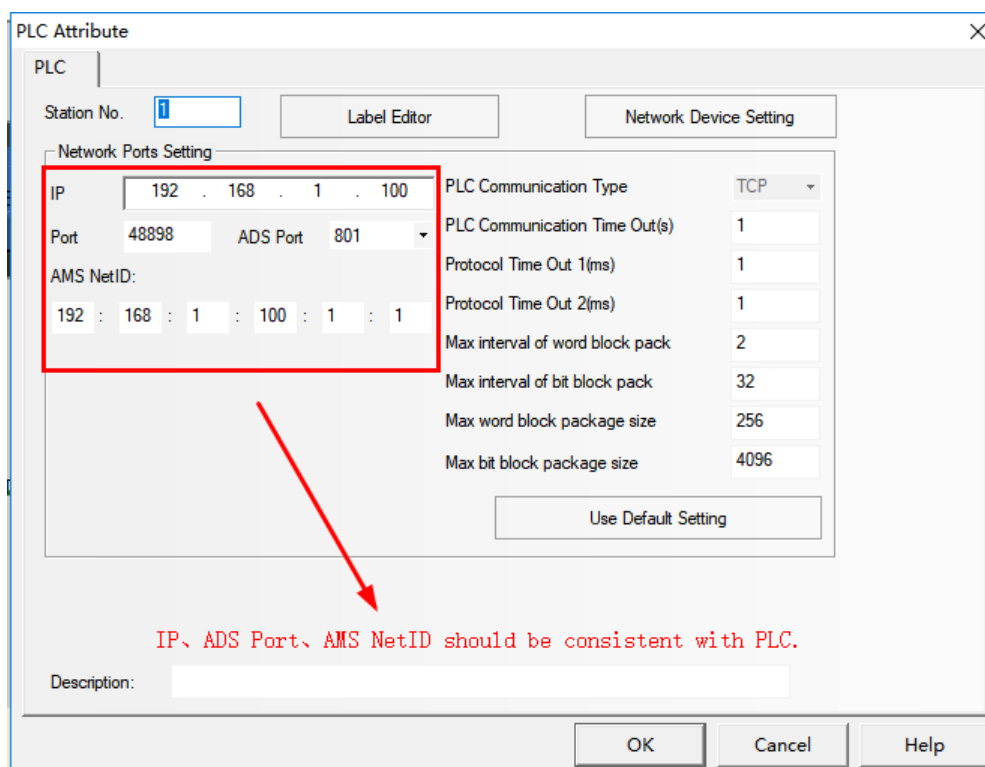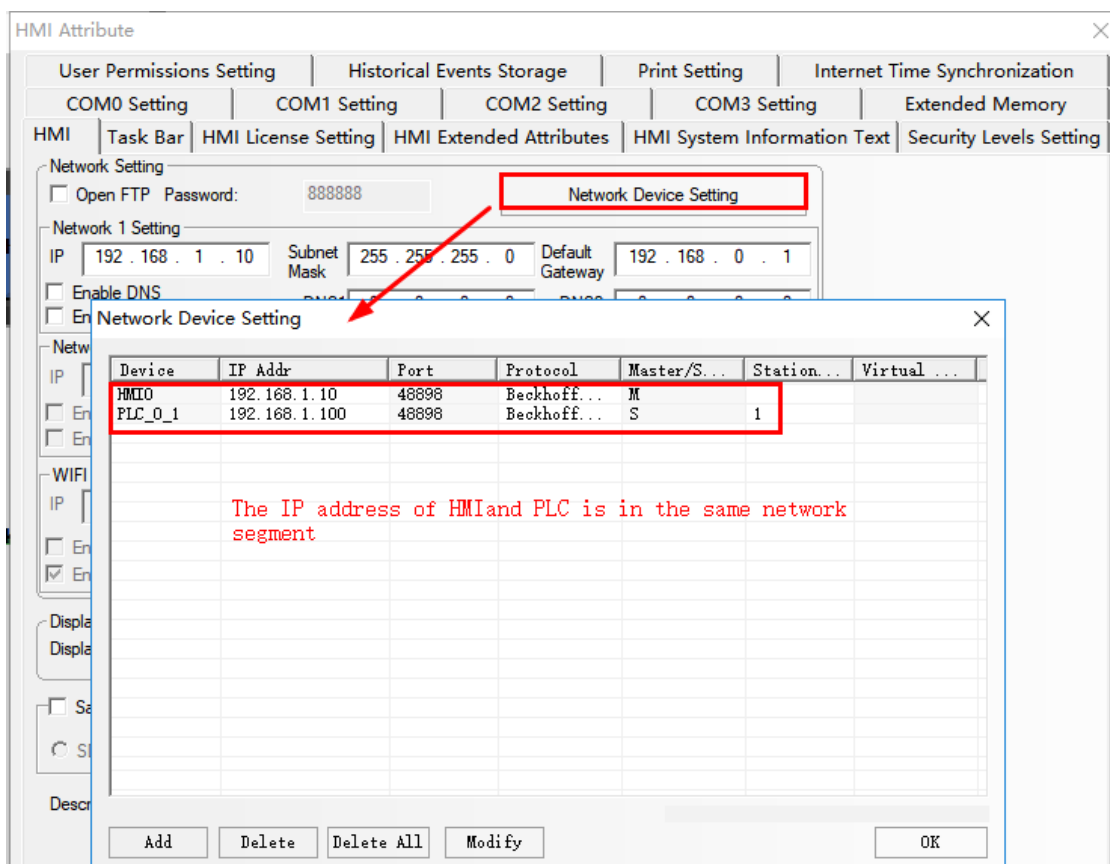


Note: 1.the default ADS port of CAT2 is 801, and the ADS port of CAT3 is 851, which can be viewed through PLC software;2.Direct online simulation is not supported.

PLC Setting


You can check the ADS Port of CAT2, use default and do not modify.

You can check the ADS port of CAT3, use default and not modify.

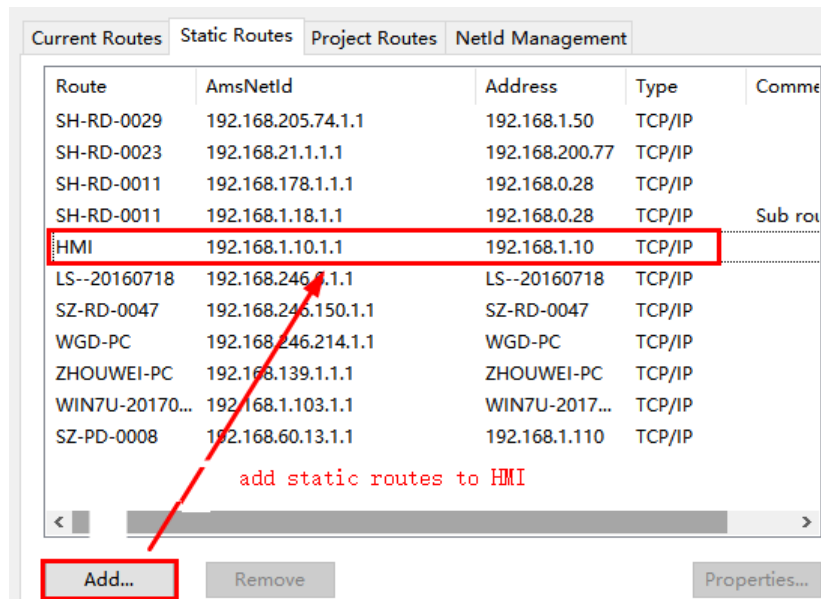


Add address tags

For TWINCAT2, u need open PLC Control, chose “POUs” add new POU, then click “OK”

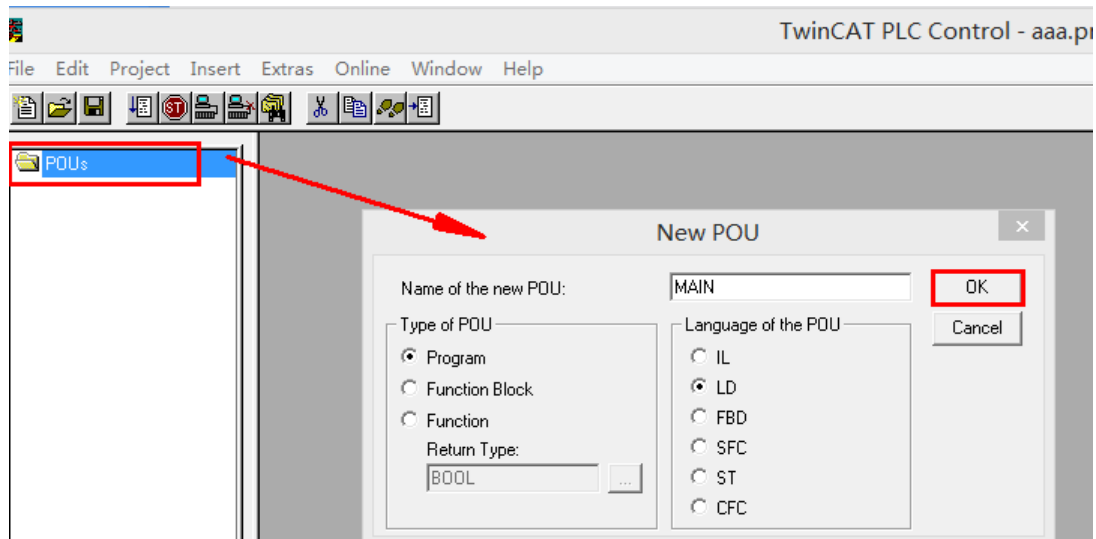



Then add address tags in “MAIN” project.


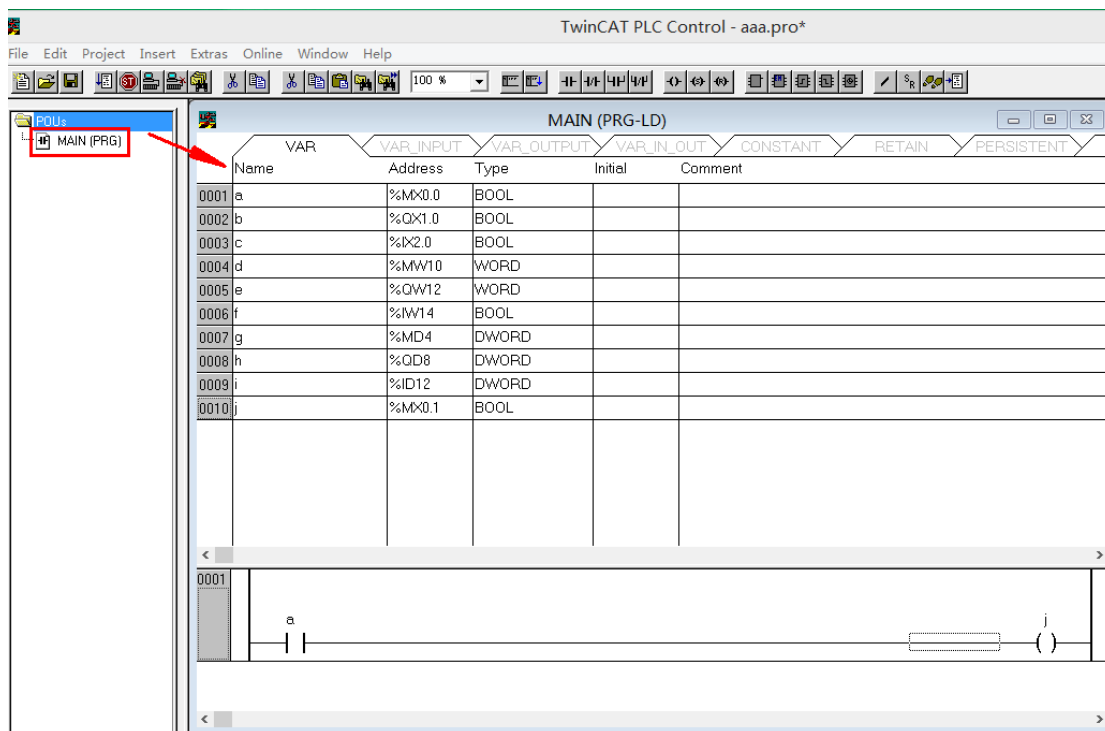


Add variable declaration format: %MX0.0, %MW2, %MD4.


After completing the compilation, you need to activate the configuration and download the program to the PLC.

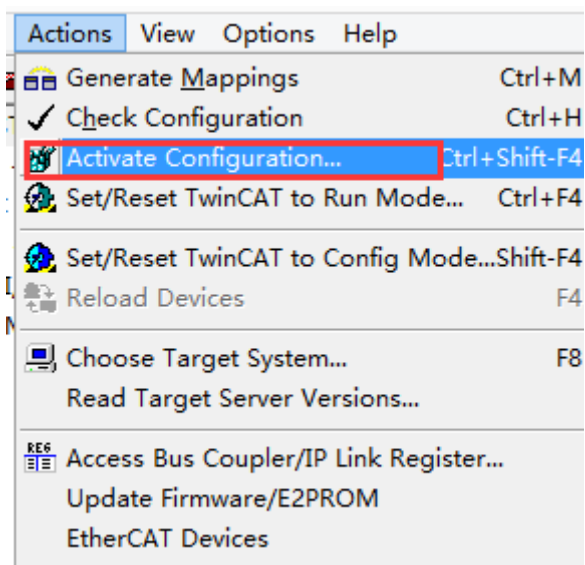

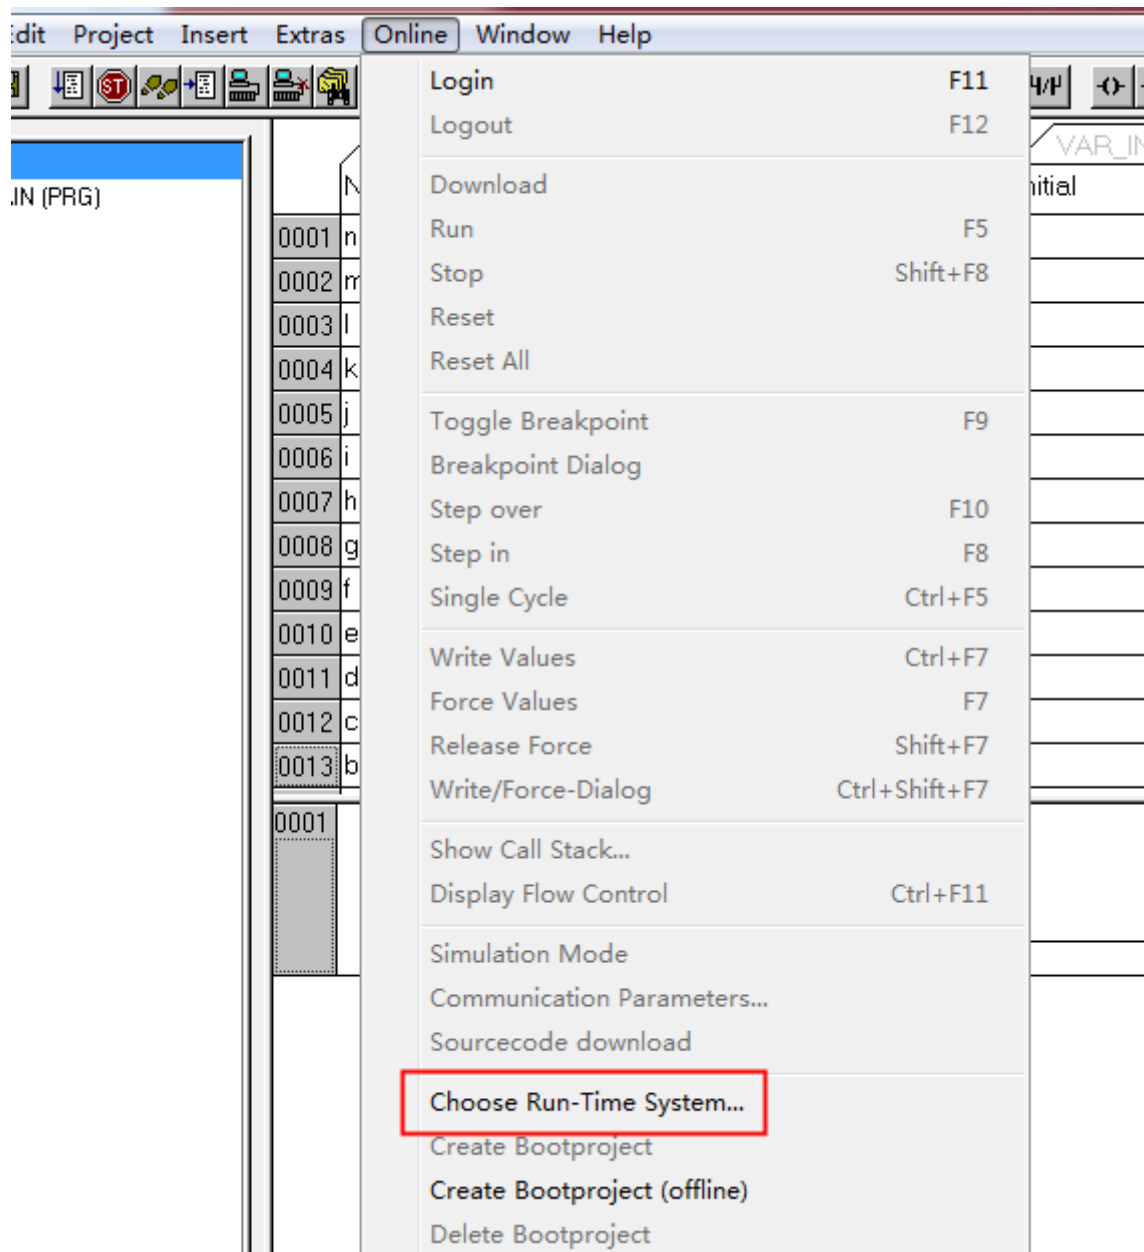


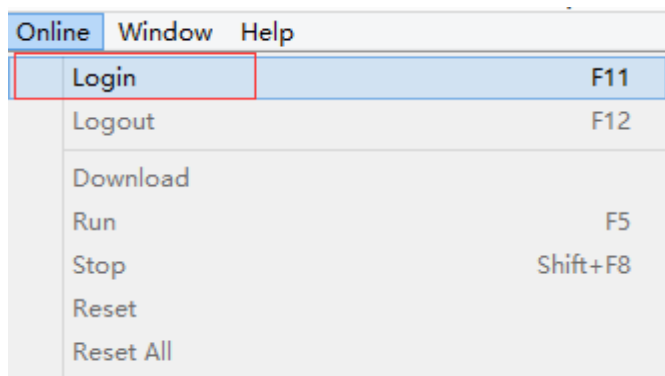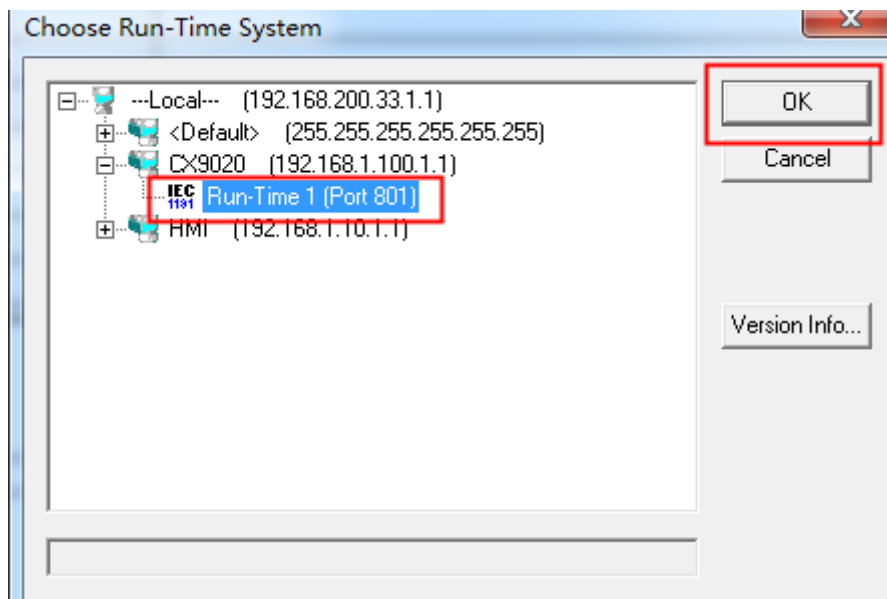

For TWINCAT3, right click “GVLs” , “Add” ---- “Global Variable List” , and then add address tags
(Add format of variable address: AT% MW1: WORD; and AT% MX0.15: BOOL;)

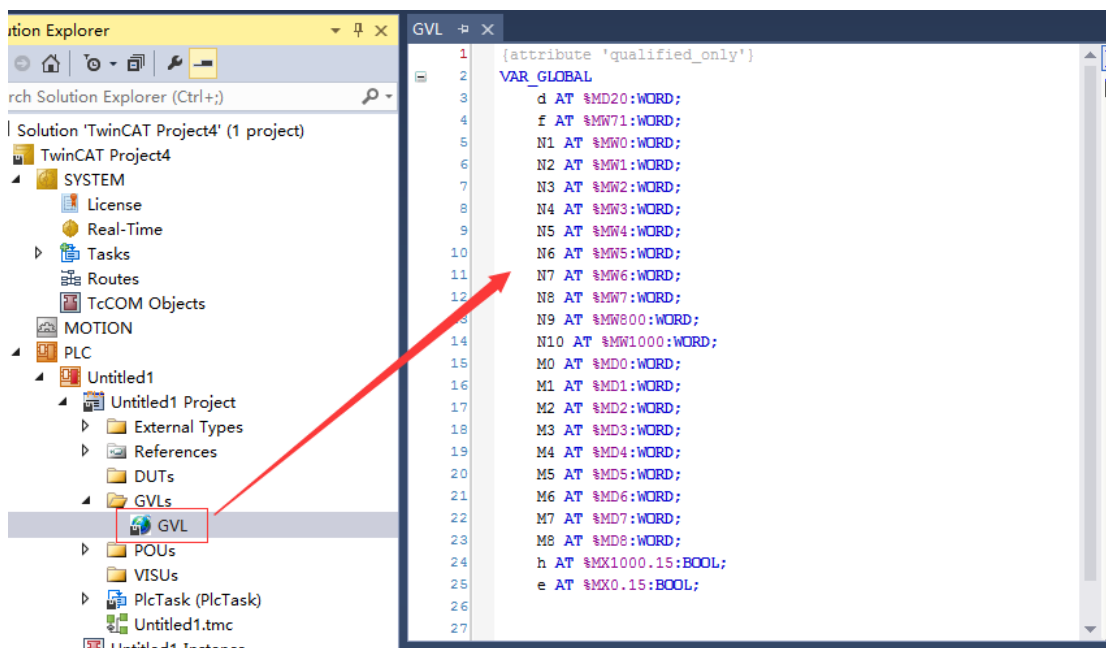


After completing the compilation, you need to activate the configuration and download the program to the PLC.

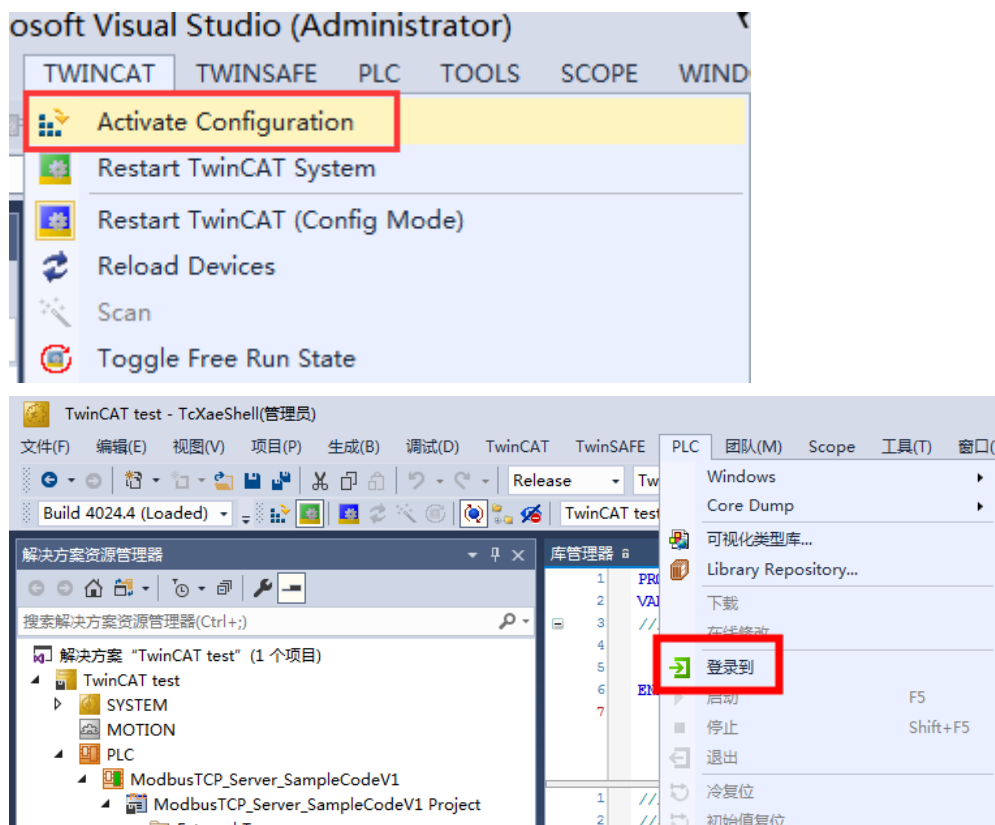

Import Label


Compiled files generated by TwinCAT2 and TwinCAT programming software can be directly imported into Kinco Dtools. The following steps show how to import address labels.

- ① PLC attribute>>Label Editor>>Import,pop up the prompt box of importing tags.

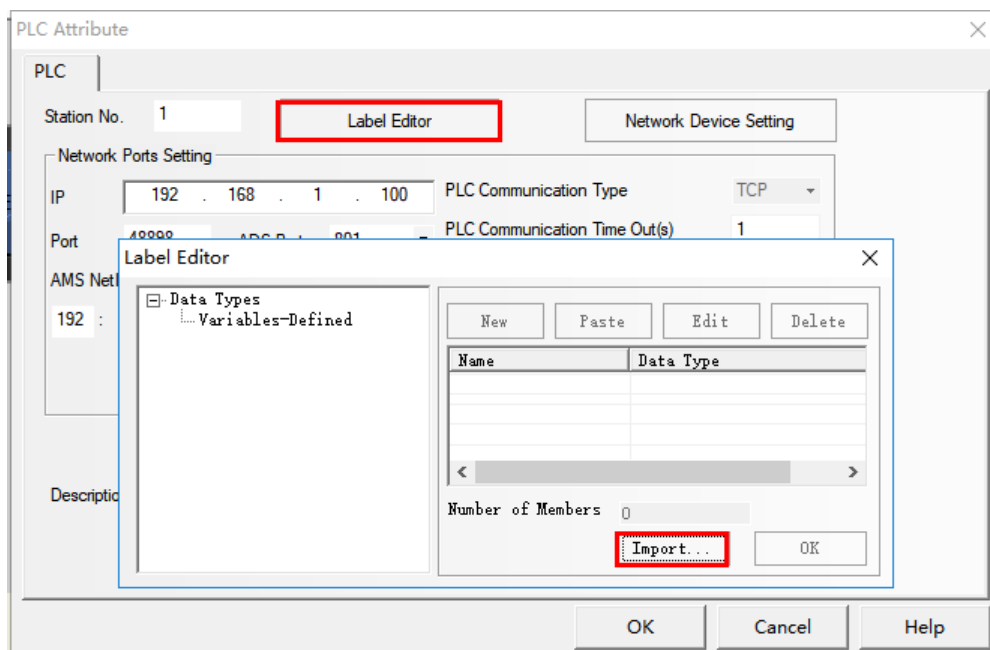


- ② Select the version of PLC software (TwinCAT2 is 2, TwinCAT3 is 3)

The standard file type of TwinCAT2 is .TYP, and the standard file type of TwinCAT3 is .TcGVL, .TcPOU. Click browse, select file type, and then click OK.

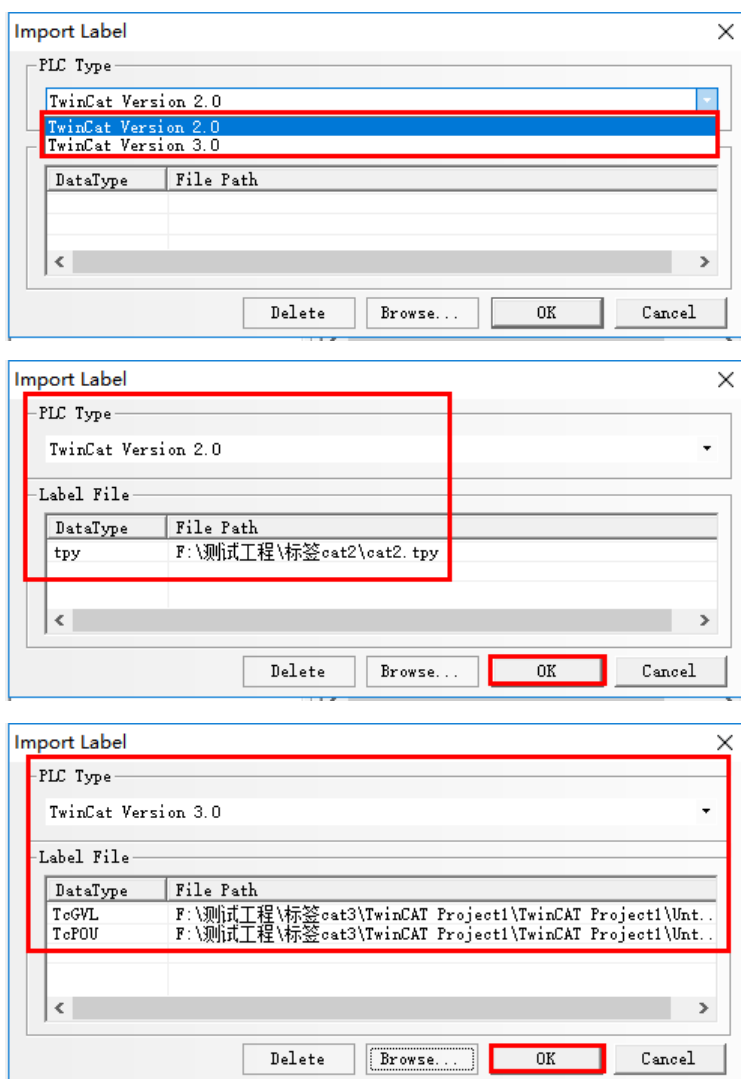

Note: Dtools software does not support data types such as commons, enumerations, etc.

③ Successfully imported labels

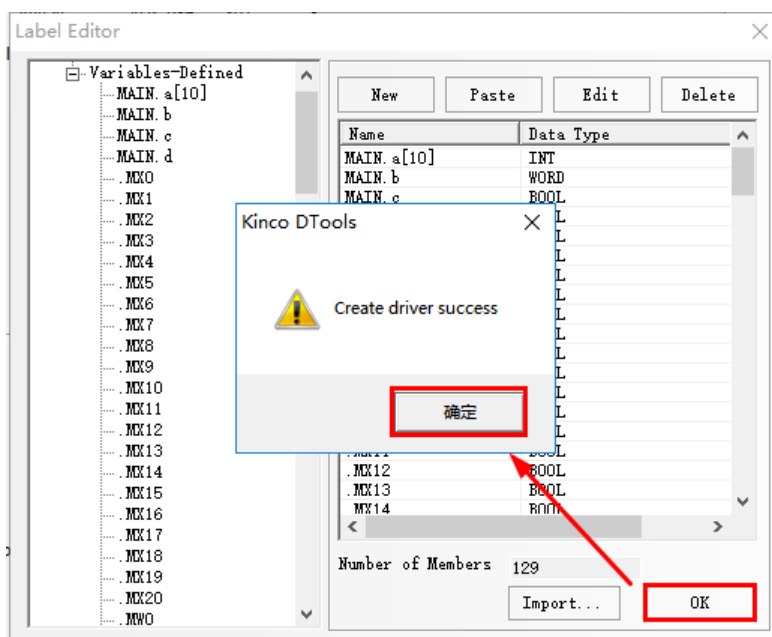

© Support Date Type

Beckhoff TwinCAT 2 ADS_AMS (Ethernet)

Device	Bit Address	Word Address	Format	
Auxiliary relay	MX 0.0-65535.7	-----	DDDDD.O	
Output Relay	QX 0.0-65535.7	-----	DDDDD.O	
Input Relay	IX 0.0-65535.7	-----	DDDDD.O	
32-bit Auxiliary register	-----	MD0-65535	DDDDD	
Auxiliary registre	-----	MW0-65535	DDDDD	
32-bit Output register	-----	QD0-65535	DDDDD	
Output register	-----	QW0-65535	DDDDD	
32-bit Input register	-----	ID0-65535	DDDDD	
Input register	-----	IW0-65535	DDDDD	

Note: MW address can only be even number, MD address can only be multiples of 4;

The correspondence between MD and MW: MD0 corresponds to MW0 and MW2; MD4 corresponds to MW4 and MW6; MD8 corresponds to MW8 and MW10.....

Beckhoff TwinCAT 3 ADS_AMS (Ethernet)

Device	Bit Address	Word Address	Format	Notes
Auxiliary relay	MX 0.0-65535.7	-----	DDDDD.O	
Input relay	IX 0.0-65535.7	-----	DDDDD.O	
Output relay	QX 0.0-65535.7	-----	DDDDD.O	
32 bit Auxiliary relay	-----	MD 0-65535	DDDDD	
Auxiliary relay	-----	MW 0-65535	DDDDD	
32 bit Input relay	-----	ID 0-65535	DDDDD	
Input relay	-----	IW 0-65535	DDDDD	
32 bit Output relay	-----	QD 0-65535	DDDDD	
Output relay	-----	QW 0-65535	DDDDD	

Note: 1. The corresponding relationship between MD and MW: MD0 corresponds to MW0 and MW1;MD1 corresponds to MW2 and MW3;.....;

2. MW1, MW3, MW5, MW7...It can only be 16bit, not 32bit in CE system.

Beckhoff TwinCAT PLC _Free Tag Names (Ethernet)

Date Type	data format	Notes
Bool	bit	
Word	16-bit Decimal, Hex, Binary	
Int	16-bit Decimal, Hex, Binary	
UInt	16-bit Decimal, Hex, Binary	

DWord	32-bit Decimal, Hex, Binary	
DInt	32-bit Decimal, Hex, Binary	
Real	32-bit Float	
UDInt	32-bit Decimal, Hex, Binary	

◎ Cable Diagram

Connecting PC and HMI use cross-ruling; communicating with hub or switch use cross-over cable or cross-ruling.

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.12 Bosch Rexroth KVFC+ (Inverter)


◎ Serial Communication

Series	CPU	Link Module	Driver
KVFC+		RS485	Bosch Rexroth KVFC+

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
KVFC+		RS485 on the CPU unit	RS485	Setting	Your owner cable

◎ Communication Setting

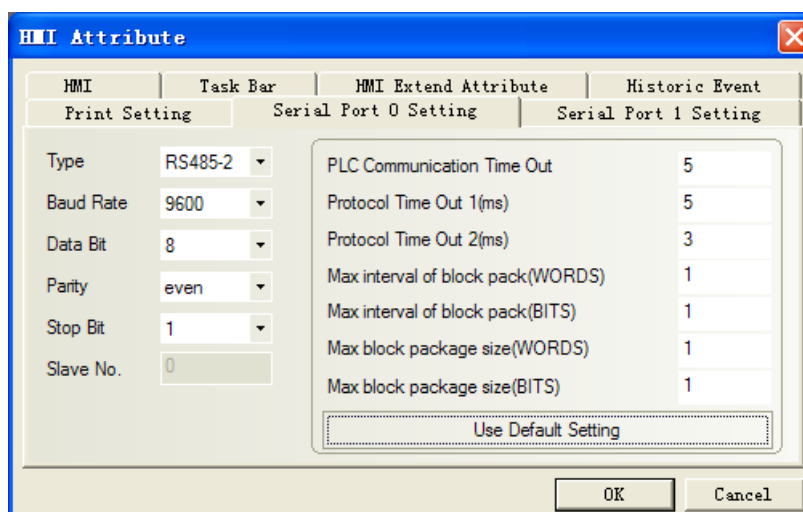


◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
Start/Stop	STW0~3	-----	D	STW0 open, start. STW0 close, stop. STW1 close, positive rotation.

				STW1 open, negative rotation. STW2 REV inching turning. STW3 FWD inching turning.
Set frequency	-----	HSW 0	D	
Basic Function Block	-----	B 0~41	DD	B16 acceleration time. B17 deceleration time.
Deviation alarm	-----	E 0~41	DD	
Programmable control function array	-----	P 0~37	DD	
High function array	-----	H 0~38	DD	
D array	-----	D 0~6	D	D0: output power. D2: running current.

◎ Cable Diagram

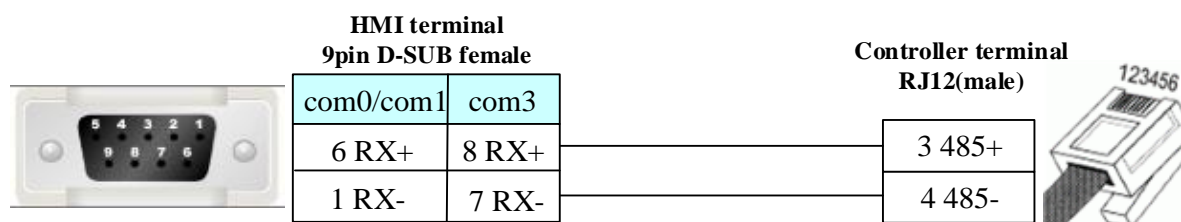

4.13 Bosch Rexroth

◎ Serial Communication

Series	CPU	Link Module	Driver
PPC-R	PPC-R22.1 13VRS	RS232 on the CPU unit	Bosch Rexroth
		RS485 on the port	
L	L40	RS232 on the CPU unit	
	L20	RS232 on the CPU unit	
IndraDrive C	HCS02	RS232 on the CPU unit	Bosch Rexroth SIS

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
PPC-R	PPC-R22.1 13VRS	RS232 on the CPU unit	RS232C	Setting	Your owner cable
		RS485 on the port	RS485	Setting	Your owner cable
L	L40 L20	RS232 on the CPU unit	RS232C	Setting	Your owner cable
IndraDrive C	HCS02	RS232 on the CPU unit	RS232	Setting	Your owner cable

◎ Communication Setting

PPC-R communication setting

RS232 communication: 19200, 8, even, 1; station number: 128

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS232'. The 'Baud Rate' is '19200', 'Data Bit' is '8', 'Parity' is 'even', 'Stop Bit' is '1', and 'Slave No.' is '0'. On the right, the 'PLC Communication Time Out' is '1', 'Protocol Time Out 1(ms)' is '30', 'Protocol Time Out 2(ms)' is '0', 'Max interval of block pack(WORDS)' is '1', 'Max interval of block pack(BITS)' is '1', 'Max block package size(WORDS)' is '1', and 'Max block package size(BITS)' is '1'. A 'Use Default Setting' button is at the bottom of the right panel. 'OK' and 'Cancel' buttons are at the bottom of the dialog.

RS485 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS485-2'. The 'Baud Rate' is '19200', 'Data Bit' is '8', 'Parity' is 'even', 'Stop Bit' is '1', and 'Slave No.' is '0'. On the right, the 'PLC Communication Time Out' is '1', 'Protocol Time Out 1(ms)' is '30', 'Protocol Time Out 2(ms)' is '0', 'Max interval of block pack(WORDS)' is '1', 'Max interval of block pack(BITS)' is '1', 'Max block package size(WORDS)' is '1', and 'Max block package size(BITS)' is '1'. A 'Use Default Setting' button is at the bottom of the right panel. 'OK' and 'Cancel' buttons are at the bottom of the dialog.

NOTE: To communicate with the touch screen, declare variable firstly in the Rexroth software.**L40 communication settings**

Default communication: 38400, 8, 1, none; Station No.: 2

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS232'. The 'Baud Rate' is '38400', 'Data Bit' is '8', 'Parity' is 'even', 'Stop Bit' is '1', and 'Slave No.' is '0'. On the right, the 'PLC Communication Time Out' is '1', 'Protocol Time Out 1(ms)' is '30', 'Protocol Time Out 2(ms)' is '0', 'Max interval of block pack(WORDS)' is '1', 'Max interval of block pack(BITS)' is '1', 'Max block package size(WORDS)' is '1', and 'Max block package size(BITS)' is '1'. A 'Use Default Setting' button is at the bottom of the right panel. 'OK' and 'Cancel' buttons are at the bottom of the dialog.

NOTE: To communicate with the touch screen, declare variable firstly in the Rexroth software.

L40 Hardware Settings




PLC Setting

PPC-R software setting


PLC connects with PC via crossover ethernet cable. If using cross-connection ethernet cable, you must add a HUB (we usually use a cross-connection line to access the Internet)

Hardware configuration:

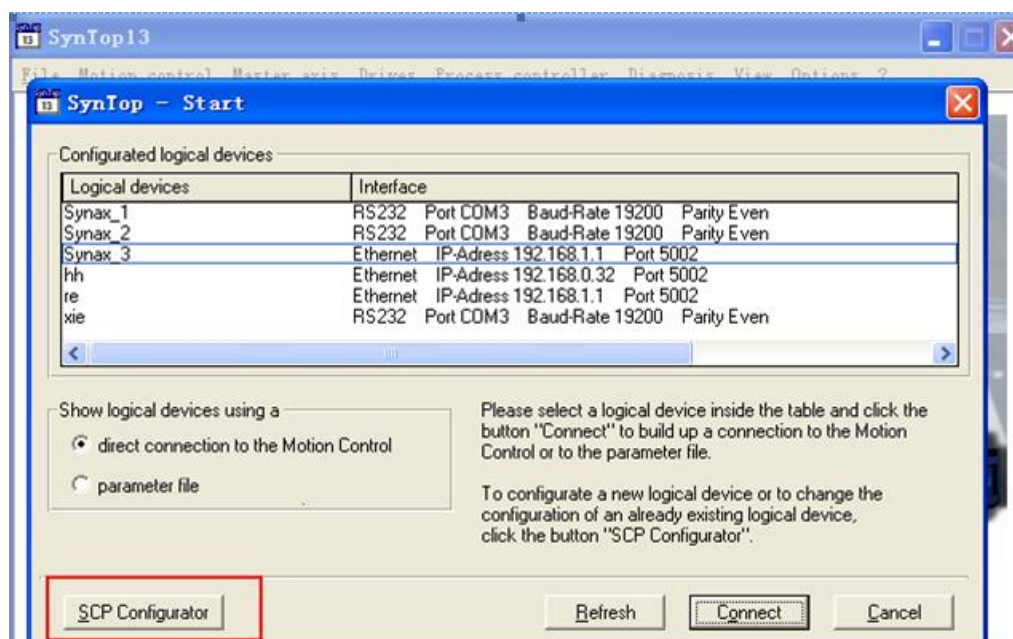


1. Click "scp configurator" ---> "scanning "or" add device" ---> "next", pay attention to the default controller IP: 192.168.1.1. And set IP 192.168.1.1 in the software (**PC and controller must be set up in the same segment**), ping IP address is OK, that configuration is successful. Save and close "scp configurator" ---> "refresh" to see logical devices created in configured logical devices", double-click to enter. All configurations will be successful.

2. Open "indralogic" ---> **online/communication parameter** ---> "new" and select "TCP/IP" to modify "value", set IP address the same as controller: 192.168.1.1

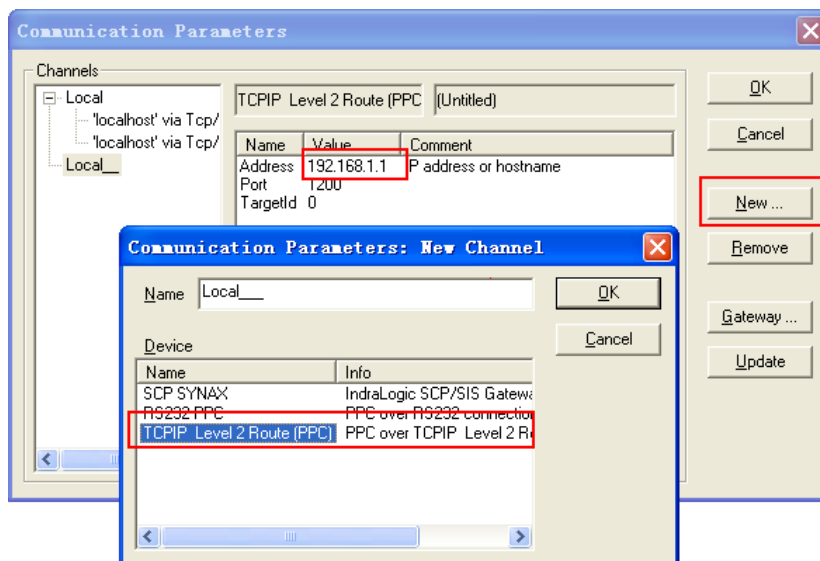

3. “Resource”---->“Global variables”---->declare variable in “HMI”

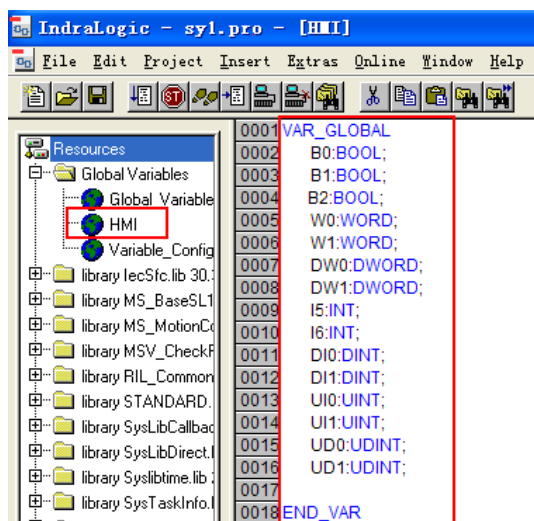


4. Click “online/login”



L40 software setting

1) The IndraLogic software connect with the Rexroth IndraControl L40 by ethernet cable (test: plc IP address: 192.168.100.103)


Open the IndraLogic software, create a new project:

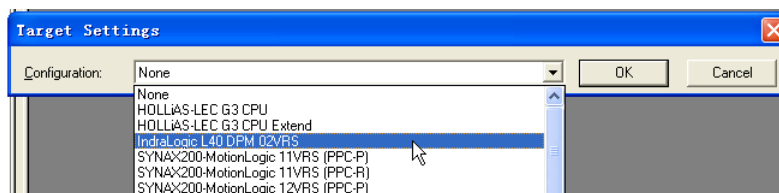


Click “OK” and pop-up the window as follows:

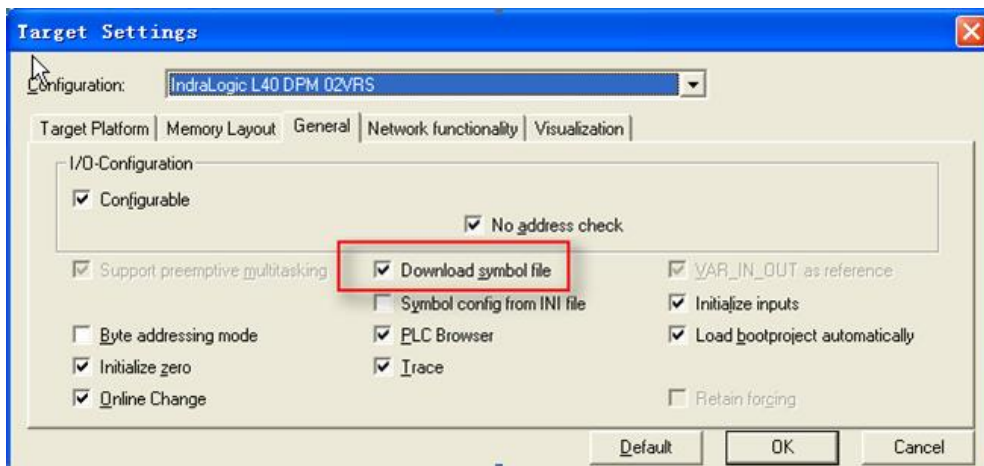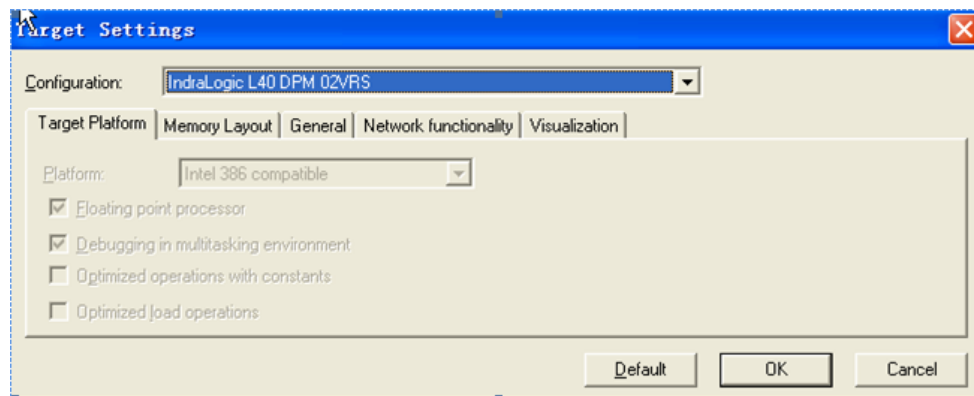


NOTE: Must select Download symbol file
Click "OK" and pop-up the window as follows:

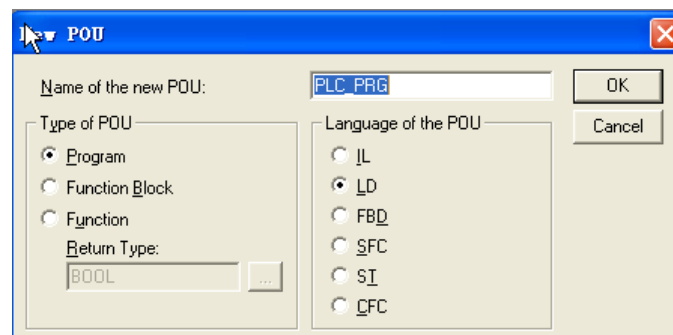



And then edit program:

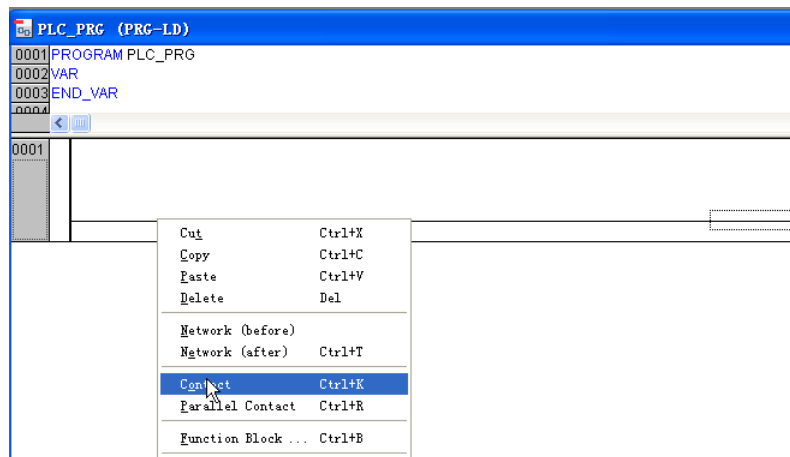


Input B0 and pop-up the dialog, configurations as follows, click "OK":

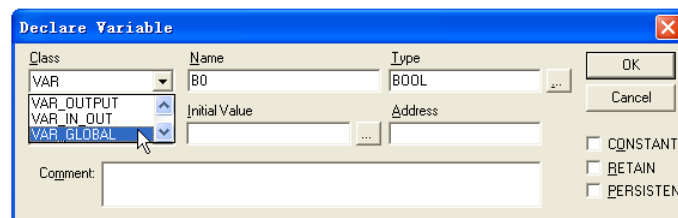


And set up coil:

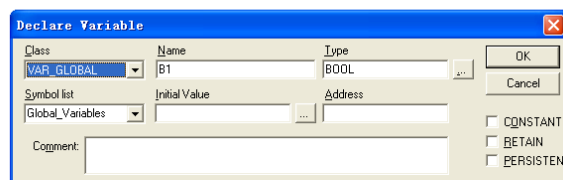


At the same time, you will find that there automatically generate two variables in the global variable:

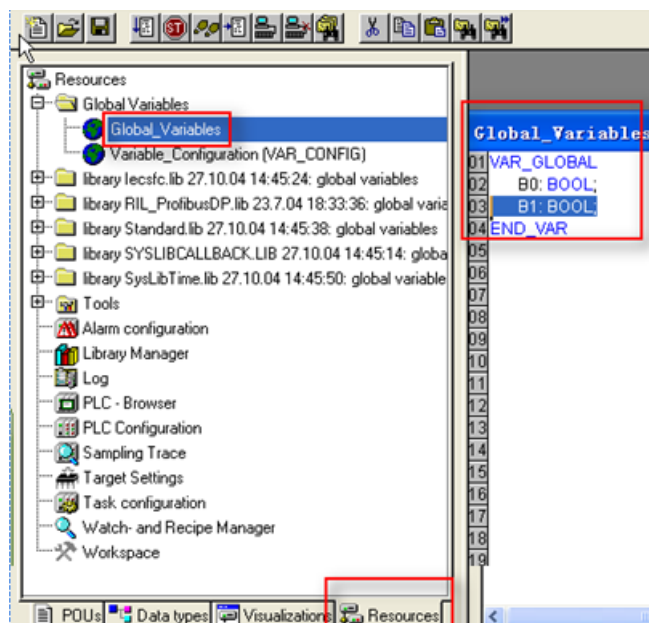


Then setting as follows:

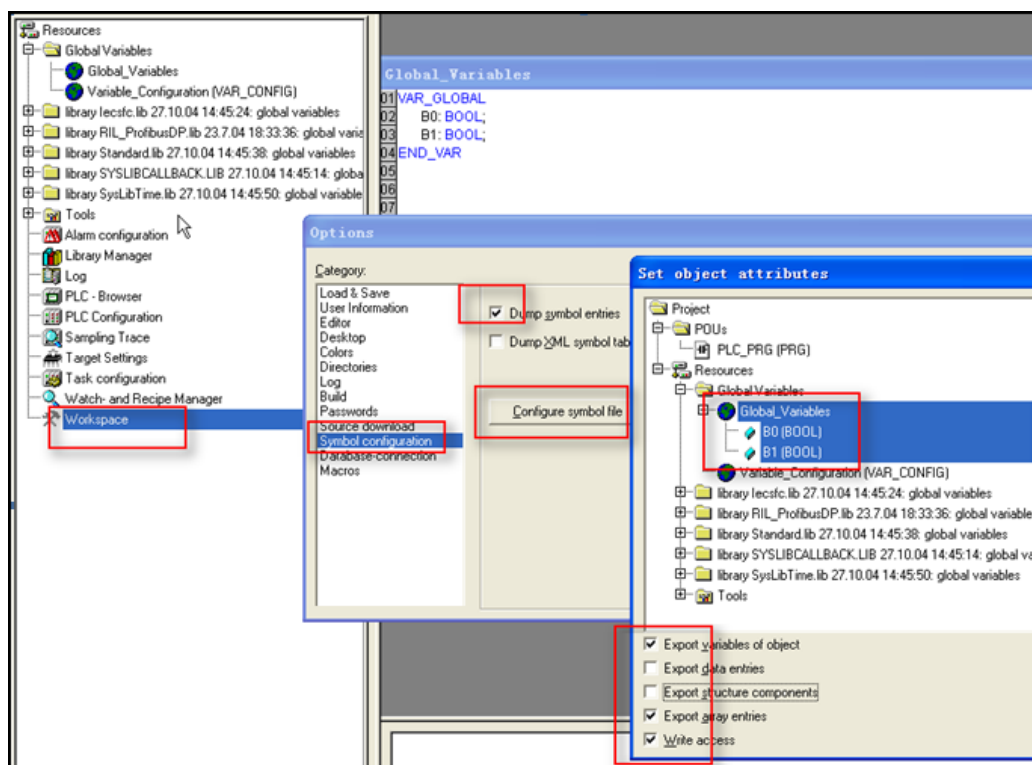


Setting communication parameter:

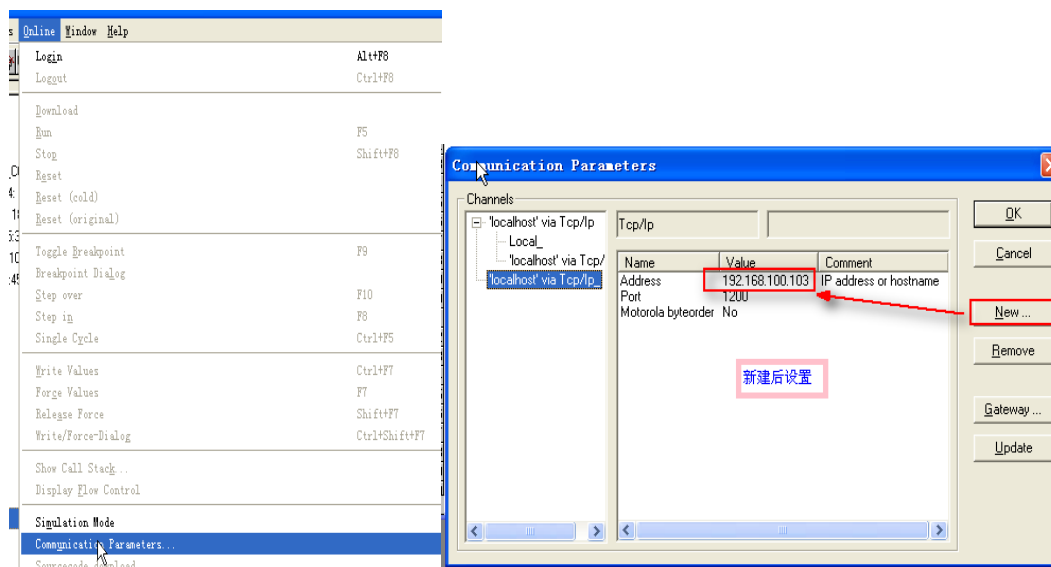

Then click “Login”:



Communicating successfully, you can operate (“Online” menu to select “run” or others) :

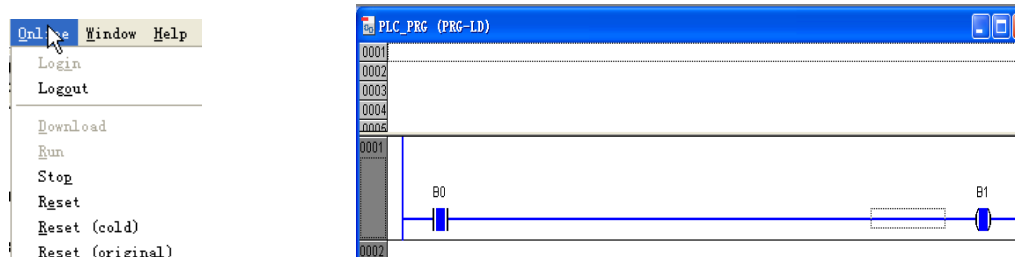

NOTE: The PLC panel must be set up, press” Enter”, then press”△”, until showed up “ RS232”, and then press”Enter” to enter “COM SERV” interfaces (not SERV, it must change to SERV)




In accordance with the above settings, the serial line access, EV5000 can be communicated with the Rexroth Controller L40 by serial port.

IndraDrive C

HMI setting

HMI default communication parameters: 9600bps, 8, parity check, 1; PLC station number: 0

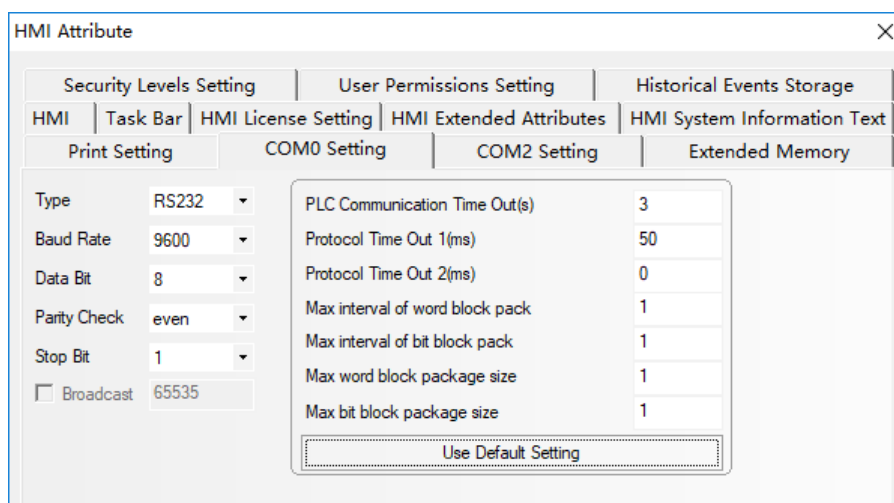

◎ Supported Device


Device	Bit Address	Word Address	Format	Notes
BYTE	B0000-9999	-----	DDDD	
WORD	-----	W0-65535	DDDDD	
INT	-----	I0-65535	DDDDD	
UINT	-----	UI0-65535	DDDDD	
DWORD	-----	DW0-65535	DDDDD	
DINT	-----	DI0-65535	DDDDD	
UDINT	-----	UD0-65535	DDDDD	




IndraDrive C

Device	Bit Address	Word Address	Format
S40	-----	S40 0	D
S51	-----	S51 0	D
S84	-----	S84 0	D
S430	-----	S430 0.00	D.HH
P1311	-----	P1311 0	D
P1312	-----	P1312 0	D
P1370	-----	P1370 0-15	DD

◎ Cable Diagram

PPC-R RS232 communication cable

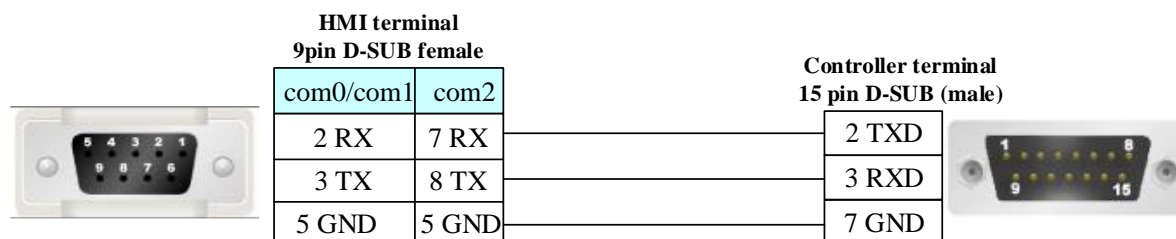

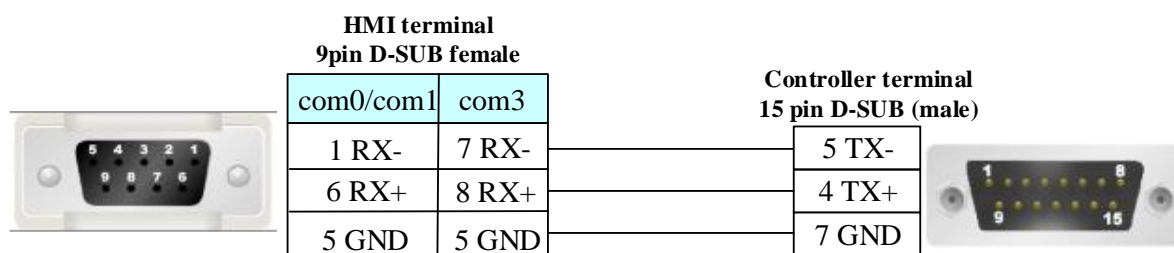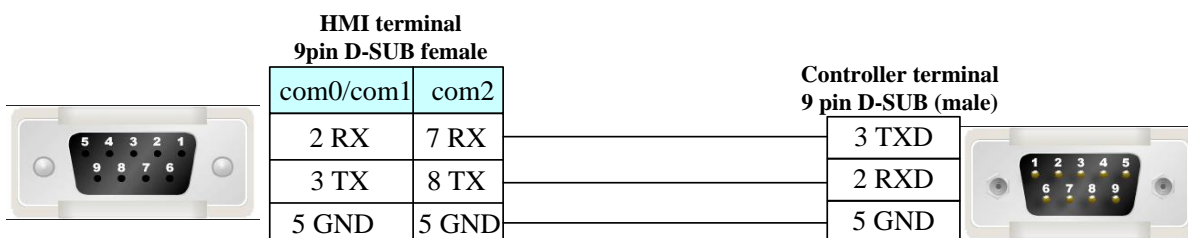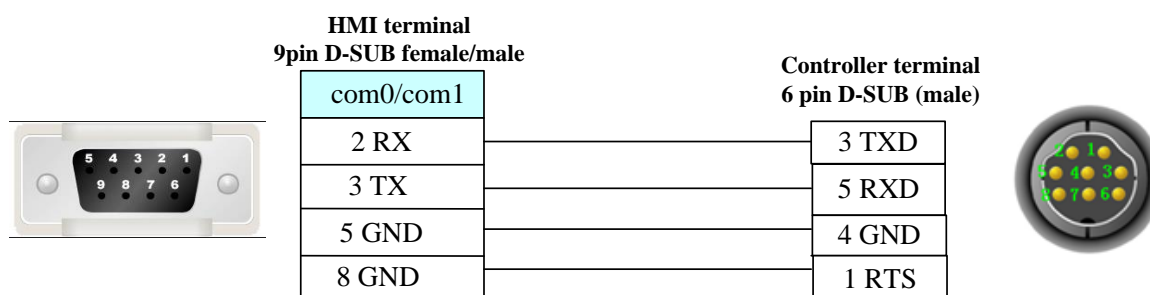PPC-R RS485 communication cable**L40 communication cable****IndraDrive C****4.14 Bosch Rexroth Ethernet**

© **Network communication** (indirect online and direct online simulation disable)


Series	CPU	Link Module	Driver
IndraLogic	IndraLogic L40 DPM	ETH on the CPU unit	Bosch Rexroth Ethernet
IndraMotion MLC	IndraControl L25	ETH on the CPU unit	Bosch Rexroth L25 Ethernet

© **System configuration**

Series	CPU	Link Module	COMM Type	Parameter	Cable
IndraLogic	L40 DPM 02VRS	ETH on the CPU unit	ETH	Setting	Your owner cable
IndraMotion MLC	IndraControl L25	ETH on the CPU unit	ETH	Setting	Your owner cable

© **Communication Setting**

L40**HMI Setting**

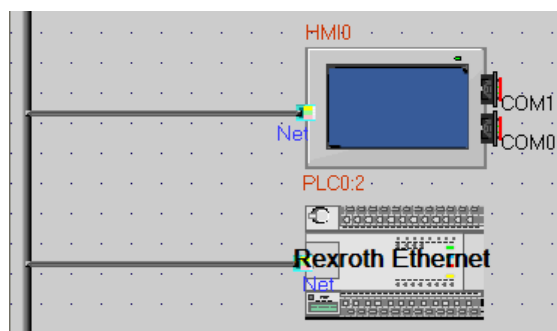

HMI Attribute

Print Setting | Serial Port 0 Setting | Serial Port 1 Setting

HMI | Task Bar | HMI Extend Attribute | Historic Event

Network Setting

IP Address: 192 . 168 . 100 . 102 Network Configure

Subnet Mask: 255 . 255 . 255 . 0 Gateway: 192 . 168 . 100 . 100

Display Setting

Screen Display Mode: ☒ Horizontal ☐ Vertical

Description: _____

OK Cancel

※PLC Attribute (station disable)

PLC Attribute

PLC

Station NO: 2 Network Device Setting

Net Setting

IP Addr: 192 . 168 . 100 . 103 PLC Communication Type: TCP

Port Num: 6042 PLC Communication Time Out(s): 1

Sub Mask: 255 . 255 . 255 . 0 Protocol Time Out 1(ms): 30

GateWay: 192 . 168 . 100 . 100 Protocol Time Out 2(ms): 0

First DNS: 255 . 255 . 255 . 255 Max interval of block pack(WORDS): 1

Second DNS: 255 . 255 . 255 . 255 Max interval of block pack(BITS): 1

MAC Addr: FF . FF . FF . FF . FF . FF Max block package size(WORDS): 1

Max block package size(BITS): 1

OK Cancel

※Network configuration (Note: PLC port num. must be set 6042, HMI port num. is optional, default is 6042. In addition, the screen and plc must be set in the same network segment, the gateway of the screen is better to be 192.168.100.100)

Network Config

Device	IP Addr	Port	Protocol	Master/Slave	State NO.	Vir
HMI0	192.168.100.102	502	Rexroth Ethernet	M		
PLC0	192.168.100.103	6042	Rexroth Ethernet	S	2	

< >



Add Delete Delete All Modify OK

NOTE: To communicate with the touch screen, declare variable firstly in the Rexroth software.


PLC Setting

PLC connect with PC by crossover network cable, if using cross-connection network cable, you must add a HUB (we usually use a cross-connection line to access the Internet)


1. After L40 equipped with software driver successfully, to set as follows:

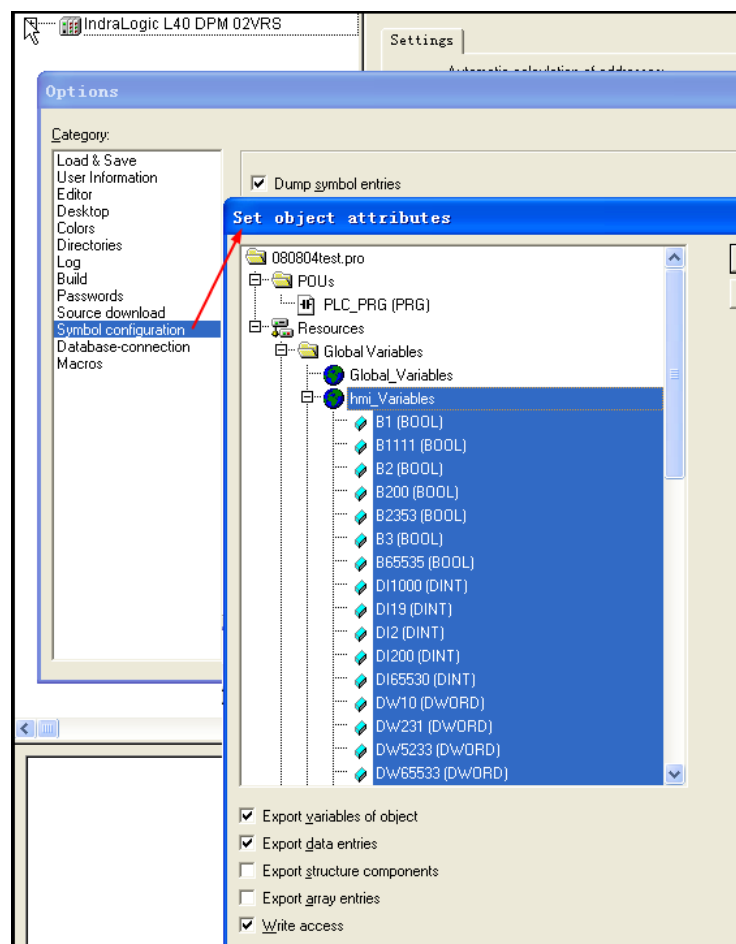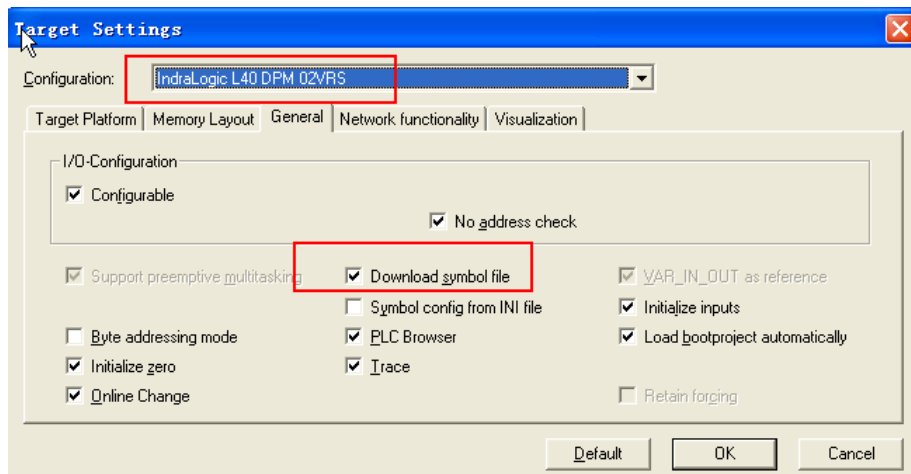

At this time open "indralogic" -->"online/communication parameter" -->"new" and select "TCP/IP " to modify "value", set IP address the same as controller: 192.168.100.103

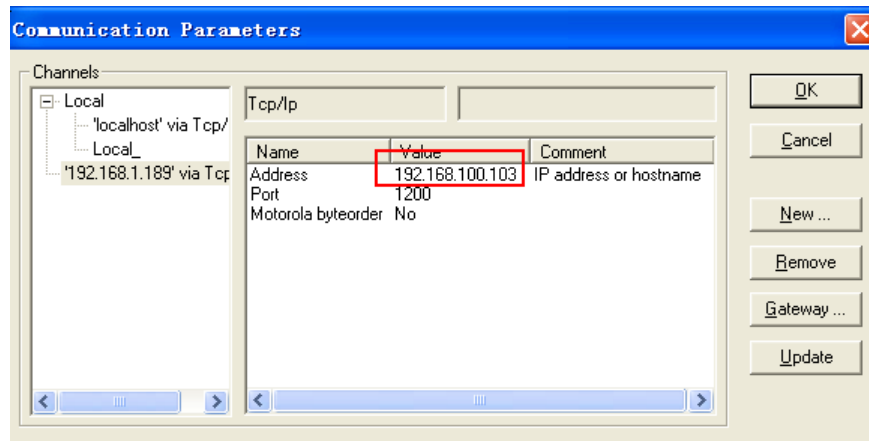


2. "Resource"---->"Global variables"---->declare variable in "HMI"

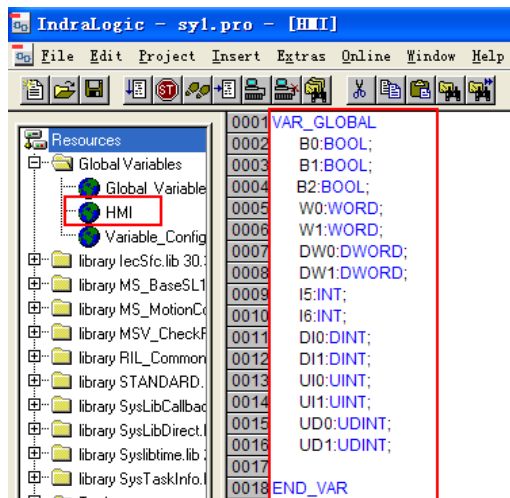

3. Click "online/login"


L25:

HMI Setting

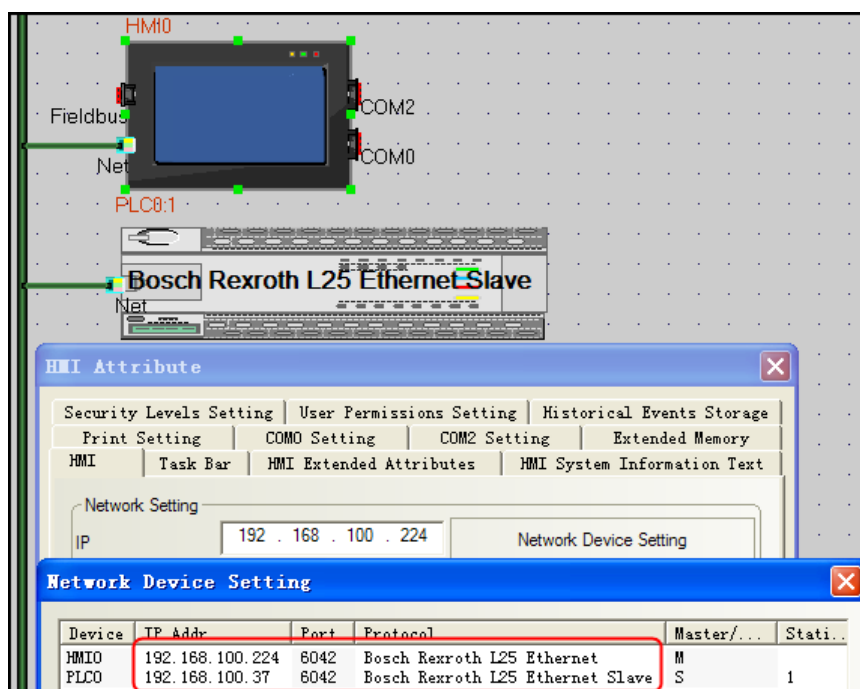


PLC Setting

1. Modify the IP in the controller.
2. Declare variable in controller programmer software.
3. Software setting
 - 1) Create new project and select IndraMotion MLC L25 (library→driver and control→IndraMotion MLC), then drag the selected controller onto the project file.

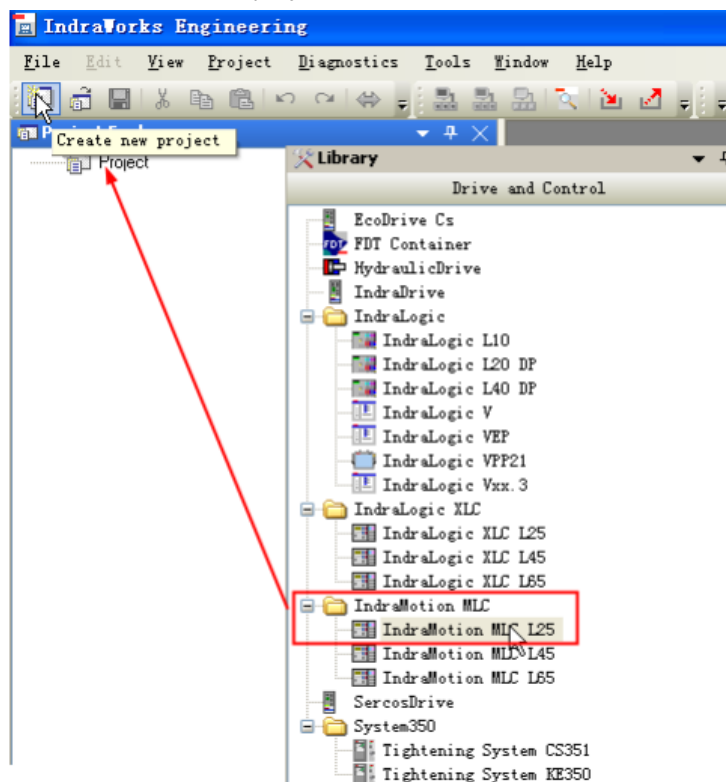


- 2) IN Insert IndraMotion MLC L25 properties box, set the Firmware release (FWA-CML25*-ML*-12V06) and IP address.

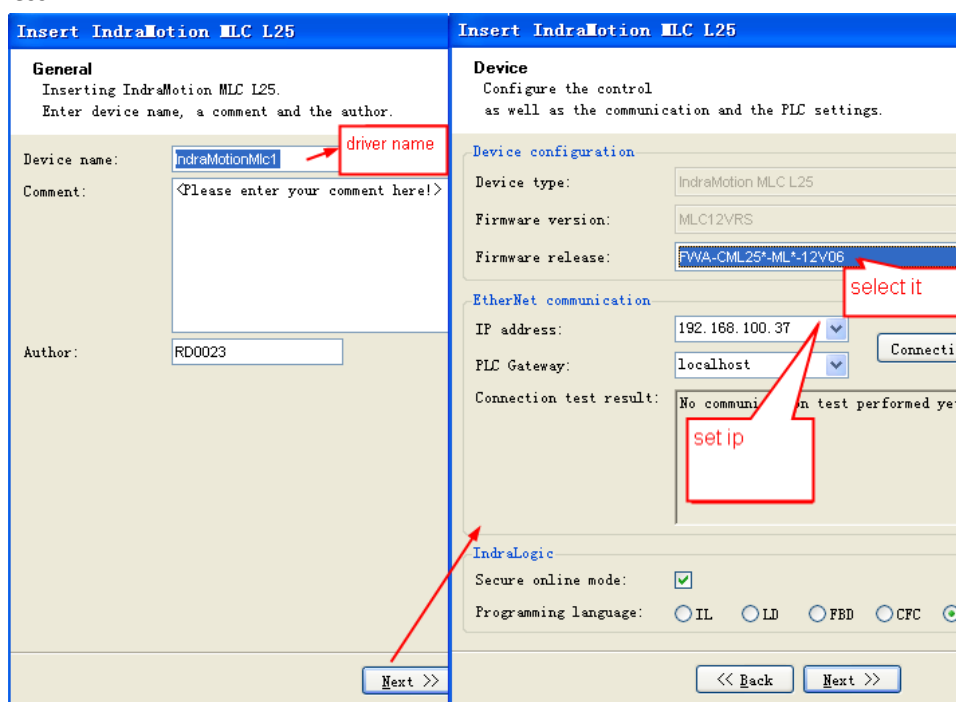


3) Declare variable

Declare variable UD in [Application]→[PlcProg(PRG)],and declare the variable type.

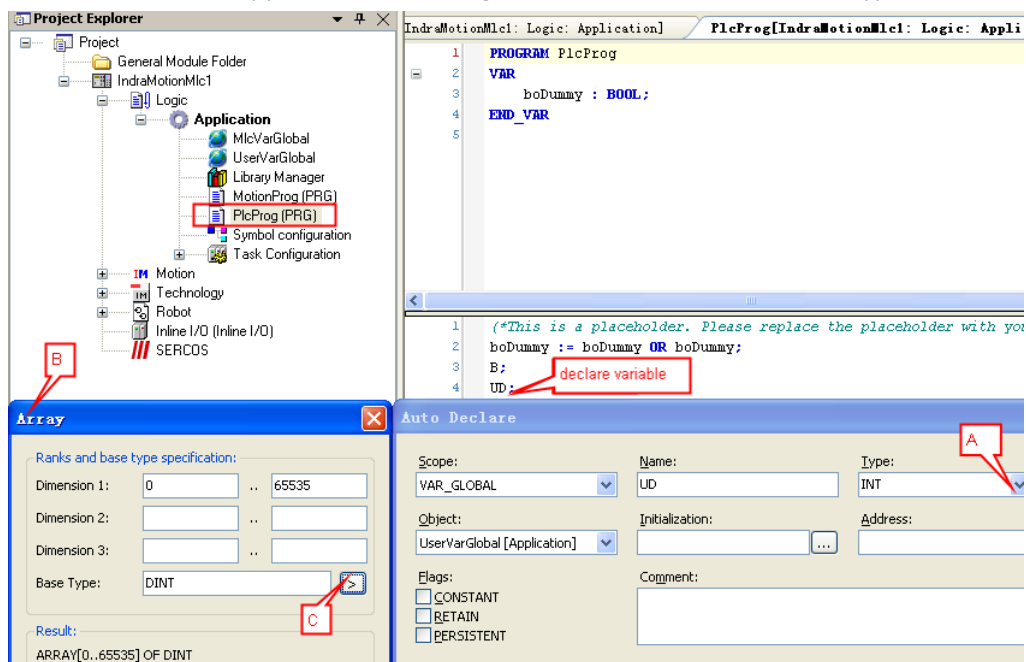

4) View the Declared variable in [Application]→[UserVarGlobal]

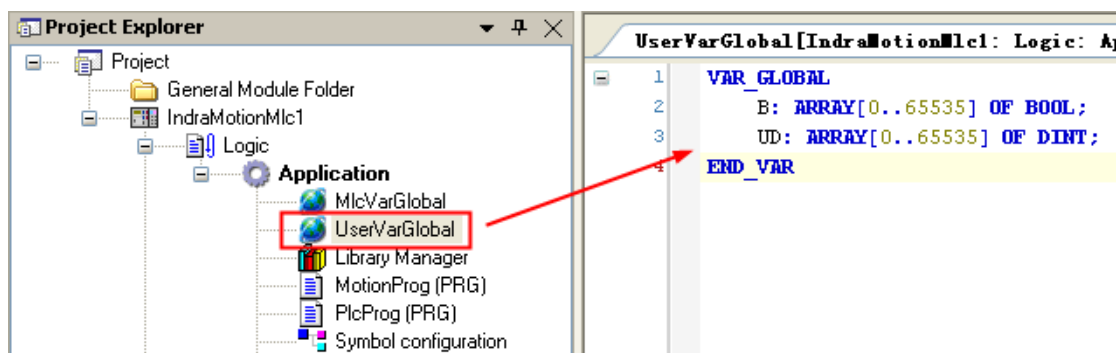

4. Click “online/login”

◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
BYTE	B0000-9999	-----	DDDD	
WORD	-----	W0-65535	DDDDD	
INT	-----	I0-65535	DDDDD	
UINT	-----	UI0-65535	DDDDD	
DWORD	-----	DW0-65535	DDDDD	
DINT	-----	DI0-65535	DDDDD	
UDINT	-----	UD0-65535	DDDDD	

◎ Cable Diagram

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.15 CANOpen Node Slave

◎ Serial Communication


Series	CPU	Link Module	Driver
KINCO	K4	CAN port on the External Device	CANOpen Node Slave
Other company devices which support CANOpen		CANOpen port	

◎ System configuration

Series	CPU	Link Module	Parameter	Cable
KINCO	K4	CAN port on the External Device	Setting	Your owner cable
Other company devices which support CANOpen		CAN port	Setting	

◎ Communication Setting

HMI Setting

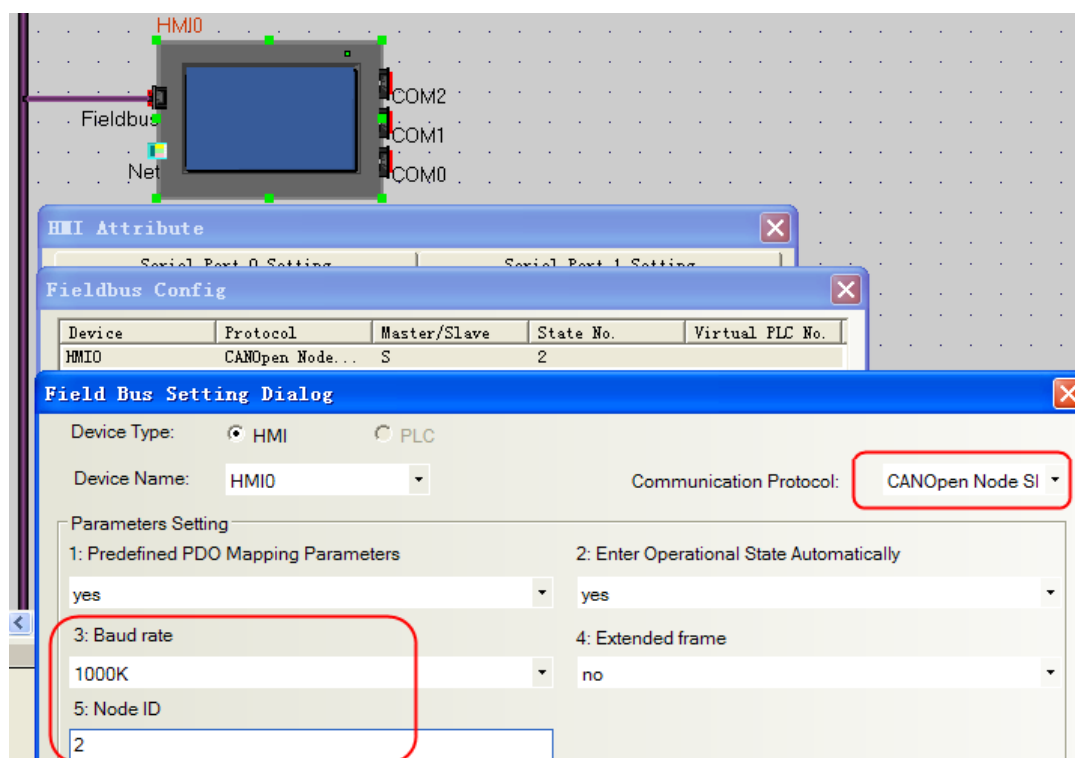

NOTE: Baud Rate and Station No. must be the same as the setting in the controller.


Parameters Setting

1. Predefined PDO mapping parameters

a. Default is “yes”, that is an effective predefined PDO mapping parameters. HMI now use the following PDO communication parameters and mapping

Receive PDO Mapping

Send PDO Mapping

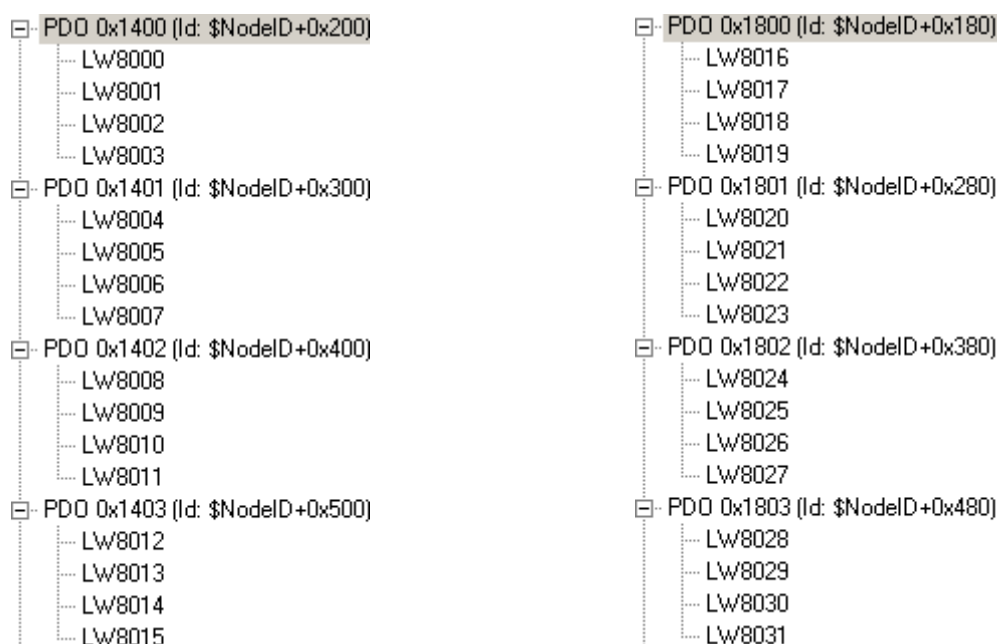

Note: TX_PDO using the event-triggered mode, that is, only when its mapping variable changes, it sends the PDO.

b. If the "No", the main station or other equipment necessary to configure the PDO communication parameters and mapping (configure only in the pre-operational status). After configured, you can send a save command via USB-CAN or controller to save the current configuration (restart still valid).

Command:

	COB-ID	DATA
Save the configuration information:	0x600 + NodeID	0x23 0x10 0x10 0x01 0x73 0x61 0x76 0x65
Restore to factory defaults:	0x600 + NodeID	0x23 0x11 0x10 0x01 0x6C 0x6F 0x61 0x64
Into the operating state:	0x00	0x01 NodeID
Into the pre-operational status:	0x00	0x80 NodeID

2. Enter operational state automatically

a. Default is "yes", that is, HMI enter the operational status (OPERATIONAL) automatically after power-up, NMT Master is no need to re-send start instructions.

b. If the "No", then HMI enter the pre-operational status (PRE-OPERATIONAL) automatically after power-up, only when the NMT Master sends start commands, system can entering the operational status (OPERATIONAL)

Note: PDO is effective only in the operating conditions (OPERATIONAL).

3. Baudrate

CAN port baud rate must be the same as CAN bus.

4. Node ID

HMI in the CAN bus ID, the ID only for the use of CANopen protocol. When using all the PDO (RX_PDO1 ~ RX_PDO64, TX_PDO1 ~ TX_PDO64), station number can not exceed 7, the bus station number of other devices also can not exceed 7.

PLC setting


Note: you can find MT5020.EDS in fieldbus file of EV5000 Installation Directory, or you can download from

www.kinco.cn.


Take MT6000 for example (we use MT6000 HMI to test, and use 3S CODESYS software to download project)

1. Setup

- Start Menu “3s Software”->“Codesys v2.3”->“installtarget”

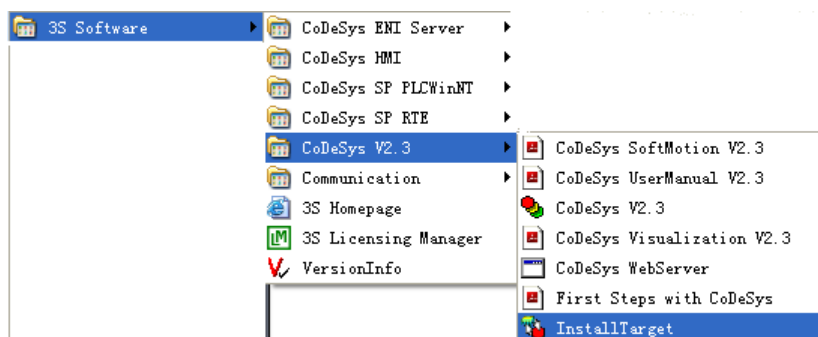


- Click “open” choose “StepServoARM.tnf”, and then click “install”.

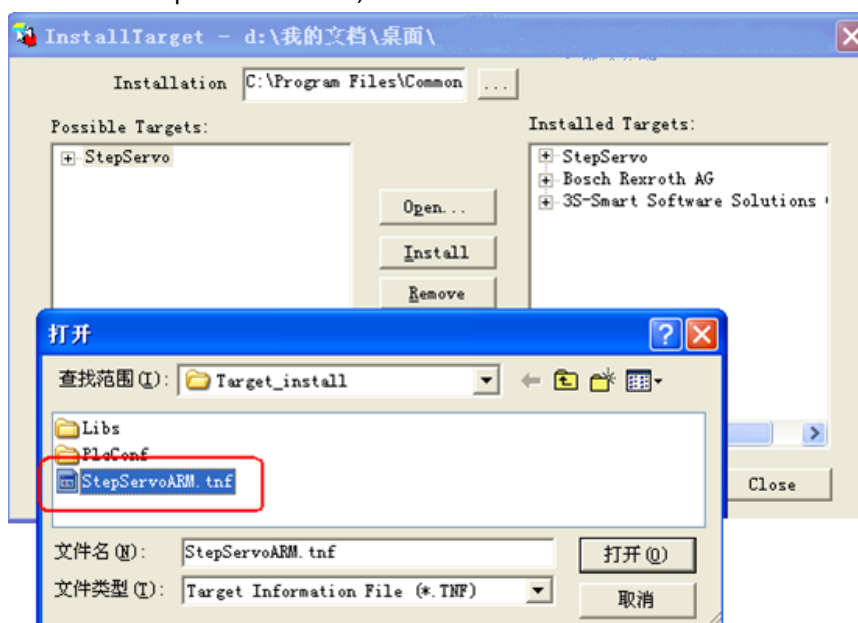


2. Copy “MT5020.EDS” to “C:\Program Files\Common Files\CAA -Targets\ StepServo\ PlcConf”

3. Configuration setting


- a. run codesys software, make a new project

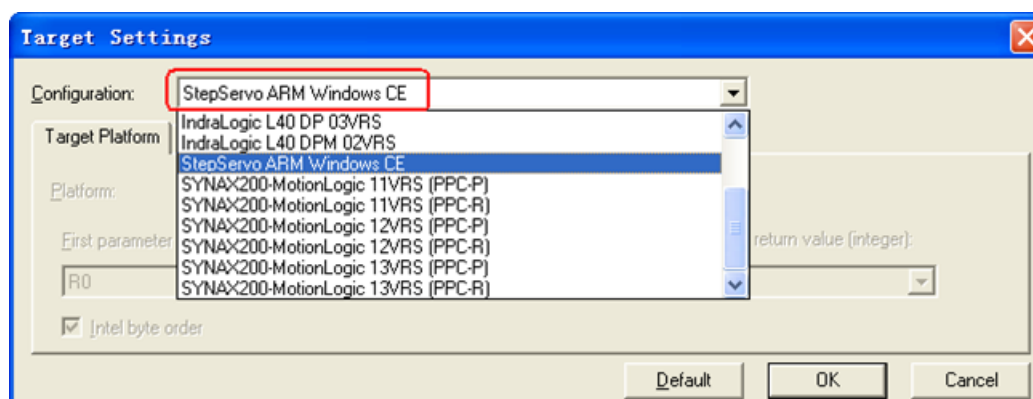


- b. configuration setting, right click “PLC configuration” and choose “CanMaster”

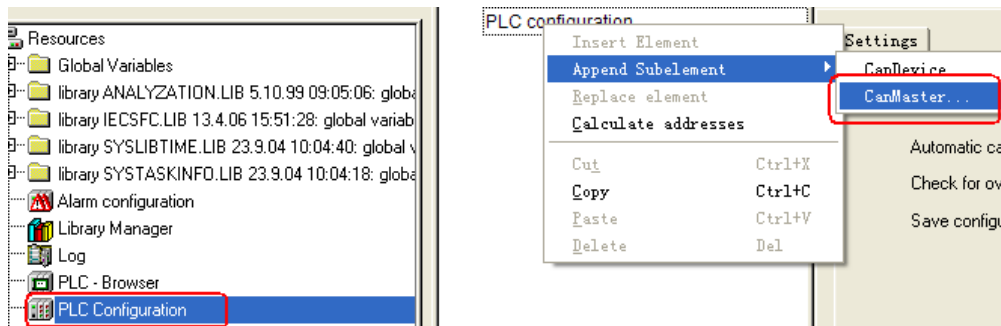


c. set Baud Rate

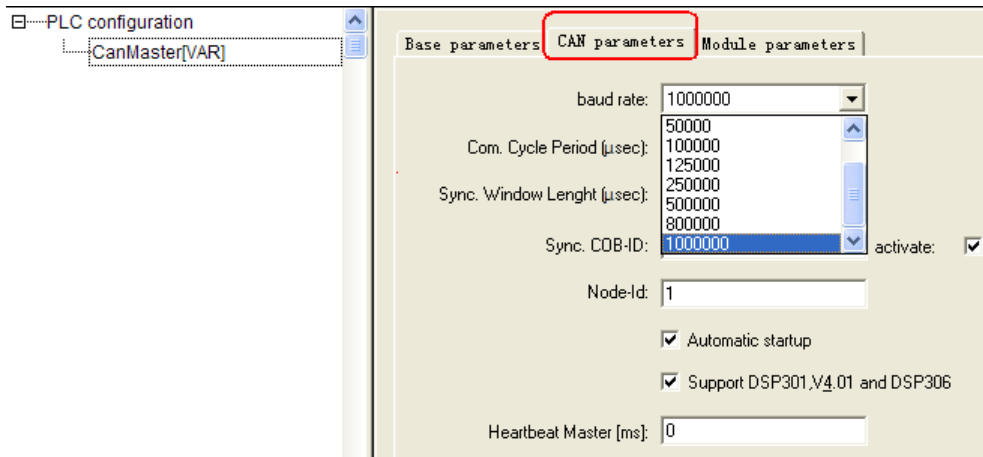


d. choose "CanMaster" right click "Append HMI-MT5020"

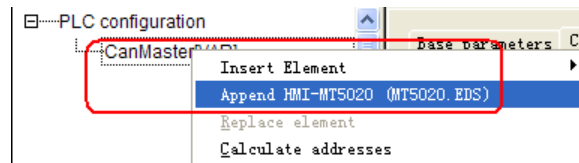


e. Node ID: set slave station No.

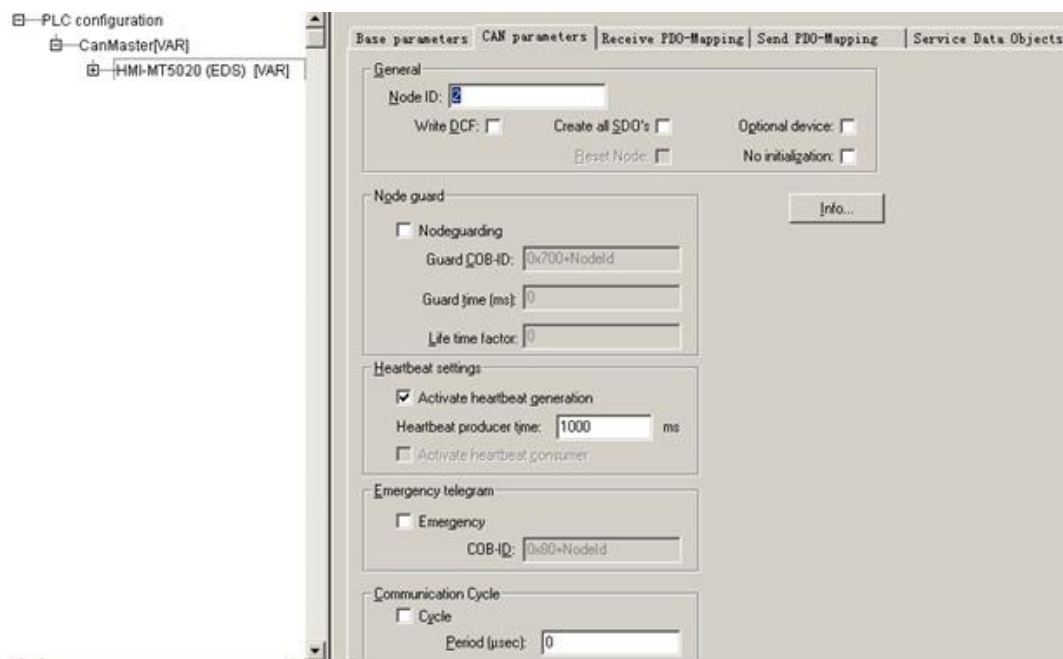


f. in the "Library Manager" we import "3S_CANopenMaster.lib"

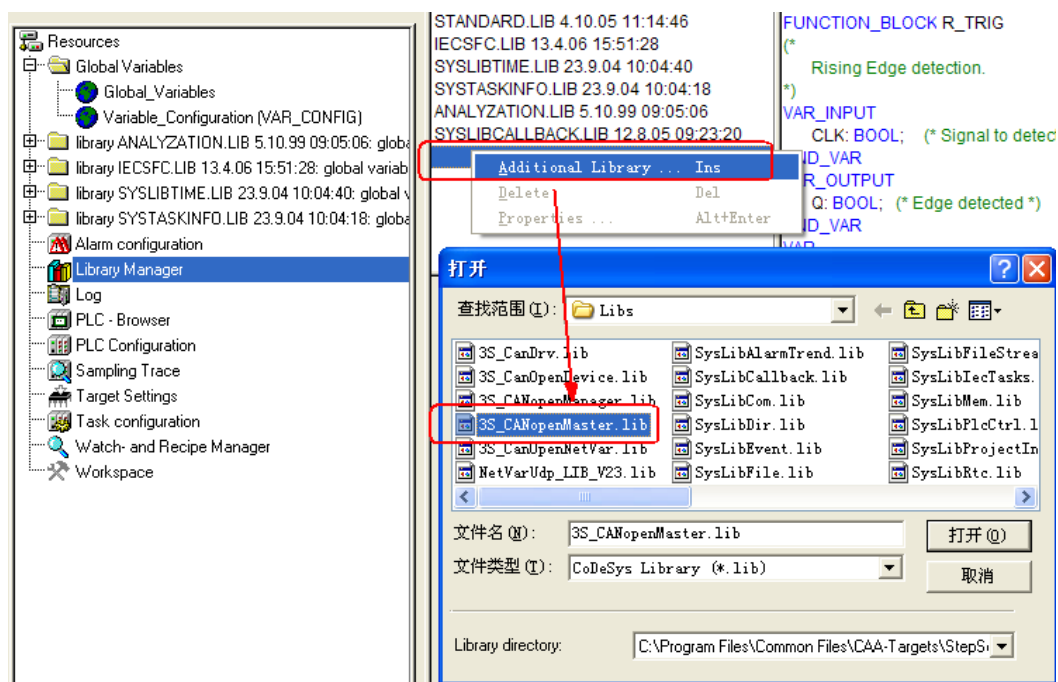


g. PDO read and write setting

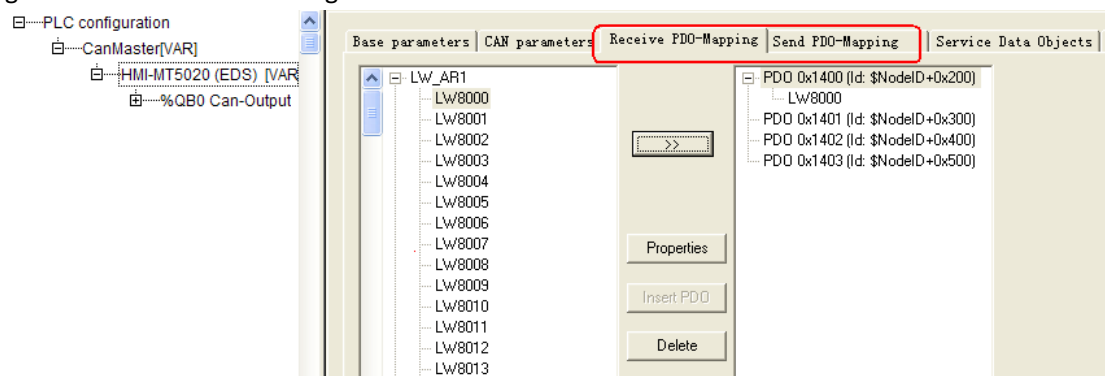

h. define Global Variable

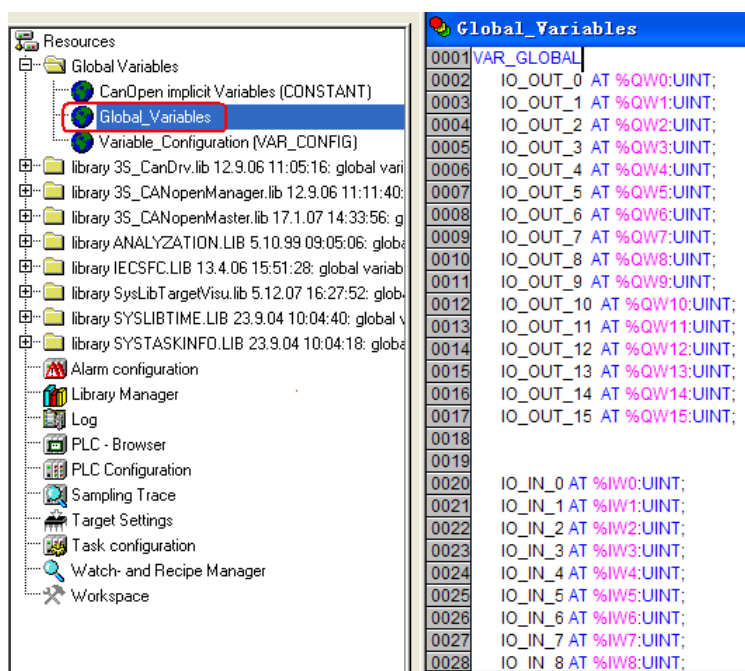

i. SDO setting, this step need program

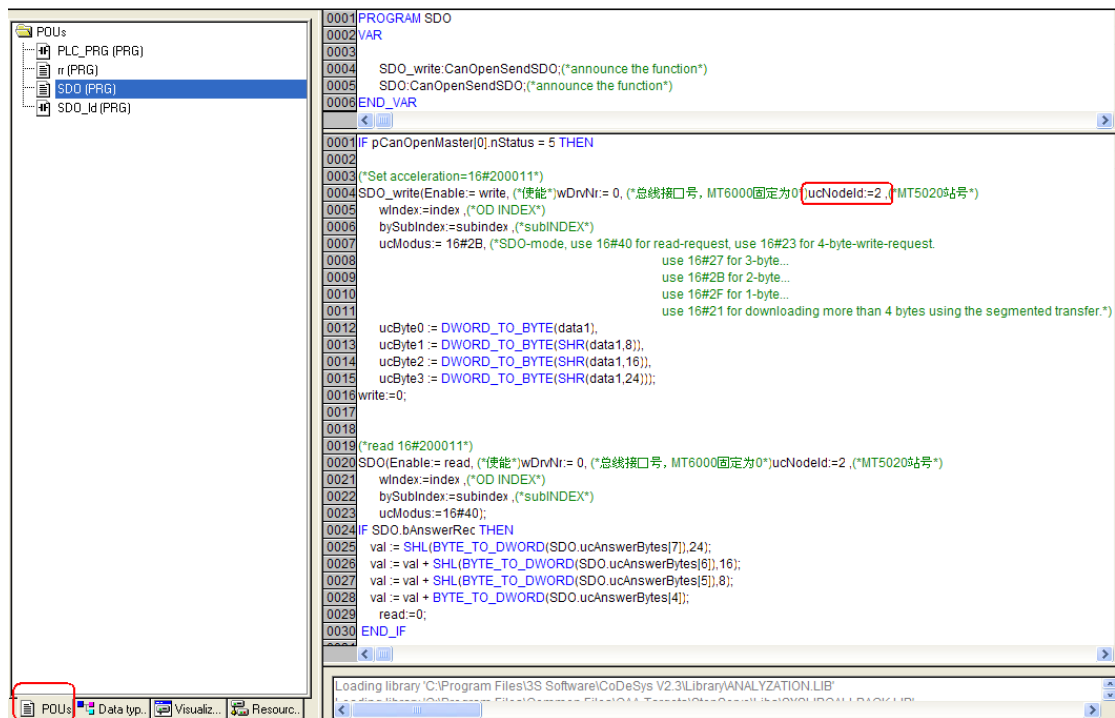

j. load the configuration into the PLC




◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
	-----	LW8000~LW8999	DDDD	

NOTE: We must make the setting of PDO, SDO and LW the same as codesys

◎ Cable Diagram

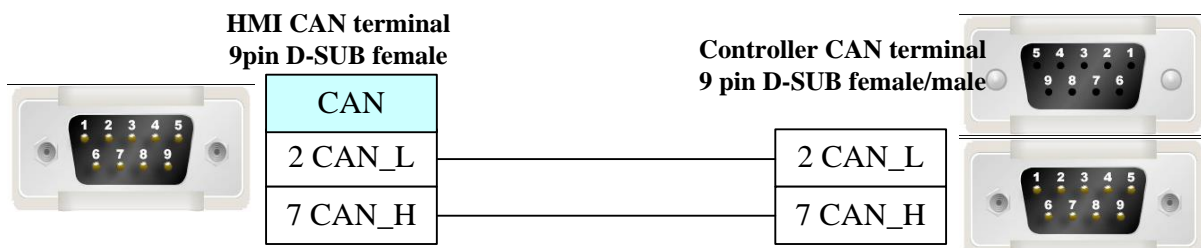

4.16 CoDeSys Automation Alilance

◎ Network communication

Series	CPU	Link Module	Driver
--------	-----	-------------	--------

Kinco	F122-D1608T	Ethernet interface on CPU	CODESYS V2 Ethernet(TCP Slave)
		Ethernet interface on CPU	CODESYS V2 Ethernet(TCP Slave)(Free tag Names)
DELTA	AX-308E	Ethernet interface on CPU	CODESYS V3 Ethernet(Free tag Names)
Inovance	AM400/AM600 AC800/AP700		
Kinco	AK800		
GOOGOLTECH0	IBX131/133 IDEABOX Pro		

◎Ethernet System configuration


Series	CPU	Link Module	COMM Type	Protocol	Parameter	Cable
Kinco	F122-D1608T	Ethernet interface on CPU	Ethernet	V2	Setting	Your owner cable
GOOGOLTECH0	IBX100			V2 (Free tag Names)	Setting	Your owner cable
DELTA	AX-308E	Ethernet interface on CPU	Ethernet	V3(Free tag Names)	Setting	Your owner cable
Inovance	AM600					
Kinco	AK800					
GOOGOLTECH0	IBX131/133					


NOTE

1. The rootfs version required to support the codesys protocol is greater than 19825;
2. The protocol currently does not support direct online simulation;

◎Network Communication Setting


CODESYS V2 Ethernet(TCP Slave) protocol HMI Setting

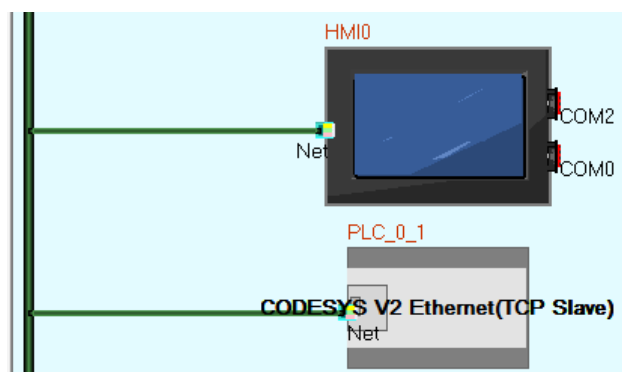


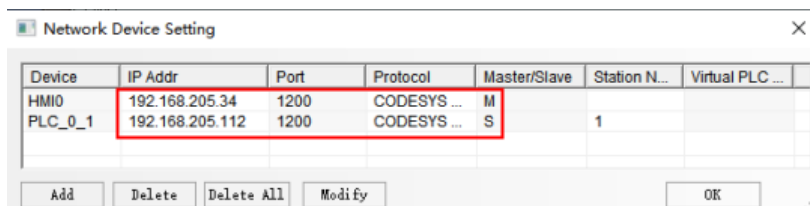


PLC Setting

1. Create absolute address variable in programming software;
2. Set download communication parameters;

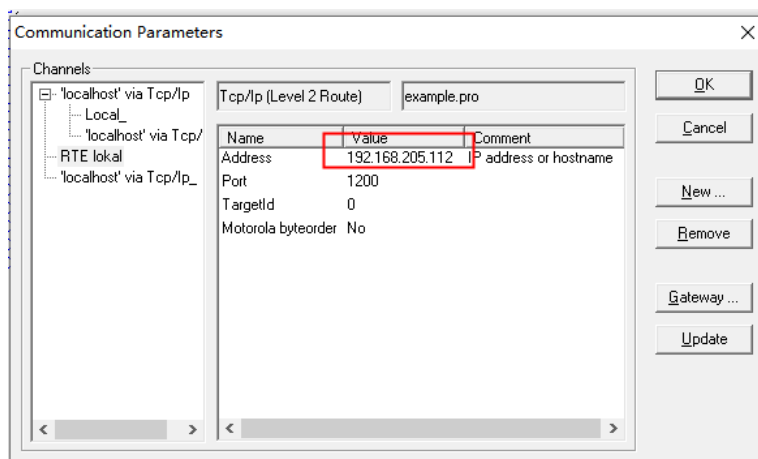


CODESYS V2 Ethernet(TCP Slave)(Free tag Names) protocol HMI Setting

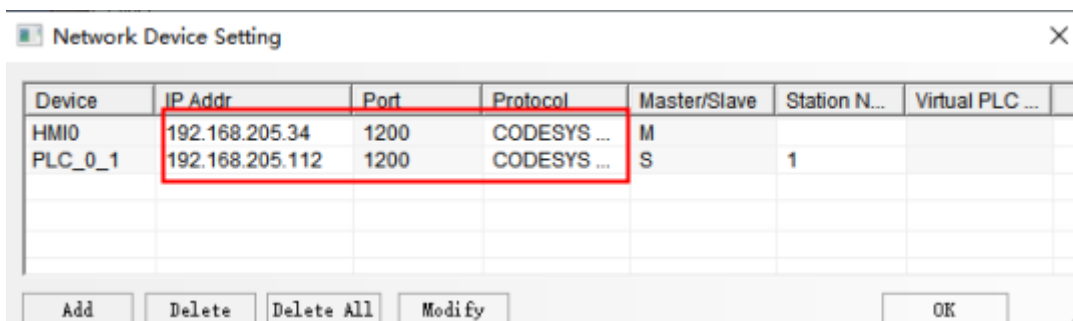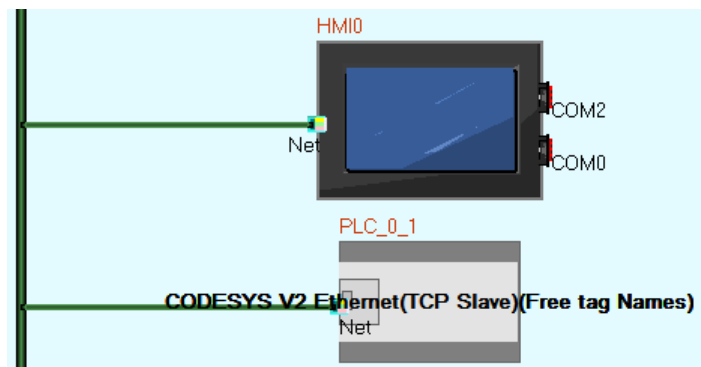


PLC Setting

1. New construction
2. Open global variables

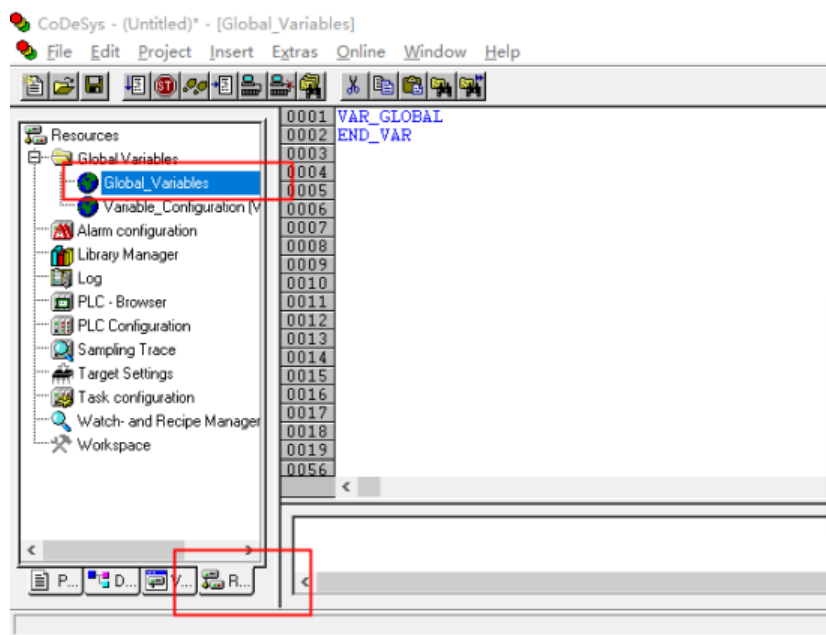

3. Create global variables


Common data types are supported, including input and output of function blocks, local variables, compound data types, etc.

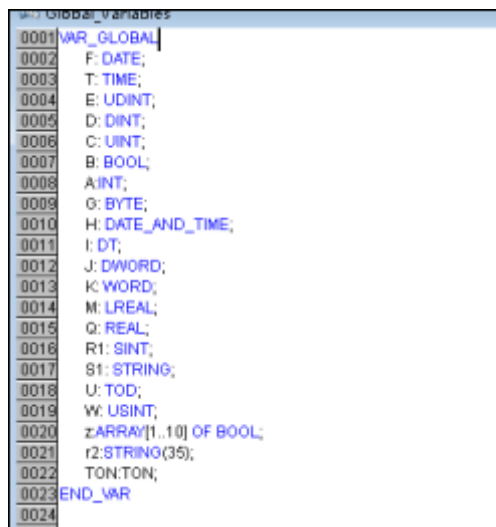

Currently, tag communication does not support the following types: LDATE, LINT, LTIME, LWORD, ULINT, enumeration.

4. Set symbol configuration, select variables


Select the required global variable or local variable, check the required function and click OK

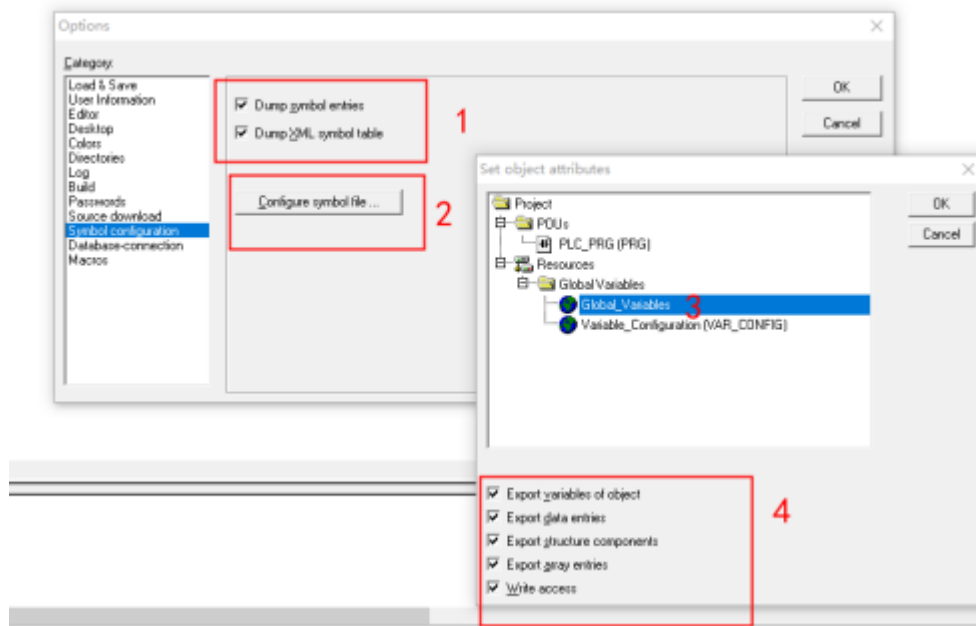


5. Open project--rebuild all and wait for the compilation to complete, a file with the suffix SYM_XML appears under the project file, which is a label file.

DEFAULT.DFR	2021/9/8 16:38	DFR 文件
example.pro	2021/9/17 13:34	CoDeSys-P
example.SDB	2021/9/17 11:01	SDB 文件
example.SYM	2021/9/17 11:01	SYM 文件
example.SYM_XML	2021/9/17 11:01	SYM_XML 文件
example000087f1r.ci	2021/9/17 13:34	CI 文件
example000087f1r.ri	2021/9/17 11:01	RI 文件

6. Export .xml in HMI configuration edit software

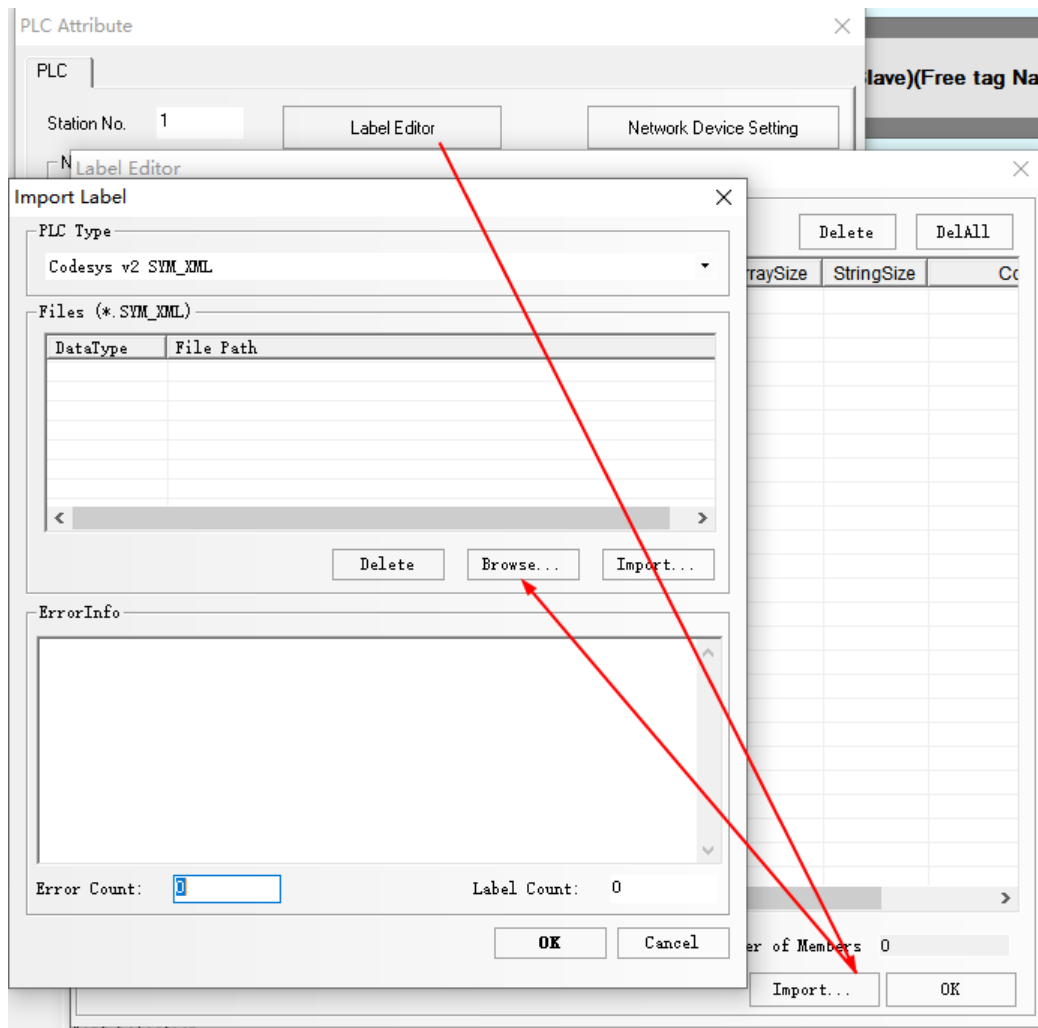


CODESYS V3 Ethernet(Free tag Names) protocol HMI Setting

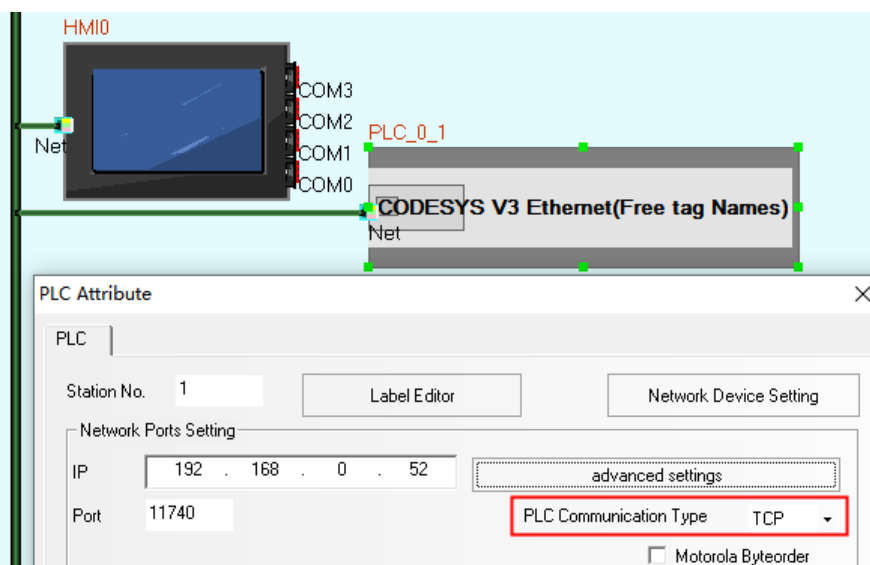


PLC Setting

1. Create label variables, you can add global variables, DUT, PLC_PRG and other variables; take the


creation of all variables as an example, right click "Application" - "Add Object" -> "Global Variable List"

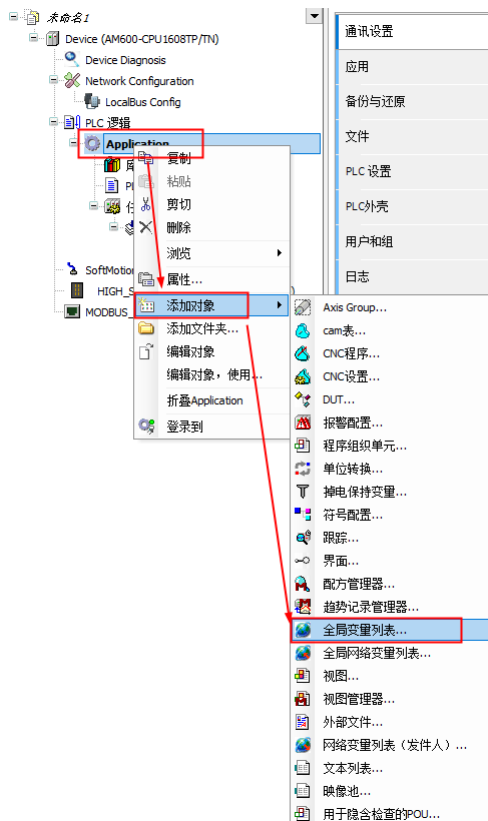


2. Enter global variables

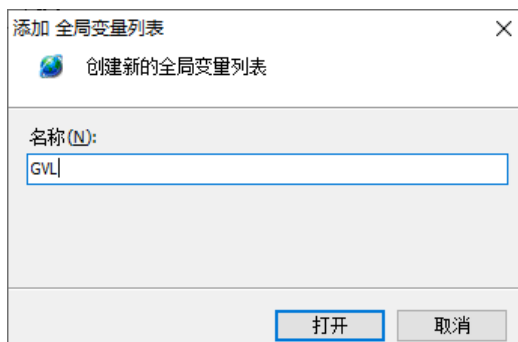


3. Create variables

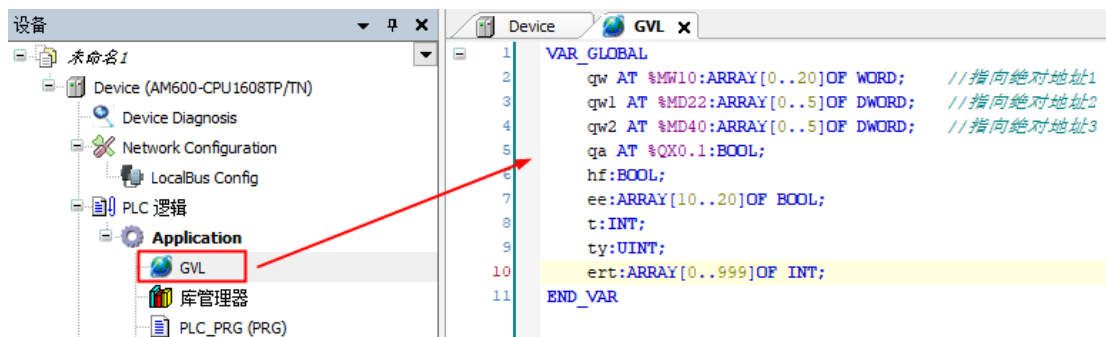

4. Right-click "GVL"->"Properties", and check "Always connect" in the properties window "Compile"

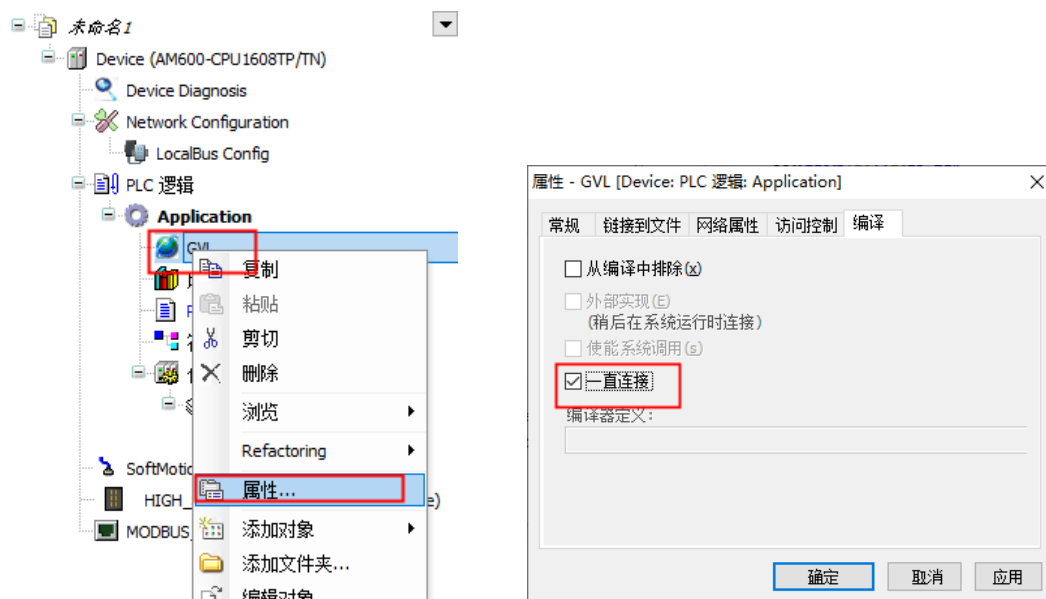


5. After the establishment is completed-"Application"->"Add Object" -> "Symbol Configuration"

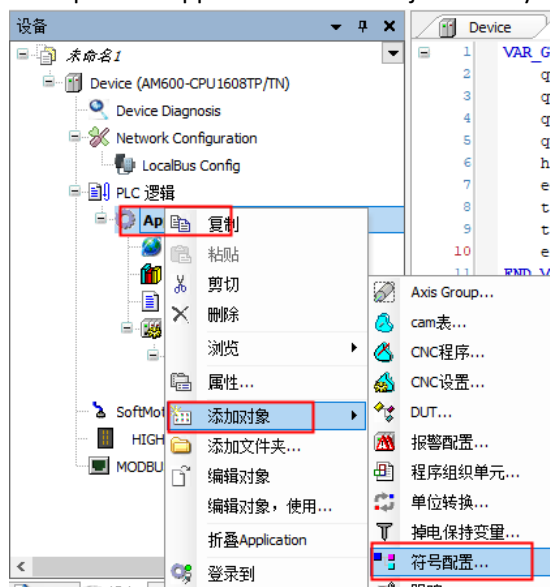


6. In the window for adding symbol configuration, select "Include comments in XML"




7. Open the symbol configuration window, click "Compile"-select the variable table "GVL" to be exported

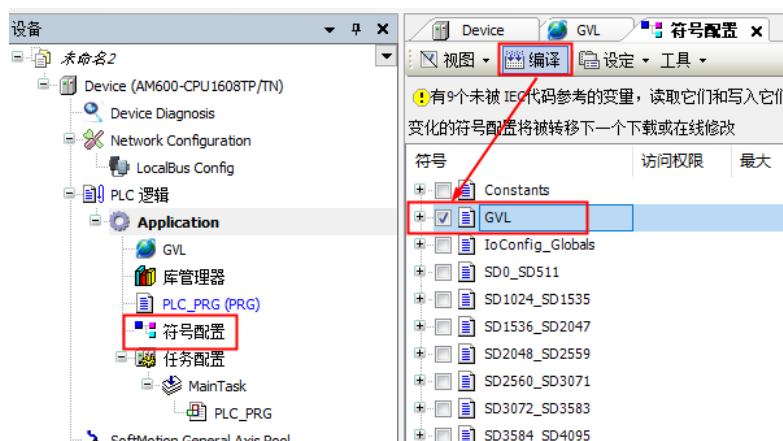

8. Toolbar-"Compile"-"Generate Code"
 9. Download plc program, toolbar—"online"—"login in"
 10. The .xml file will be placed in the plc program folder.

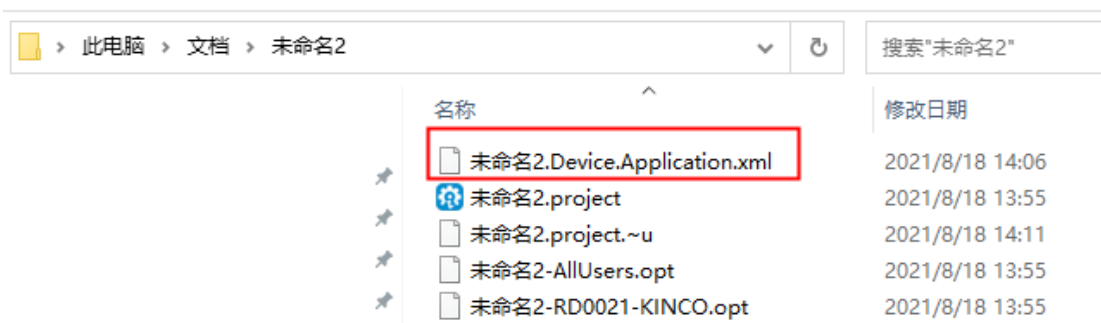


11. DTools software import .xml

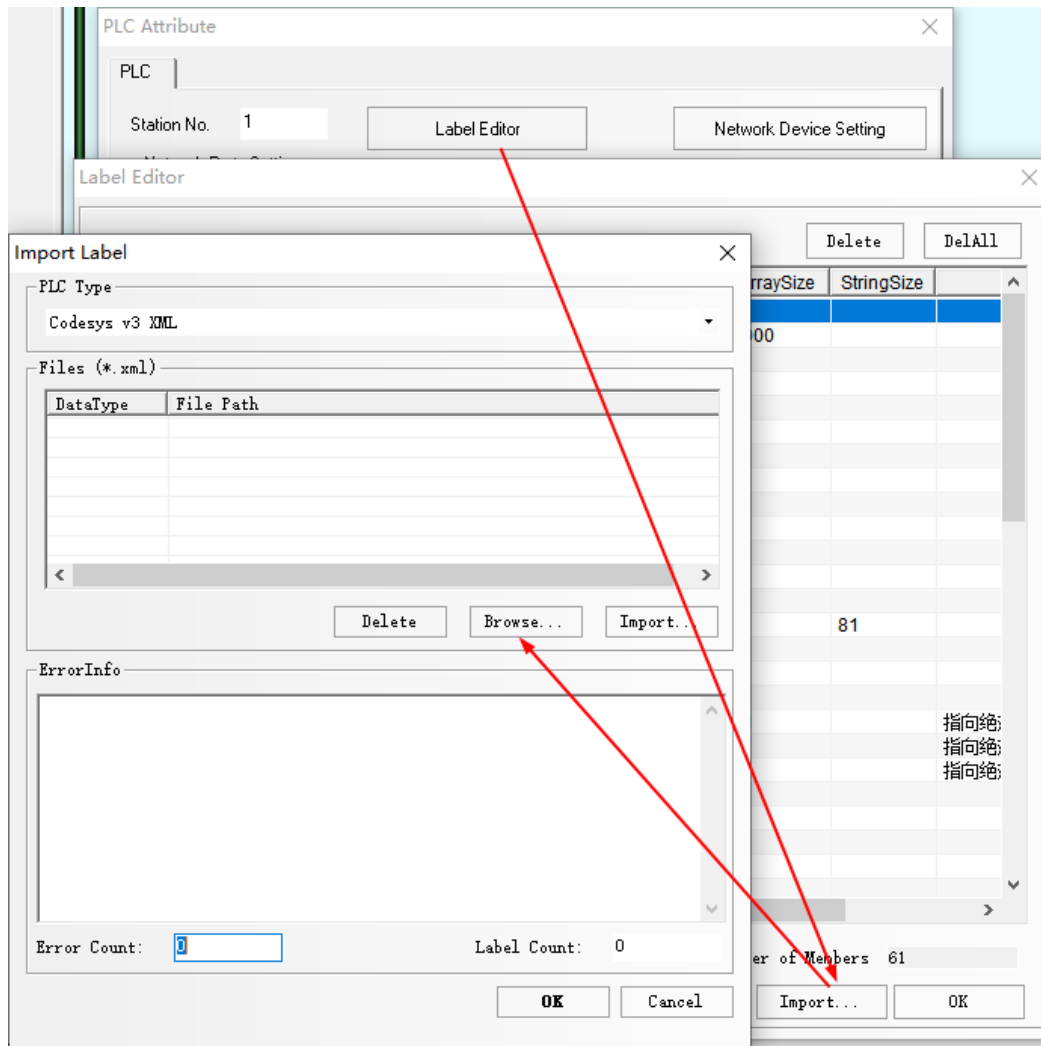

Multi-language support: Support includes Chinese, Arabic, Korean, Japanese, Polish and other hundreds of languages.

Version: 3.5.19.10

The default setting does not support any Chinese in the project. The setting is set to support multiple languages, and the String is set to UTF-8 encoding

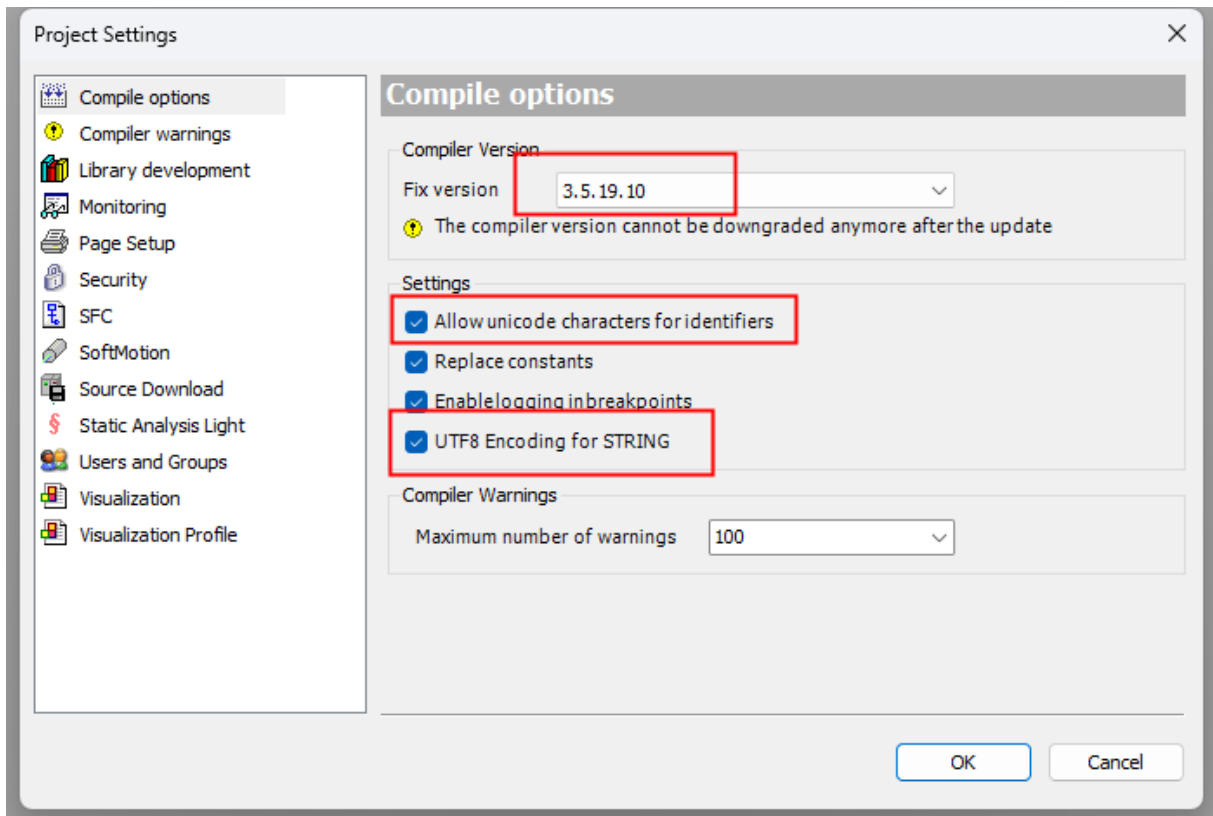

HMI setting:

PLC Attribute

PLC

Station No. 1

Label Editor

Network Device Setting

Network Ports Setting

IP 192 . 168 . 1 . 129

Port 11740

advanced settings

PLC Communication Type TCP

☐ Motorola Byteorder

PLC Type: Others

Label Code: UTF-8

☐ Enable User Info

UserName: Password:

Description:

OK Cancel Help

© Support Date Type

CODESYS V2 Ethernet(TCP Slave)

Date type	Bit Address	Word Address	Format	Notes
IX	0.00-65535.15		DDDDD.DD	----
QX	0.00-65535.15		DDDDD.DD	----
MX	0.00-65535.15		DDDDD.DD	----
QD		0-65535	DDDDD	----
MD		0-65535	DDDDD	----
ID		0-65535	DDDDD	----
QW		0-65535	DDDDD	----
MW		0-65535	DDDDD	----
IW		0-65535	DDDDD	----

CODESYS V2 Ethernet(TCP Slave)(Free tag Names)

Date type	Date Format	Notes
Bool	Bit	----
BYTE	16-Bit decimal, Hex, Binary	8-bit
SINT	16-Bit decimal, Hex, Binary	8-bit
USINT	16-Bit decimal, Hex, Binary	8-bit
WORD	16-Bit decimal, Hex, Binary	----
INT	16-Bit decimal, Hex, Binary	----
UINT	16-Bit decimal, Hex, Binary	----
DWORD	32-Bit Float, decimal, Hex, Binary	----
DINT	32-Bit Float, decimal, Hex, Binary	----
UDINT	32-Bit Float, decimal, Hex, Binary	----
REAL	32-Bit Float, decimal, Hex, Binary	----
DATE	Text Component	----
TIME	Text Component	----
STRING	Text Component	----

CODESYS V3 Ethernet(Free tag Names)

Date Type	data format	Notes
Bool	bit	
BYTE	16-bit BCD, Hex, Binary, Unsigned	8-bit
SINT	16-bit BCD, Hex, Binary, signed	8-bit
USINT	16-bit BCD, Hex, Binary, Unsigned	8-bit
Word	16-bit BCD, Hex, Binary, Unsigned	
Int	16-bit BCD, Hex, Binary, signed	
UInt	16-bit BCD, Hex, Binary, Unsigned	
DWord	32-bit BCD, Hex, Binary, Unsigned	
DInt	32-bit BCD, Hex, Binary, signed	
UDInt	32-bit BCD, Hex, Binary, Unsigned	
Real	32-bit Float	
LReal	64-bit Float	
WString	Text Component	Unicode is checked
String	Text Component	
Date	Text Component	
Time	Text Component	

© Cable Diagram

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.17 Cimon

◎ Serial Communication

Series	CPU	Link Module	Driver
PLC-S	Cimon CM3-SP16MDRV	RS232 on the CPU unit	Cimon CM3-SP16

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
PLC-S	Cimon CM3-SP16MDRV	RS232 on the CPU unit	RS232/RS485	Setting	Your owner cable

◎ Communication Setting

HMI setting

Default parameter: 9600bps, 8, none, 1; station number: 0

RS232

The screenshot shows the 'HMI Attribute' dialog box with the 'COMO Setting' tab selected. The 'Type' is set to 'RS232'. The 'Baud Rate' is '9600', 'Data Bit' is '8', 'Parity Check' is 'none', and 'Stop Bit' is '1'. The 'Broadcast' checkbox is unchecked, and the 'Station Number' is '65535'. On the right, the 'PLC Communication Time Out' is '1', 'Protocol Time Out 1(ms)' is '10', 'Protocol Time Out 2(ms)' is '0', 'Max interval of word block pack' is '8', 'Max interval of bit block pack' is '8', 'Max word block package size' is '32', and 'Max bit block package size' is '128'. A 'Use Default Setting' button is at the bottom.

RS485

The screenshot shows the 'HMI Attribute' dialog box with the 'COMO Setting' tab selected. The 'Type' is set to 'RS485-2'. The 'Baud Rate' is '9600', 'Data Bit' is '8', 'Parity Check' is 'none', and 'Stop Bit' is '1'. The 'Broadcast' checkbox is unchecked, and the 'Station Number' is '65535'. On the right, the 'PLC Communication Time Out' is '1', 'Protocol Time Out 1(ms)' is '20', 'Protocol Time Out 2(ms)' is '0', 'Max interval of word block pack' is '8', 'Max interval of bit block pack' is '8', 'Max word block package size' is '32', and 'Max bit block package size' is '128'. A 'Use Default Setting' button is at the bottom.


◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
--------	-------------	--------------	--------	-------


Input	X 0.0-63.F	-----	DD.F	
Output	Y 0.0-63.F	-----	DD.F	
Sub Relay	M 0.0-511.F	-----	DDD.F	
Link Relay	L 0.0-255.F	-----	DDD.F	
Keep Relay	K 0.0-255.F	-----	DDD.F	
Timer	T 0-519	-----	DDD	
Counter	C 0-519	-----	DDD	
Special Relay	F 0-2047	-----	DDDD	
Z Register	-----	Z 0-1029	DDDD	
Timer	-----	T 0-519	DDD	
Counter	-----	C 0-519	DDD	
Data Device	-----	D 0-9999	DDDD	
Sub Relay	-----	M 0-511	DDD	
Output	-----	Y 0-63	DD	
Input	-----	X 0-63	DD	
Keep Relay	-----	K 0-255	DDD	
Link Relay	-----	L 0-255	DDD	
Step Control Relay	-----	S 0-99	DD	

◎ Cable Diagram

RS232

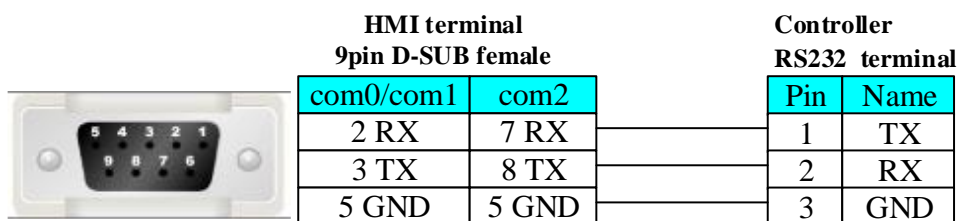

RS485

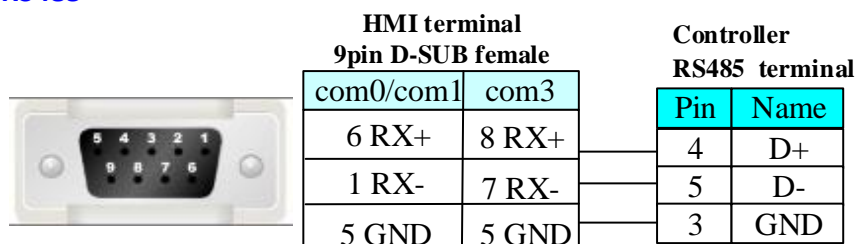

4.18 Danfoss Inverter

◎ Serial Communication

Series	CPU	Link Module	Driver
Danfoss	FC-300	RS485 on the CPU unit	Danfoss Modbus RTU

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
Danfoss	FC-300	RS485 on the CPU unit	RS485	Setting	Your owner cable
Modbus RTU	FC-300	RS485 on the CPU unit	RS485	Setting	Your owner cable

◎ Communication Setting

Danfoss Protocol:

HMI Attribute

HMI | Task Bar | HMI Extend Attribute | Historic Event
 Print Setting | Serial Port 0 Setting | Serial Port 1 Setting

Type: RS485-2
 Baud Rate: 9600
 Data Bit: 8
 Parity: even
 Stop Bit: 1
 Slave No.: 1

PLC Communication Time Out: 3
 Protocol Time Out 1(ms): 50
 Protocol Time Out 2(ms): 3
 Max interval of block pack(WORDS): 2
 Max interval of block pack(BITS): 1
 Max block package size(WORDS): 2
 Max block package size(BITS): 1

Use Default Setting

OK Cancel

Modbus RTU Protocol:

HMI Attribute

HMI | Task Bar | HMI Extend Attribute | Historic Event
 Print Setting | Serial Port 0 Setting | Serial Port 1 Setting

Type: RS485-2
 Baud Rate: 9600
 Data Bit: 8
 Parity: even
 Stop Bit: 1
 Slave No.: 0

PLC Communication Time Out: 3
 Protocol Time Out 1(ms): 3
 Protocol Time Out 2(ms): 3
 Max interval of block pack(WORDS): 2
 Max interval of block pack(BITS): 8
 Max block package size(WORDS): 16
 Max block package size(BITS): 64

Use Default Setting

OK Cancel

Note: Change the value of 8-30 to 2 on the Danfoss inverter for modbus protocol (Change the value of 8-30 to 0 for the Danfoss Protocol)

Inverter

8-3* FC Port Setting

8-30 protocol

*[0] FC (danfoss protocol)

[2] Modbus (modbus protocol)

8-31 address

1 – 247 * 1 (HMI station No.)

8-32 FC Port Baud Rate

[0] 2400 Baud

[1] 4800 Baud

*[2] 9600 Baud

8-33 FC Port Parity

*[0] even, 1 stop bit

[1] Odd, 1 stop bit

[2] None, 1 stop bit

[3] None, 2 stop bit

Inverter setting

Please refer to the manual of Danfoss inverter for details

© Supported Device

Danfoss Protocol:


Device	Bit Address	Word Address	Format
EEPROM Register(Double Word)	-----	EPD0-7998.99999	DDDD.DDDDD
EEPROM Register	-----	EPW0-7998.99999	DDDD.DDDDD
RAM Register(Double Word)	-----	RMD0-7998.99999	DDDD.DDDDD
RAM Register	-----	RMW0-7998.99999	DDDD.DDDDD

Note:


1. D indicates decimal; the prefix of RMD\RMW\EPD\EPW is address parameter, the suffix is index number.

2. Mapping of index address (adding radix point if having index address, index value follow radix point. Otherwise there's no radix point):

RMW310.1 is to 3-10, please clicking Menu, to find 3-10 to check.

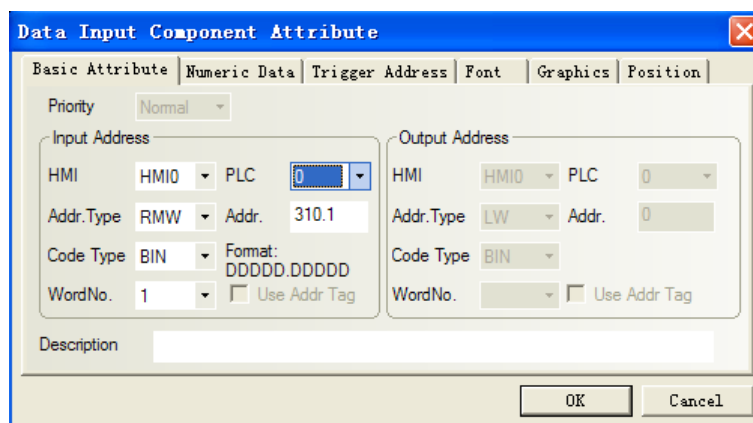


3. If no index, radix point followed by default zero. As follows RMW122 to 1-22:

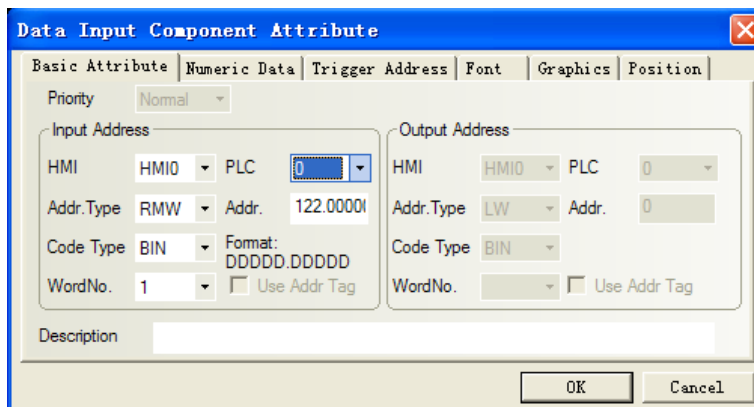



4. R/W of process word:

- 1) Address of EPD register is 8000, is for saving input command value of process word;
- 2) Address of EPD register is 8100, is for saving return value of process word;
- 3) Input command value and return value can be showed by RW register.
- 4) Start\Stop, Mapping of reference value to frequency:

Reason: RWD8000 is for inputting control word, it's not able to input control word by itself, but via sending RW1, RW0 to RWD8000 by timer.

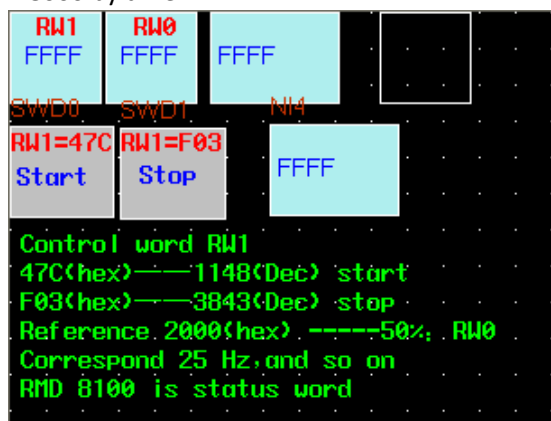


◆Control word RW1: While RW1=0x47C or 1148, it means start. While RW=0x0F03 or 3843, it means stop.

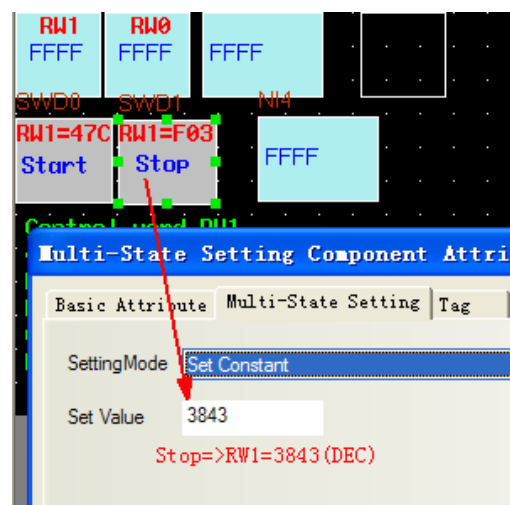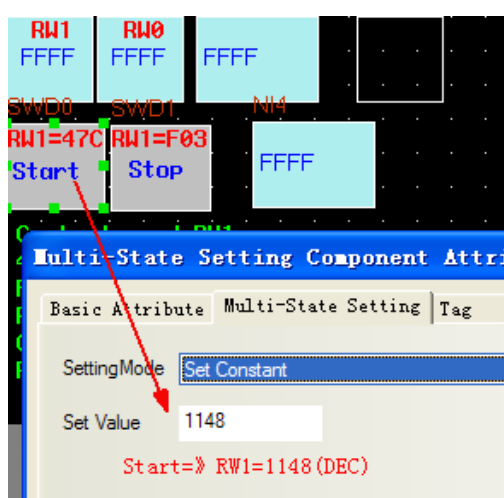

◆Frequency of RW0 mapping : If input 2000 to RW0, frequency is 25HZ, and input 4000, frequency

is 50HZ, and so on.

- ◆Timer, send value of RW1 and RW0 to RWD8000.

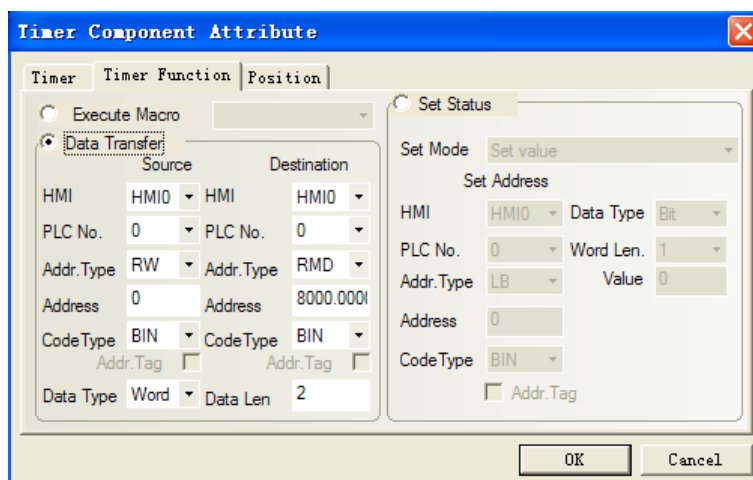

Modbus RTU Protocol:

Device	Bit Address	Word Address	Format	Notes
Output bit	0X1-65535	-----	DDDDD	
Input bit (read only)	1X1-65535	-----	DDDDD	
Input Register (read only)	-----	3X1-65535	DDDDD	
Output Register	-----	4X1-65535	DDDDD	


Note:

Mapping of address (same as *10 relationships):

2-01 is to 4X2010

3-02 is to 4X3020

So address 4X1300 is to 1-30 as following picture, here is double word address. To get more information, please refer to danfoss manual.

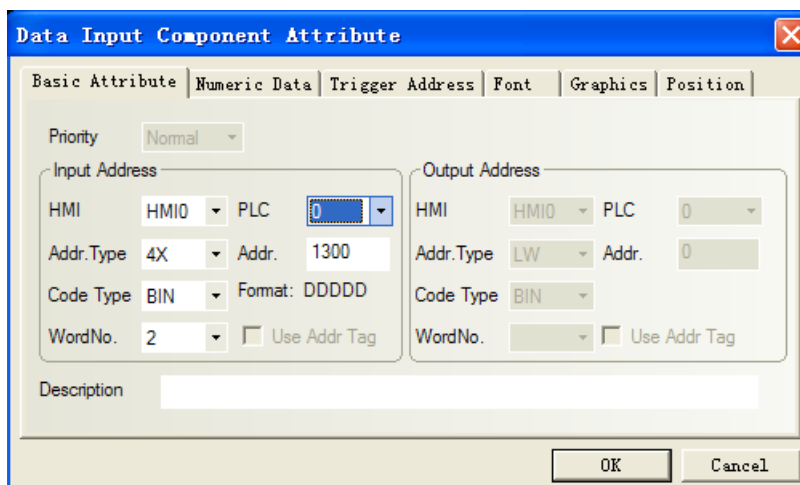


In addition, to get mapping address of startup, you should set bit of 3, 4, 5, 6, 7, 11 coil on:


0x047C=0000 0100 0111 1100

Set 0X 3, 0X 4, 0X 5, 0X 6, 0X 7, 0X 11 all to "1" (if random one of these registers is "0", inverter will stop).

loop	0	1
01	Preset reference value LSB	
02	Preset reference value MSB	
03	DC brake	Do not DC brake
04	Inertial stop	Do not Inertial stop
05	Quickly stop	Do not Quickly stop
06	locking frequency	Do not locking frequency
07	Acc/Dec stop	start
08	Do not reset	reset
09	Do not inching	inching
10	Acc/Dec 1	Acc/Dec 2
11	valid data	invalid data
12	Relay 1 close	Relay 1 open
13	Relay 2 close	Relay 2 open
14	Set LSB	
15	Set MSB	
16	Do not reverse	reverse
Transducer controller word (FC structure)		

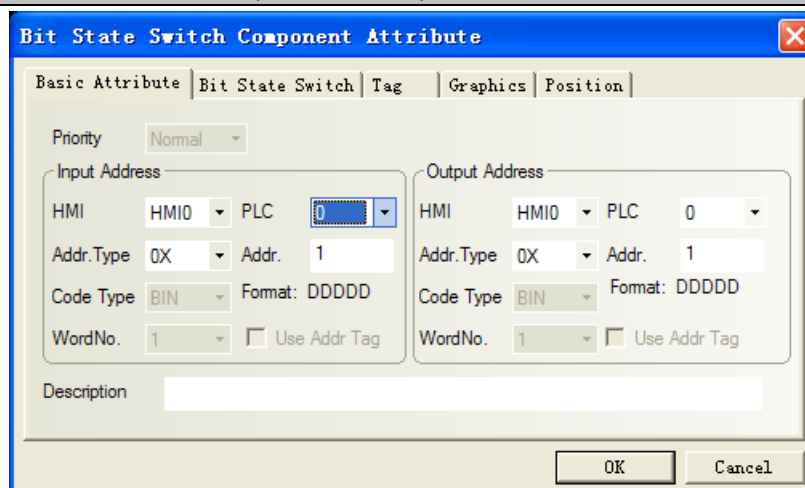

Set 0X 3, 0X 4, 0X 5, 0X 6, 0X 7 all to “1” via the method of setting on when window open; Change the inverter status (start or stop) by control the status of 0X11.

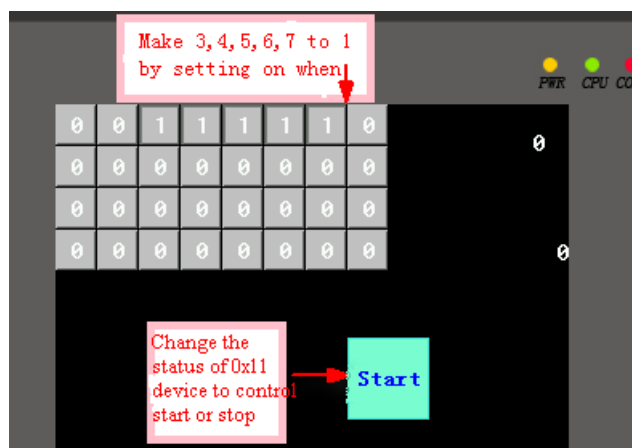

0x2000=0010 0000 0000 0000(binary bit from the 17th to the 32nd), setting the 30th bit to “1”

means frequency is 25Hz, and “1” in the 29th bit means 12.5Hz, and so on. In short, the 0X17~0X32 is to control frequency. The inverter will show the value after starting.

0X17~0X32 for controlling frequency, mapping as follows:

0x4000 —— 50Hz


0x2000 —— 25Hz

0x1000 —— 12.5Hz (approximate)

0x800 —— 6Hz

And so on, about 80 times

◎ Cable Diagram

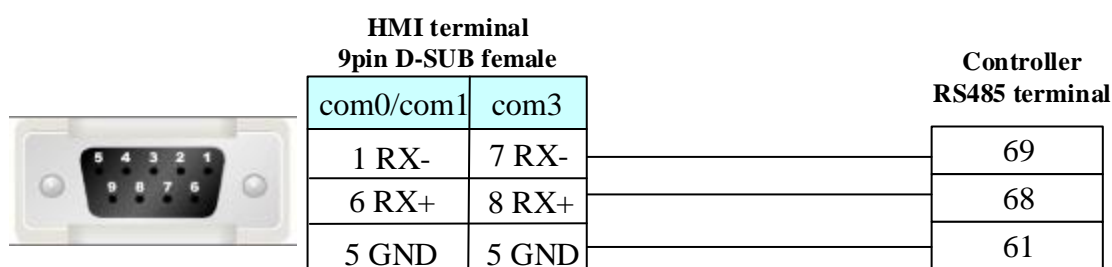

4.19 DCCE

◎ Serial communication

Series	CPU	Link Module	Driver
DCCE	MAC1110	RS485 on port	DCCE PLC Serial

◎ Network communication

Series	CPU	Link Module	Driver
DCCE	MAC1110	Ethernet interface on CPU	DCCE PLC Ethernet(TCP Slave)

◎ Serial System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
DCCE	MAC1110	RS485 on port	RS485	Setting	Your owner cable

◎ Network System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
DCCE	MAC1110	Ethernet interface on CPU	Ethernet	Setting	Your owner cable

◎ Serial Communication Setting

DCCE PLC Serial protocol

HMI Setting

HMI Default communication parameters: 9600bps, 8, none, PLC station: 1

RS485 communication

Security Levels Setting		User Permissions Setting		Historical Events Storage		Print Setting	
HMI		Task Bar		HMI License Setting		HMI Extended Attributes	
Internet Time Synchronization		COM0 Setting		COM2 Setting		Extended Memory	
Type	RS485	PLC Communication Time Out(s)		3			
Baud Rate	9600	Protocol Time Out 1(ms)		3			
Data Bit	8	Protocol Time Out 2(ms)		50			
Parity Check	none	Max interval of word block pack		2			
Stop Bit	1	Max interval of bit block pack		8			
<input type="checkbox"/> Broadcast	65535	Max word block package size		16			
		Max bit block package size		64			
Use Default Setting							


PLC configuration

- 1) Click on the controller to open the controller management and select the serial port settings.

◎ Network Communication Setting

DCCE PLC Ethernet(TCP Slave) protocol

HMI Setting

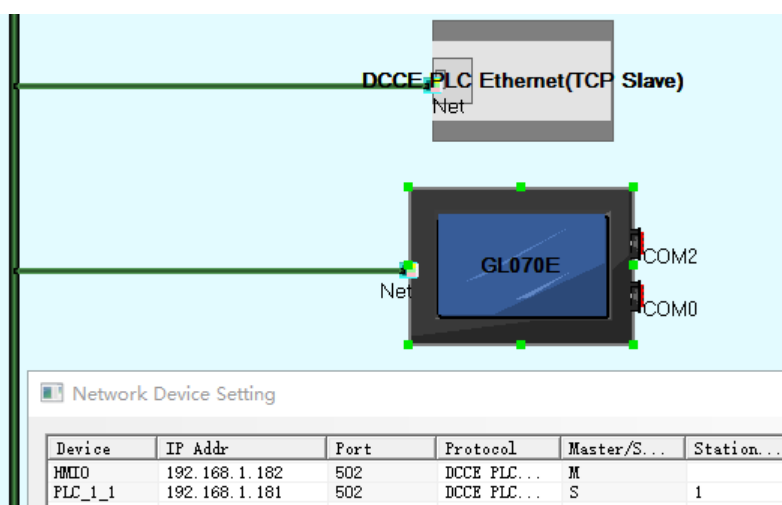

PLC configuration

- 1) Open the PLC_Config software and create a new project.
- 2) Click Controller Management to add a controller.
- 3) Refresh controller list.


◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
Switch input	I0.00~3.15	-----	D.DD	
Switch output	Q0.00~3.15	-----	D.DD	
Memory variable	M0.00~255.15	-----	DDD.DD	
Sequence control	S0.00~15.15	-----	DD.DD	

Local variable	L0.00~15.15	-----	DD.DD	
User variables	V0.00~511.15	-----	DDD.DD	
Special function	SM0.00~511.15	-----	DDD.DD	
Analog input	-----	AI0~15	DD	
Analog output	-----	AQ0~15	DD	
Extended input	-----	XI0~255	DDD	
Extended output	-----	XQ0~255	DDD	
Extended analog input	-----	PAI0~255	DDD	
Variable analog input	-----	XAI0~511	DDD	
Extended analog output	-----	PAQ0~255	DDD	
Variable analog output	-----	XAQ0~511	DDD	
Timer	-----	T0~127	DDD	
Counter	-----	C0~127	DDD	
Keep forever	-----	P0~8191	DDDD	
Extended digital input	-----	EI0~31	DD	
Extended digital output	-----	EQ0~31	DD	
Extended analog input	-----	EAI0~255	DDD	
Extended analog output	-----	EAQ0~255	DDD	

© Cable Diagram

RS485 communication cable

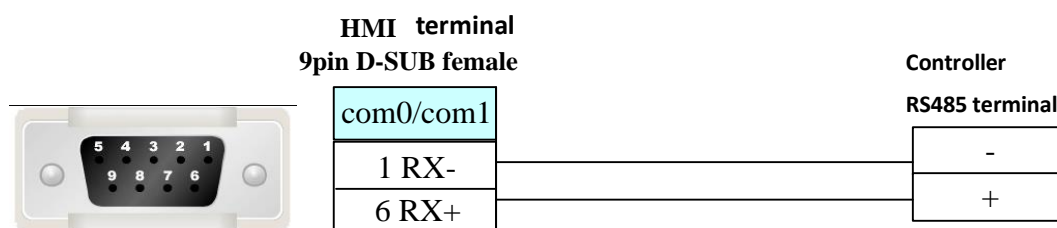

Ethernet communication protocol cable

Refer to [3.3Download by Network Ethernet](#)

4.20 Delta Corporation

◎ Serial Communication

Series	CPU	Link Module	Driver
DVP	DVP14SS11R2 DVP 24 DVP 32 DVP 60ES00 DVP-XXES01	RS232 on the CPU unit	Delta DVP
		RS485 on port	
	DVP-ES3	RS485 on port	Delta DVP-ES3 Series ASCII
			Delta DVP-ES3 Series RTU
Delta AS300	AS332T	RS485 on port	Delta AS Series ASCII
			Delta AS Series RTU
Delta MC	DVP Delta 50MC	RS485\232 on port	Delta MC Series RTU Delta MC Series ASCII
Delta AH	AH 500	RS232 on the CPU unit RS485 on port	Delta AH500

◎ Ethernet Communication

Series	CPU	Link Module	Driver
DVP	DVP-32EH	DVPEN01-SL	Delta DVPEN01-SL Ethernet (TCP Slave)
	DVP-ES3	Ethernet interface on CPU	Delta DVP-ES3 Ethernet(TCP Slave)
AS300	AS332T	Ethernet interface on CPU	Delta AS300 Ethernet(TCP Slave)
Delta MC	DVP Delta 50MC	Ethernet interface on CPU	Delta MC Ethernet(TCP Slave)

◎ Serial System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
DVP	DVP14SS11R2 DVP 24 DVP 32 DVP 60ES00 DVP-XXES01	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485 on port	RS485	Setting	Your owner cable
	Delta DVP-ES3 Series ASCII	RS485 on port	RS485	Setting	Your owner cable
	Delta DVP-ES3 Series RTU	RS485 on port	RS485	Setting	Your owner cable
Delta AS300	Delta AS300 ASCII	RS485 on port	RS485	Setting	Your owner cable
	Delta AS300 RTU	RS485 on port	RS485	Setting	Your owner cable
Delta MC	Delta MC Series RTU	RS485\232 on port	RS485\ RS232	Setting	Your owner cable

	Delta MC Series ASCII	RS485\232 on port	RS485\ RS232	Setting	Your owner cable
Delta AH	AH 500	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485 on port	RS485	Setting	Your owner cable

◎ Ethernet Communication Parameters and Cables Production

Series	CPU	Link Module	COMM Type	Parameter	Cable
DVP	DVP-32EH	DVPEN01-SL	Ethernet	Setting	Your owner cable
	DVP-ES3	Ethernet interface on CPU	Ethernet	Setting	Your owner cable
AS300	AS332T	Ethernet interface on CPU	Ethernet	Setting	Your owner cable
Delta MC	DVP Delta 50MC	Ethernet interface on CPU	Ethernet	Setting	Your owner cable


◎ Serial Communication Setting

Use Delta DVP protocol


[HMI setting](#)

HMI default communication parameters: 9600bps, 7, even check, 1; PLC station no. : 1

[RS232 communication](#)

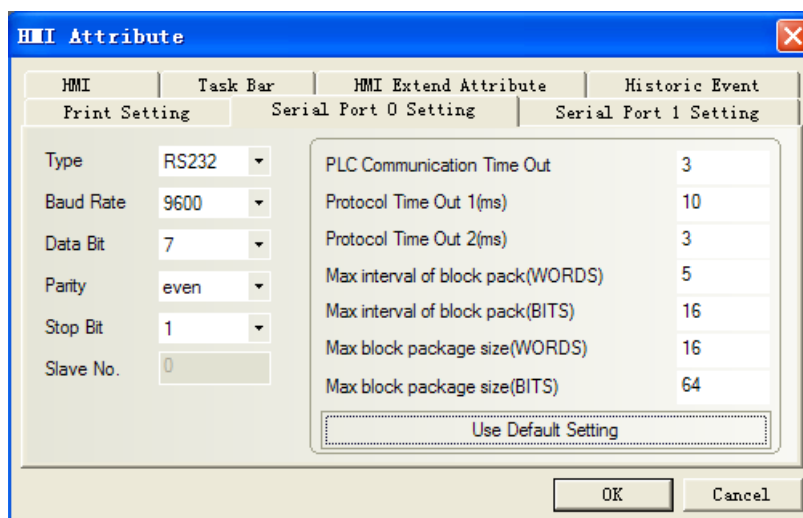



[RS485 communication](#)

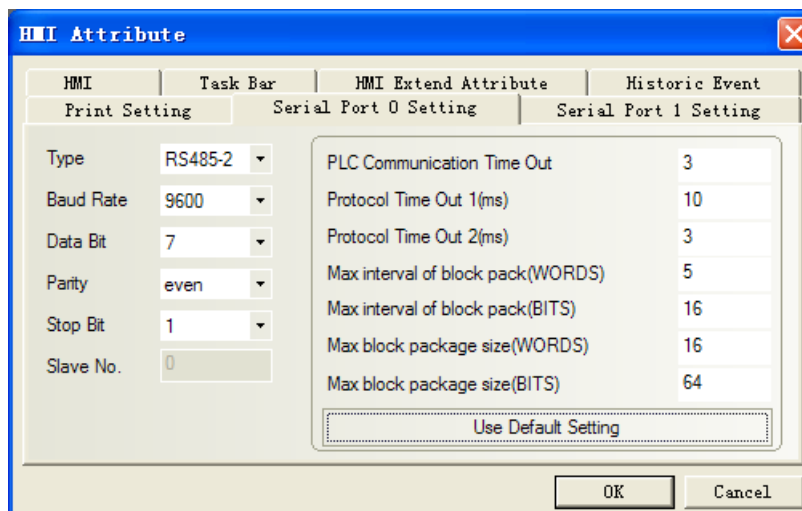

Note: RS485 communication, we should change the value of D1120 in the PLC Software.

PLC setting

1. Wpl207->Auxiliary Editing->RS-485 Protocol Setting (D1120), you can set the value of D1120.

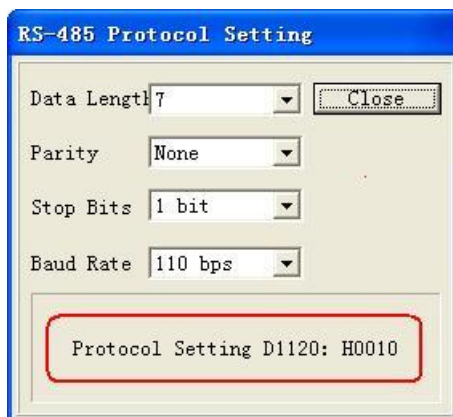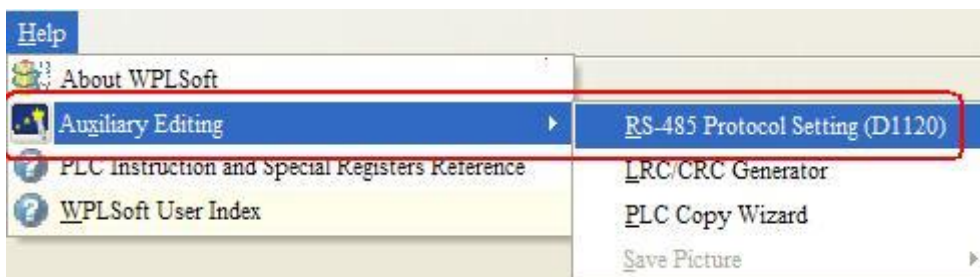


2. PLC connection with the Wpl207, monitoring changes in the value of D1120. for example, 9600, 7, even, 1. and then D1120=86 (HEX)

Use Delta DVP-ES3 Series ASCII protocol

HMI setting


HMI default communication parameters: 9600bps, 7, even check, 1; PLC station no. : 1

RS485 communication


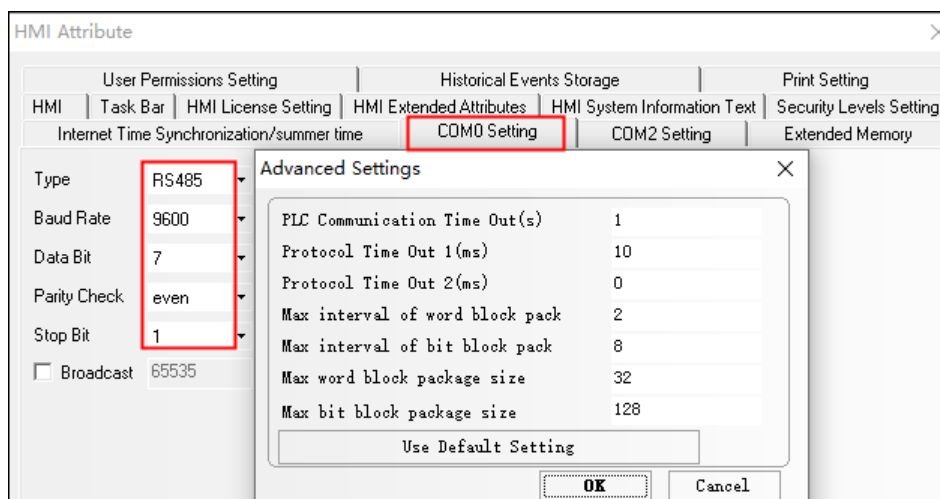


PLC setting


1. Open ISPSOFT PLC programming software, and click HWCONFIG after the new project.

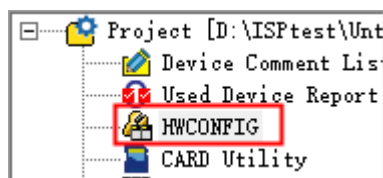

2. Click the setting button

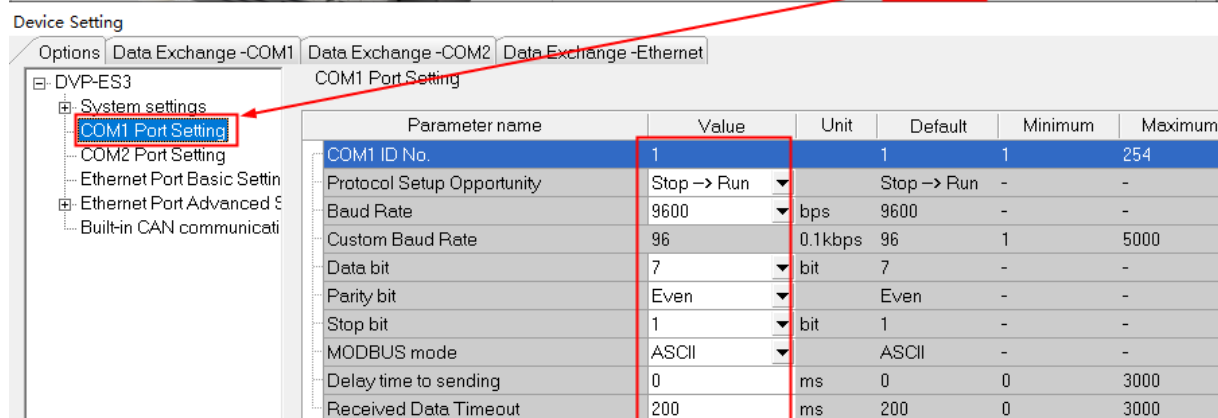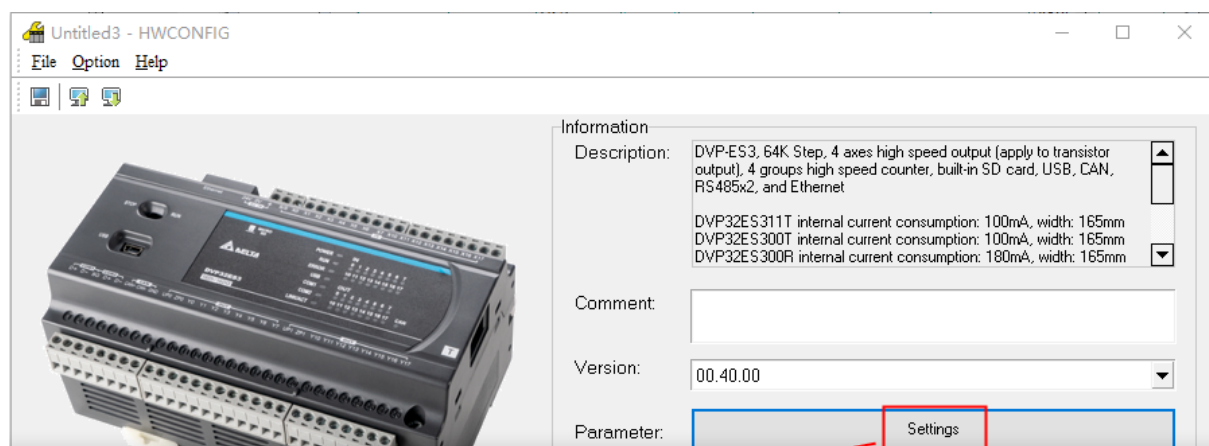

3. After setting, click the download button




Use Delta DVP-ES3 Series RTU protocol

HMI setting


HMI default communication parameters: 9600bps, 7, even check, 1; PLC station no. : 1

RS485 communication

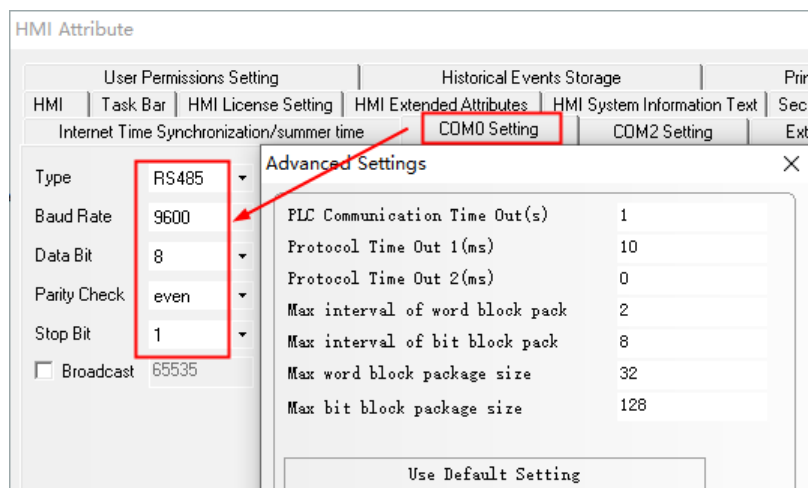


PLC setting

1. Open ISPSOFT PLC programming software, and click HWCONFIG after the new project.

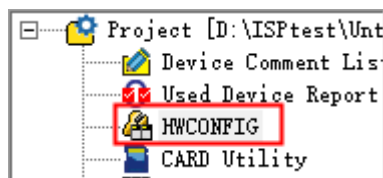

2. Click the setting button

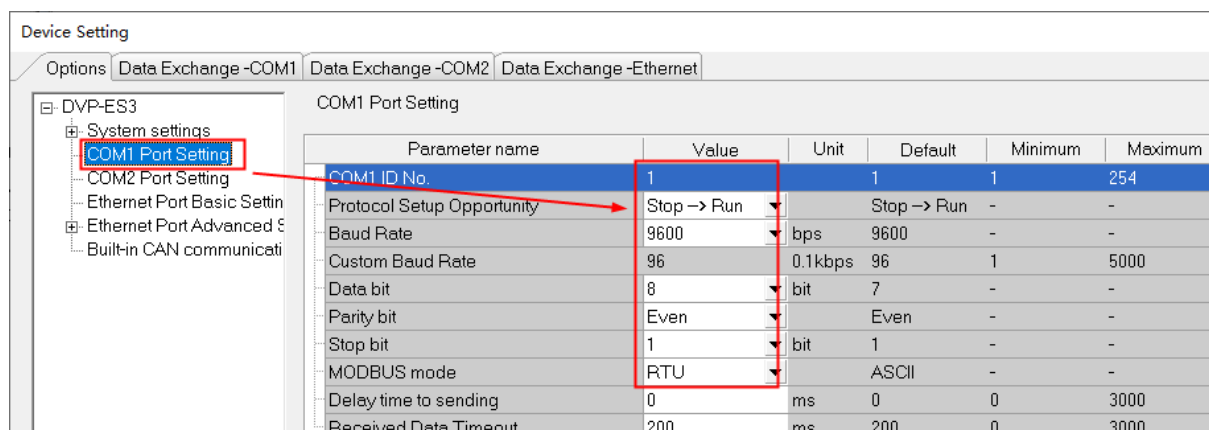


Use Delta AS Series ASCII protocol

HMI setting


HMI default communication parameters: 9600bps, 7, even check, 1; PLC station no. : 1

RS485 communication

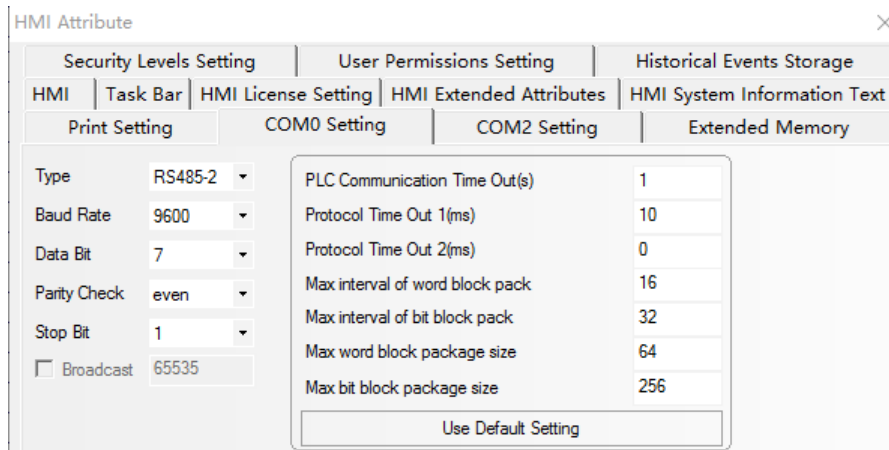


PLC setting


1. Open ISPSOFT PLC programming software, and click HWCONFIG after the new project.

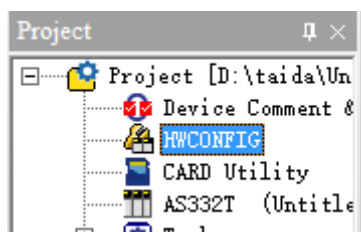

2. Double-click the PLC module, and the communication parameters are set as follows:

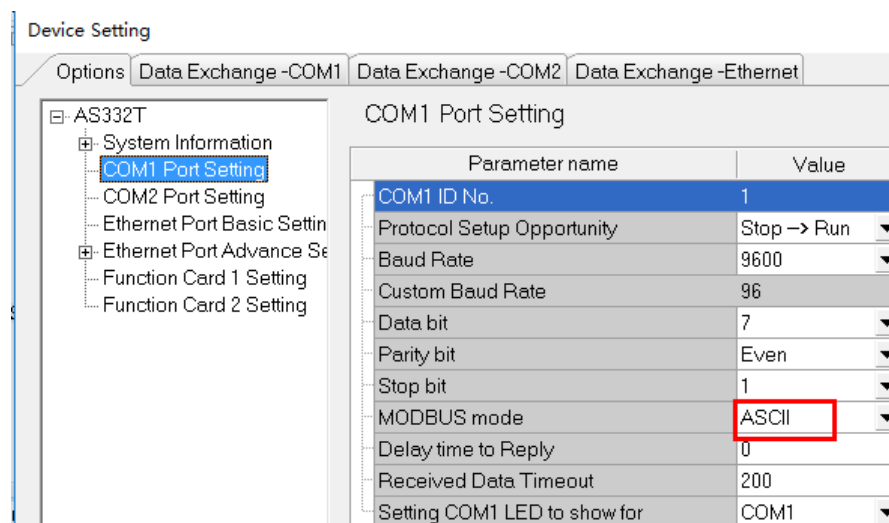


3. Establish global symbol -- master symbol table

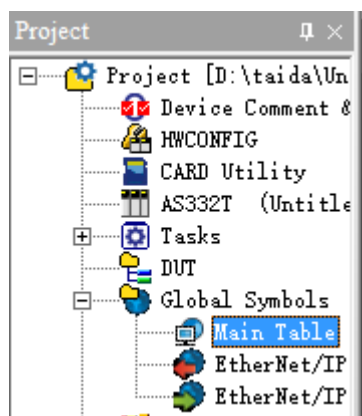

VAR	cc3	HC4	COUNTER	1
VAR	cc10	HC34	COUNTER	1
VAR	cc9	HC32	COUNTER	1
VAR	cc6	HC236	COUNTER	1
VAR	cc2	HC2	COUNTER	1
VAR	cc5	HC144	COUNTER	1

4. Add device monitoring table

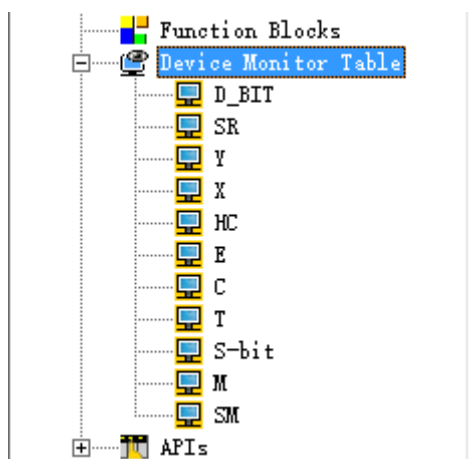


	Object	Identifiers	Device Name	Status	Data Type
▶	GlobalVar	FDGH	HC255		COUNTER
	GlobalVar	jk	HC0		COUNTER
	GlobalVar	AS	HC2		COUNTER

Use Delta AS Series RTU protocol

HMI setting


HMI default communication parameters: 9600bps, 7, even check, 1; PLC station no. : 1

RS485 communication

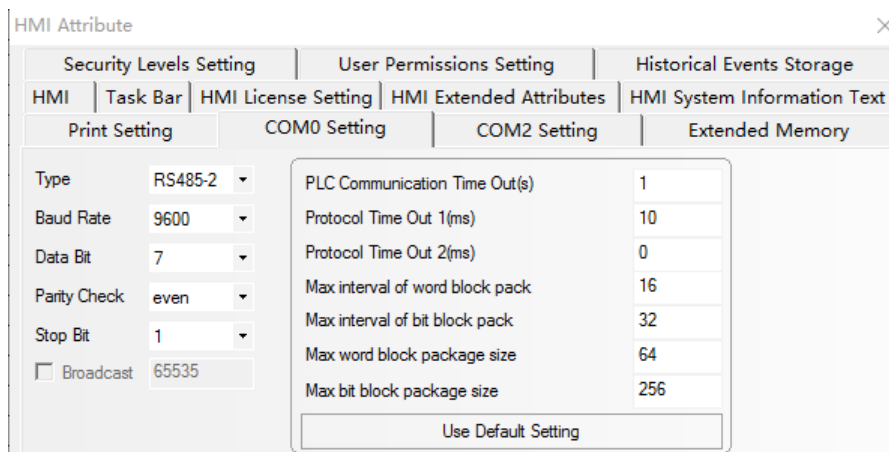


PLC setting


1. Open ISPSoft 3.01 PLC programming software, and click HWCONFIG after the new project.

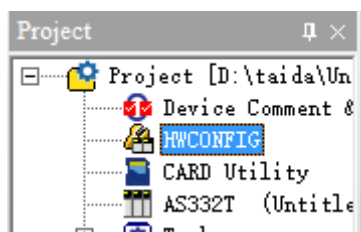

2. Double-click the PLC module, and the communication parameters are set as follows:

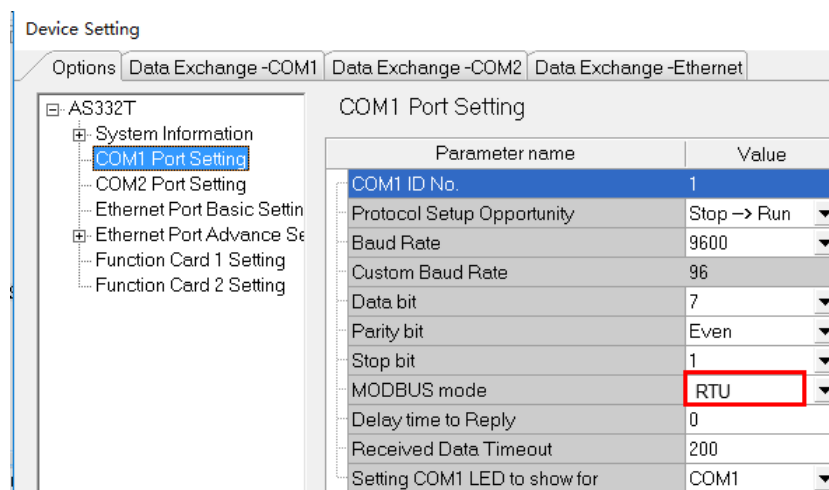


3. Establish global symbol -- master symbol table

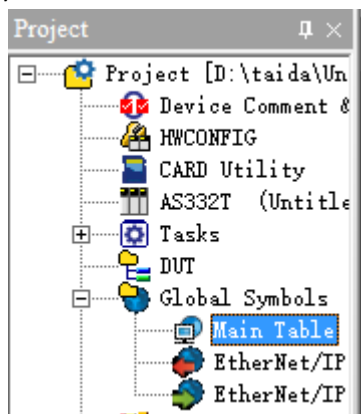

VAR	cc3	HC4	COUNTER	1
VAR	cc10	HC34	COUNTER	1
VAR	cc9	HC32	COUNTER	1
VAR	cc6	HC236	COUNTER	1
VAR	cc2	HC2	COUNTER	1
VAR	cc5	HC144	COUNTER	1

4. Add device monitoring table

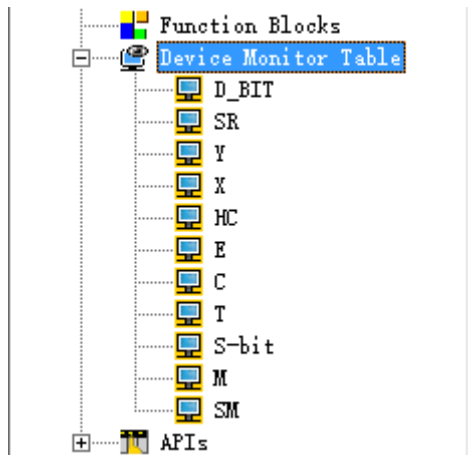

	Object	Identifiers	Device Name	Status	Data Type
▶	GlobalVar	FDGH	HC255		COUNTER
	GlobalVar	jk	HC0		COUNTER
	GlobalVar	AS	HC2		COUNTER

Use Delta MC Series RTU protocol

HMI setting

HMI default communication parameters: 9600bps, 8, none check, 1; PLC station no. : 1

RS485 communication

HMI Attribute

User Permissions Setting		Historical Events Storage	
HMI	Task Bar	HMI License Setting	HMI Extended Attributes
Internet Time Synchronization/summer time		COM0 Setting	COM2 Setting

Type: RS485

Baud Rate: 9600

Data Bit: 8

Parity Check: none


Stop Bit: 1

☐ Broadcast 65535

Advanced Settings

PLC setting

Open Can Open builder software

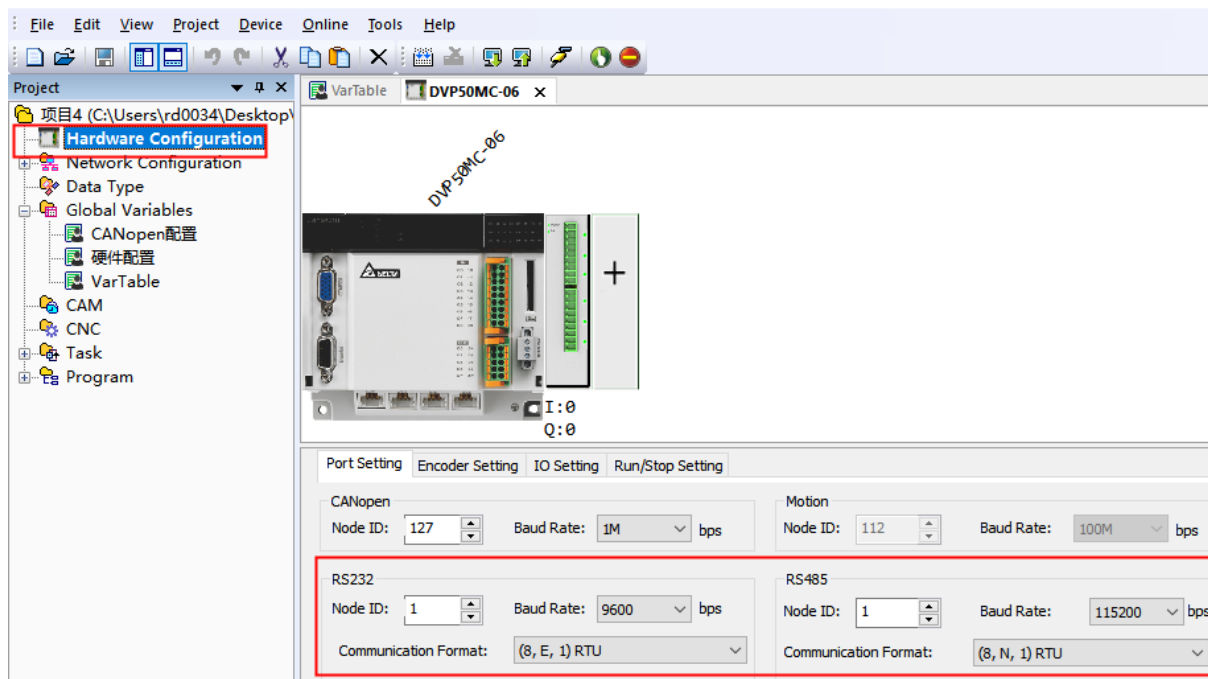


Use Delta MC Series ASCII protocol

HMI setting


HMI default communication parameters: 9600bps, 8, none check, 1; PLC station no. : 1

RS485 communication

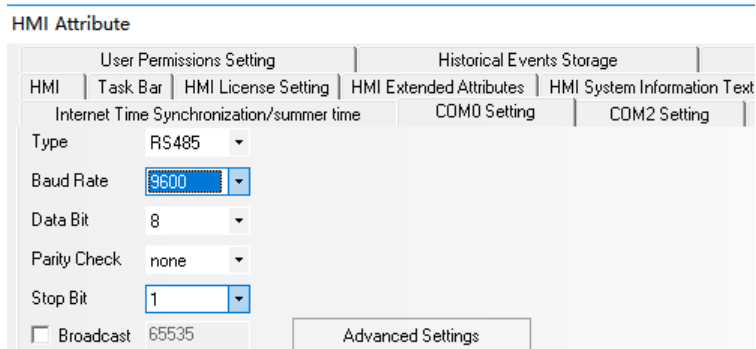

PLC setting

Open Can Open builder software

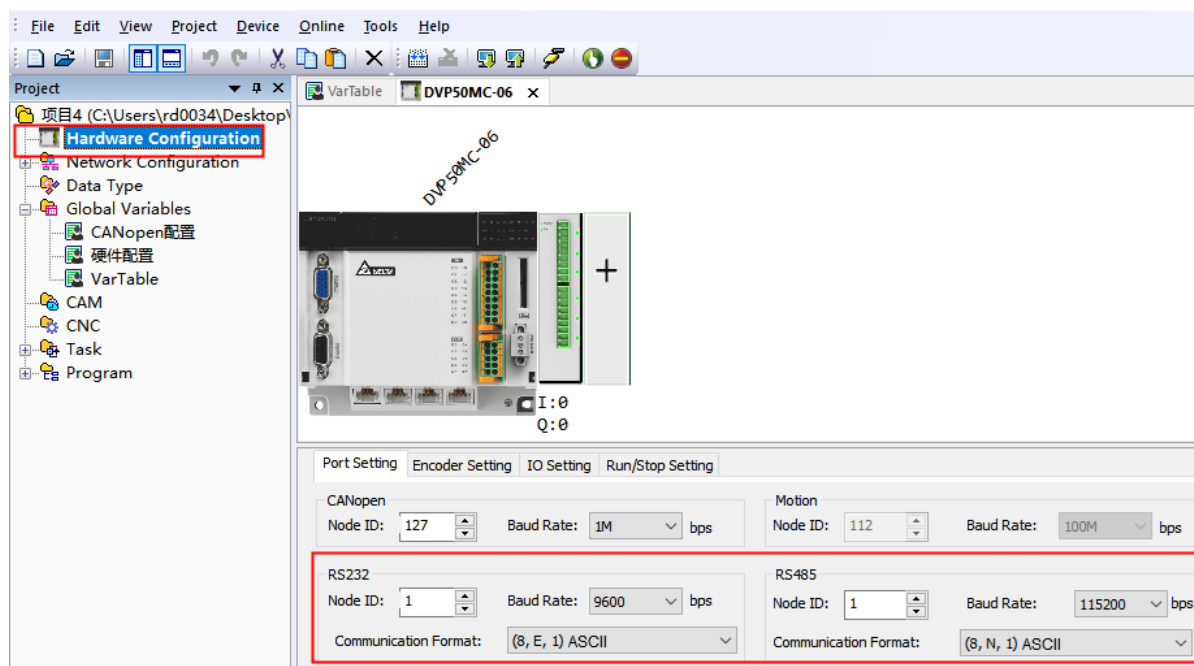


Use Delta AH500 protocol


HMI setting

HMI default communication parameters: 9600bps, 7, 1, even parity; PLC station number: 1

RS232 communication

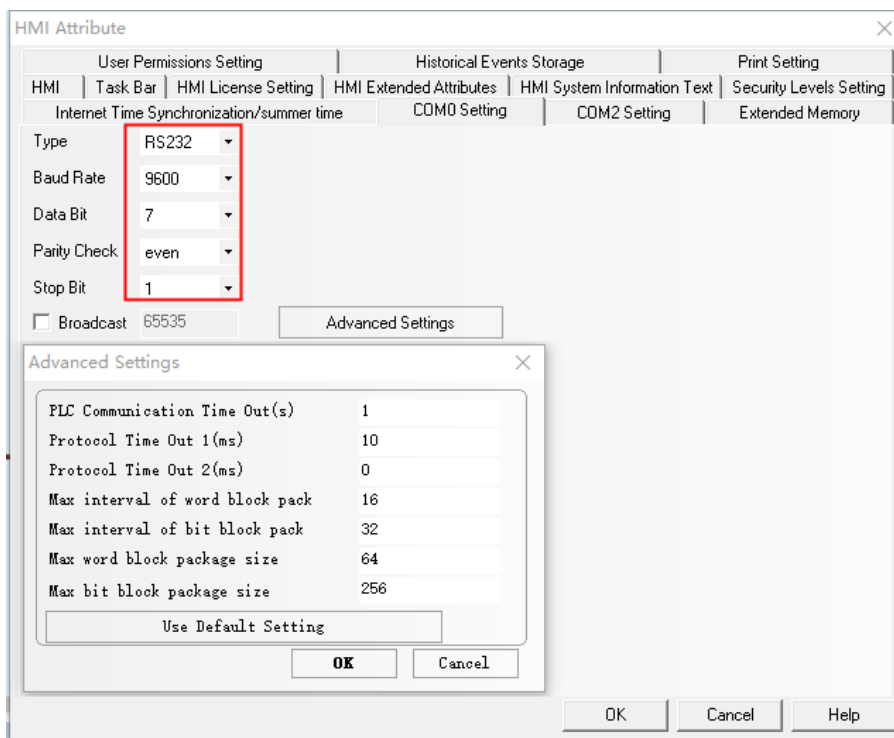


RS485 communication

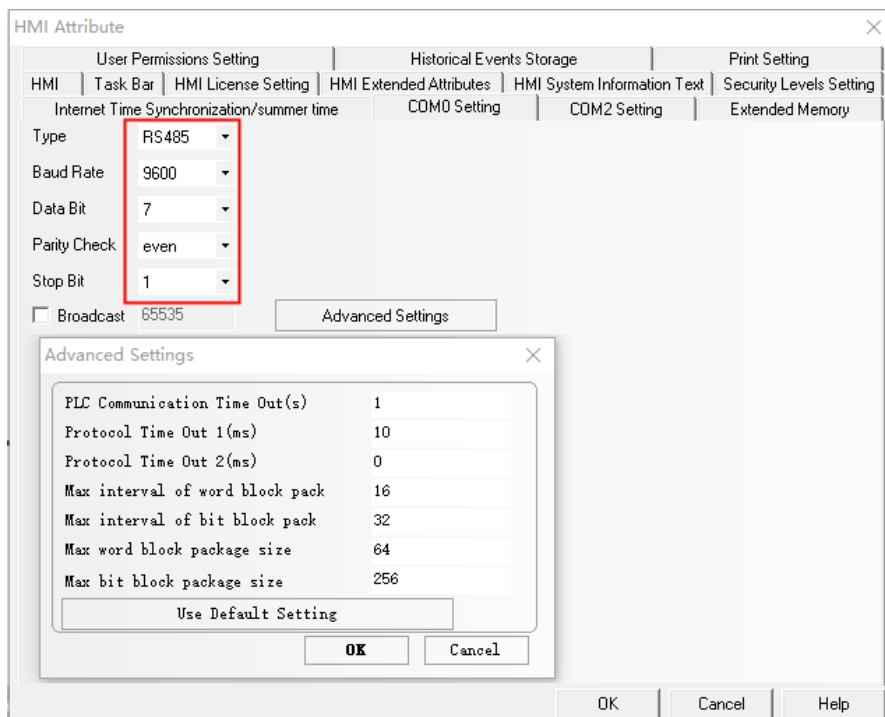



PLC Setting

1. Open ISPSoft 3.12 PLC programming software, after creating a new project, click HWCONFIG

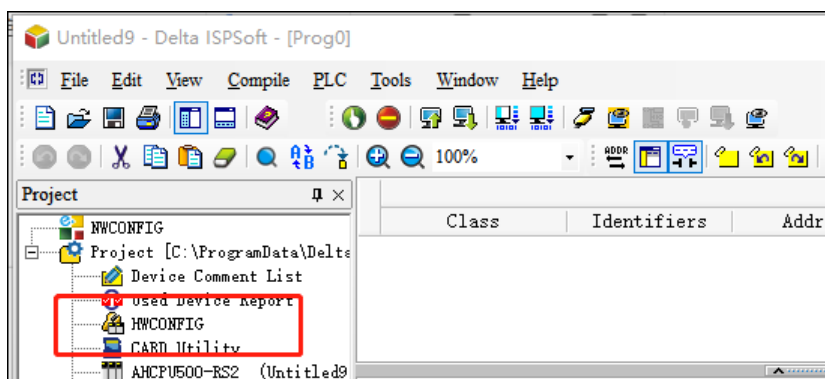

2. Double-click PLC Module, and the communication parameters are set as follows:

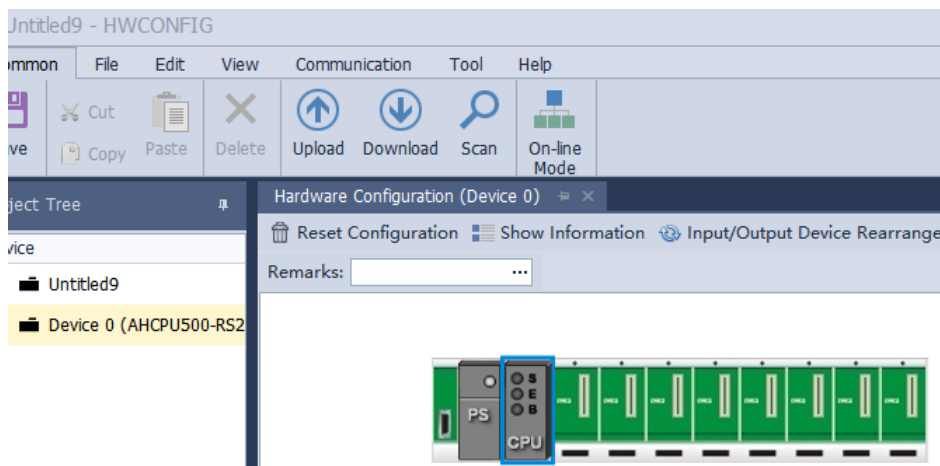


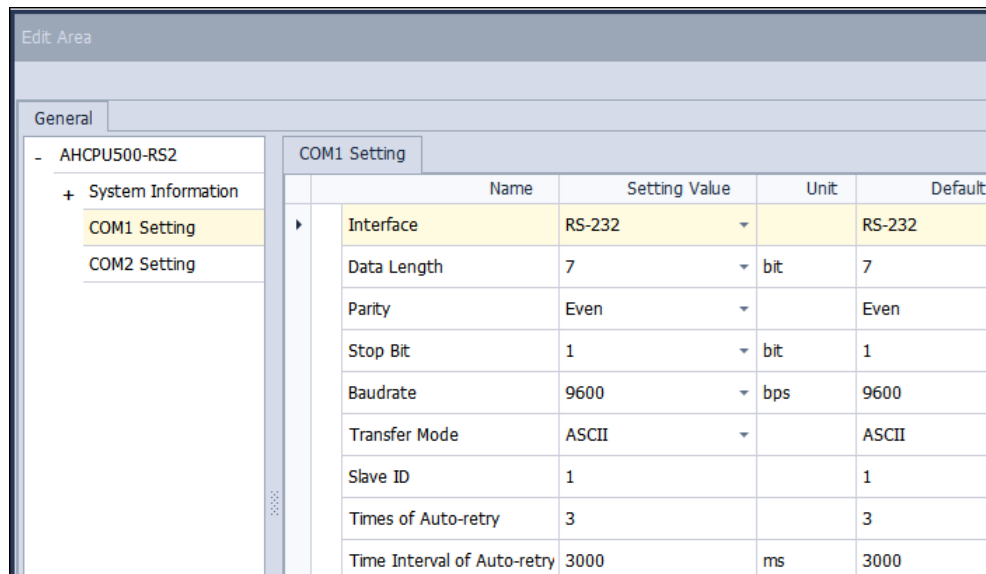

© Ethernet Communication Parameters


Delta DVPEN01-SL Ethernet (TCP Slave)

HMI Setting

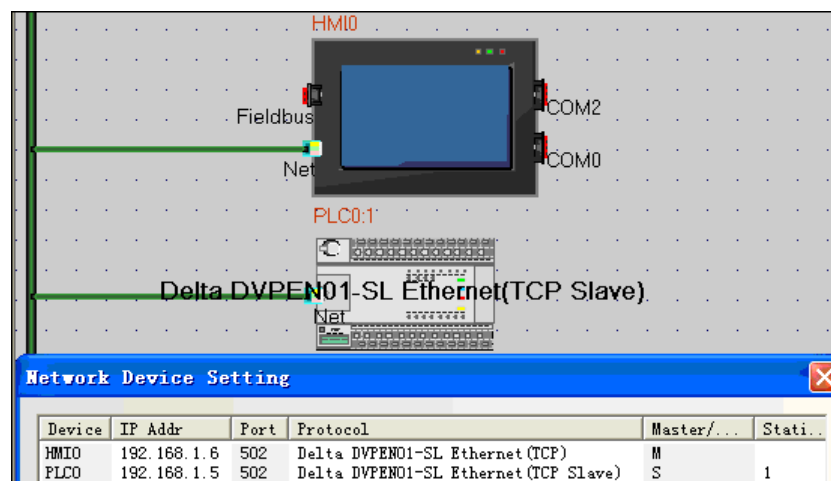


PLC Setting

- 1) Open the WPLSoft and build new project;

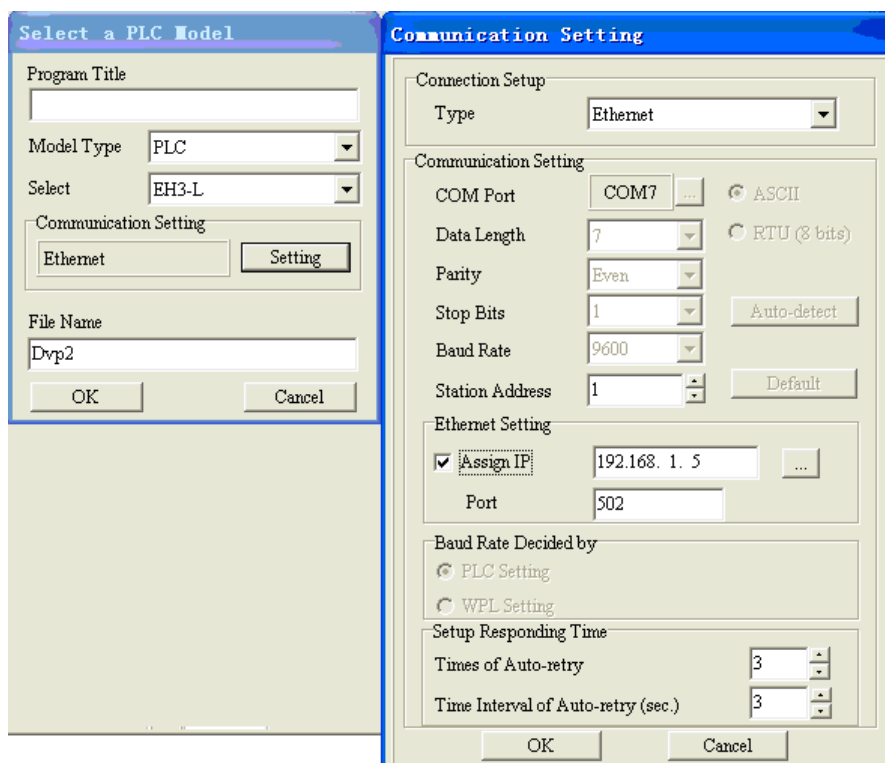


2) Change the IP address

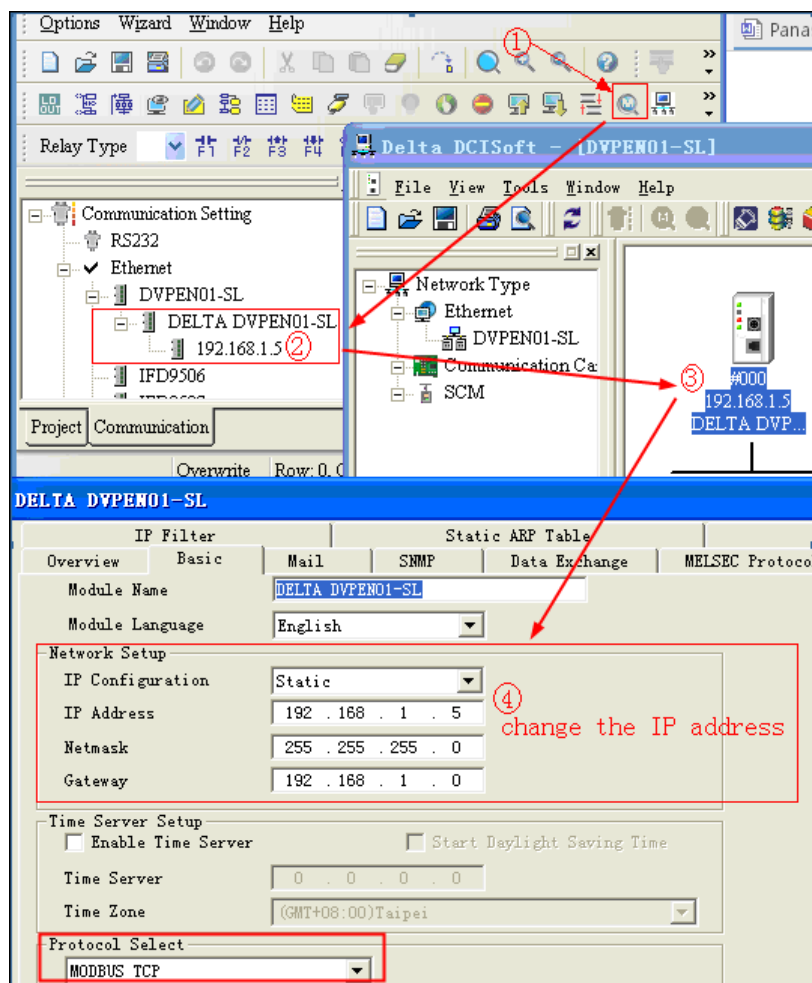

Delta DVP-ES3 Ethernet (TCP Slave)

HMI Setting


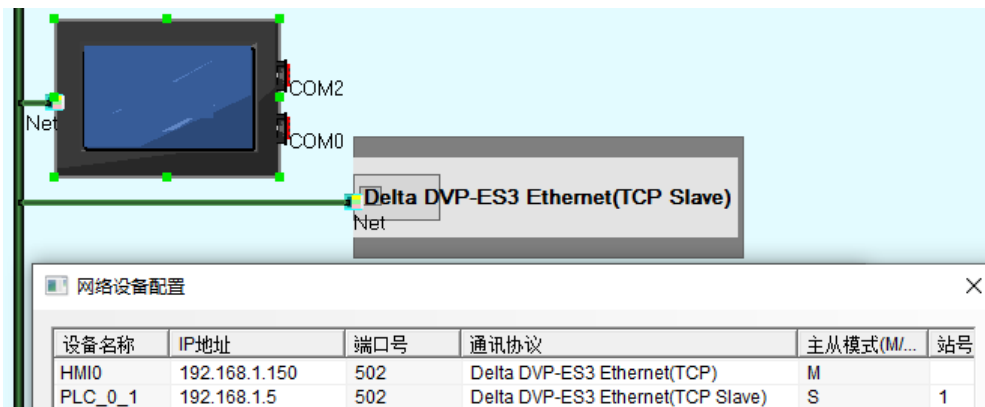


PLC Setting

1. Open ISPSOFT PLC programming software, after creating a new project, click HWCONFIG




2. Click setting button to set the ethernet port parameters

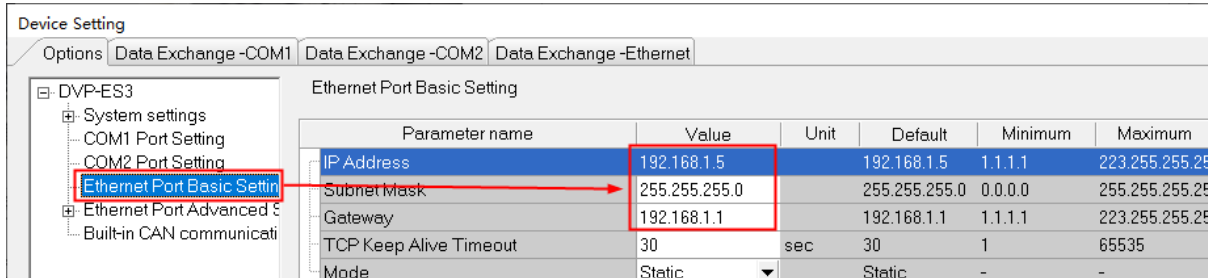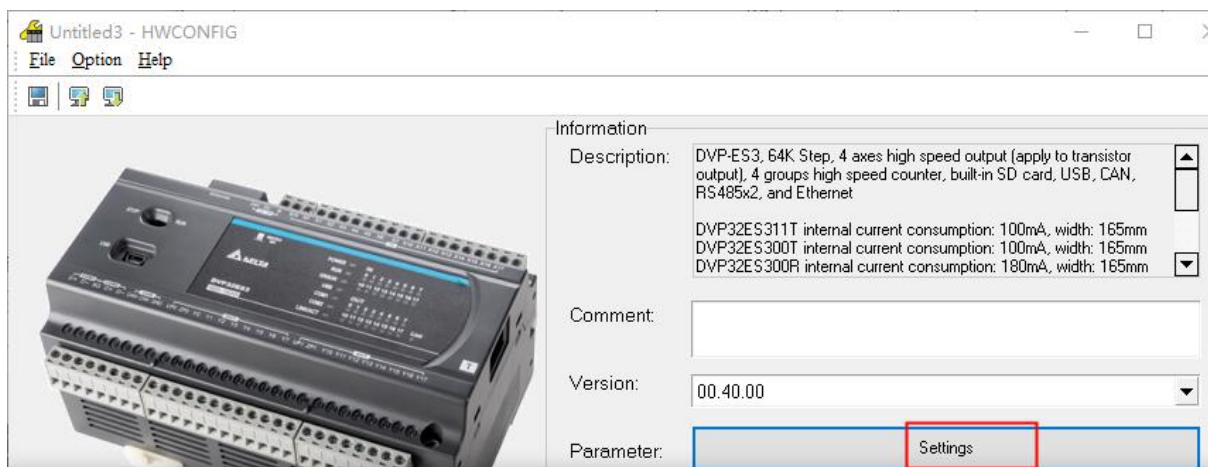


Delta AS300 Ethernet (TCP Slave)

HMI Setting

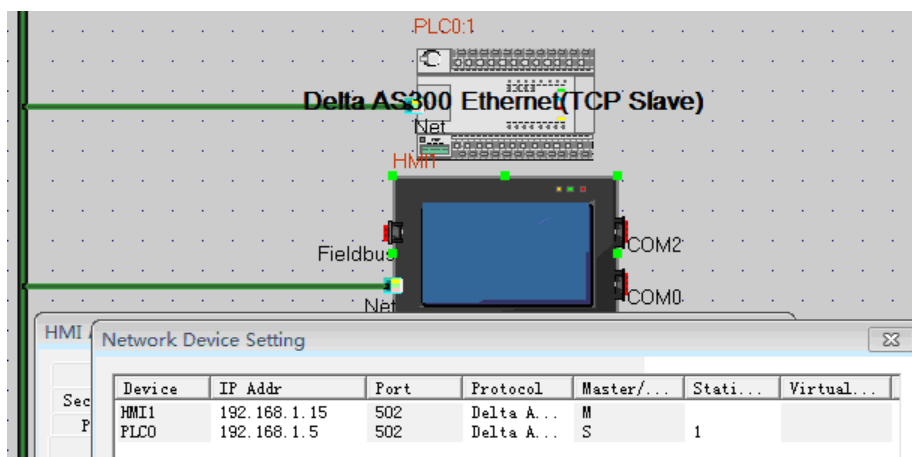


PLC Setting

1. Open ISPSoft, build new project and choose the right CPU type.

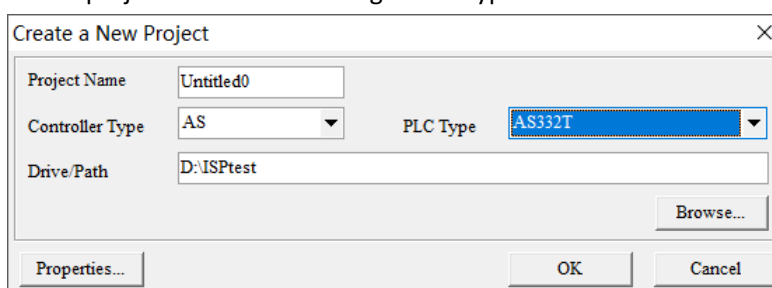



2. PLC parameter setting:

3. Install COMMGR first, set the communication channel name, communication method and IP address after starting COMMGR

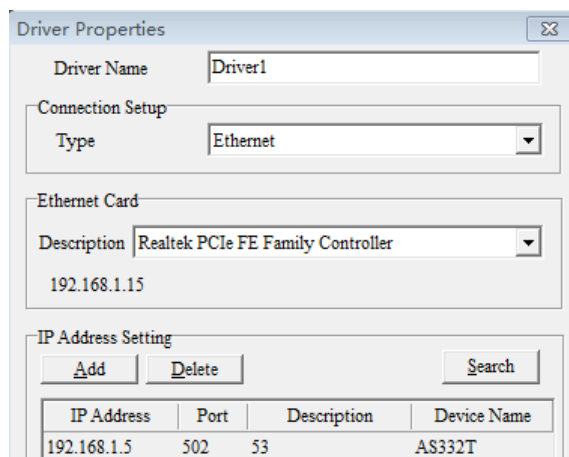

Then open the toolbar to select the communication channel and set the PLC station number

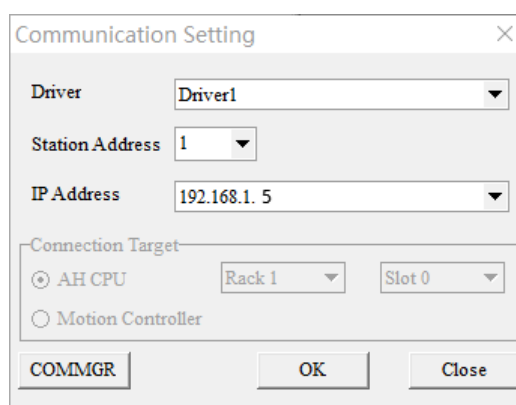

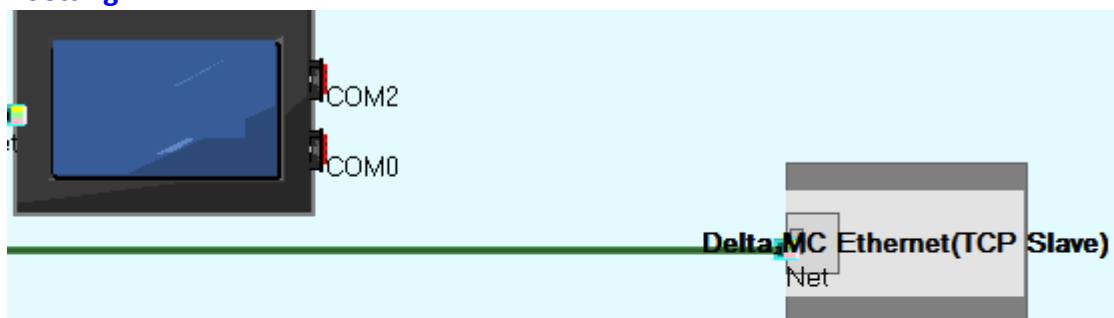Delta MC Ethernet (TCP Slave)**HMI Setting**

Network Device Setting

Device	IP Addr	Port	Protocol
HMI0	192.168.1.178	502	Delta MC Ethernet(TCP)
PLC_0_1	192.168.1.1	502	Delta MC Ethernet(TCP Slave)

PLC Setting

Please check the relevant PLC software setting instructions

© **Supported Device**

Delta DVP

Device	Bit Address	Word Address	Format	Notes
Input	X0-9999	-----	OOOO	
Output	Y0-9999	-----	OOOO	
Auxiliary Relay	M0-9999	-----	DDDD	
Step Relay	S0-9999	-----	DDDD	
Timer Relay	T0-9999	-----	DDDD	
Counter Relay	C0-9999	-----	DDDD	
Timer	-----	TV0-9999	DDDD	
Counter	-----	CV0-127	DDD	
Double word counter	-----	CV2 232-255	DDD	
Data Register	-----	D0-9999	DDDD	

Delta MC Series

Device	Bit Address	Word Address	Format	Notes
Input	IX0.0-127.7	-----	DDD.O	
Output	QX0.0-127.7	-----	DDD.O	
Auxiliary Relay	MX0-8191.63		DDDD.DD	
Auxiliary Register	-----	MW0-32767	DDDDD	
Input	-----	IW0-63	DD	

Output	-----	QW0-63	DD	
--------	-------	--------	----	--

Delta AH500

Device	Word Address	Bit Address	Format	Notes
32-bit counter	HC 0-63	-----	DD	----
Index register	E 0-31	-----	DD	----
counter	C 0-2047	-----	DDDD	----
Timer	T 0-2047	-----	DDDD	----
Data register	D 0-32767	-----	DDDDD	----
Special data register	SR 0-2047	-----	DDDD	----
Output relay	Y 0-511	-----	DDD	----
Input relay	X 0-511	-----	DDD	----
32-bit counter	-----	HC 0-63	DD	----
counter	-----	C 0-2047	DDDD	----
Timer	-----	T 0-2047	DDDD	----
Step point relay	-----	S 0-2047	DDDD	----
Special auxiliary signs	-----	SM 0-2047	DDDD	----
Auxiliary relay	-----	M 0-8191	DDDD	----
Output relay	-----	Y 0.00-511.15	DDD.DD	----
Input relay	-----	X 0.00-511.15	DDD.DD	----

Delta DVPEN01-SL Ethernet

Device	Bit Address	Word Address	Format	Notes
Input	X0-377	-----	OOO	
Output	Y0-377	-----	OOO	
Auxiliary Relay	M0-4095	-----	DDDD	
Step Relay	S0-1023	-----	DDDD	
Timer Relay	T0-255	-----	DDD	
Counter Relay	C0-255	-----	DDD	
Timer	-----	T0-255	DDD	
Counter	-----	C0-199	DDD	
Double word counter	-----	C2 200-255	DDD	
Data Register	-----	D0-11999	DDDDD	

Delta DVP-ES3 Series、Delta DVP-ES3 Ethernet(TCP Slave)

Device	Bit Address	Word Address	Format	
32-bit Counter	HC 0-255	-----	DDD	
Counter	C 0-511	-----	DDD	
Timer	T 0--511	-----	DDD	
Step point Relay	S 0-2047	-----	DDDD	






Special auxiliary sign	SM 0-4095	-----	DDDD	
Special auxiliary	M 0-8191	-----	DDDD	
Output Relay	Y 0-377	-----	OOO	
Input Relay	X 0-377	-----	OOO	
Data Register	D 0.00-29999.15	-----	DDDDD.DD	
32-bit Counter	-----	HC 0-255	DDD	
Index Register	-----	E 0-14	DD	
Counter	-----	C 0--511	DDD	
Timer	-----	T 0-511	DDD	
Data Register	-----	D 0-29999	DDDDD	
Special data Register	-----	SR 0-2047	DDDD	


Delta AS300 Ethernet(TCP Slave)

Device	Bit Address	Word Address	Format	
32-bit Counter	HC 0-255	-----	DDD	
Counter	C 0-511	-----	DDD	
Timer	T 0--511	-----	DDD	
Step point Relay	S 0-2047	-----	DDDD	
Special auxiliary sign	SM 0-4095	-----	DDDD	
Special auxiliary	M 0-8191	-----	DDDD	
Output Relay	Y 0.00-63.15	-----	DD.DD	
Input Relay	X 0.00-63.15	-----	DD.DD	
Data Register	D 0.00-29999.15	-----	DDDDD.DD	
32-bit Counter	-----	HC 0-255	DDD	
Index Register	-----	E_Word 0-9	D	
Counter	-----	C 0--511	DDD	
Timer	-----	T 0-511	DDD	
Data Register	-----	D 0-29999	DDDDD	
Special data Register	-----	SR 0-2047	DDDD	
Output Relay	-----	Y 0-63	DD	
Input Relay	-----	X 0-63	DD	

© Cable Diagram

DVP RS232 communication cable

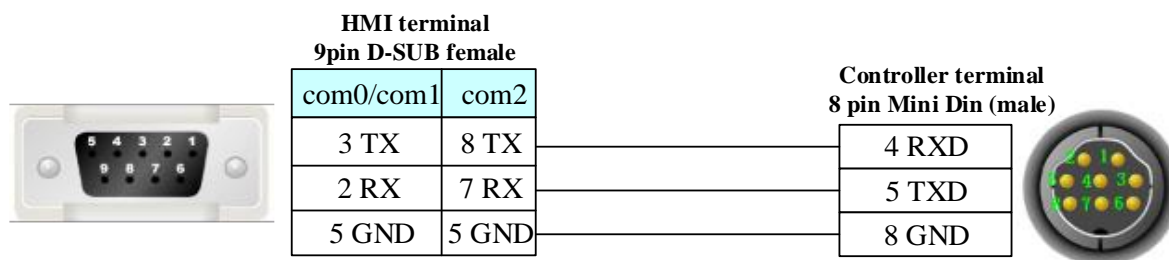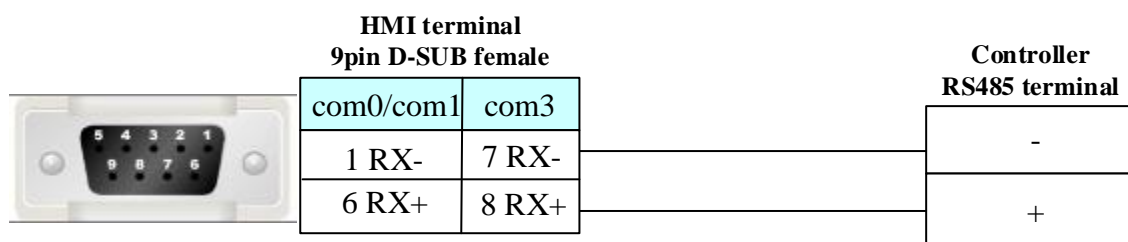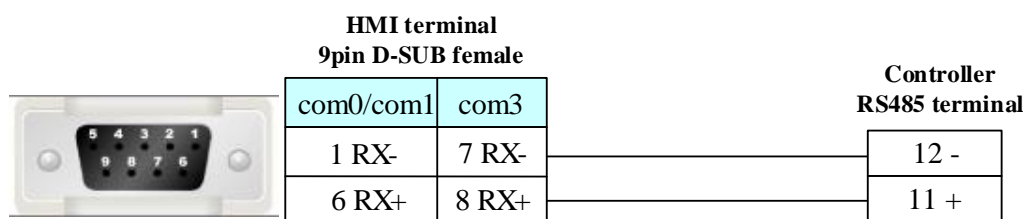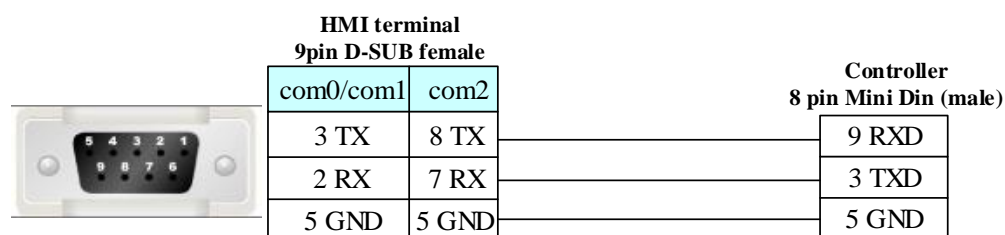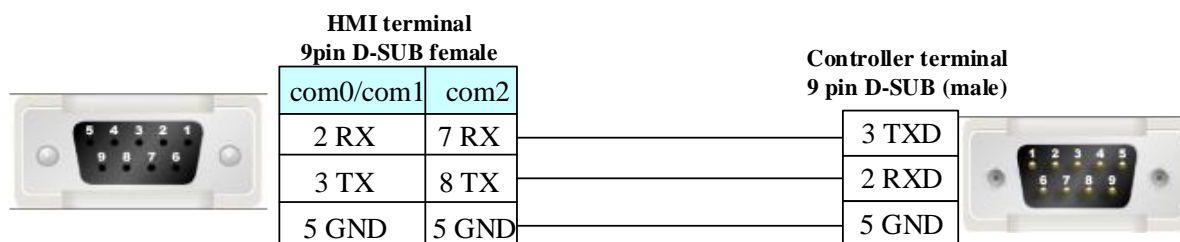**DVP \AS300 RS485 communication cable****Delta MC50 RS485\232 communication cable****RS485****RS232****Delta AH500 communication cable****RS232****RS485**

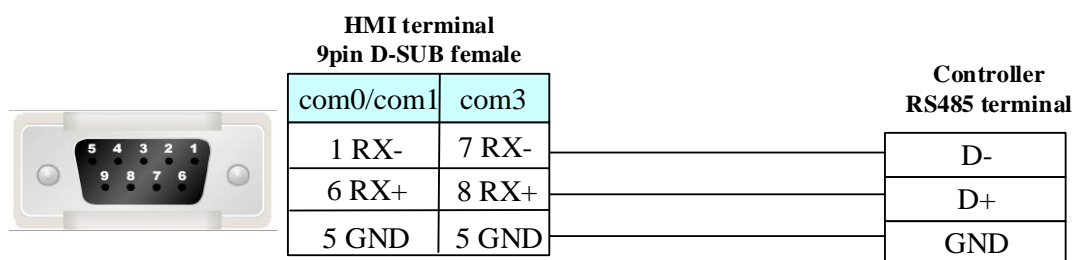

Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub
Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.21 Delta (Temperature Controller)

◎ Serial Communication


Series	CPU	Link Module	Driver
DVP	DTA4848 DTB9696VR DTC1000 DTC2000	RS485 on the CPU unit	Delta DTA/DTB/DTC

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
DVP	DTA4848 DTB9696VR DTC1000 DTC2000	RS485 on port	RS485	Setting	Your owner cable

◎ Communication Setting

RS485 communication

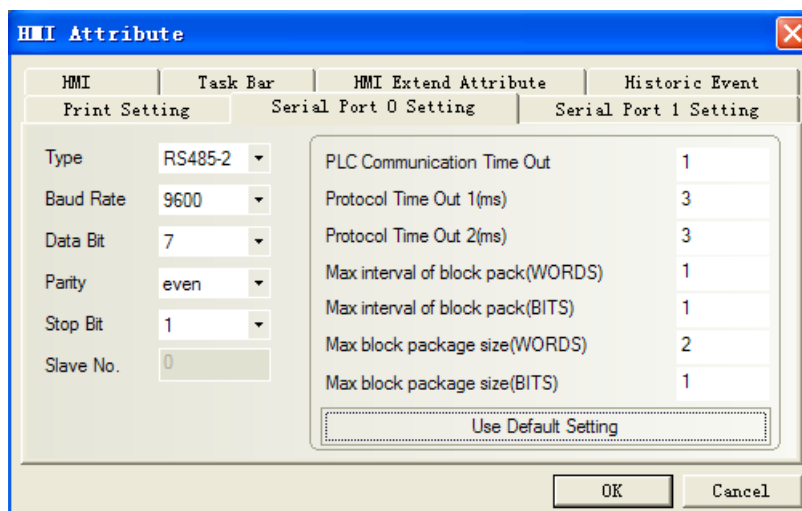

NOTE: Only use 4X, not 3X in the ev5000 project.

© Supported Device

Device	Bit Address	Word Address	Format	Notes
Output bit	0X1-FFFF	-----	HHHH	
Input bit (read only)	1X1-FFFF	-----	HHHH	
Input Register (read only)	-----	3X1-FFFF	HHHH	
Output Register	-----	4X1-FFFF	HHHH	

Controller Setting

1. Set the communication parameter

Setting communication parameter in “setting mode”

- (1) **E-no** (Station number) matching the station No. of the Ev5000
- (2) **bPS** (Baudrate)
- (3) **LEn** (Data bit)
- (4) **Prty** (Parity)
- (5) **Stop** (Stop bit)

Non-supported formats: 7, N, 1 or 8, O, 2 or 8, E, 2(Databit、Parity、Stopbit).

(6) Setting the parameter of CoSH

The data must be ON when executing write operation in touch-screen.

2. Communication parameters and notes

DTA4848: Address and Content of Word Register (corresponds to 4X in the HMI)

Address	Content	Explanations
4700H	Process value (PV)	
4701H	Set point (SV)	

4702H	Upper-limit alarm 1	In the running mode AL 1H , when ALA1 is 1 and Upper-limit alarm is valid.
4703H	Lower-limit alarm 1	In the running mode AL 1L , when ALA1 is 1 and Lower-limit alarm is valid.
4704H	Upper-limit alarm 2	In the running mode AL 2H , when ALA2 is 2 and Upper-limit alarm is valid.
4705H	Lower-limit alarm 2	In the running mode AL 2L , when ALA2 is 2 and Lower-limit alarm is valid.
4706H	Upper-limit of temperature range	The data content should not be higher than the temperature range. In the setting mode SP-H
4707H	Lower-limit of temperature range	The data content should not be lower than the temperature range. In the setting mode SP-L
4708H	PB Proportional band	1 to 9999, unit is 0.1. In the adjusting mode P
4709H	Ti Integral time	0~9999. In the adjusting mode I
470AH	Td Derivative time	0~9999. In the adjusting mode d
470BH	Heating/Cooling hysteresis	0~9999
4710H	Input temperature sensor type	In the setting mode INPt
4711H	Control method	0: PID (default), 1: ON/OFF, 2: manual tuning. In the setting mode Ctrl
4712H	Heating/Cooling control cycle	0 to 99 second, 0:0.5s, in the adjusting mode HePd or CLPd , when it is under the control of PID
4713H	Proportional control offset error value	0%~100%
4714H	Temperature regulation value	-99.9~99.9. in the adjusting mode SPoF
4715H	Alarm 1 type	Please refer to the contents of the “Alarm Outputs” for detail. In the setting mode ALA 1
4716H	Alarm 2 type	Please refer to the contents of the “Alarm Outputs” for

		detail. In the setting mode ALAZ
4717H	Temperature unit display selection	°C : 1 (default), °F : 0. in the setting mode EPUN
4718H	Heating/Cooling control Selection	Heating: 0 (default), Cooling: 1. in the setting mode S-HC
4719H	Control Run/Stop setting	Run: 1 (default), Stop: 0. in the running mode r-S
471AH	Communication write-in selection	Communication write in disabled: 0 (default), Communication write in enabled: 1. In the setting mode CoSH
471BH	Software Version	V1.00 indicates 0 x 100
4729H	AT Setting	OFF: 0 (default), ON: 1. in the adjusting mode At
4733H	CT monitor value	Unit is 0.1A. in the running mode ct

DTB9696VR: Address and Content of Word Register (corresponds to 4X in the HMI)

Address	Content	Explanation
1000H	Process value (PV)	Measuring unit is 0.1, updated one time in 0.4 second
1001H	Set point (SV)	Unit is 0.1, °C or °F
1002H	Upper-limit of temperature range	The data content should not be higher than the temperature range. In the setting mode EP-H
1003H	Lower-limit of temperature range	The data content should not be lower than the temperature range. In the setting mode EP-L
1004H	Input temperature sensor type	Please refer to the contents of the "Temperature Sensor Type and Temperature Range" for detail. In the setting mode EnPt
1005H	Control method	0: PID, 1: ON/OFF, 2: manual tuning, 3: PID program control. In the setting mode Ctrl
1006H	Heating/Cooling control selection	0: Heating, 1: Cooling, 2: Heating/Cooling, 3: Cooling/Heating. In the setting mode S-HC
1007H	1st group of Heating/Cooling control cycle	0 ~ 99, 0:0.5 sec. in the adjusting mode HtPd or CLPd

1008H	2nd group of Heating/Cooling control cycle	0 ~ 99, 0:0.5 sec. in the adjusting mode HCPd
1009H	PB Proportional band	0.1 ~ 999.9. in the adjusting mode P0
100AH	Ti Integral time	0~9999. in the adjusting mode i0
100BH	Td Derivative time	0~9999. in the adjusting mode d0
100CH	Integration default	0 ~ 100%, unit is 0.1%. in the adjusting mode i0F0
100DH	Proportional control offset error value, when Ti = 0	0 ~ 100%, unit is 0.1%. in the adjusting mode Pd0F
100EH	The setting of COEF when Dual Loop output control are used	0.01 ~ 99.99, unit is 0.01 (setting when it is under the control of PID) in the adjusting mode CoEF
100FH	The setting of Dead band when Dual Loop output control are used	-999 ~ 9,999. in the adjusting mode dEAd
1010H	Hysteresis setting value of the 1st output group	0~9999. in the adjusting mode HtS or ltS
1011H	Hysteresis setting value of the 1st output group	0~9999. (setting when Dual Loop output control are used) in the adjusting mode HtS or ltS
1012H	Hysteresis setting value of the 1st output group	Unit is 0.1%; write operation is valid under manual tuning mode only. In the running mode out1
1013H	Hysteresis setting value of the 2nd output group	Unit is 0.1%; write operation is valid under manual tuning mode only. In the running mode out2
1014H	Upper-limit regulation of analog linear output	1 Unit = 2.8uA (Current Output) = 1.3mV (Linear Voltage Output) in the adjusting mode CrH
1015H	Lower-limit regulation of analog linear output	1 Unit = 2.8uA (Current Output) = 1.3mV (Linear Voltage Output) in the adjusting mode CrLo
1016H	Temperature regulation value	-99.9 ~ +99.9, unit: 0.1. in the adjusting mode tPoF
1017H	Analog decimal setting	0~3. in the running mode SP
1018H	Time for valve from full open to full close	0.1~999.9. in the adjusting mode uAtr
1019H	Dead Band setting of valve	0 ~ 100%; unit: 0.1%. in the adjusting mode u-dE

101AH	Upper-limit of feedback signal set by valve	0~1024. in the adjusting mode u-HL
101BH	Lower-limit of feedback signal set by valve	0~1024. in the adjusting mode u-Lo
101CH	PID parameter selection	0~4. in the adjusting mode PIdn
101DH	SV value corresponded to PID value	Only valid within available range, unit: 0.1 scale. in the adjusting mode SV0
1020H	Alarm 1 type	In the setting mode ALA1
1021H	Alarm 2 type	In the setting mode ALA2
1022H	Alarm 3 type	In the setting mode ALA3
1023H	System alarm setting	0: None (default), 1~3: Set Alarm 1 to Alarm 3. In the setting mode SALA
1024H	Upper-limit alarm 1	In the setting mode AL1H unit: 0.1
1025H	Lower-limit alarm 1	In the setting mode AL1L
1026H	Upper-limit alarm 2	In the setting mode AL2H
1027H	Lower-limit alarm 2	In the setting mode AL2L
1028H	Upper-limit alarm 3	In the setting mode AL3H
1029H	Lower-limit alarm 3	In the setting mode AL3L
102AH	Read LED status	b0 : Alm3, b1: Alm2, b2: F, b3: °C, b4: Alm1, b5: OUT2, b6: OUT1, b7: AT
102BH	Read pushbutton status	b0: Set, b1: Select, b2: Up, b3: Down. 0 is to push
102CH	Setting lock status	0: Normal, 1: All setting lock, 11: Lock others than SV value. In the running mode LoL
102DH	CT read value	Unit: 0.1A. In the running mode ct
102FH	software version	V1.00 indicates 0x100.
1030H	Start pattern number	0 ~ 7. In the running mode Pt rn (setting when it is under the control of PID and the mode of PSLP)
1040H~	Actual step number setting inside	0 ~ 7 = N, indicate that this pattern is executed from

1047H	the correspond pattern	step 0 to step N. in the setting mode P590
1050H~ 1057H	Cycle number for repeating the execution of the correspond pattern	0 ~ 99 indicate that this pattern has been executed for 1 ~ 100 times. In the setting mode E9C0
1060H~ 1067H	Link pattern number setting of the correspond pattern	0 ~ 8, 8 indicates the program end. 0~7 indicates the next execution pattern number after executing the current pattern. In the setting mode E2n0
2000H~ 203FH	Pattern 0~7 temperature set point setting(Pattern 0 temperature is set to2000H ~ 2007H)	-999 ~ 9,999. in the setting mode SP00 ~ SP07
2080H~ 20BFH	Pattern 0~7 execution time setting(Pattern 0 time is set to 2080H~2087H)	Time 0 ~ 900 (1 minute per scale). in the setting mode E200 ~ E207

DTB9696VR: Address and Content of Bit Register (corresponds to 1X in the HMI)

0810H	Communication write-in selection	Communication write in disabled: 0 (default), Communication write in enabled: 1. In the setting mode E05H
0811H	Temperature unit display selection	°C/linear input (default): 1 , °F : 0. in the setting mode EPU0
0812H	Decimal point position selection	Except for the thermocouple B, S, R type, all the other thermocouple type are valid. (0 or 1). In the running mode SP
0813H	AT setting	OFF: 0 (default), ON : 1. In the adjusting mode At
0814H	Control RUN/STOP setting	0: STOP, 1: RUN (default). In the running mode r-5
0815H	STOP setting for PID program control	0: RUN (default), 1: STOP. In the running mode r-5
0816H	Temporarily STOP for PID program control	0: RUN (default), 1: Temporarily STOP. In the running mode r-5
0817H	Valve feedback setting status	0: w/o feedback (default), 1: feedback function.
0818H	Auto-tuning valve feedback status	0: Stop AT (default), 1: Start AT


3. Communication Parameters List

- Communication protocol: Modbus (ASCII); Available communication address: 1 to 255, 0 is broadcast address

- Function code: 03H: read the contents of register (Max. 3 words).
06H: write 1 (one) word into register.

◎ Cable Diagram

DVP RS485 communication cable

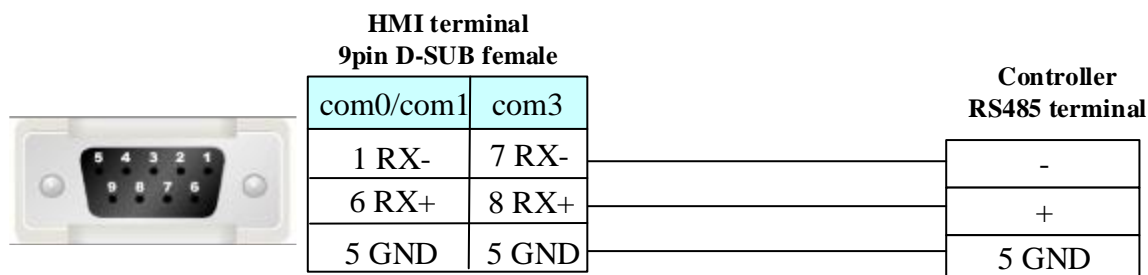

4.22 DL_T645 2007 Standard (Electric power meter)

* the instrument for testing is "CHINT" DTS634 type power instrument, standard 07 protocol .

◎ Serial Communication

Series	Link Module	Driver
DTS634 devices	RS485 on the CPU unit	DL_T645 2007 Standard
DTSD1352 devices	RS485 on the CPU unit	DL_T645 1997/2007 Standard

◎ System configuration

Series	Link Module	COMM Type	Parameter	Cable
DTS634 devices	RS485 on the CPU unit	RS485	Setting	Your owner cable
DTSD1352 devices	RS485 on the CPU unit	RS485	Setting	Your owner cable


◎ Communication Setting

DL_T645 2007 Standard

HMI setting



Default communication: 9600, 8, 1, Even; station: 1

1. HMI attribute setting

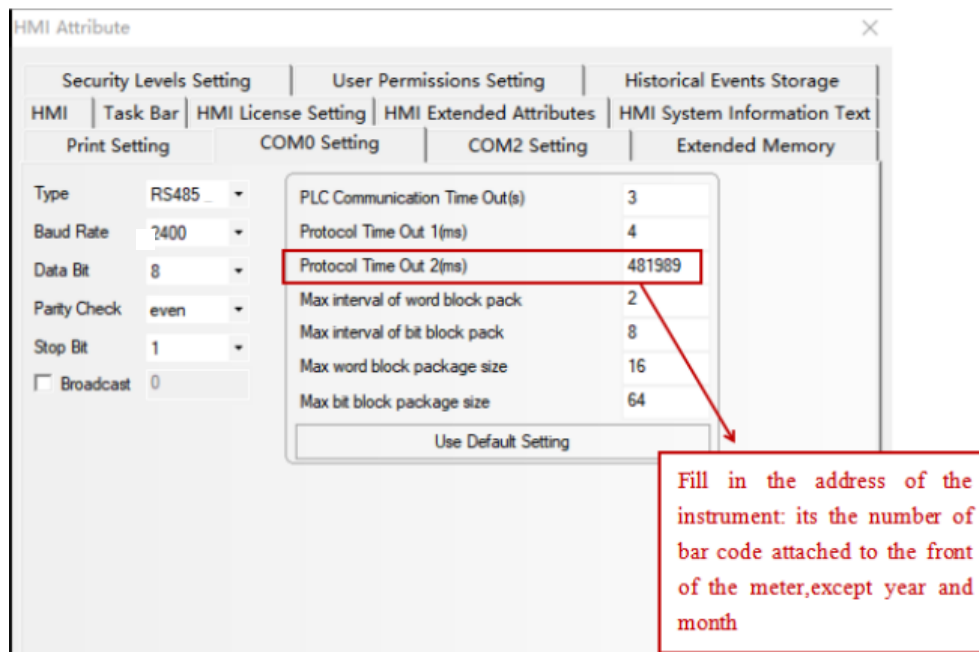


2. object interface:

Put a data input element: address data1(Read the power)

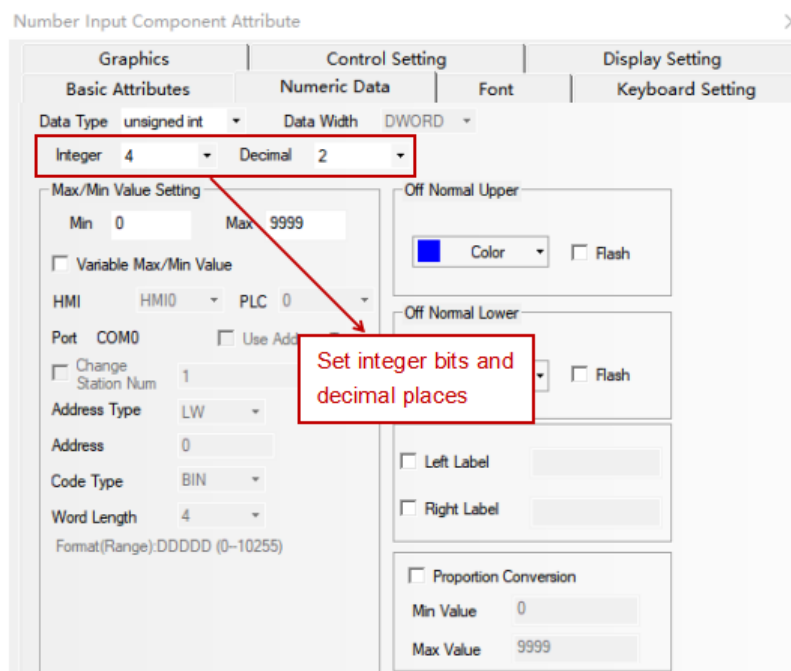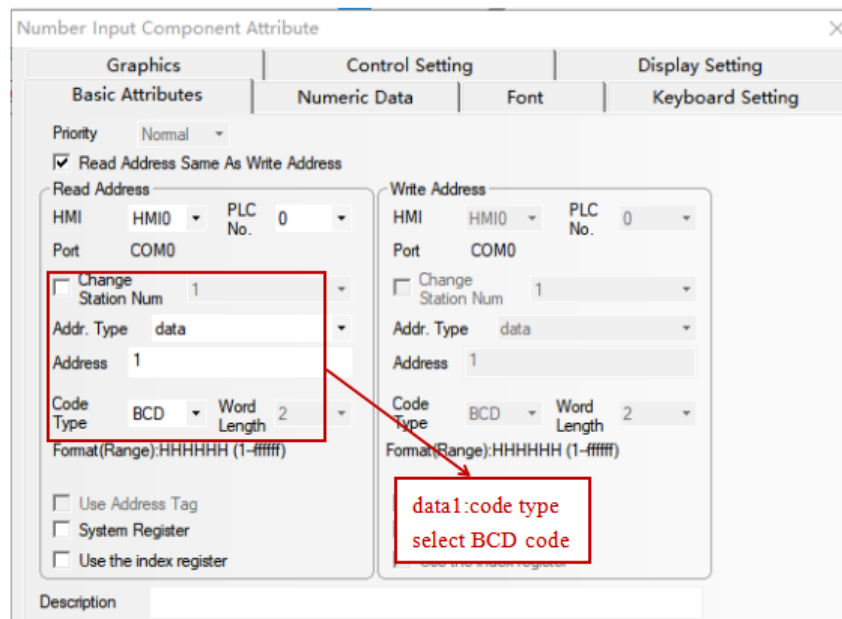

The final display results:

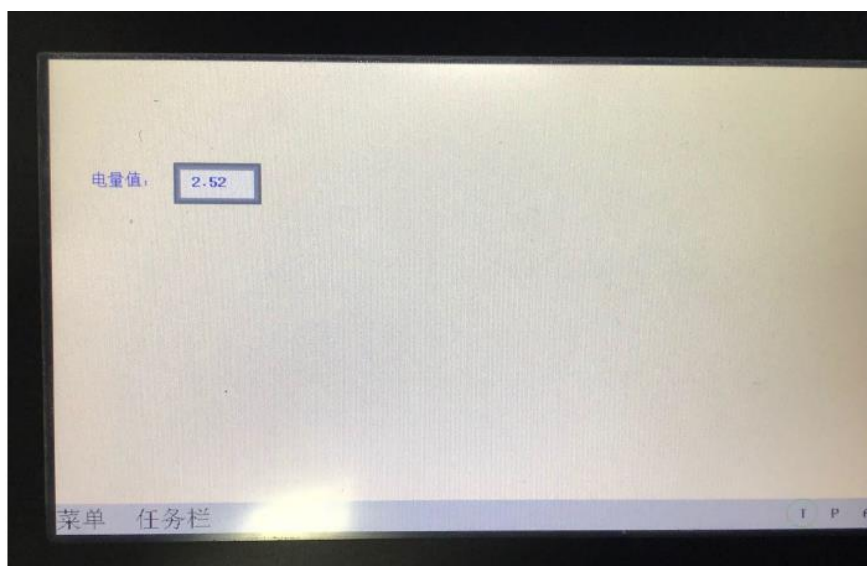

DL_T645 1997/2007 Standard

HMI setting

Default communication: 9600, 8, 1, Even; station: 1

For one-to-many meter use, a meter address is 12 bits, stored in RW:

Station No. 0: Use the address of the upper electromechanical meter


Station No. 1: Use RW0~RW6

Station No. 2: Use RW10~RW16


Station No. 3: Use RW20~RW26


And so on

1. HMI attribute setting

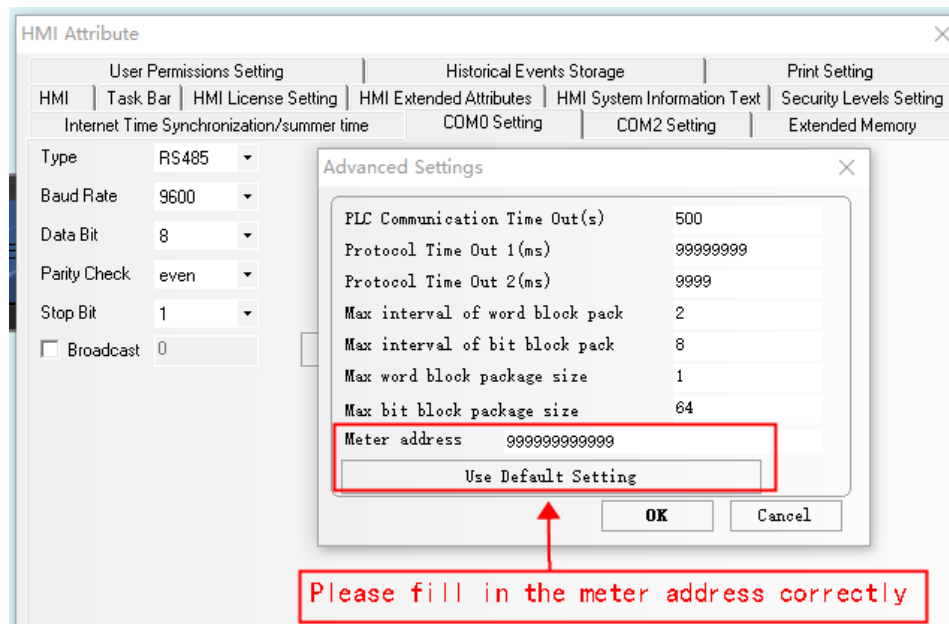


Example: Put a data input element address data_2007 2010100 (read voltage)

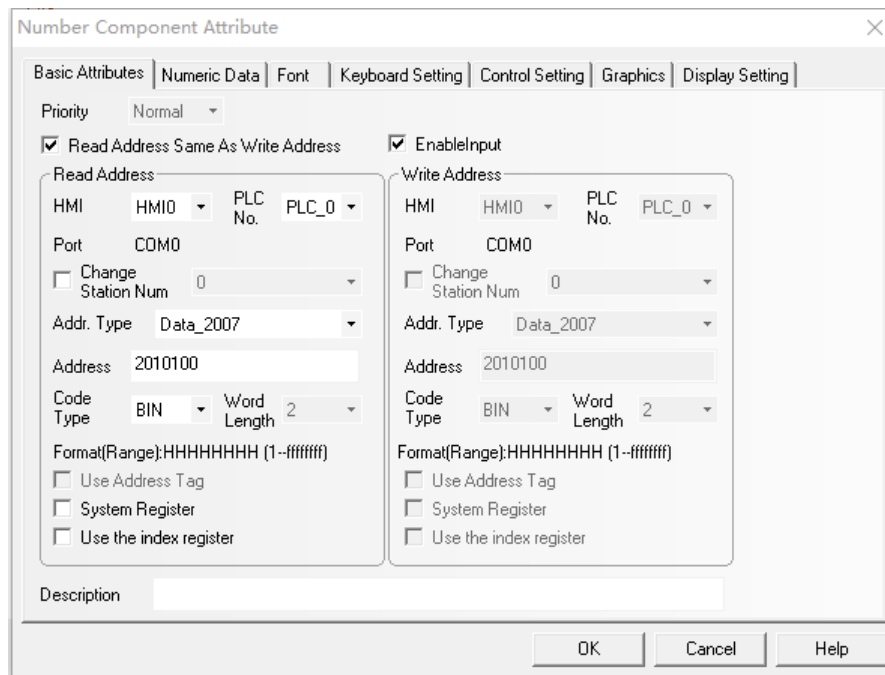

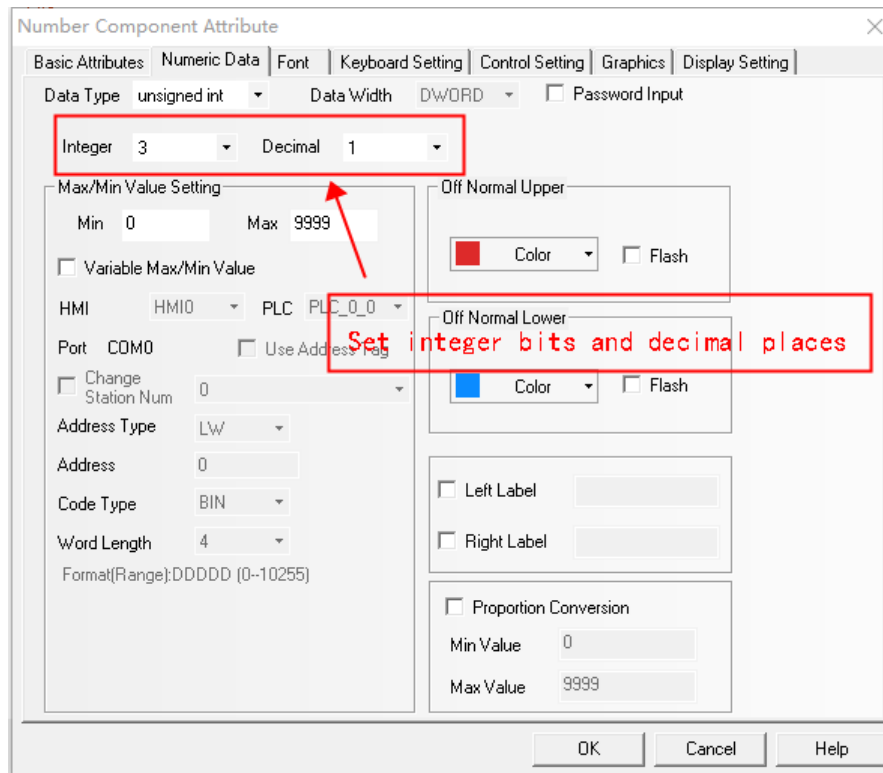

The final display effect:



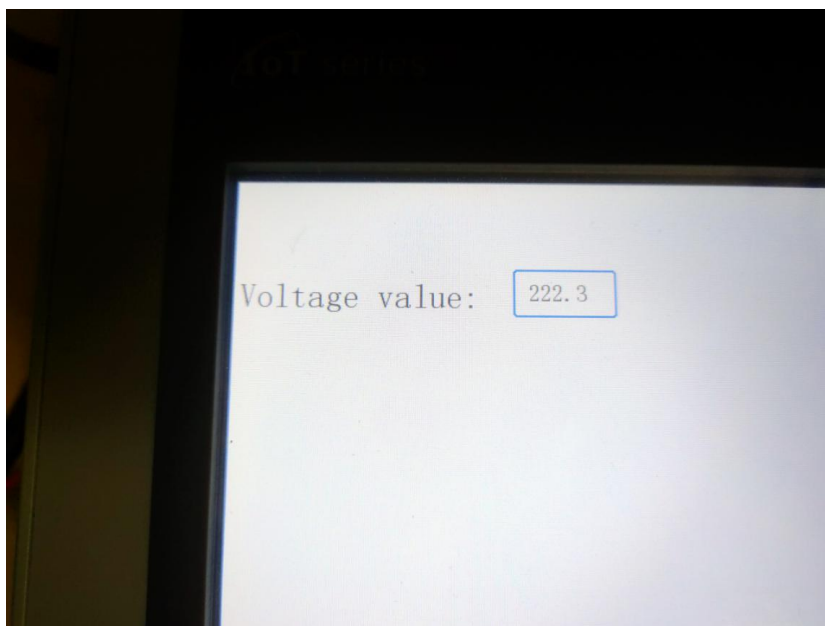

© Supported Device

DTSD634 Devices


Device	Word Address	Format	Code type	Notes
DTSD634	data1	HHHHH	BCD	----

DL_T645 1997/2007 Standard

Device	Word Address	Format	Code type	Notes
DTSD1352	Data_1997	HHHH	BIN	----
DTSD1352	Data_2007	HHHHHHHH	BIN	----

© Cable Diagram

RS485 communication cable

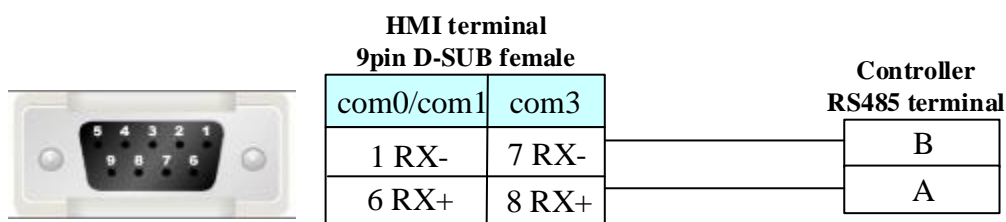



4.23 ENDA

◎Serial Communication


Series	CPU	Link Module	Driver
END A devices	ELC	RS485 on the CPU unit	END A Controller/PLC Devices
	ETC	RS485 on the CPU unit	
	EUC	RS485 on the CPU unit	
	EPC	RS485 on the CPU unit	
	EDP	RS485 on the CPU unit	

◎System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
END A devices	ELC	RS485 on the CPU unit	RS485	Setting	Your owner cable
	ETC	RS485 on the CPU unit	RS485		
	EUC	RS485 on the CPU unit	RS485		
	EPC	RS485 on the CPU unit	RS485		
	EDP	RS485 on the CPU unit	RS485		

◎Communication Setting

END A Devices:Default communication:9600, 8, 1, none; station: 1

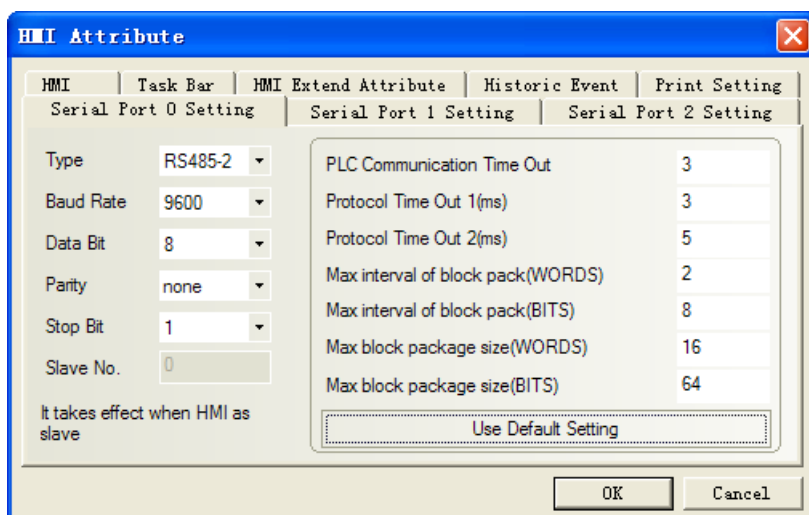

◎ Supported Device

ENDAS PLC Devices


Device	Bit Address	Word Address	Format	Notes
Output Relay	MB 0-65535	-----	DDDDDD	
Input Relay (read only)	IP 0-65535	-----	DDDDDD	
Output Register	-----	MW 0-65535	DDDDDD	
Input Register (read only)	-----	IR 0-65535	DDDDDD	

ENDAS Controller Devices

Device	Bit Address	Word Address	Format	Notes
Coils	Coils 0-65535	-----	DDDDDD	
Discrete input (read only)	DI 0-65535	-----	DDDDDD	
Holding Registers	-----	HR 0-65535	DDDDDD	
Input Register (read only)	-----	IR 0-65535	DDDDDD	

◎ Cable Diagram

RS485 communication cable

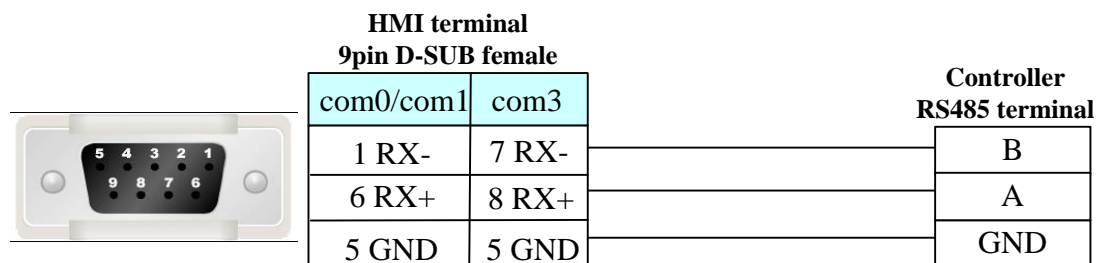

4.24 Emerson NetWork Power

◎ Serial Communication

Series	CPU	Link Module	Driver
Emerson EC10	Ec10-1006BRA	RS232 on the CPU unit	Emerson EC10
Emerson EC20	Ec20-2012BRA Ec20-3232BRA	RS232 on the CPU unit	Emerson EC20

◎ System configuration


Series	CPU	Link Module	COMM Type	Parameter	Cable
Emerson EC10	EC10-1006BRA	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485 on port1	RS485	Setting	Your owner cable
Emerson EC20	EC20-2012BRA	RS232 on the CPU unit	RS232	Setting	Your owner cable
	EC20-3232BRA	RS485 on port1	RS485	Setting	Your owner cable

◎ Communication Setting


Emerson EC10 RS232 communication

Emerson EC20 RS232 communication


Emerson EC10 RS485 communication

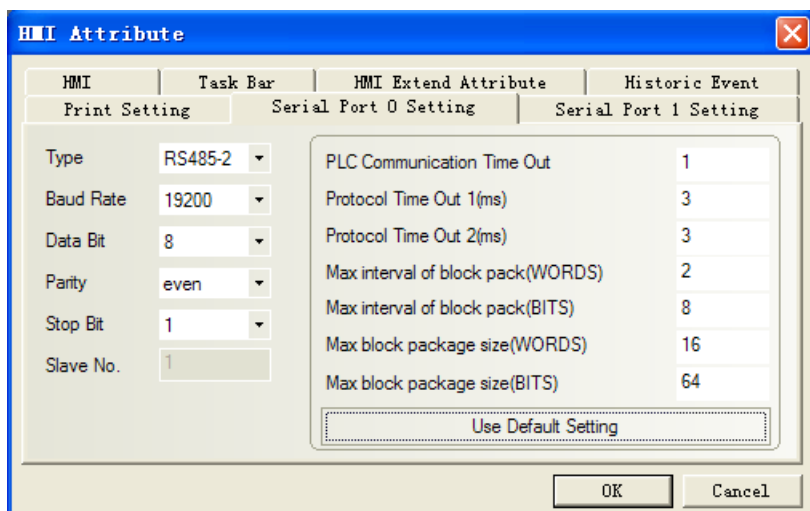

Emerson EC20 RS485 communication

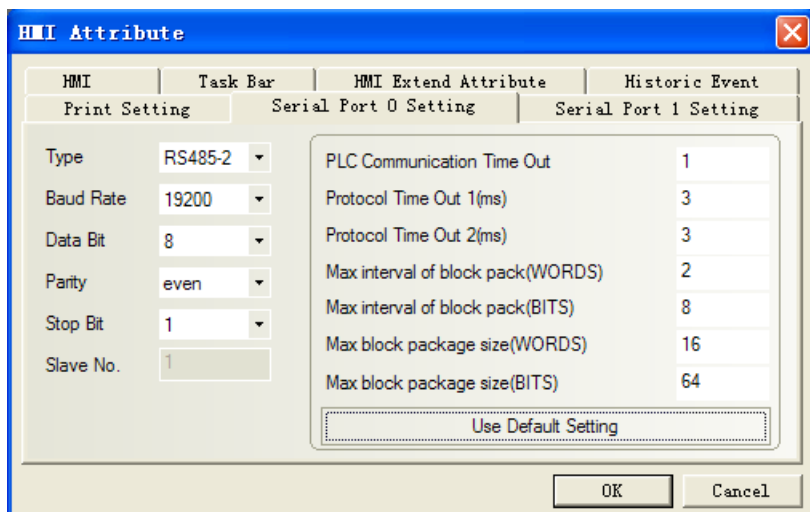

NOTE: Communication with port1, you must set the system configuration in the programming software first.

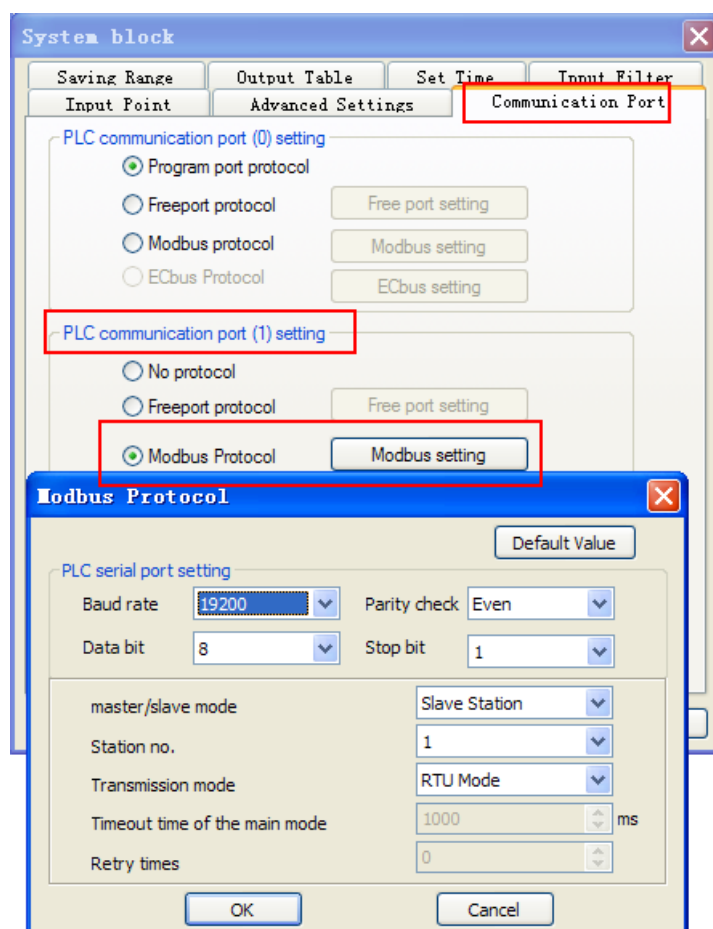

© Supported Device

Emerson EC10


Device	Bit Address	Word Address	Format	Notes
Input Relay	X000-377	-----	OOO	
Output Relay	Y000-377	-----	OOO	
Internal Relay	M0000-1999	-----	DDDD	
Special Relay	SM000-255	-----	DDD	
Step Relay	S000-991	-----	DDD	
Timer Relay	T000-255	-----	DDD	
Counter Relay	C000-255	-----	DDD	
Data register	-----	D0000-7999	DDDD	
Special Register	-----	SD000-255	DDD	
Index Register	-----	Z00-15	DD	
Timer	-----	T000-255	DDD	
Counter	-----	C000-199	DDD	
Counter(double word)	-----	C_Double200-255	DDD	
Data register(double word)	-----	D_Double0000-7999	DDDD	
Special Register(double word)	-----	SD_Double000-127	DDD	

Emerson EC20


Device	Bit Address	Word Address	Format	Notes
Input Relay	X000-377	-----	OOO	
Output Relay	Y000-377	-----	OOO	
Internal Relay	M0000-1999	-----	DDDD	
Special Relay	SM000-255	-----	DDD	
Step Relay	S000-991	-----	DDD	
Timer	T000-255	-----	DDD	
Counter	C000-255	-----	DDD	
Data register	-----	D0000-7999	DDDD	
Special Register	-----	SD000-255	DDD	
Index Register	-----	Z00-15	DD	
Timer	-----	T000-255	DDD	
Counter	-----	C000-199	DDD	
Counter(double word)	-----	C_Double200-255	DDD	
Data register(double word)	-----	D_Double0000-7999	DDDD	
Special Register(double word)	-----	SD_Double000-125	DDD	

© Cable Diagram

Emerson RS232 communication

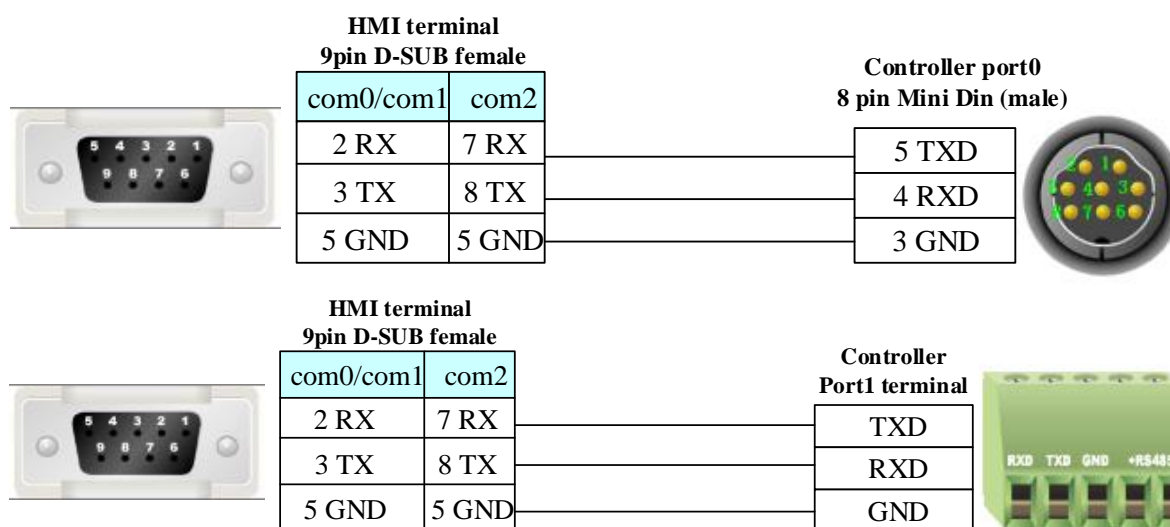

Emerson RS485 communication

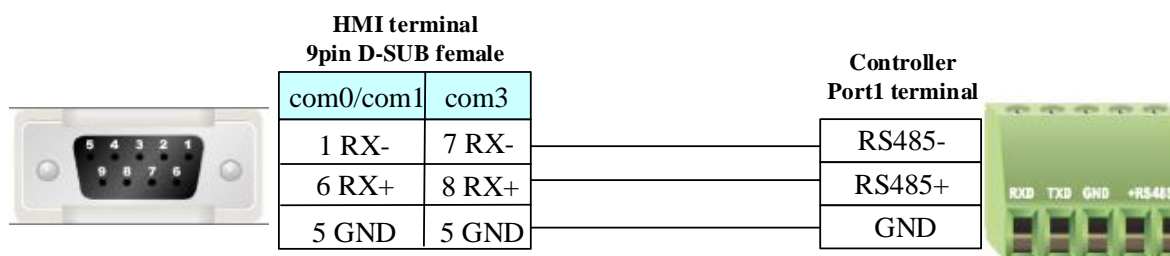

4.25 Epower


◎ Serial Communication


Series	CPU	Link Module	Driver
Epower	Epower	CPU Direct	EPower
			Epower Slave

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
Epower	Epower	CPU Direct	RS232	Setting	Your owner cable
				Setting	Your owner cable

◎ Communication Setting

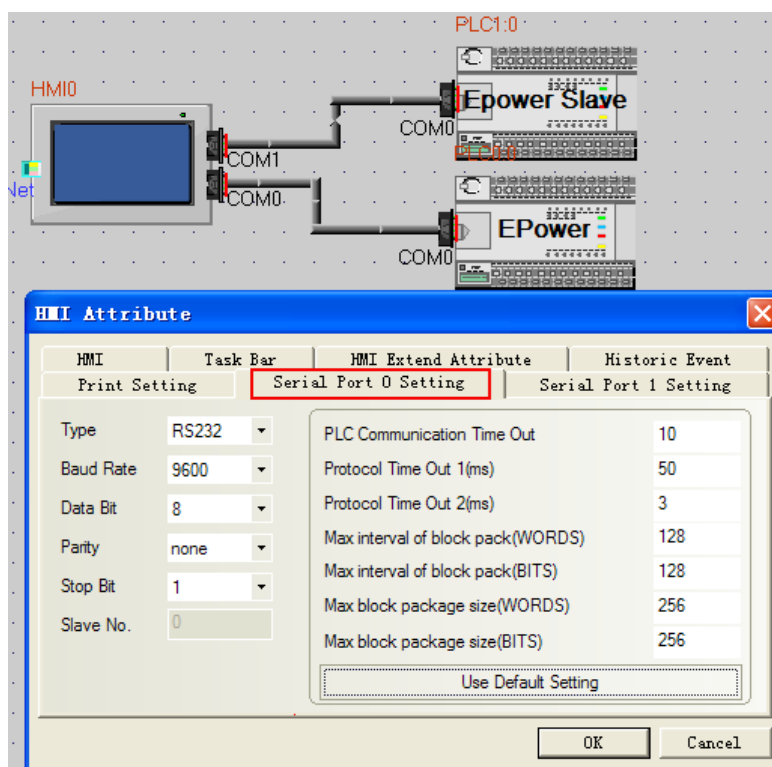

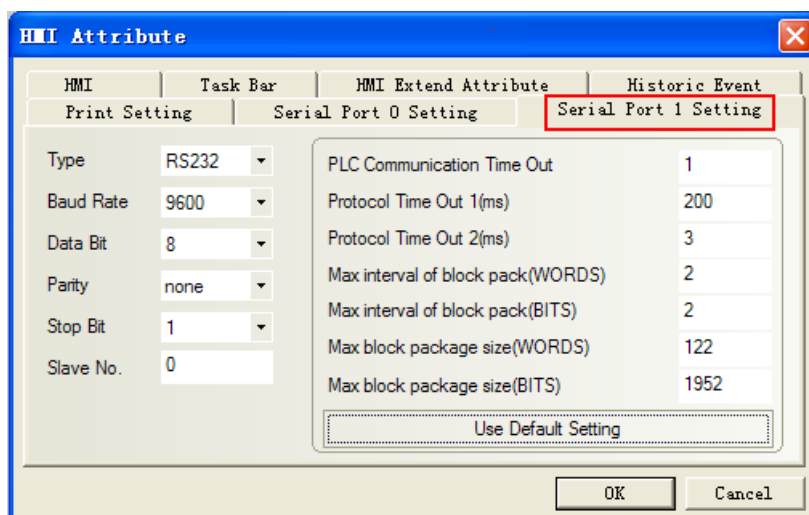

© Supported Device

Device	Bit Address	Word Address	Format	Notes
UPSSet	UPSSet1-6	-----	DDDDD	
UPSPanel	UPSPanel0-9	-----	DDDDD	
UPSDData	-----	UPSDData0-70	DDDD	
UPSDisp	-----	UPSDisp0	DDDDD	
UPSCCommand	-----	UPSCCommand0-52	DDDDD	
UPSText	-----	UPSText0-1	DDDDD	

Slave driver notes:


1. Transmit the device value to LW, LB by timer; refer to the addr table for details.
2. UPSCCommand must use with UPSSet、macro;
3. UPSDisp must use with UPStextr、UPSPanel、macro.

Epower HMI project notes:


1. The project must have UPSData0 device, otherwise the data accuracy will be affected; Suggest to put UPSData0 device in the public window.
2. LW.B indicates the bits of UPSData

© Cable Diagram

COM0 connect to ups communication board

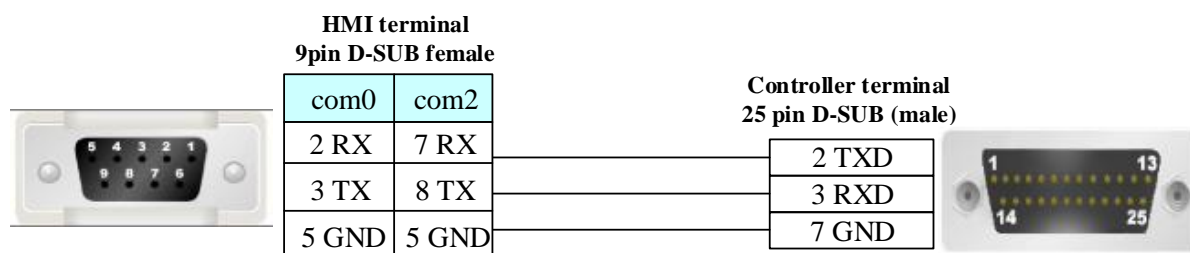

COM1 connect to King software or com debug tool

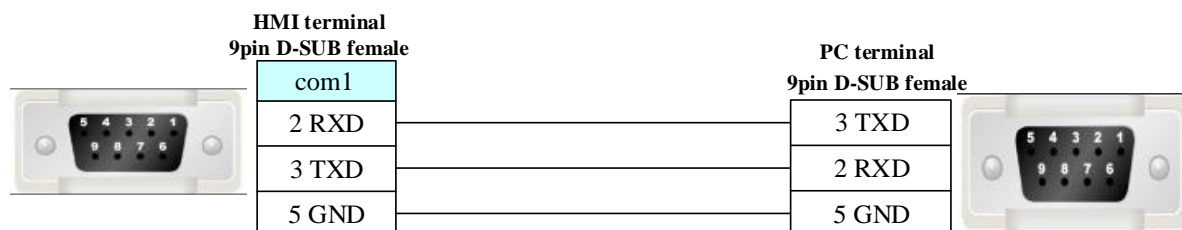

4.26 Fatek Corporation

◎ Serial Communication

c	CPU	Link Module		Driver
FBs	FBs-10MA/MC	RS232 on the CPU unit	Port 0	FATEK FB Modbus RTU
	FBs-14MA/MC	FBS-CB25-3	Port 1	
	FBs-20MA/MC		Port 2	
	FBs-24MA/MC			
	FBs-32MA/MC			
	FBs-40MA/MC			
	FBs-60MA/MC			
	FBs-20MN			
	FBs-32MN			
	FBs-44MN			
FBe/FBn	FBe-20MA	CPU unit	Port 0	
	FBe-28MA			
	FBe-40MA			
	FBe-20MC	CPU unit	Port 0	
	FBe-28MC		Port 1	
	FBe-40MC		Port 2	
	FBn-19MCT	FB-DTBR		
	FBn-26MCT	FB-DTBR-E		
FBn-36MCT				

◎ Network communication

Series	CPU	Link Module	Driver
FBs	FBs-20MAT	FBs-CBE-3	FATEK FB Ethernet(TCP)

◎ Serial System configuration

Driver	Series	CPU	Link Module	COMM Type	Parameter	Cable
FACON FB	FB MA FB MC	FBs-20MAT	RS232 on the CPU unit	RS232	Setting	Your owner cable
			FBS-CB25-3	RS232	Setting	Your owner cable
				RS485	Setting	Your owner cable
Modbus	FB MA	FBs-20MAT	FBS-CB25-3	RS232	Setting	Your owner cable

RTU	FB MC			RS485	Setting	Your owner cable
-----	-------	--	--	-------	-------------------------	----------------------------------

◎ Network System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
FBs	FBs-20MAT	FBs-CBE-3	ETH	Setting	Your owner cable

◎ Serial Communication Setting

FACON FB RS232 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS232'. The 'Baud Rate' is '9600', 'Data Bit' is '7', 'Parity' is 'even', 'Stop Bit' is '1', and 'Slave No.' is '0'. On the right, communication parameters are listed: 'PLC Communication Time Out' (3), 'Protocol Time Out 1(ms)' (3), 'Protocol Time Out 2(ms)' (3), 'Max interval of block pack(WORDS)' (16), 'Max interval of block pack(BITS)' (32), 'Max block package size(WORDS)' (64), and 'Max block package size(BITS)' (256). A 'Use Default Setting' button is at the bottom right of the parameter list. 'OK' and 'Cancel' buttons are at the bottom of the dialog.

FBS-CB25-3 module RS485 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 2 Setting' tab selected. The 'Type' is set to 'RS485-2'. The 'Baud Rate' is '9600', 'Data Bit' is '7', 'Parity' is 'even', 'Stop Bit' is '1', and 'Slave No.' is '0'. A note below the 'Slave No.' field states 'It takes effect when HMI as slave'. The right side of the dialog shows the same communication parameters as the previous screenshot. 'OK' and 'Cancel' buttons are at the bottom of the dialog.

FBS-CB25-3 module communication

Modbus RTU RS232 communication

The 'HMI Attribute' dialog box is shown with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS232C'. The 'Baud Rate' is '9600', 'Data Bit' is '8', 'Parity' is 'even', 'Stop Bit' is '1', and 'Slave No.' is '0'. The 'PLC Communication Time Out' is '3'. The 'Protocol Time Out 1(ms)' is '3', 'Protocol Time Out 2(ms)' is '3', 'Max interval of block pack(WORDS)' is '2', 'Max interval of block pack(BITS)' is '8', 'Max block package size(WORDS)' is '16', and 'Max block package size(BITS)' is '64'. A 'Use Default Setting' button is present. The 'OK' and 'Cancel' buttons are at the bottom right.

Serial Port 0 Setting	Serial Port 1 Setting
Type: RS232C	PLC Communication Time Out: 3
Baud Rate: 9600	Protocol Time Out 1(ms): 3
Data Bit: 8	Protocol Time Out 2(ms): 3
Parity: even	Max interval of block pack(WORDS): 2
Stop Bit: 1	Max interval of block pack(BITS): 8
Slave No.: 0	Max block package size(WORDS): 16
	Max block package size(BITS): 64

Modbus RTU RS485 communication


The 'HMI Attribute' dialog box is shown with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS485-2'. The 'Baud Rate' is '9600', 'Data Bit' is '8', 'Parity' is 'even', 'Stop Bit' is '1', and 'Slave No.' is '0'. The 'PLC Communication Time Out' is '3'. The 'Protocol Time Out 1(ms)' is '3', 'Protocol Time Out 2(ms)' is '3', 'Max interval of block pack(WORDS)' is '16', 'Max interval of block pack(BITS)' is '32', 'Max block package size(WORDS)' is '64', and 'Max block package size(BITS)' is '256'. A 'Use Default Setting' button is present. The 'OK' and 'Cancel' buttons are at the bottom right.

Serial Port 0 Setting	Serial Port 1 Setting
Type: RS485-2	PLC Communication Time Out: 3
Baud Rate: 9600	Protocol Time Out 1(ms): 3
Data Bit: 8	Protocol Time Out 2(ms): 3
Parity: even	Max interval of block pack(WORDS): 16
Stop Bit: 1	Max interval of block pack(BITS): 32
Slave No.: 0	Max block package size(WORDS): 64
	Max block package size(BITS): 256

Note: The detailed communication configuration must be the same as the PLC's port setting.


© Network Communication Setting

HMI Setting

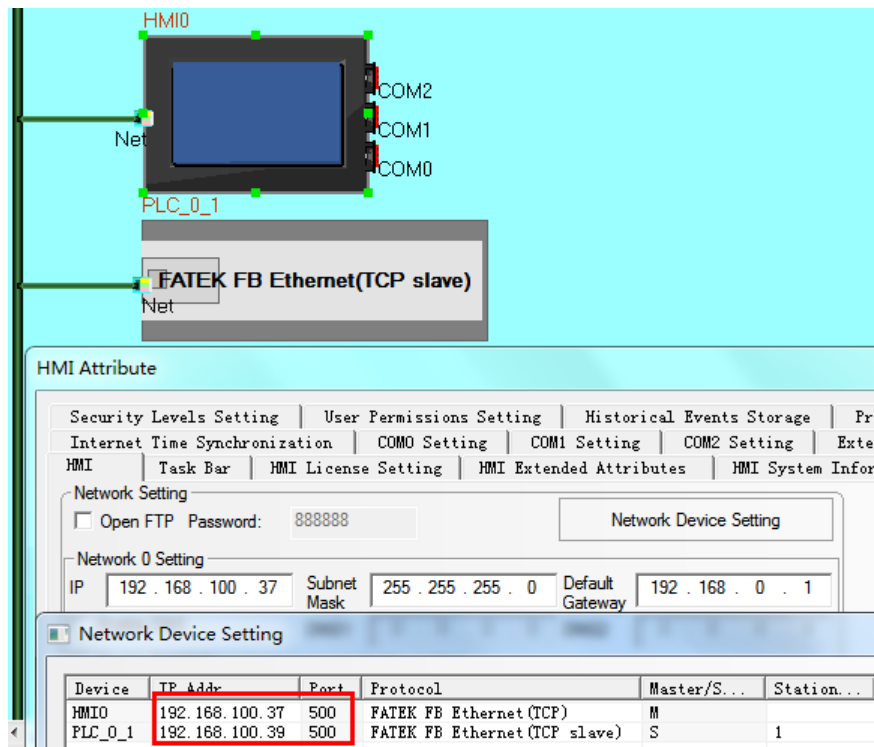


PLC Setting

1. In ether cfg software, click [scan] to search the PLC information.

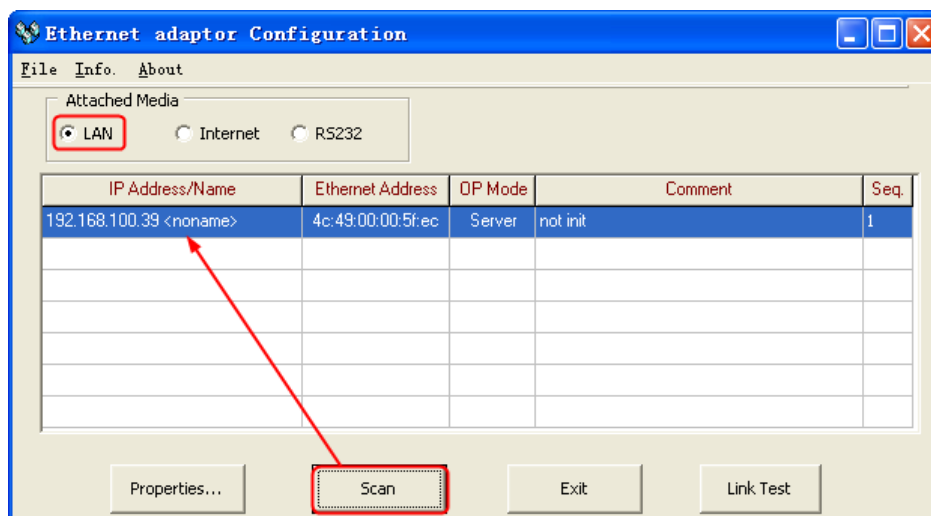

2. Click [Properties] to change the IP and ports.

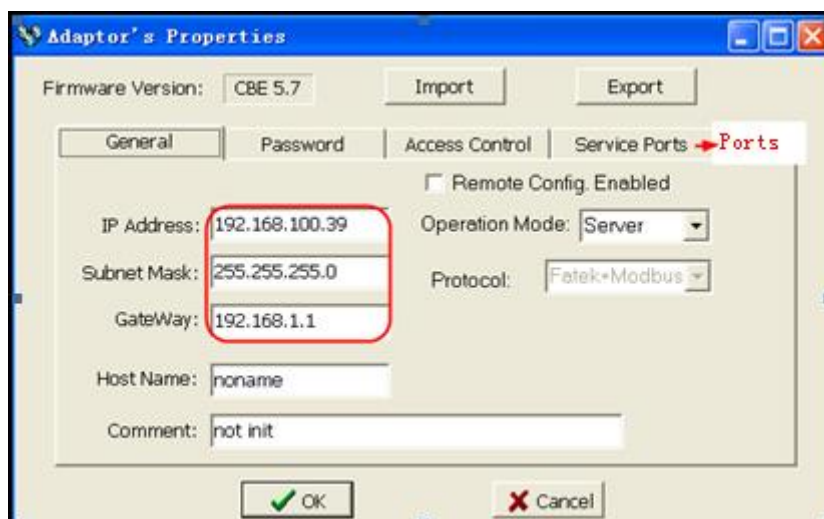

3、 Click [ok] to save the settings.

◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
Input	X0-9999	-----	DDDD	
Output	Y0-9999	-----	DDDD	
Internal Relay	M0-9999	-----	DDDD	
Step Relay	S0-9999	-----	DDDD	
Timer Relay	T0-9999	-----	DDDD	
Counter Relay	C0-9999	-----	DDDD	
Counter Relay (FBe MODE)	C_FBe 0-9999	-----	DDDD	
Timer Relay (FBe MODE)	T_FBe 0-9999	-----	DDDD	
	D_Bit 0.0-9999.15	-----	DDDD.D D	
	R_Bit0.0-9999.15	-----	DDDD.D D	
PLC MODE	PLC_MODE 0-1	-----	D	PLC
Data Register	-----	R-L 0-3839	DDDD	
Data Register	-----	R-H 3840-9999	DDDD	
Data Register	-----	D0-9999	DDDD	
Timer	-----	T0-9999	DDDD	
Counter	-----	C0-199	DDD	
High-speed Counter	-----	HC200-255	DDD	
File Register	-----	F 0-8191	DDDD	
Input Register	-----	WX 0-240	DDD	
Output Register	-----	WY 0-240	DDD	

Interrupt Register	-----	WM 0-1888	DDDD	
Step Register	-----	WS 0-984	DDDD	


Note: R-L register corresponds to the “R” register of the PLC, the address range 0~3839;

R-H register corresponds to the “R” register of the PLC, the address range 3840~9999;

HC register corresponds to the “C(32)” register of the PLC, e.g.: HRC200==C200


◎ Cable Diagram

FB RS232 communication cable

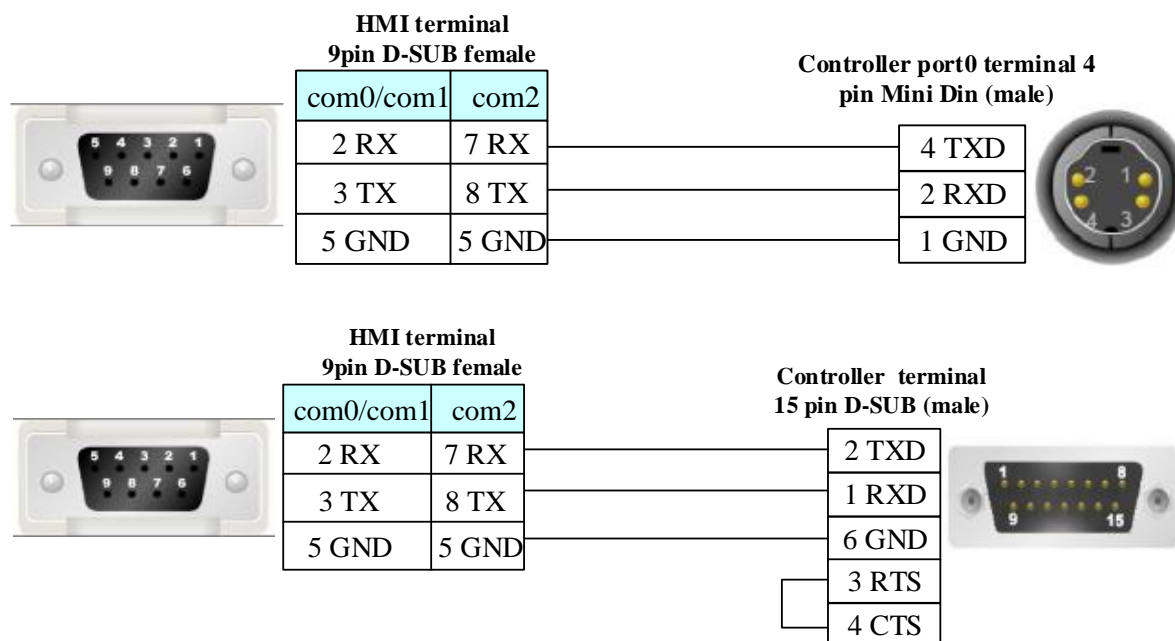


FBS-CB25-3 module communication

RS232 communication cable

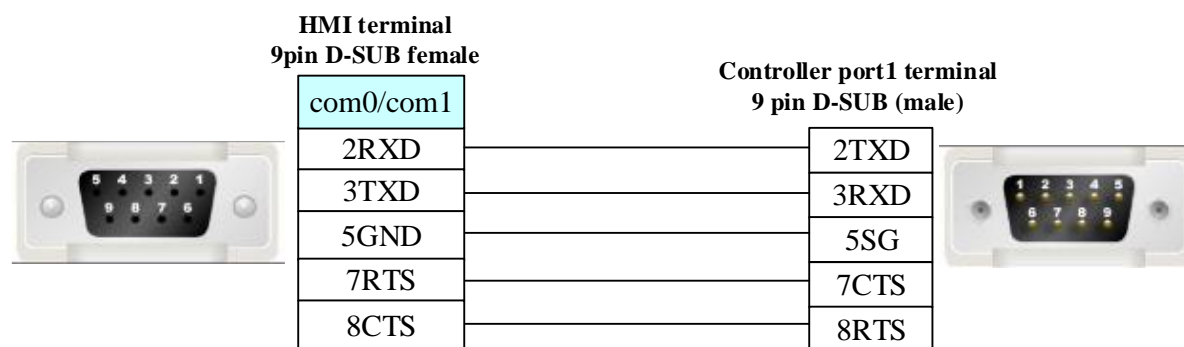

RS485 communication cable

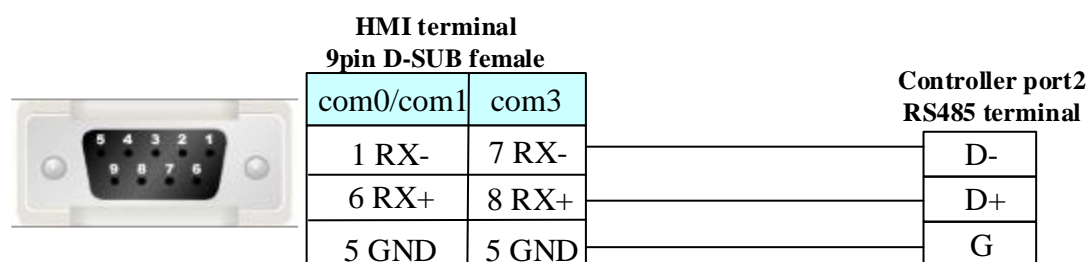

Ethernet cable

Connecting PC and HMI use cross-ruling; communicating with hub or switch use cross-over cable or cross-ruling.

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.27 Fuji

◎ Serial Communication


Series	CPU	Link Module	Driver
SPB	NW0P20T-31	RS485 interface on the CPU	Fuji MICREX-SX Series
NB	NB2U24R-11	RS485 interface on the CPU	
SPF	NA0P14T-34C	RS232 interface on the CPU	Fuji SPF

◎ System configuration

Series	CPU	Link Module	Ethernet Type	Parameter	Cable
SPB	NW0P20T-31	RS485 interface on the CPU	RS422	Setting	Your owner cable
NB	NB2U24R-11	RS485 interface on the CPU	RS422		
SPF	NA0P14T-34	RS232 interface on the CPU	RS232	Setting	Your owner cable

◎ Communication Setting

Fuji MICREX-SX Series

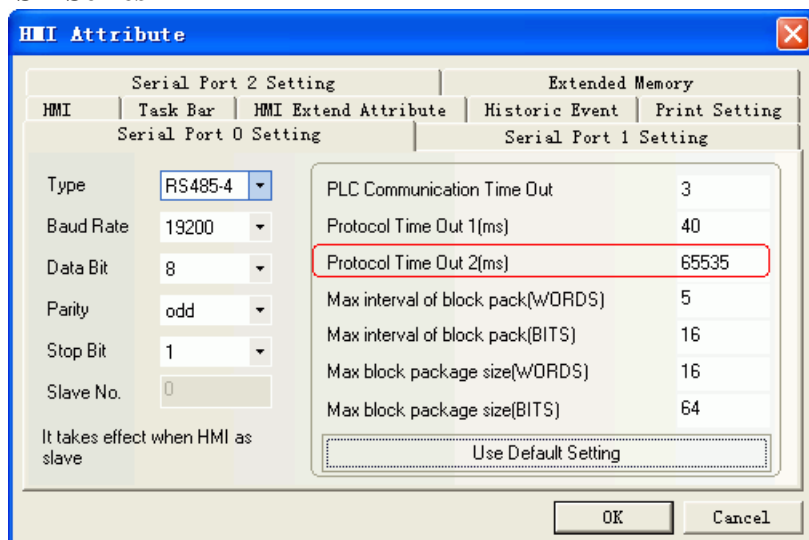

NOTE: When PLC is protected by password, protocol time out 2 is 65535, and the register is read only. If you want to make the register writable, you must let the protocol time out 2 equal the PLC password.


Example: PLC password is 1234, and then you make the protocol time out 2 to be 1234.

PLC password is 0010, and then you make the protocol time out 2 to be 10.

Fuji SPF

HMI Setting

Default: 38400, 8, even, 1 ; station number: 0

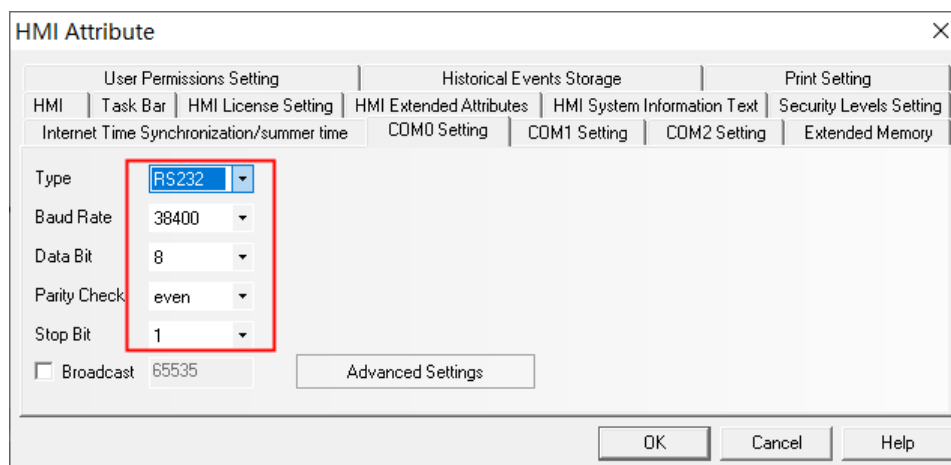

◎ Supported Device

SPB

Device	Bit Address	Word Address	Format	Notes
Data register	D 0~6FF.F	-----	HHH.H	
Special relay	M_special 0~1FF	-----	HHH	
Counter contact	C 0~FF	-----	HH	
Timer contact	T 0~1FF	-----	HHH	
Keep relay	L 0~FFF	-----	HHH	
Auxiliary relay	M 0~FFF	-----	HHH	
Output relay	Y 0~3FF	-----	HHH	
Input relay	X 0~3FF	-----	HHH	
Timer contact	-----	TW 0~3FF	HHH	
Counter contac	-----	CW 0~FF	HH	
Data register	-----	DW 0~6FF	HHH	
Special register	-----	DW_special 0~1FF	HHH	
Link register(0 slot)	-----	W0 0~7FF	HH	
Link register(1 slot)	-----	W1 0~7FF	HHH	
Link register(2 slot)	-----	W2 0~7FF	HHH	
Link register(3 slot)	-----	W3 0~7FF	HHH	
Link register(4 slot)	-----	W4 0~7FF	HHH	
Link register(5 slot)	-----	W5 0~7FF	HHH	
Link register(6 slot)	-----	W6 0~7FF	HHH	
Link register(7 slot)	-----	W7 0~7FF	HHH	

Note: M_special address: 8000 in the PLC corresponds to 0 in the HMI.

DW_special address: 8000 in the PLC corresponds to 0 in the HMI.

NB

Device	Bit Address	Word Address	Format	Notes
--------	-------------	--------------	--------	-------

Data register	D 0~3F.F	-----	HHH.H	
Special relay	M_special 0~1FF	-----	HHH	
Counter contact	C 0~1F	-----	HH	
Timer contact	T 0~1F	-----	HHH	
Keep relay	L 0~1FF	-----	HHH	
Auxiliary relay	M 0~3FF	-----	HHH	
Output relay	Y 0~3F	-----	HHH	
Input relay	X 0~3F	-----	HHH	Read only
Timer contact	-----	TW 0~1F	HHH	
Counter contact	-----	CW 0~1F	HH	
Data register	-----	DW 0~3F	HHH	
Special register	-----	DW_special 0~1FF	HHH	

SPF

Device	Bit Address	Word Address	Format	Notes
	MW1_bit 0~65535	-----	HHH.H	
	MW3_bit 0~65535	-----	HHH	
	MW10_bit 0~65535	-----	HH	
Output relay	QX0_bit 4-5	-----	HHH	
Input relay	IX0_bit 0-2	-----	HHH	
	-----	MW1 0~65535	DDDDD	
	-----	MW3 0~65535	DDDDD	
	-----	MW10 0~65535	DDDDD	
Output register	-----	QX0 4-5	D	
Output register		IX0 0-2	D	



Monitor in the plc programmer, you should some variables

Note:

名称	类型	用法	描述	地址	初值	保持	TB	隐藏
Global Variables								
a	BOOL	VAR_GL...		%MX1.100.0		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
b	BOOL	VAR_GL...		%MX1.100.15		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
MW1_127	INT	VAR_GL...		%MW1.127		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
MW3_255	INT	VAR_GL...		%MW3.255		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
MW10_511	INT	VAR_GL...		%MW10.511		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
QX0_4	BOOL	VAR_GL...		%QX0.4.0		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
IX0_0	BOOL	VAR_GL...		%IX0.0.0		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
IX0_1	BOOL	VAR_GL...		%IX0.1.0		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

© Cable Diagram

Fuji MICREX-SX Series Protocol:

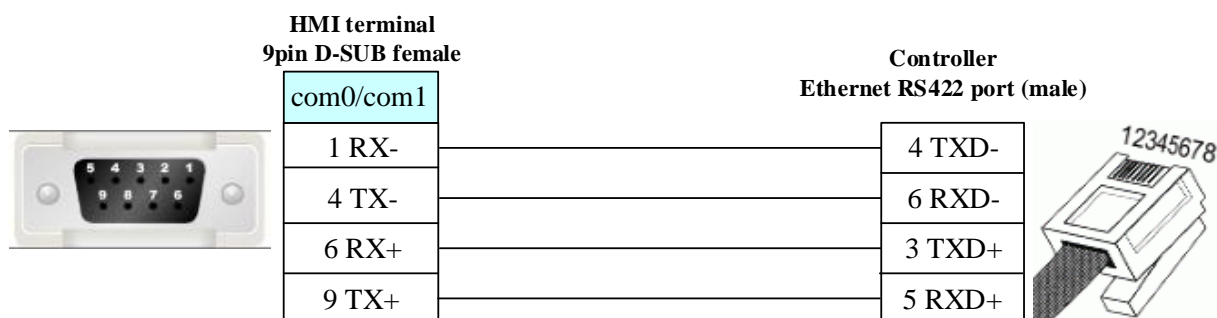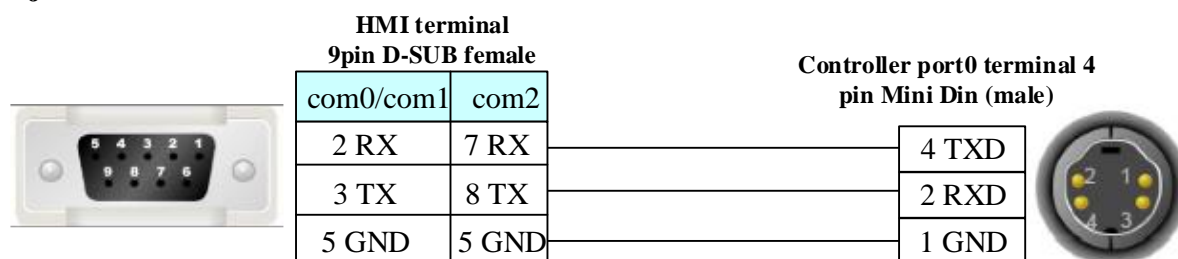**Fuji SPF Protocol:****4.28 GE Fanuc Automation Inc.****◎ Serial Communication**

Series	CPU	Link Module	Driver
GE Fanuc Series 90-30	IC693CPU311/313	Serial Connector on Power Supply	GE Fanuc Series SNP
	IC693CPU321/323		
	IC693CPU331		
	IC693CPU340/341		
	IC693CPU350/351/352		
	IC693CPU360/363/364		
	IC693CPU374		
	IC693CSE311		
	IC693CSE313		
	IC693CSE323		
	IC693CSE331		
	IC693CSE340		
IC693CPU311/313 IC693CPU321/323 IC693CPU331 IC693CPU340/341 IC693CPU350 IC693CPU360/364	Connector on Power Supply	GE SNP-X	
	IC693CMM311		
	IC693CPU351 IC693CPU352 IC693CPU363		Connector on Power Supply
			Port1 on CPU unit
			Port2 on CPU unit

		IC693CMM311	
	IC693CPU374	Port on Power Supply	
		IC693CMM311	
VersaMax Series	CPU001/002/005	RS232 on port1	
	CPUE05	RS485 on port2	
VersaMax Micro & Nano Series	IC200UAL004/005/006	RS232 on port1	
	IC200UDD110/120/212		
	IC200UDR005/006/010	RS485 on port2	
	IC200UAA007		
	IC200UAR028		
PACSystems RX3i	IC695CPE310	RS232 on port1	GE Fanuc Series SNP
	IC695CPE320	RS485 on port2	

◎ Network communication

Series	CPU	Link Module	Driver
Series90-30	CPU340/341 CPU350/351/352 CPU360/363 CSE311 CSE313 CSE323 CSE331 CSE340	IC693CMM321	GE IP Ethernet (TCP Slave)
	CPU364 CPU374	Ethernet interface on CPU	
VersMax Micro&Nano	IC200UDD020 IC200UDD040 IC200UDD064 IC200UDD120 IC200UDD164 IC200UDD220 IC200UDD240 IC200UDR020 IC200UDR040 IC200UDR064 IC200UDR120 IC200UDR140 IC200UDR164 IC200UDR440	IC200UEM001	
VerMax	CPUE05	Ethernet interface on CPU	

Series 90-30	CPU311/313 CPU323 CPU331 CPU340/341 CPU350/351/352 CPU360/363 CSE311 CSE313 CSE323 CSE331 CSE340	IC693CMM321	Modbus TCP
	CPU364 CPU374	Ethernet interface on CPU	
Series 90-70	CPU731 CPU771 CPU772 CPU780 CPU781 CPU782 CPU788 CPU789 CPM790 CPM915 CPM925 CSE784 CSE924 CSE925 CPX772 CPX782 CPX928 CPX935 CGR772 CGR935	IC697CMM742 (Type2)	
PACSystem RX7i	CPE010 CPE020 CRE020	Ethernet interface on CPU	
PACSystem RX3i	IC695CPE 302 IC695CPE305 IC695CPE310	IC695ETM001	GE RX3i Ethernet(TCP Slave)

	IC695CPE 330		
--	--------------	--	--

◎ Serial System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
GE Fanuc Series 90-30	IC693CPU374	RS485 on the CPU unit	RS232	Setting	Your owner cable
			RS422	Setting	Your owner cable
		IC693CMM311	RS232	Setting	Your owner cable
			RS422	Setting	Your owner cable
VersaMax Series	CPU001/002/005 CPUE05	RS232 on port1	RS232	Setting	Your owner cable
		RS485 on port2	RS422	Setting	Your owner cable
VersaMax Micro & Nano Series	IC200UAL004/005/006 IC200UDD110/120/212 IC200UDR005/006/010 IC200UAA007 IC200UAR028	RS232 on port1	RS232	Setting	Your owner cable
		RS485 on port2	RS422	Setting	Your owner cable
PACSystems RX3i	IC695CPE310 IC695CPE320	RS232 on port1	RS232	Setting	Your owner cable
		RS485 on port2	RS422	Setting	Your owner cable

◎ Network System configuration

Series	Connect Type	Parameter	Cable
Series 90-30/ Versamax/ Versamax Mico&Nano	Ethernet (GE IP Ethernet(TCP Slave))	Setting	Your owner cable
PACSystem RX3i	Ethernet (GE RX3i Ethernet(TCP Slave))	Setting	
Series 90-30/ PACSystem RX3i/ Versamax Mico&Nano	Ethernet (Modbus TCP Slave)	Setting	

◎ Serial Communication Setting

GE Fanuc Series SNP RS232 Communication

The HMI Attribute dialog box shows the following settings for RS232 communication:

Category	Setting	Value
Serial Port 0 Setting	Type	RS232
	Baud Rate	19200
	Data Bit	8
	Parity	odd
	Stop Bit	1
	Slave No.	1
Serial Port 1 Setting	PLC Communication Time Out	1
	Protocol Time Out 1(ms)	1
	Protocol Time Out 2(ms)	0
	Max interval of block pack(WORDS)	2
	Max interval of block pack(BITS)	2
	Max block package size(WORDS)	16
	Max block package size(BITS)	16

Buttons: OK, Cancel, Use Default Setting

GE Fanuc Series SNP RS422 Communication

The HMI Attribute dialog box shows the following settings for RS485-4 communication:

Category	Setting	Value
Serial Port 0 Setting	Type	RS485-4
	Baud Rate	19200
	Data Bit	8
	Parity	odd
	Stop Bit	1
	Slave No.	1
Serial Port 1 Setting	PLC Communication Time Out	1
	Protocol Time Out 1(ms)	1
	Protocol Time Out 2(ms)	0
	Max interval of block pack(WORDS)	2
	Max interval of block pack(BITS)	2
	Max block package size(WORDS)	16
	Max block package size(BITS)	16

Buttons: OK, Cancel, Use Default Setting

It takes effect when HMI as slave


GE SNP-X Protocol RS232 Communication

The HMI Attribute dialog box shows the following settings for RS232 communication:

Category	Setting	Value
Serial Port 0 Setting	Type	RS232
	Baud Rate	19200
	Data Bit	8
	Parity	odd
	Stop Bit	1
	Slave No.	1
Serial Port 1 Setting	PLC Communication Time Out	3
	Protocol Time Out 1(ms)	1000
	Protocol Time Out 2(ms)	3
	Max interval of block pack(WORDS)	2
	Max interval of block pack(BITS)	2
	Max block package size(WORDS)	16
	Max block package size(BITS)	8

Buttons: OK, Cancel, Use Default Setting

GE SNP-X Protocol RS422 Communication

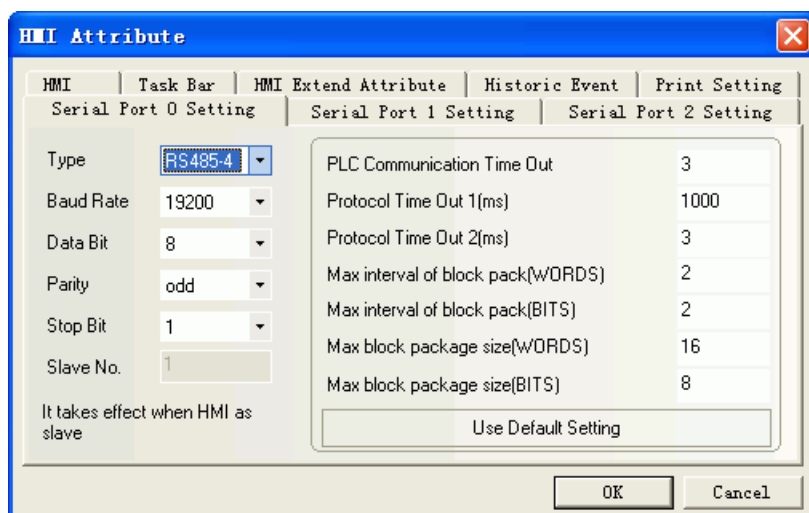

NOTE: Set matching communication parameter in the Programming software.

PLC Setting

CPU Settings	Scan	Port 1 (RS-232)	Port 2 (RS-485)	Memory	Wiring
Parameters	Values				
I/O Scan-Stop:	No				
Power Up Mode:	Last				
Logic / Configuration From:	RAM				
Registers:	RAM				
Passwords:	Enabled				
Checksum Words:	8				
Default Modem Turnaround Time (.01	0				
Default Idle Time (Sec):	10				
SNP ID:	1				
Switch Run / Stop:	Enabled				
Switch Memory Protect:	Disabled				
Diagnostics:	Enabled				
Fatal Fault Override:	Disabled				

Settings	Scan	Port 1 (RS-232)	Port 2 (RS-485)	Memory	Ether
Parameters	Values				
Port Mode:	SNP				
Port Type:	Slave				
Data Rate (bps):	19200				
Parity:	Odd				
Stop Bits:	1				
Timeout:	Long				
Turnaround Delay (mSec in 10 mSec)	0				
SNP ID:	1				

RX3i 设置:


Settings	Scan	Memory	Faults	Port 1	Port 2	Scan Sets	Power Consumption
Parameters	Values						
Port Mode	SNP Slave						
Data Rate	19.2k Baud						
Parity	Odd						
Stop bits	1						
Physical Interface	2-wire						
Turn Around Delay Time (ms)	0						
Timeout (s)	60						
SNP ID	1						
Specify stop mode	No						

Settings	Scan	Memory	Faults	Port 1	Port 2	Scan Sets	Power Consumption
Parameters	Values						
Port Mode	SNP Slave						
Data Rate	19.2k Baud						
Parity	Odd						
Stop bits	1						
Physical Interface	4-wire Transmitter On						
Turn Around Delay Time (ms)	0						
Timeout (s)	60						
SNP ID	1						
Specify stop mode	No						

◎ Network Communication Setting

MODBUS TCP Protocol:

HMI:

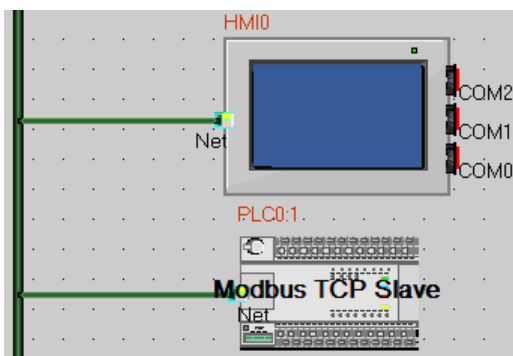

Network Config

Device	IP Addr	Port	Protocol	Master/...	State...	Virtual
HMI0	192.168.0.253	502	Modbus TCP	M	1	
PLC0	192.168.0.10	502	Modbus TCP Slave	S		

Buttons: Add, Delete, Delete All, Modify, OK

PLC:

fany22 - Proficy Machine Edition - [(0.2) IC693CMM321]

File Edit Search Project Target Variables Parameter Tools Window Help

Navigator

- fany22
 - Target1
 - Data Watch Lists
 - Hardware Configuration
 - Main Rack (IC693CHS391)
 - PWR (IC693PWR330)
 - Slot 1 (IC693CPU372)
 - Slot 2 (IC693CMM321)
 - Slot 3 0
 - Slot 4 0
 - Slot 5 0
 - Slot 6 0
 - Slot 7 0

Inspector

Slot

Catalog Number IC693CMM321

InfoViewer (0.1) IC693CPU372 (0.2) IC693CMM321 (0.0) IC693PWR330

Settings Station Manager Port Software Load Port Power Consumption


Parameters	Values
Configuration Mode:	TCP/IP
Status Address:	%I00081
Status Length:	80
IP Address:	192.168.0.10
Subnet Mask:	255.255.255.0
Gateway IP Address:	0.0.0.0
Name Server IP Address:	0.0.0.0
Converter Power Consumption (Watts)	0
AAUI Transceiver (Watts)	.5

Supplemental Info


Default IP Address (0.0.0.0) requires a network BOOTP server. [Backspace-Delete] key sequence will zero

GE IP Ethernet (TCP Slave) Protocol:

HMI:

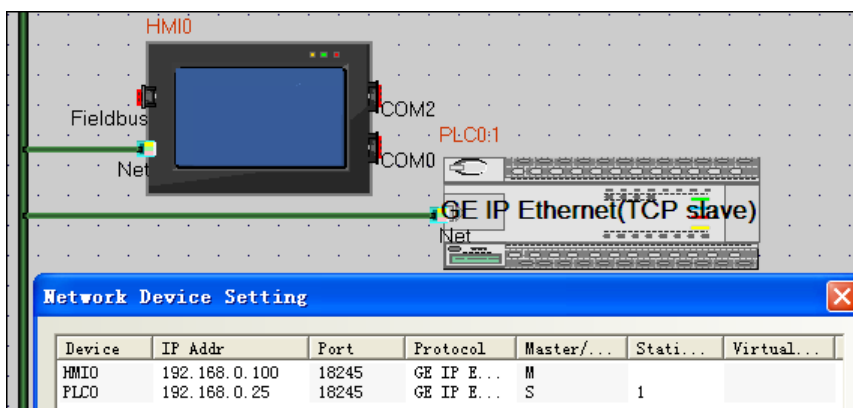


PLC:

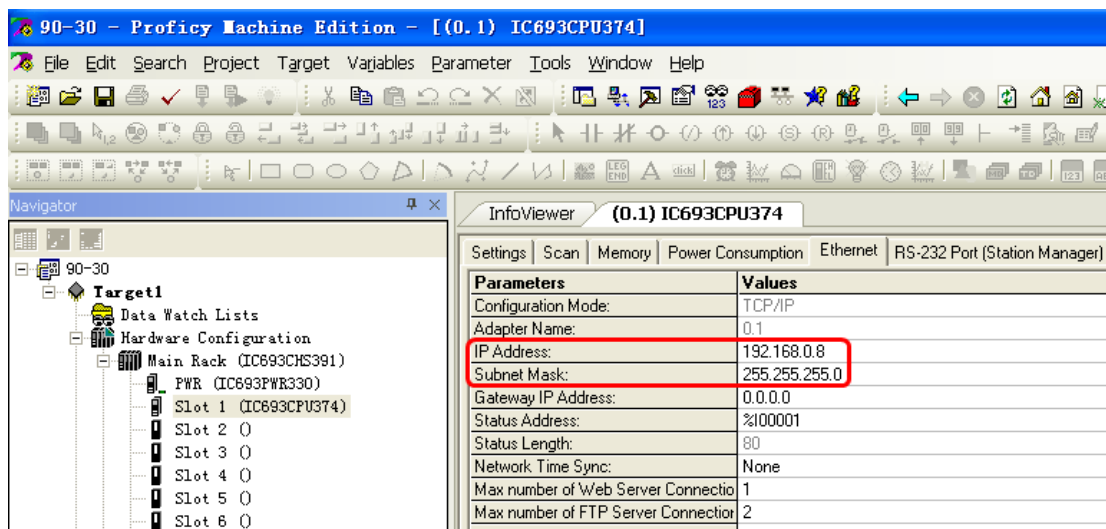


GE RX3i Ethernet (TCP Slave) Protocol:

HMI:

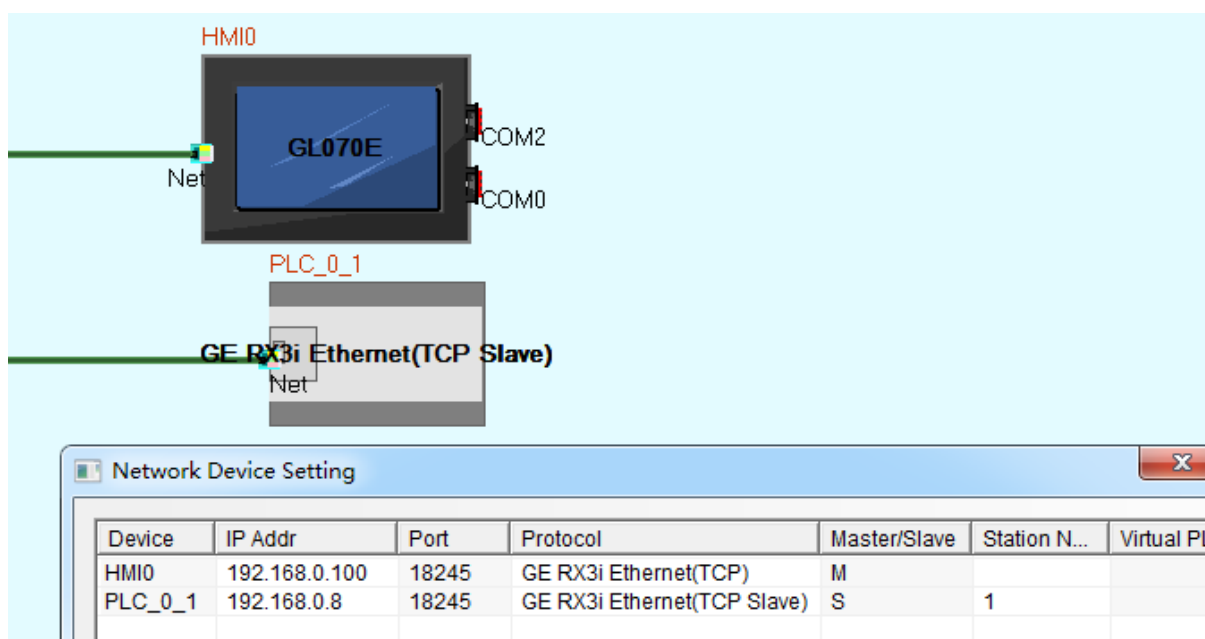

PLC:

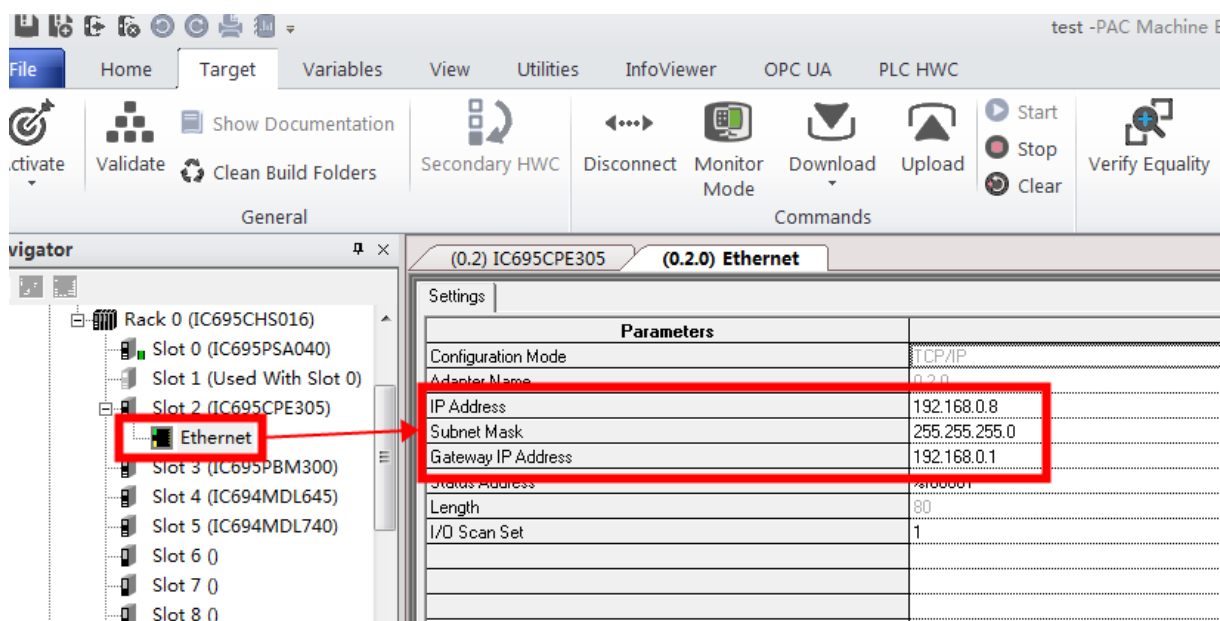

© Supported Device

GE Fanuc Series SNP

Device	Bit Address	Word Address	Format	Notes
System	SC 01-128	-----	DDD	
System	SB 01-128	-----	DDD	
System	SA 01-128	-----	DDD	
System	S 01-128	-----	DDD	
Temporary	T 001-256	-----	DDD	
Internal	M 0001-12288	-----	DDDDD	
Genius Global	G 0001-7680	-----	DDDD	
Output	Q 0001-12288	-----	DDDDD	
Input	I 0001-12288	-----	DDDD	
Analog Output	-----	AQ 001-32640	DDDD	
Analog Input	-----	AI 001-32640	DDDDD	
Register	-----	R 001-32640	DDDDD	

GE SNP-X

Device	Bit Address	Word Address	Format	Notes
System	SC 01-9999	-----	DDDD	
System	SB 01-9999	-----	DDDD	
System	SA 01-9999	-----	DDDD	
System	S 01-9999	-----	DDDD	
Temporary	T 001-9999	-----	DDDD	
Internal	M 0001-9999	-----	DDDD	
Genius Global	G 0001-9999	-----	DDDD	

Output	Q 0001-9999	-----	DDDD	
Input	I 001-9999	-----	DDDD	
Analog Output	-----	AQ 001-9999	DDDD	
Analog Input	-----	AI 0001-9999	DDDD	
Register	-----	R 0001-99999	DDDD	

Address correspondence between modbus




Faults	Port 1	Port 2	Scan Sets	Modbus TCP Address Map	Power Consumption	
Modbus Register	Start Address		End Address		PLC Memory Address	Length
0xxxx - Coil Table	1		32768		%Q00001	32768
1xxxx - Discrete Inputs Table	1		32768		%I00001	32768
3xxxx - Input Register Table	1		64		%AI00001	64
4xxxx - Holding Register Table	1		1024		%R00001	1024
6xxxx - Internal Tables	0		0		%W00001	0


GE IP Ethernet (TCP Slave)

Device	Bit Address	Word Address	Format	Note
System	S_B 0-127	----	DDD	
System	SA_B 0-127	----	DDD	
System	SB_B 0-127	----	DDD	
System	SC_B 0-127	----	DDD	
Input	I_B 0-32767	----	DDDDD	
Output	Q_B 0-32767	----	DDDDD	
Internal	M_B 0-32767	----	DDDDD	
Temporary	T_B 0-1023	----	DDDD	
Genius Global	G_B 0-7679	----	DDDD	
Register	R_B 0-32769.15	----	DDDDD.DD	
Analog Input	----	AI 0-2047	DDDD	
Analog Output	----	AQ 0-511	DDD	
Register	----	R 0-32639	DDDDD	
System	----	S 0-7	D	
System	----	SA 0-7	D	
System	----	SB 0-7	D	
System	----	SC 0-7	D	
Input	----	I 0-2047	DDDD	
Output	----	Q 0-2047	DDDD	
Internal	----	M 0-2047	DDDD	
Temporary	----	T 0-63	DD	
Genius Global	----	G 0-479	DDD	


NOTE:

In HMI, the first address is 0, but in PLC is 1

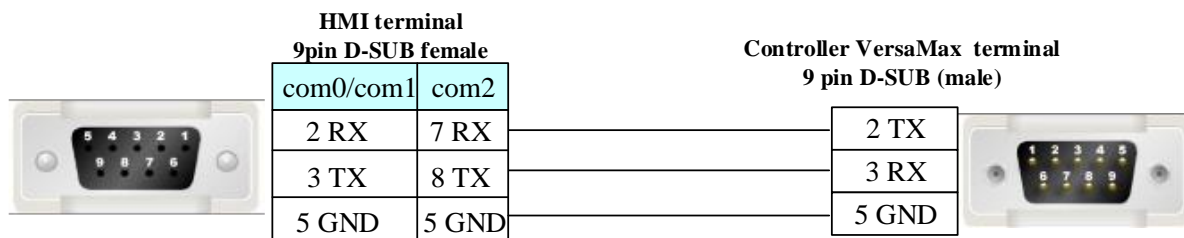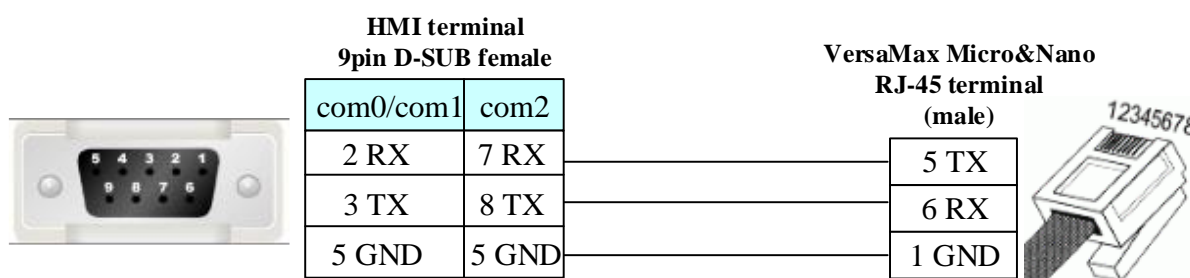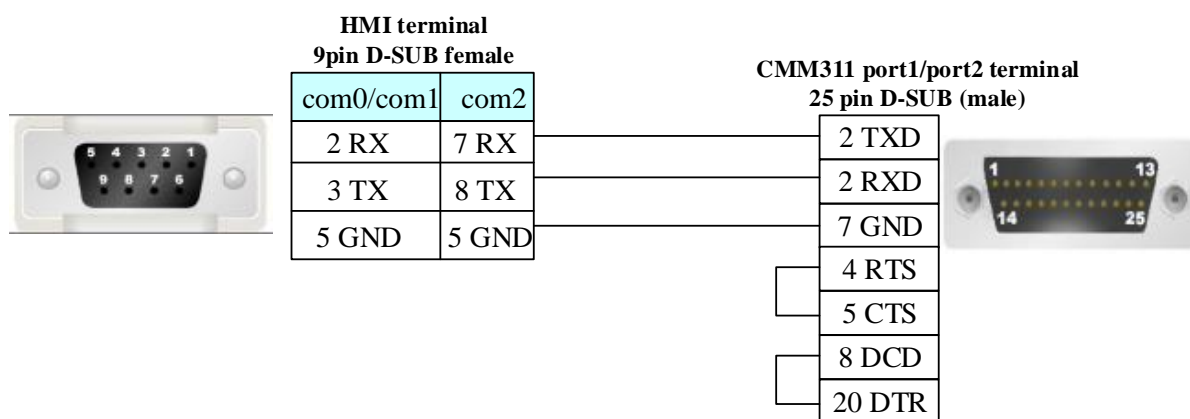◎ Cable Diagram**90-30/VersaMax/RXi RS232 communication****VersaMax Micro & Nano Series RS232 communication****CMM311 RS232 communication****CMM311 RS422 communication**

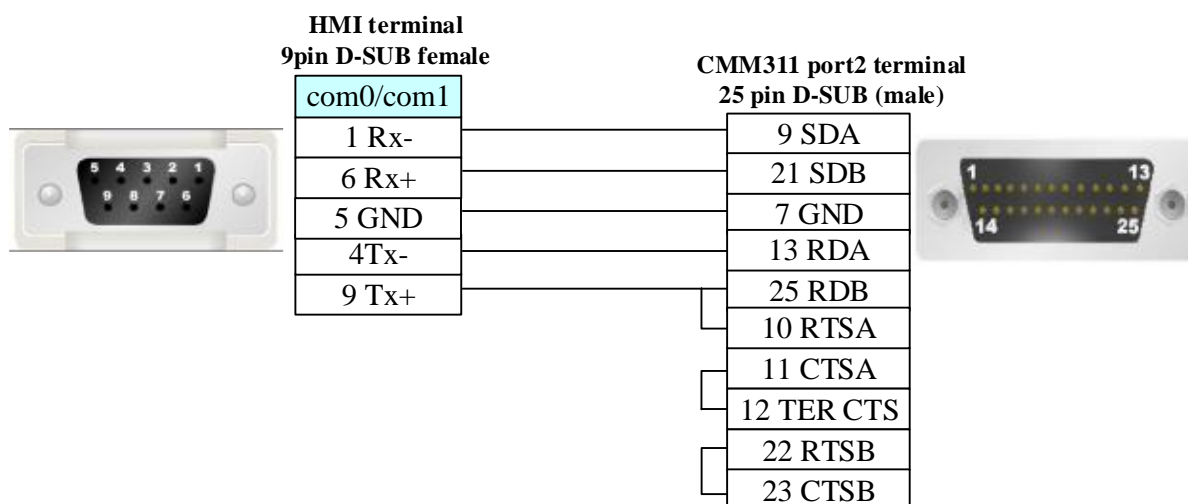

90-30/VersaMax RS422 communication

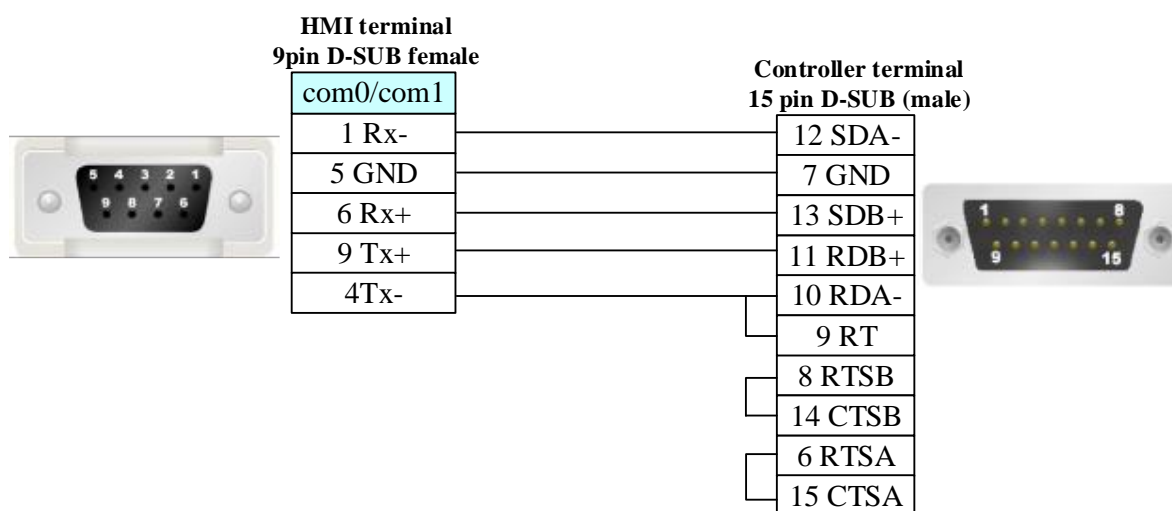

Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.29 HAIWELL

© Serial Communication

Series	CPU	Link Module	Driver
E/S	HW-S16ZA220R	RS232 on com1	Haiwell
		RS485 on com2	

© Network Communication (Direct online simulation disable)

Series	CPU	Link Module	Driver
C/T/H/N/S		Ethernet port on CPU unit	Haiwell Ethernet(TCP Slave)

◎ Serial System configuration

Series	CPU	Link Module	COM Type	Parameter	Cable
E/S	HW-S16ZA220R	RS232 on com1	RS232	Setting	Your owner cable
		RS485 on com2	RS485	Setting	Your owner cable

◎ Network System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
C/T/H/N/S		Ethernet port on CPU unit	ETH	Setting	Your owner cable

◎ Serial Communication Setting

Haiwell RS232 communication


The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS232'. The 'Baud Rate' is '9600', 'Data Bit' is '8', 'Parity' is 'odd', 'Stop Bit' is '1', and 'Slave No.' is '1'. On the right, the 'PLC Communication Time Out' is '3', 'Protocol Time Out 1(ms)' is '10', 'Protocol Time Out 2(ms)' is '3', 'Max interval of block pack(WORDS)' is '2', 'Max interval of block pack(BITS)' is '8', 'Max block package size(WORDS)' is '48', and 'Max block package size(BITS)' is '128'. There is a 'Use Default Setting' button and 'OK' and 'Cancel' buttons at the bottom.

Haiwell RS485 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS485-2'. The 'Baud Rate' is '9600', 'Data Bit' is '8', 'Parity' is 'odd', 'Stop Bit' is '1', and 'Slave No.' is '1'. On the right, the 'PLC Communication Time Out' is '3', 'Protocol Time Out 1(ms)' is '10', 'Protocol Time Out 2(ms)' is '3', 'Max interval of block pack(WORDS)' is '2', 'Max interval of block pack(BITS)' is '8', 'Max block package size(WORDS)' is '48', and 'Max block package size(BITS)' is '128'. There is a 'Use Default Setting' button and 'OK' and 'Cancel' buttons at the bottom.

◎ Network Communication Setting

HMI Setting

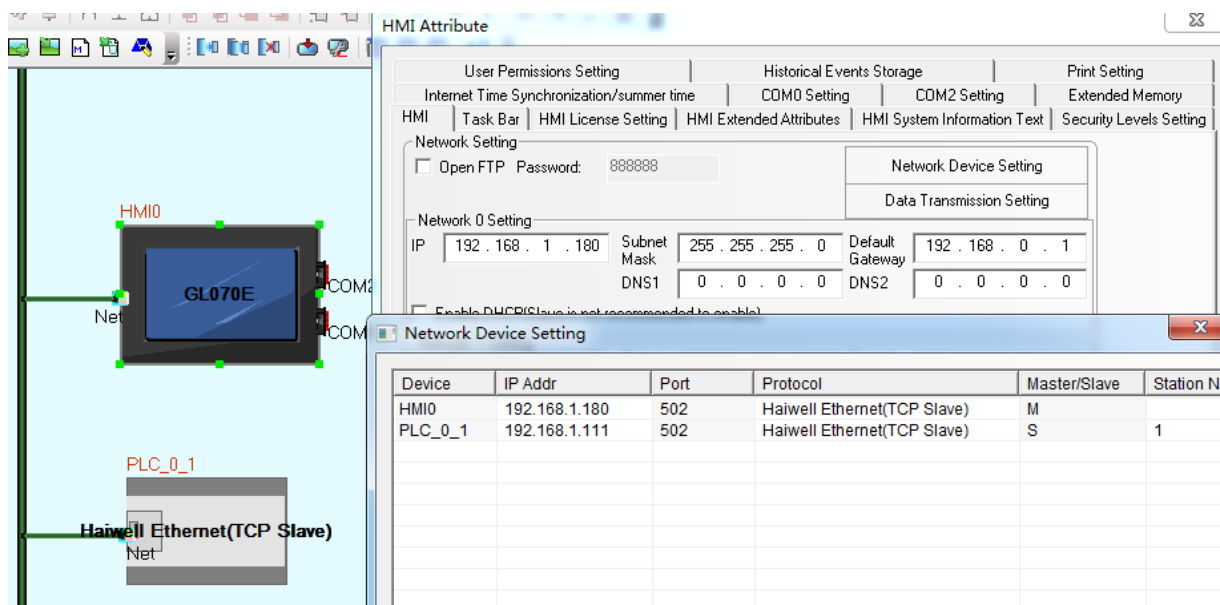

© Supported Device

HW-S16ZA220R

Device	Bit Address	Word Address	Format
Special memory Relay	SM0 – 99999	-----	DDD
Counter Relay	C0 – 99999	-----	DDD
Timer Relay	T0 – 99999	-----	DDD
Internal Relay	M0 – 99999	-----	DDDD
Switch Output	Y0 – 99999	-----	DDD
Switch Input	X0 – 99999	-----	DDD
System register	-----	SV0-9999	DDD
Counter(Current Value)	-----	CCV_16 0-9999	DDD
Counter(Current Value double word)	-----	CCV_32 48-79	DD
Timer(Current Value)	-----	TCV0-9999	DDD
Internal Register	-----	V0-9999	DDDD
Analog Output	-----	AQ0-9999	DD
Analog Input	-----	AI0-9999	DD


Ethernet port on CPU unit

Device	Bit Address	Word Address	Format
Special memory Relay	SM0 – 215	-----	DDD
Counter Relay	C0 – 255	-----	DDD
Timer Relay	T0 – 1023	-----	DDD
Internal Relay	M0 – 12287	-----	DDDD
Switch Output	Y0 – 1023	-----	DDD
Switch Input	X0 – 1023	-----	DDD
Step relay	S0 -- 2047	-----	DD


System register	-----	SV0-900	DDD
Counter(Current Value)	-----	CV0-255	DDD
Counter(Current Value double word)	-----	CCV_32 48-79	DD
Timer(Current Value)	-----	TV0-1023	DDD
Internal Register	-----	V0-14847	DDDD
Analog Output	-----	AQ0-255	DD
Analog Input	-----	AI0-255	DD
Extension module parameter	-----	CR0-255	DDDD

◎ Cable Diagram

Haiwell RS232 communication cable

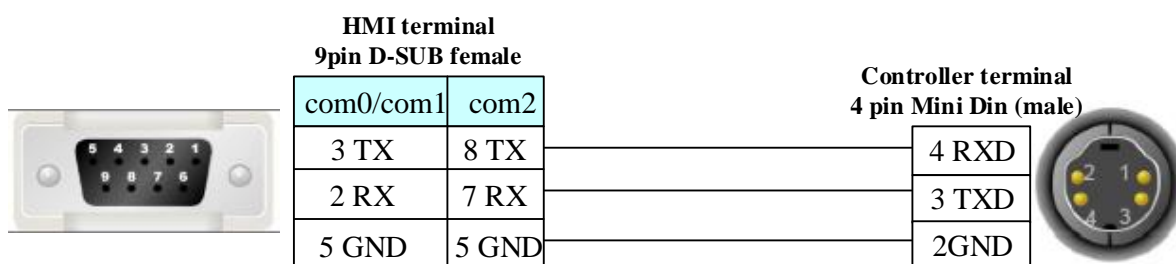

Haiwell RS485 communication cable

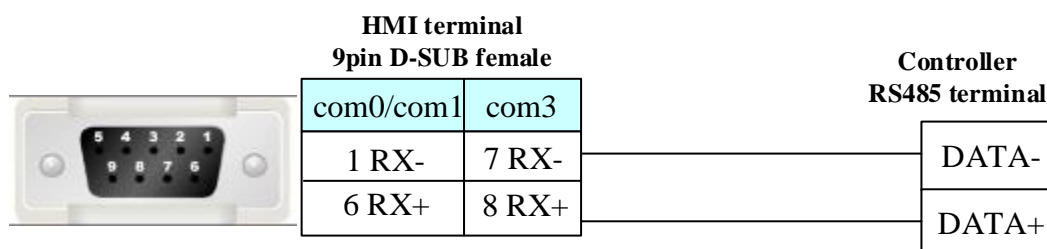

Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.30 HanG

◎ Serial Communication


Series	CPU	Link Module	Driver
HanG	DTS3338	RS485 on the CPU unit	HanG

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
--------	-----	-------------	-----------	-----------	-------

HanG	DTS3338	RS485 on the CPU unit	RS485	Setting	Your owner cable
------	---------	-----------------------	-------	-------------------------	----------------------------------

◎ Communication Setting

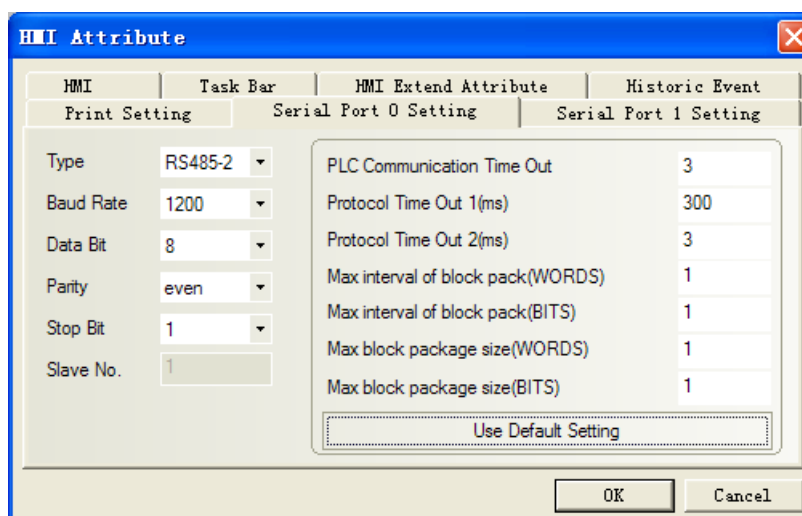


◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
Password	-----	APAS 0	H	
Meter Number	-----	ANUM C032	HHHH	
Init Meter	-----	ASTR 0	H	
Register value	-----	AMVD 9010	HHHH	

NOTE: Use text part to show meter number (ANUM). AMVD data type: signed integer

◎ Cable Diagram

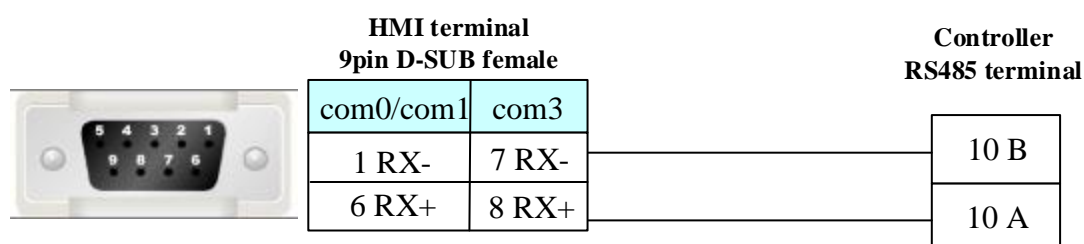

4.31 HCFA Corporation

◎ Serial Communication

Series	CPU	Link Module	Driver
HCFA	HCR8P-48MT-A	RS485 on the CPU unit	HCFA R Series RTU

◎ Ethernet Communication

Series	CPU	Link Module	Driver
--------	-----	-------------	--------

HCFA	HCR8P-48MT-A	Ethernet interface on CPU	HCFA R Series Ethernet(TCP Slave)
------	--------------	---------------------------	-----------------------------------

◎ Serial System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
HCFA	HCR8P-48MT-A HCR2-40AMT-A	RS232 on the CPU unit	RS232	Setting	Your owner cable


◎ Ethernet System Configuration

Series	CPU	Link Module	Connect Type	Parameter	Cable
HCFA	HCR8P-48MT-A	Ethernet interface on CPU	Ethernet	Setting	Your owner cable

◎ Serial Communication Setting

HMI Setting

HMI default communication parameter:115200, 7, none, 1; station: 1

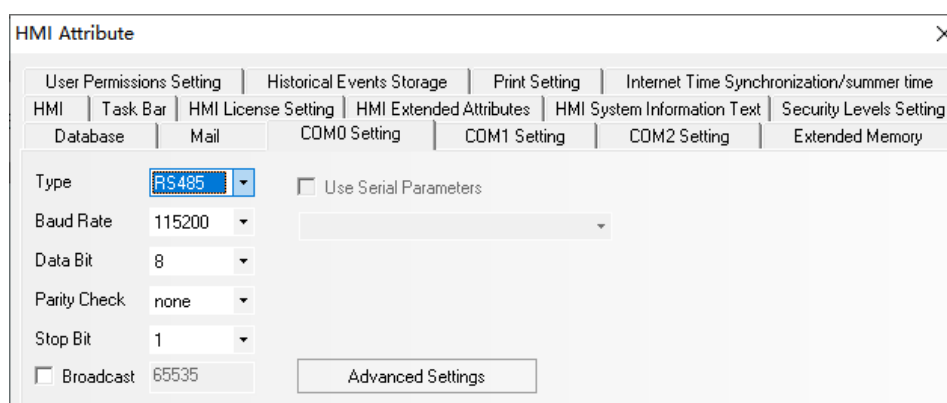


PLC Setting

The software version of HCP Works2 used in this manual is R8P V1.20.0024, and the PLC model is HCR8P-48MT-A.

1. Open HCP Works software, click "Tools" --> "Communication Settings", select the communication mode and then click "Communication Test". This step is used to check whether the communication is successful:
2. Click "Online", select "Read user program", the read program window appears, you can select the path name and user-defined project name, click "Execute". Complete the plc reading.
3. Double-click "com1" to enter the serial port Settings. In this window, you can view the communication protocol, communication mode, protocol Settings and station number.

◎ Ethernet Communication Setting

HMI Setting

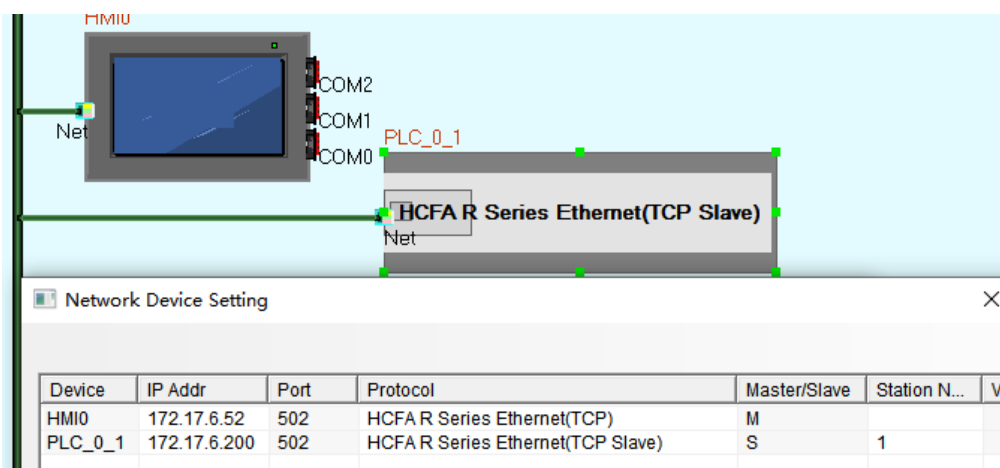

PLC Setting

The software version of HCP Works2 used in this manual is R8P V1.20.0024, and the PLC model is HCR8P-48MT-A.

1. Open HCP Works software, click "Tools" --> "Communication Settings", select the communication mode and then click "Communication Test". This step is used to check whether the communication is successful:
 2. Click "Online", select "Read user program", the read program window appears, you can select the path name and user-defined project name, click "Execute". Complete the plc reading.
 3. Tap Ethernet Port. On the Ethernet port Settings page, you can view the IP address parameters.
- On the object configuration page, view the communication type and port number


©Supported Device

Device	Bit Address	Word Address	Format	Notes
External input	X0-377	----	OOO	
External output	Y0-377	----	OOO	
Internal auxiliary	M0-7679	----	DDDD	
Special auxiliary	SM0-12287	----	DDDDD	
Status register	S0-4095	----	DDDD	
timer	T0-511	----	DDDD	
Counter counter	C0-255	----	DDD	
Link in relay	B0-255	----	DDD	
Link special relay	SB0-511	----	DDD	
Alarm device	F0-127	----	DDD	
Latch up relay	L0-7679	----	DDDD	
Cumulative timer	----	ST 0~31	DD	
Extra long counter	----	LC 0~63	DD	
Data data register	----	D 0~7999	DDDD	
File register	----	R 0~2047	DDDD	
Link register	----	W 0~7FF	HHH	
Link special register	----	SW 0~7FF	HHH	
Addressing register	----	Z 0~11	DD	

Ultra long variable address register	----	LZ 0~1	D	
Special register	----	SD 0~12287	DDDD	

◎ Cable Diagram

RS485 communication cable

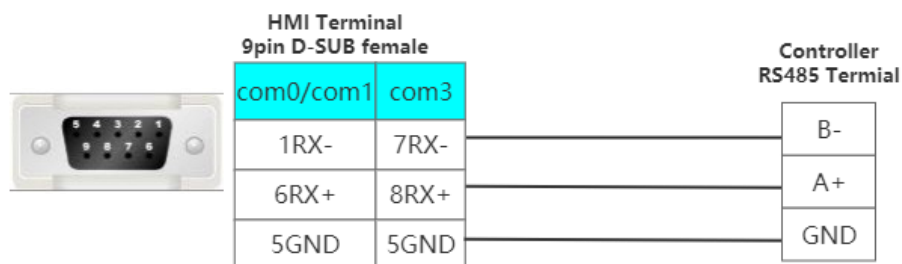

Ethernet Cable

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.31 Hitachi Inverter

◎ Serial Communication


Series	CPU	Link Module	Driver
Hitachi Inverter	SJ300	RS485	Hitachi SJ300

◎ System configuration

Series	CPU	Link Module	Parameter	Cable
Hitachi Inverter	SJ300	RS485	Setting	Your owner cable

◎ Communication Setting

HMI default communication parameter: 4800, 7, none, 1; station: 1

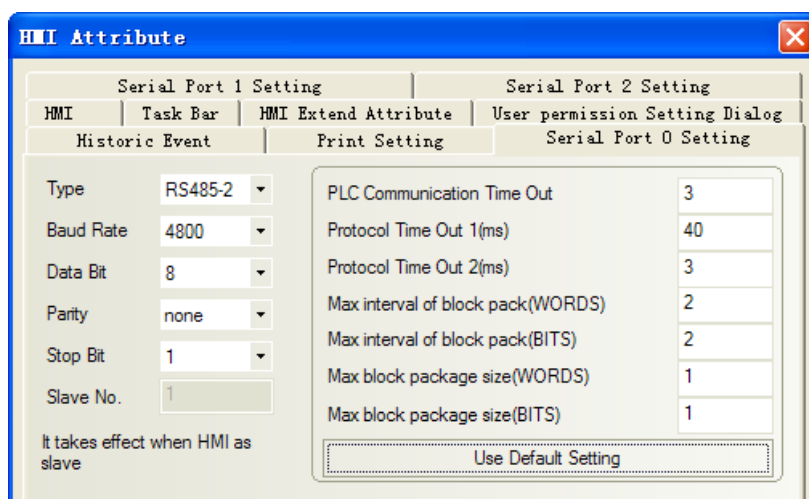

Inverter internal setting

Code	Name	description
A001	Frequency set	00(VR)/01(Terminal)/02(operator)/03(RS485)/04(OPT 1)/05(OPT 2)
A002	Run set	01(Terminal)/02(operator)/03(RS485) /04(OPT 1)/05(OPT 2)
C71	Baudrate	02(close loop detect)/ 03(2400bps)/ 04(4800bps)/ 05(9600bps)/ 06(19200bps)
C72	Station set	1~32
C73	Data bit	7(7 bit)/8(8 bit)
C74	Parity	00(none)/01(even)/02(odd)
C75	Stop bit	1(bit)/2(bit)

NOTE: A001, A002 must be set 03 (RS485) in order to communication with HMI.


◎Supported Device

Device	Bit Address	Word Address	Format	Notes
	-----	P Extend Func 0~50	DD	
	-----	H Extend Func 0~512	DDD	
	-----	F Func Date 0~65535	DDDDD	
	-----	C Func Date 0~65535	DDDD	
	-----	B Func Date 0~999	DDD	
	-----	A Func Date 0~999	DDD	
FWD/REW/STOP		(00)FWD/REW/STOP 0	D	Write only
FREQ SET	-----	(01)FREQ SET 0	D	Write only
TerminalPoint State		(02)TerminalPoint State 0~7	D	Write only
Surveillance Data	-----	(03)Surveillance Data 0~12	DD	Read only
Transducer State		(04)Transducer State 0~3	D	Read only
Trip Record	-----	(05)Trip Record 0~54	DD	Read only
Revert	-----	(08)Revert 0	D	Write only
Recount Motor Con	-----	(0B)Recount Motor Cons 0	D	Write only
Store EEPROM	-----	Store EEPROM 0	D	

NOTE: (02)Terminal Point State 0~7 use text part

◎ Cable Diagram

RS485 communication cable

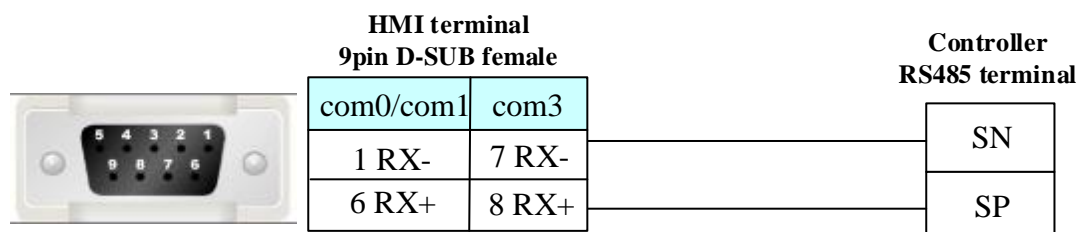

4.32 Hitachi IES Co., Ltd

◎ Serial Communication

Series	CPU	Link Module	Driver
H	H-20	port on CPU	Hitachi
	H-28		
	H-40		
	H-64		
	H-200(CPU-02H)		
	H-250(CPU21-02H)		
	H-252B(CPU22-02HB)		
	H-252C(CPU22-02HC)		
	H-300(CPU-03Ha)		
	H-302(CPU2-03H)		
	H-700(CPU-07Ha)		
	H-702(CPU2-07H)		
	H-2000(CPU-20Ha)		
	H-2002(CPU2-20H)		
	H-4010(CPU3-40H)		
	H-1002(CPU2-10H)		
H-300(CPU-03Ha)	COMM-H COMM-2H		
H-302(CPU2-03H)			
H-700(CPU-07Ha)			
H-702(CPU2-07H)			
H-2000(CPU-20Ha)			
H-2002(CPU2-20H)			
H-4010(CPU3-40H)			
H-1002(CPU2-10H)	COMM-2H		
EH-150	EH-150(EH-CPU104)	Serial port 1 on CPU	
	EH-150(EH-CPU104A)	Serial port 2 on CPU	

	EH-150(EH-CPU208) EH-150(EH-CPU208A) EH-150(EH-CPU308) EH-150(EH-CPU308A) EH-150(EH-CPU316) EH-150(EH-CPU316A) EH-150(EH-CPU448) EH-150(EH-CPU448A) EH-150(EH-CPU516) EH-150(EH-CPU548)		
	EH-150(EH-CPU516) EH-150(EH-CPU548)	Port 1 on EH-SIO Port 2 on EH-SIO	
MICRO-EH	MICRO-EH(EH-D10□□□) MICRO-EH(EH-A14□□□) MICRO-EH(EH-D14□□□) MICRO-EH(EH-A23□□□) MICRO-EH(EH-D23□□□) MICRO-EH(EH-A28□□□) MICRO-EH(EH-D28□□□)	Port 1 on CPU	
	MICRO-EH(EH-A23□□□) MICRO-EH(EH-D23□□□) MICRO-EH(EH-A28□□□) MICRO-EH(EH-D28□□□)	Port 2 on CPU	
	MICRO-EH(EH-A64□□□) MICRO-EH(EH-D64□□□) MICRO-EH(EH-A40□□□) MICRO-EH(EH-D40□□□) MICRO-EH(EH-A20□□□) MICRO-EH(EH-D20□□□)	Port on CPU	
		EH-OB232 EH-OB485	

◎ Ethernet Communication

Series	CPU	Link Module	Driver
S10V	LQP510-Z	LQP520-Z	HITACHI S10V Series Ethernet (TCP Slave)
EHV	EHV-CPU32	Ethernet interface on CPU	HITACHI EHV Series Ethernet (TCP Slave)

◎ Serial System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
H	H-20	RS232 on the CPU unit	RS232	Setting_	Your owner cable
MICRO-EH	EH-A23DR	Port 1 on CPU	RS232	Setting_	Your owner cable
		Port 2 on CPU	RS485	Setting_	Your owner cable

◎ Ethernet System Communication

Series	CPU	Link Module	Connect Type	Parameter	Cable
--------	-----	-------------	--------------	-----------	-------

S10V	LQP510-Z	LQP520-Z	Ethernet	Setting	Your owner cable
EHV	EHV-CPU32	Ethernet interface on CPU	Ethernet	Setting	

◎ Serial Communication Setting

RS232 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS232'. The 'Baud Rate' is 19200, 'Data Bit' is 7, 'Parity' is even, 'Stop Bit' is 1, and 'Slave No.' is 0. On the right, a table lists communication parameters:

PLC Communication Time Out	3
Protocol Time Out 1(ms)	500
Protocol Time Out 2(ms)	3
Max interval of block pack(WORDS)	16
Max interval of block pack(BITS)	32
Max block package size(WORDS)	32
Max block package size(BITS)	128

At the bottom right of the parameter table is a button labeled 'Use Default Setting'. The dialog has 'OK' and 'Cancel' buttons at the bottom.

RS422 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS485-4'. The 'Baud Rate' is 19200, 'Data Bit' is 7, 'Parity' is even, 'Stop Bit' is 1, and 'Slave No.' is 0. On the right, a table lists communication parameters:


PLC Communication Time Out	3
Protocol Time Out 1(ms)	500
Protocol Time Out 2(ms)	3
Max interval of block pack(WORDS)	16
Max interval of block pack(BITS)	32
Max block package size(WORDS)	32
Max block package size(BITS)	128


At the bottom right of the parameter table is a button labeled 'Use Default Setting'. The dialog has 'OK' and 'Cancel' buttons at the bottom.

Ethernet Communication Setting

HITACHI S10V Series Ethernet (TCP Slave)


HMI Setting

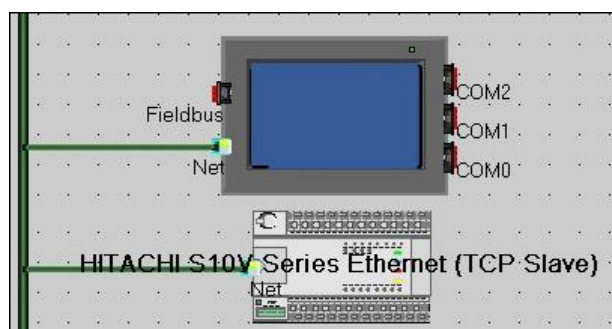

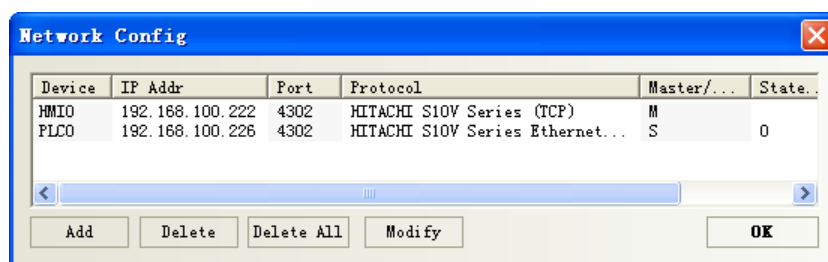

HITACHI EHV Series Ethernet (TCP Slave)

HMI Setting

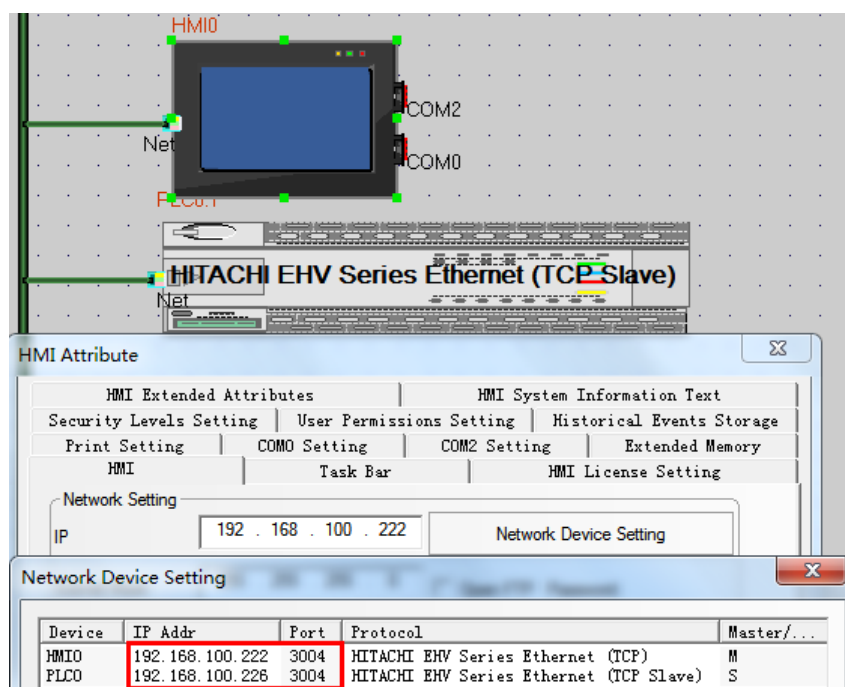

© Supported Device

Hitachi EH-A23DR

Device	Bit Address	Word Address	Format	Notes
External Input	X 00.000-5A.095	-----	HHH.DDD	Read Only
External Output	Y 00.000-5A.095	-----	HHH.DDD	
Remote Input	X 100.000-9FF.095	-----	HHH.DDD	Read Only
Remote Output	Y 100.000-9FF.095	-----	HHH.DDD	

Internal Output	R 0000-FFFF	-----	HHHH	
Data Area	M 0000-FFFF	-----	HHHH	
First CPU Link	L 00000-03FFF	-----	HHHHH	
Second CPU Link	L 10000-FFFFF	-----	HHHHH	
On Delay Timer	TD 00000-65535	-----	DDDDD	
External Input	-----	WX 000.00-05A.09	HHH.DD	Read Only
External Output	-----	WY 000.00-05A.09	HHH.DD	
Remote Input	-----	WX 100.00-9FF.09	HHH.DD	Read Only
Remote Output	-----	WY 100.00-9FF.09	HHH.DD	
Word Internal Output	-----	WR 0000-C3FF	HHHH	
Special Word Output	-----	WRF 000-FFFF	HHHH	
Data Area	-----	WM 0000- FFFF	HHHH	
First CPU Link	-----	WL 0000-03FF	HHHH	
Second CPU Link	-----	WL 1000-FFFF	HHHH	
Timer Counter	-----	TC 00000-65535	DDDDD	

Note: X0.015 in the HMI match x15 in the PLC, Y1.000 in the HMI match Y100, WX0.09 in the HMI match WX9 in the Plicate effective address is deleted radix point and the first zero behind radix point.

The list of address correspondence

Bit Address	Word Address	PLC address	Notes
X 00.000-00.047	-----	X 0000-0047	
Y 01.000-01.031	-----	Y 0100-0131	
-----	WX 000.00-000.03	WX 0000-0003	
-----	WY 001.00-Y001.01	WY 0010-0011	

Note: The range of X, Y, WX, WY is according to the I/O assign. Make sure the I/O address before using the register.

Note:

1. Communication setting

EH series, only port1 supports procedure 2. Switch DIP and change special Internal Input (WR) value to select procedure.

EH150 series, only EHCPU***A/448/516/548 support procedure 2.

EH PLC connect with PC only by procedure 1.

2. CPU related actions

EH150

DIP 5 must be set on.

If DIP 5 is on, which procedure (1 or 2) to use by judging the value of the **WR F037**. The highest bit of **WR F037** must be on, so that the other bits can be written in. The data keep on, when turn on the power again.

o By entering **0x8000**, turn on the power again and value of the address is 0x0000. After settings, communication with procedure 1.

o By entering **0xC000**, turn on the power again and value of the address is 0x4000. After settings,

communication with procedure 2.

The transmission speed of port 1 will be set with DIP 3, 4 switches

o 3 on, 4 off is 19200 bps

The transmission speed of port 2 will be set with DIP 6, PHL switches.

o 6 off, PHL on is 19200 bps

MicroEH

The transmission speed will be set with DIP switches

o SW1 on is 19200 bps

Which procedure(1 or2) to use by judging the value of the **WR F01A**. Different with EH150, The highest bit of **WR F01A** is optional, The data will reset when turn on the power again. If the value of **R 7F6** is set on, the data of **WR F01A** will be stored in Flash memory.

o 0x0000 for procedure 1.

o 0x8000 for procedure 2.

Note: if procedure 2 is set and written in Flash memory, external device (only supports procedure 1) or ladder editor will not connect with it.

S10V

Device	Bit Address	Word Address	Format	Notes
S	S 0-BFF	-----	HHH	
Z	Z 0-3FF	-----	HHH	
E	E 0-FFF	-----	HHH	
V	V 0-FFF	-----	HHH	
P	P 0-7F	-----	HH	
N	N 0-FF	-----	HH	
CCC	CCC 0-FF	-----	HH	
CR	CR 0-FF	-----	HH	
CD	CD 0-FF	-----	HH	
CU	CU 0-FF	-----	HH	
UUU	UUU 0-FF	-----	HH	
UU	UU 0-FF	-----	HH	
TTT	TTT 0-1FF	-----	HHH	
TT	TT 0-1FF	-----	HHH	
K	K 0-FFF	-----	HHH	
M	M 0-FFF	-----	HHH	
R	R 0-FFF	-----	HHH	
G	G 0-FFF	-----	HHH	
Q	Q 0-FFF	-----	HHH	
Y	Y 0-FFF	-----	HHH	
J	J 0-FFF	-----	HHH	
X	X 0-FFF	-----	HHH	
OW	-----	OW 0-FFF	HHH	
IW	-----	IW 0-FFF	HHH	


DW	-----	DW 0-FFF	HHH	
FW	-----	FW 0-BFF	HHH	
SW	-----	SW 0-BF	HH	
ZW	-----	ZW 0-3F	HH	
EW	-----	EW 0-FF	HH	
VW	-----	VW 0-FF	HH	
PW	-----	PW 0-8	H	
NW	-----	NW 0-F	H	
CW	-----	CW 0-F	H	
UW	-----	UW 0-F	H	
TW	-----	TW 0-1F	HH	
KW	-----	KW 0-FF	HH	
MW	-----	MW 0-FF	HH	
RW	-----	RW 0-FF	HH	
GW	-----	GW 0-FF	HH	
QW	-----	QW 0-FF	HH	
YW	-----	YW 0-FF	HH	
JW	-----	JW 0-FF	HH	
XW	-----	XW 0-FF	HH	
CC	-----	CC 0-FF	HH	
CS	-----	CS 0-FF	HH	
UC	-----	UC 0-FF	HH	
US	-----	US 0-FF	HH	
TC	-----	TC 1FF	HHH	
TS	-----	TS 0-1FF	HHH	

HITACHI EHV Series Ethernet (TCP Slave)


Device	Bit Address	Word Address	Format	Notes
Timer	T 0-65535	-----	DDDDD	
Internal output(shared Bit/Word)	M 0-FFFFFF	-----	HHHHH	
Link area No.n(n is 0 to 7)	L 0-73FFF	-----	HHHHH	
Internal output	R 0-FFFF	-----	HHHH	
External output	Y 0-65535	-----	DDDDD	
External input	X 0-65535	-----	DDDDD	
Timer progress value	-----	TC 0-65535	DDDDD	
Internal output	-----	WM 0-FFFF	HHHH	
Link area No.n(n is 0 to 7)	-----	WL 0-FFFF	HHHH	
Internal output	-----	WR 0-FFFF	HHHH	
External output	-----	WY 0-65535	DDDDD	
External input	-----	WX 0-65535	DDDDD	

◎ Cable Diagram

Hitachi EH-A23DR RS232 communication cable

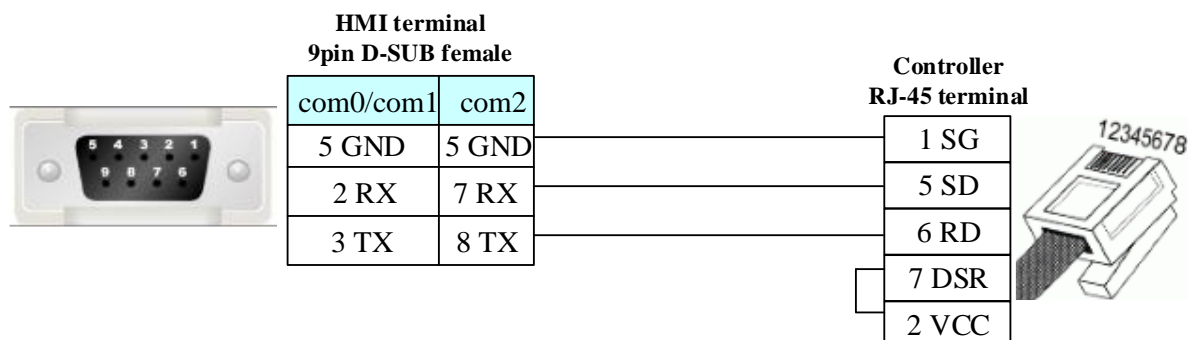

Hitachi EH-A23DR RS422 communication cable

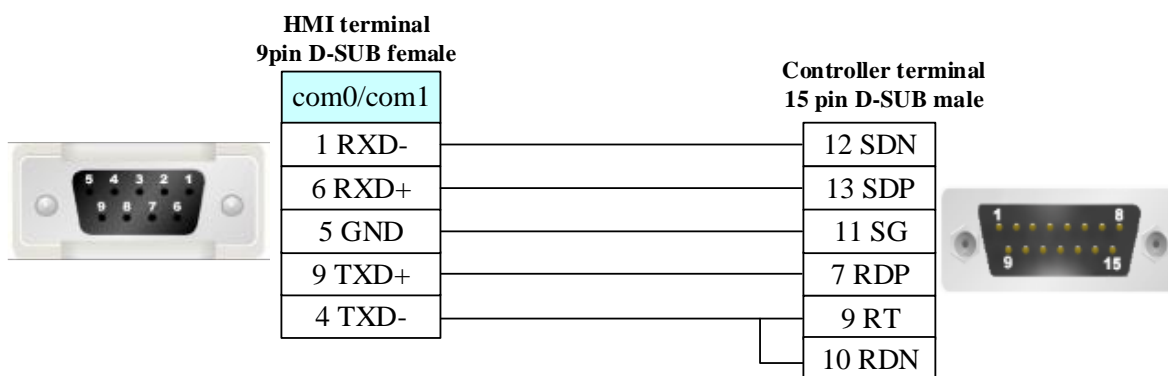

Ethernet Cable

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [4.3 Download by Network Ethernet](#) for method of making connection cable.

4.33 Hollysys Corporation

◎ Serial Communication

Series	CPU	Link Module	Driver
Hollysys LM	LM3109	Serial port0 on CPU 485 Serial port1 on CPU 232	Hollysys LM Modbus RTU
	LM3107	RS232 on CPU	
Hollysys LK	LK205	RS232 on CPU	Hollysys LK Modbus RTU

◎ Ethernet Communication

Series	CPU	Link Module	Driver
Hollysys LK	LK210 LK205	Ethernet interface on CPU	Hollysys LK Modbus TCP Slave ^{*1}

Hollysys LX	LX-CU500	Ethernet interface on CPU	Hollysys LX Modbus TCP Slave
-------------	----------	---------------------------	-------------------------------------

*1 Support dual redundancy

◎ Serial System Configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
Hollysys LM	LM3109	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485 on the CPU unit	RS485	Setting	Your owner cable
	LM3107	RS232 on the CPU unit	RS232	Setting	Your owner cable
Hollysys LK	LK205	RS232 on the CPU unit	RS232	Setting	Your owner cable

◎ Ethernet System Configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
Hollysys LK	LK210	ETH on the CPU unit	ETH	Setting	Your owner cable
	LK205				
Hollysys LX	LX-CU500	ETH on the CPU unit	ETH	Setting	Your owner cable


◎ Serial Communication Setting

Hollysys LM Modbus RTU Protocol

HMI Setting

Default communication parameters: 38400, 8, none, 1; station: 51

RS232

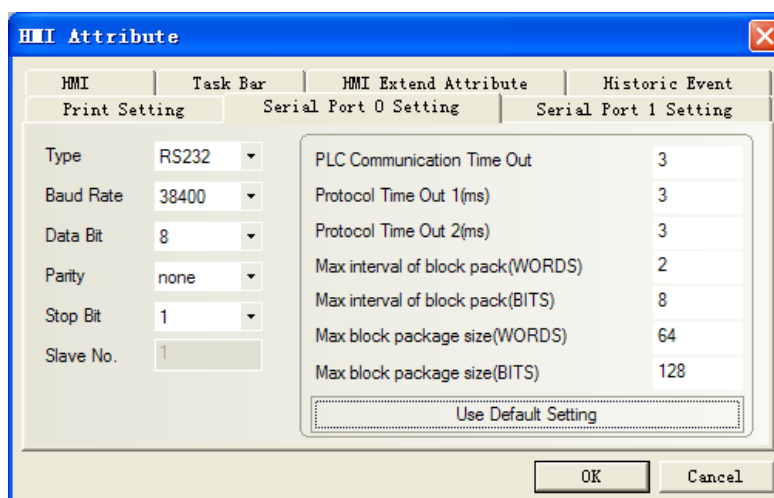


Hollysys LK Modbus RTU Protocol

HMI Setting


Default communication parameters: 38400, 8, none, 1; station: 2

RS232

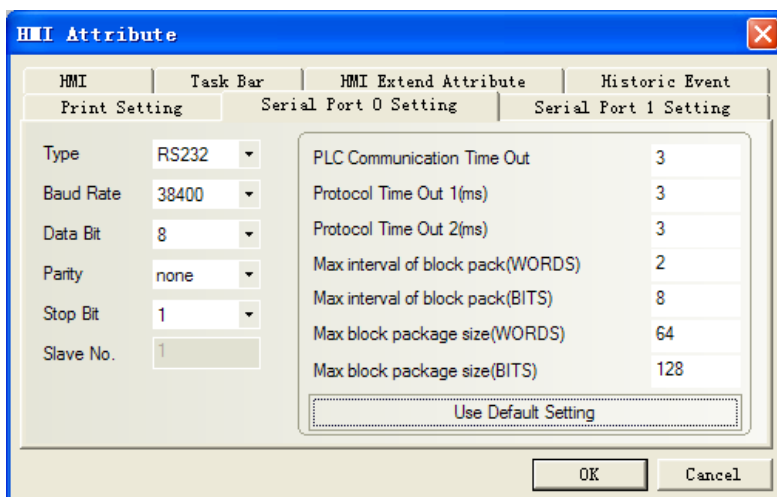


PLC Setting

1. Load communication lib

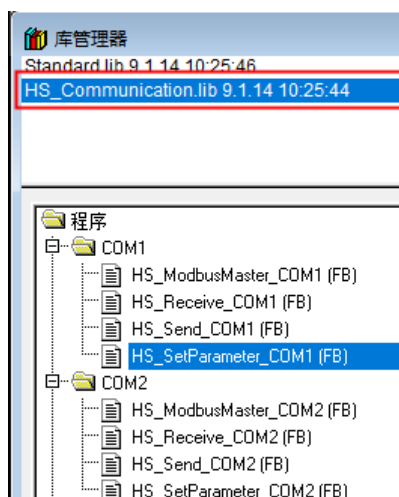


2. Program

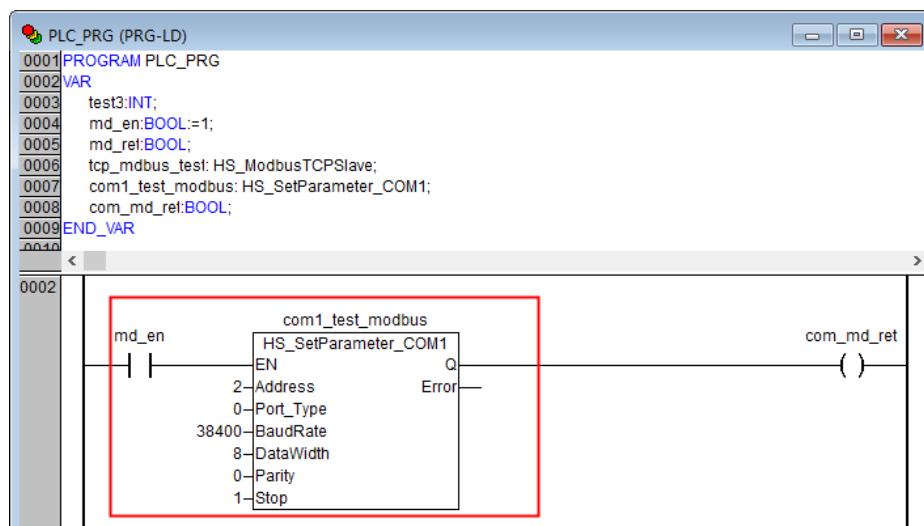


© Ethernet Communication Setting

HMI Setting

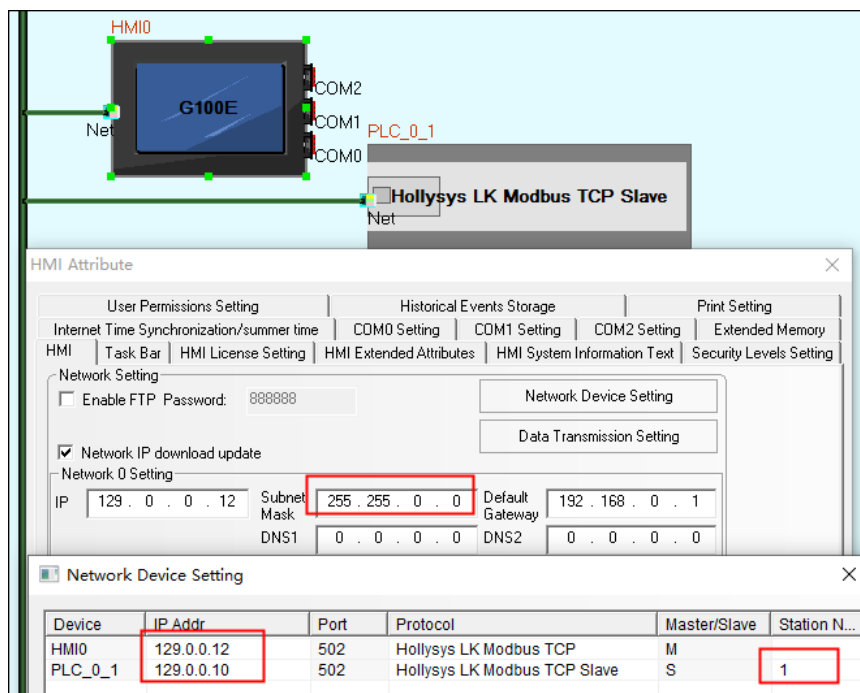
**Note:**

1. HMI subnet must be set:255.255.0.0;
2. Take plc IP "129.0.0.10" as an example, the last digit "10" represents the station number of the CPU module, which can be set on the CPU panel;
3. In the dual redundancy system, just set one of IP addresses in Network Device Setting

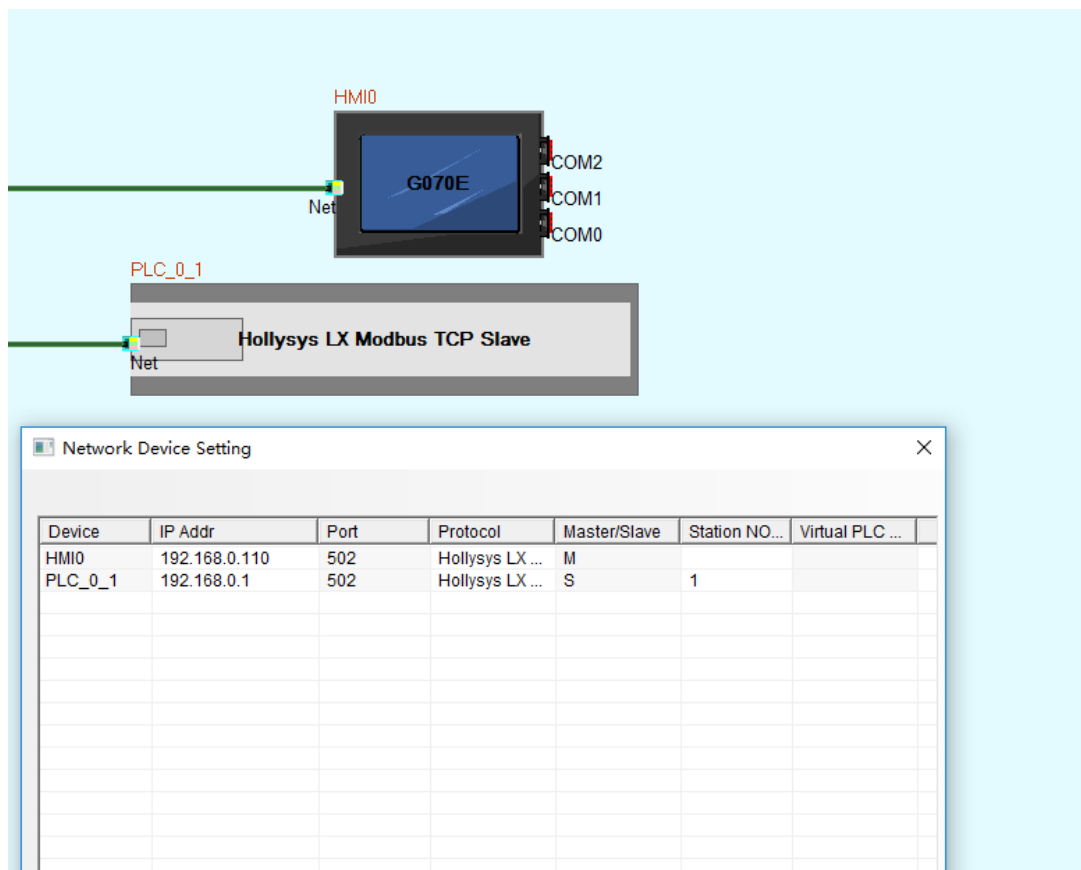
Hollysys LX Modbus TCP Slave

PLC Setting

1. Load communication lib

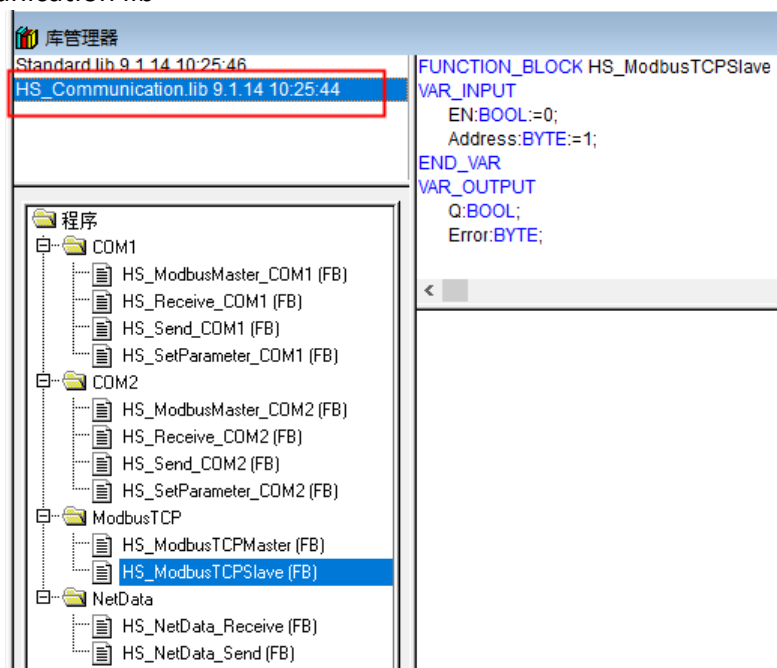

2. Program

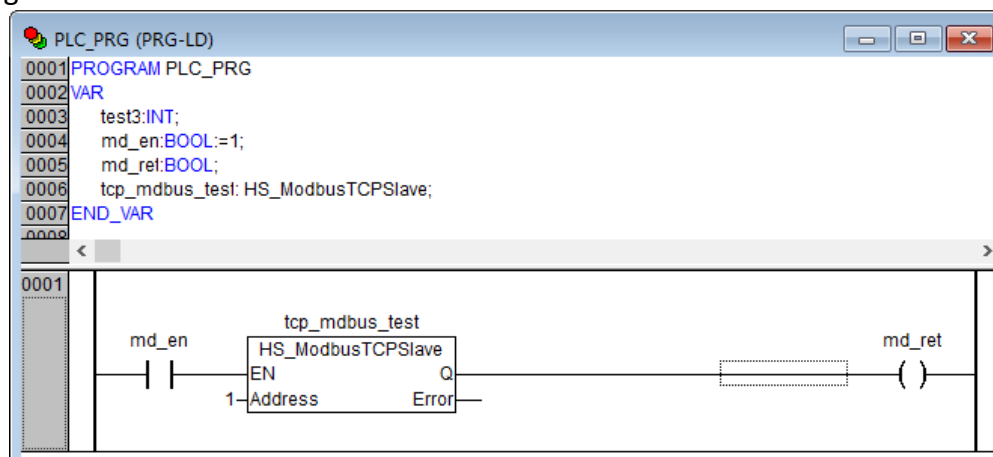

© Supported Device

LM

Device	Bit Address	Word Address	Format	Notes
Discrete inputs and image Relay	I0.0-2.7	-----	D.O	
Discrete outputs and image Relay	Q0.0-1.7	-----	D.O	
Internal memory Relay	M100.0-7816.7	-----	DDDD.O	M0-99 are occupied by system diagnosis.
Analog inputs	-----	IW0	D	address must be an even number; IW,QW address range to 30 by adding a module
Analog outputs	-----	QW0	D	
Internal register	-----	MW0-8190	DDDD	
Internal register(double word)	-----	MD0-8188	DDDD	



Note: I,IW register read only

LK

Device	Bit Address	Word Address	Format	Notes
Discrete inputs and image Relay	I0.0-4095.15	-----	DDDD.DD	
Discrete outputs and image Relay	Q0.0-4095.15	-----	DDDD.DD	
Internal memory Relay	M0.0-4095.15	-----	DDDD.DD	
Analog inputs	-----	IW0-65535	DDDDD	
Analog outputs	-----	QW0-65535	DDDDD	
Internal register	-----	MW0-65535	DDDDD	
Internal register(double word)	-----	MD0-65535	DDDDD	

LX

Device	Bit Address	Word Address	Format	Notes
Discrete inputs and image Relay	I0.0-374.7	-----	DDDD.DD	
Discrete outputs and image Relay	Q0.0-374.7	-----	DDDD.DD	
Internal memory Relay	M0.0-7816.7	-----	DDDD.DD	
Analog inputs	-----	IW0-5998	DDDDD	
Analog outputs	-----	QW0-5998	DDDDD	
Internal register	-----	MW0-125070	DDDDD	
Internal register(double word)	-----	ID0-5996	DDDDD	
Internal register(double word)	-----	QD0-5996	DDDDD	
Internal register(double word)	-----	MD0-125068	DDDDD	

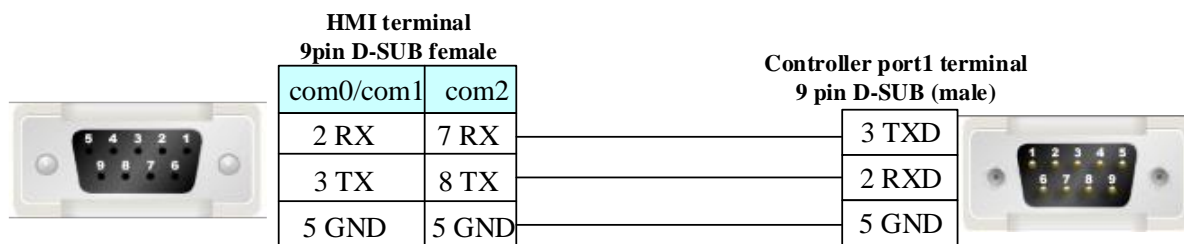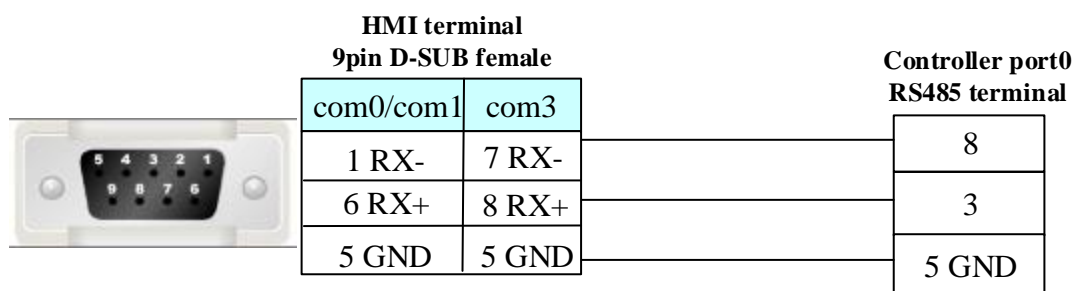© **Cable Diagram****Hollysys LM RS232 communication cable****Hollysys LM RS485 communication cable**

Ethernet Cable

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.34 HuaDA HD-JZ06

◎ Serial Communication

Series	CPU	Link Module	Driver
HD	HD-JZ06	RS232 on the CPU unit	HuaDA HD-JZ06\ HuaDA
		RS485 on the CPU unit	HD SLAVE

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
HD	HD-JZ06	RS232 on the CPU unit	RS232	Setting_	Your owner cable
		RS485 on the CPU unit	RS485	Setting_	Your owner cable

◎ Communication Setting

RS232 communication

HMI Attribute

Task Bar | HMI Extend Attribute | Historic Event

Print Setting | **Serial Port 0 Setting** | Serial Port 1 Setting


Type: RS232
 Baud Rate: 9600
 Data Bit: 8
 Parity: none
 Stop Bit: 1
 Slave No.: 1

PLC Communication Time Out	3
Protocol Time Out 1(ms)	50000
Protocol Time Out 2(ms)	3
Max interval of block pack(WORDS)	16
Max interval of block pack(BITS)	32
Max block package size(WORDS)	64
Max block package size(BITS)	64

Use Default Setting

OK Cancel

RS485 communication

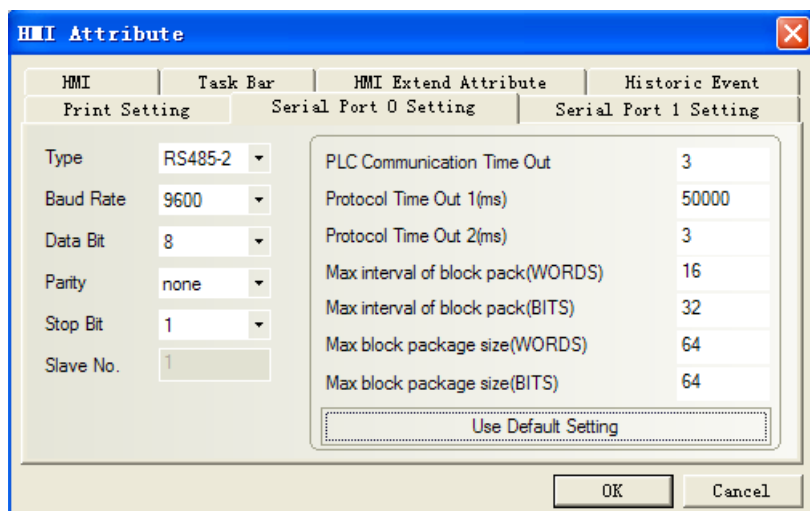


◎ Supported Device


Device	Bit Address	Word Address	Format	Notes
HMI Internal Relay	LB 0-4095	-----	DDDD	
MCU Register	VB 0-4095	-----	DDDD	
HMI Internal register	-----	LW 0-4094	DDDD	
MCU Register	-----	VW 0-4094	DDDD	

◎ Cable Diagram

RS232 Port

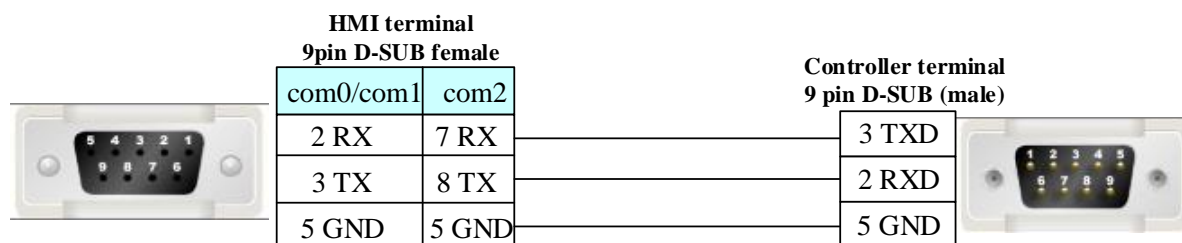

RS485 Port

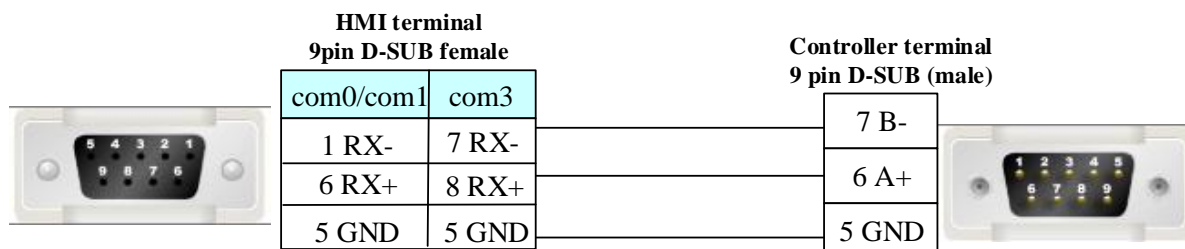

4.35 HUATO S500

◎ Serial communication

Series	CPU	Link Module	Driver
S500	S500-TH-RS485	RS485 on the CPU unit	HUATO S500

◎ Communication parameters and cable production


Series	Link Module	COMM Type	Parameter	Cable
S500	RS485 on the CPU unit	RS485	Setting	Your owner cable

◎ Serial communication settings


HMI setting

HMI default communication parameter: 19200bps,8,1, without checked; PLC station No.: 1

RS485 communication

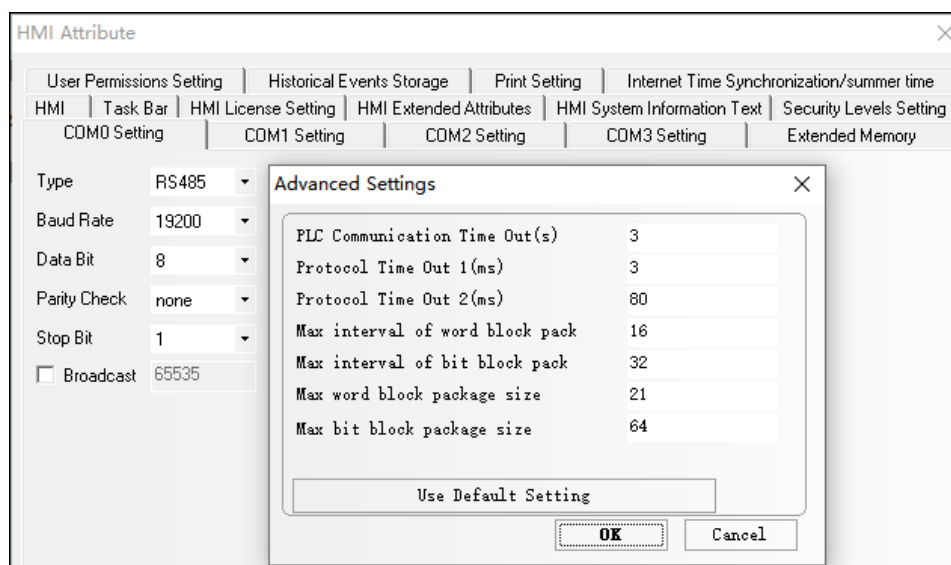

The Serial number is entered in the Device Number edit box in the PLC property box

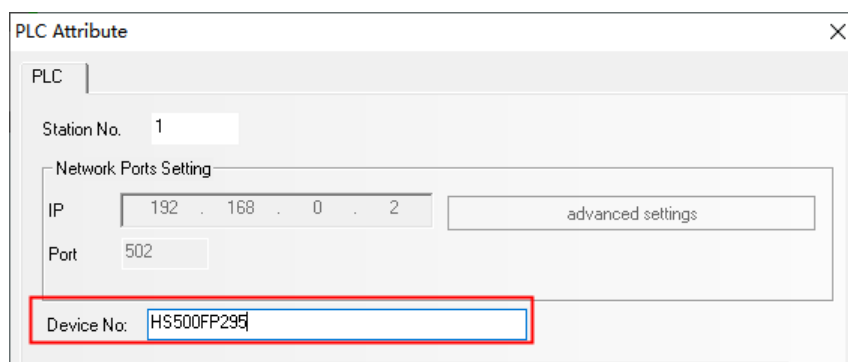


◎ Supported registers

Device	Word Address	Bit Address	Format	Code type	Notes
Data register	Temperature 0	-----	D	BIN	----
Data register	Humidity 0	-----	D	BIN	----

◎ Cable Diagram

RS485 communication cable

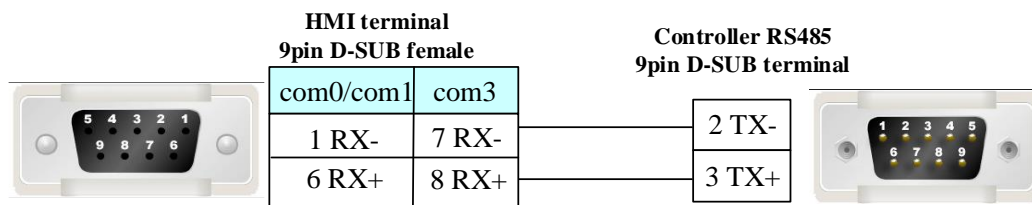

Note: The yellow line segment of the communication line brought with the equipment corresponds to 3 pins of 9 feet D-SUB, and the blue line segment corresponds to 2 pins

4.36 IDEC Corporation

◎ Serial Communication

Series	CPU	Link Module	Driver
MICRO SMART	FC4A-C10R2 FC5A-C24R2 FT1A-H48SA	RS232 on the CPU unit	IDEC MicroSmart

◎ Ethernet Communication

Series	CPU	Link Module	Driver
MicroSmart	FC6A	Ethernet on CPU	IDEC MicroSmart FC6A Series (TCP Slave)



◎ Serial System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
MICRO SMART	FC4A-C10R2 FC5A-C24R2 FT1A-H48SA	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485 on the CPU unit	RS485	Setting	Your owner cable

◎ Ethernet System Configuration


Series	CPU	Link Module	COMM Type	Parameter	Cable
MicroSmart	FC6A	Ethernet on CPU	ETH	Setting	Your owner cable

◎ Serial Communication Setting

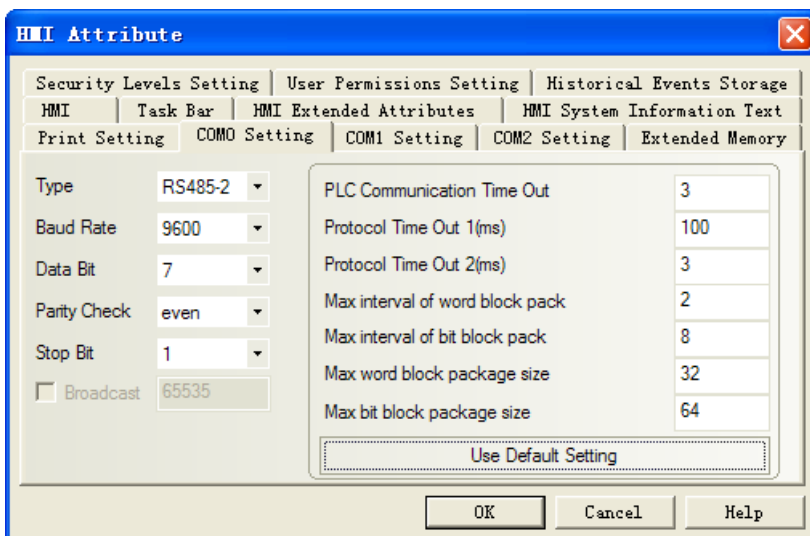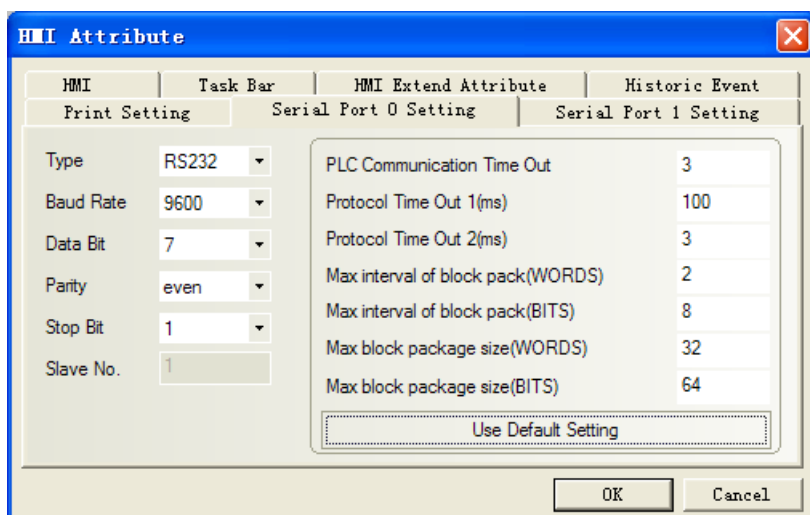


© Ethernet Communication Setting

HMI Setting

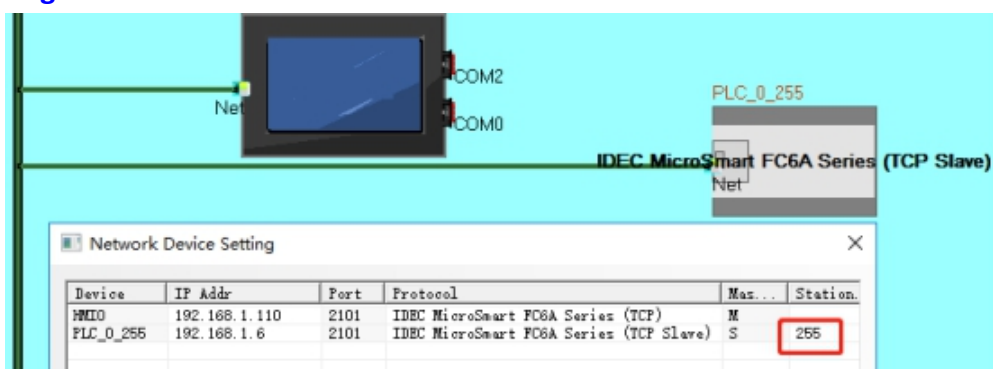

PLC Setting

Must set the PLC station in PLC program software.

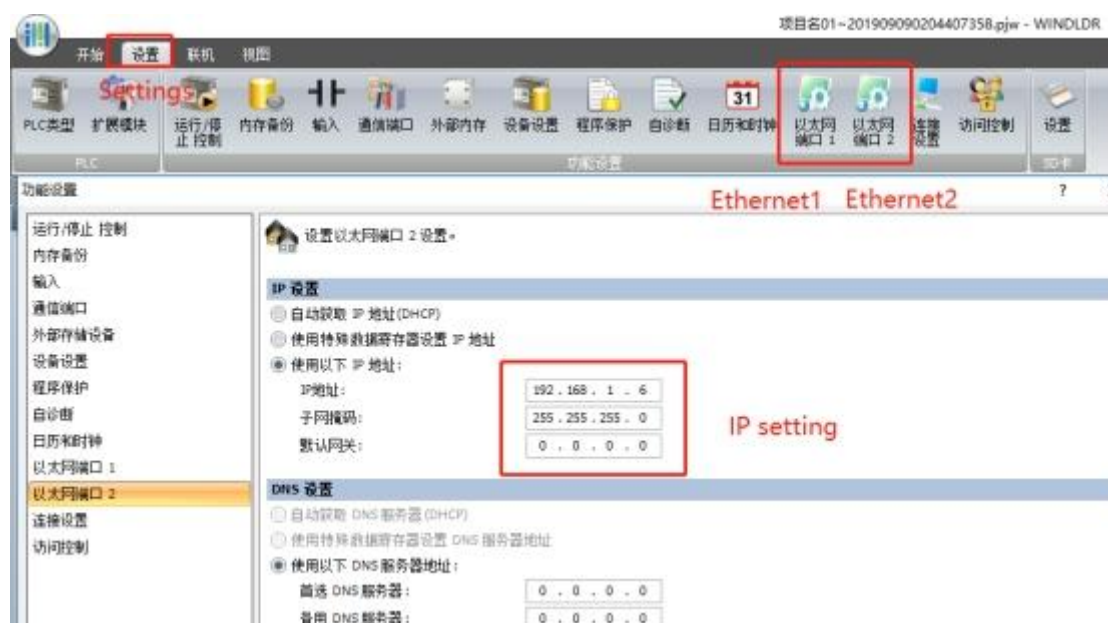

◎ Supported Device

IDEC MicroSmart

Device	Bit Address	Word Address	Format	Notes
Internal Relay	M0.0-127.7	-----	DDD.O	
Output	Q0.0-30.7	-----	DD.O	
Input	I0.0-30.7	-----	DD.O	
Data Register	-----	D 0-9999	DDDD	
Counter(Current Value)	-----	C_CV 0-999	DD	
Counter(Preset Value)	-----	C_SV 0-999	DD	
Timer(Current Value)	-----	T_CV 0-999	DD	
Timer(Preset Value)	-----	T_SV 0-999	DD	
Dword data register	-----	D_Dword0-9999	DDDD	

Note: M address: 121 in the plc correspond to 12.1 in the HMI.

Q\I address: 1277 in the plc corresponds to 127.7 in the HMI.

IDEC MicroSmart FC6A Series (TCP Slave)


Device	Bit Address	Word Address	Format	Notes
Internal Relay	M 0.0-1749.7	-----	DDDD.O	
Output	Q 0.0-63.7	-----	DD.O	
Input	I 0.0-63.7	-----	DD.O	
Counter	C 0-511	-----	DDD	
Timer	T 0-1023	-----	DDDD	
R Register	R 0-255	-----	DDD	
Data Register	D_Bit 0.00-55999.15	-----	DDDDD.DD	

Data Word Register	-----	D 0-55999	DDDDD	
Data Double Register	-----	D_Dword 0-55998	DDDDD	
Internal Relay	-----	MW0.0-1748.0	DDDD.O	
Internal Double Relay	-----	M_Dword0.0-1746.0	DDDD.O	
Input Word Register	-----	IW 0.0-62.0	DD.O	
Input Double Register	-----	I_Dword 0.0-60.0	DD.O	
Output Word Register	-----	QW 0.0-62.0	DD.O	
Output Double Register	-----	Q_Dword 0.0-60.0	DD.O	
Counter(Current Value)	-----	CC 0-511	DDD	
Counter(Preset Value)	-----	CP 0-511	DDD	
Timer(Current Value)	-----	TC0-1023	DDDD	
Timer(Preset Value)	-----	TP 0-1023	DDDD	
R Word Register	-----	RW 0-240	DDD	
R Double Register	-----	R_Dword 0-224	DDD	


◎ Cable Diagram

Idec RS232 communication cable


FC4A

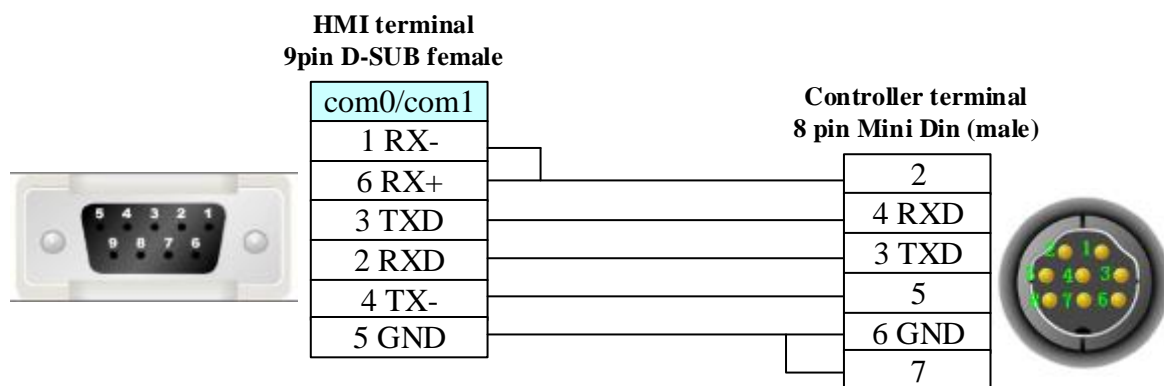

FC5A

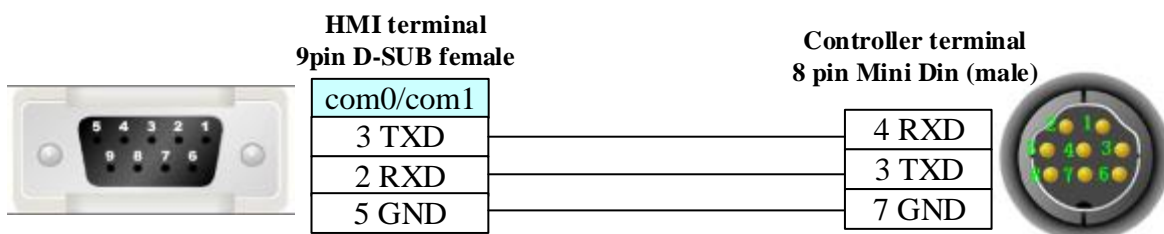

RS485

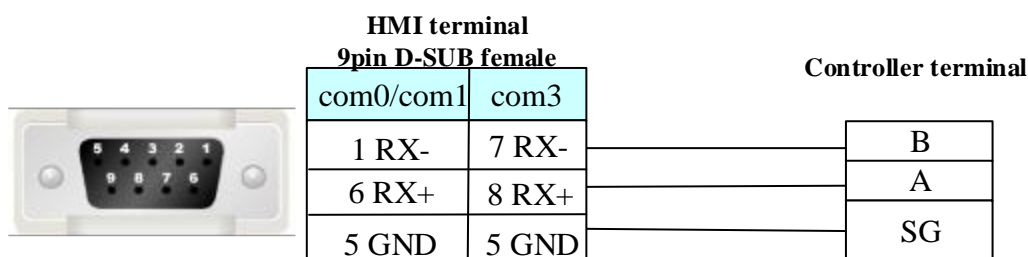

Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.37 IEC 60870-5-104

◎ Ethernet Communication

Series	CPU	Link Module	Driver
IEC 60870-5-104 Server		Ethernet interface on CPU	IEC 60870-5-104 Server
IEC 60870-5-104 Client(TCP Slave)		Ethernet interface on CPU	IEC60870-5-104 Client(TCP Slave)

◎ Ethernet System Configuration

Series	COMM Type	Parameter	Cable
IEC 60870-5-104 Server	Ethernet	Setting	Your owner cable
IEC 60870-5-104 Client(TCP Slave)	Ethernet	Setting	Your owner cable

◎ Ethernet Communication Setting

IEC 60870-5-104 Server protocol

HMI Setting



IEC 60870-5-104 Client(TCP Slave) protocol

HMI Setting



◎ Supported Device

IEC 60870-5-104 Server

Device	Bit Address	Word Address	Format	Value Range	Notes
Single Point	0-16777215	---	DDDDDDDD	---	----
Single Command	0-16777215	---	DDDDDDDD	--	----
Interrogation Command	0	---	D	---	----
Double Point	---	0-16777215	DDDDDDDD	0-3	----
Measured Scaled	---	0-16777215	DDDDDDDD	---	----
Measured Float	---	0-16777215	DDDDDDDD	---	Float
Step Position	---	0-16777215	DDDDDDDD	---	----
Measured Normalized	---	0-16777215	DDDDDDDD	---	Float
Bitstring 32bit	---	0-16777215	DDDDDDDD	---	uint32_t
Integrated Totals	---	0-16777215	DDDDDDDD		uint32_t
Double Command	---	0-16777215	DDDDDDDD	0-3	----
SetPoint Float Command	---	0-16777215	DDDDDDDD	---	Float
SetPoint Scaled Command	---	0-16777215	DDDDDDDD	---	----
Regulating Step Command	---	0-16777215	DDDDDDDD	0-3	----
Bitstring 32bit Command	---	0-16777215	DDDDDDDD	---	uint32_t
SetPoint Normalized Command	---	0-16777215	DDDDDDDD	---	Float

IEC 60870-5-104 Client(TCP Slave)

Device	Bit Address	Word Address	Format	Value Range	Notes
Single Point	0-16777215(RO)	---	DDDDDDDD	---	----
Single Command	0-16777215	---	DDDDDDDD	--	----

Interrogation Command	0	---	D	---	----
Double Point	---	0-16777215(RO)	DDDDDDDD	0-3	----
Measured Scaled	---	0-16777215(RO)	DDDDDDDD	---	----
Measured Float	---	0-16777215(RO)	DDDDDDDD	---	Float
Step Position	---	0-16777215(RO)	DDDDDDDD	-64-63	----
Measured Normalized	---	0-16777215(RO)	DDDDDDDD	---	Float
Bitstring 32bit	---	0-16777215(RO)	DDDDDDDD	---	uint32_t
Integrated Totals	---	0-16777215(RO)	DDDDDDDD		uint32_t
Double Command	---	0-16777215	DDDDDDDD	0-3	----
SetPoint Float Command	---	0-16777215	DDDDDDDD	---	Float
SetPoint Scaled Command	---	0-16777215	DDDDDDDD	---	----
Regulating Step Command	---	0-16777215	DDDDDDDD	0-3	----
Bitstring 32bit Command	---	0-16777215	DDDDDDDD	---	uint32_t
SetPoint Normalized Command	---	0-16777215	DDDDDDDD	---	Float

◎ Cable Diagram

Ethernet communication protocol cable

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.38 IEC 61850 MMS Client

◎ Ethernet Communication


Series	CPU	Link Module	Driver
IEC 61850 MMS Client		Ethernet interface on CPU	IEC 61850 MMS Client

◎ Ethernet Communication Parameters and Cables Production

Series	CPU	Link Module	SIO Type	Parameter	Cable
IEC 61850 MMS Client		Ethernet interface on CPU	Ethernet	Setting	Your owner cable

◎ Ethernet Communication Parameters

HMI setting

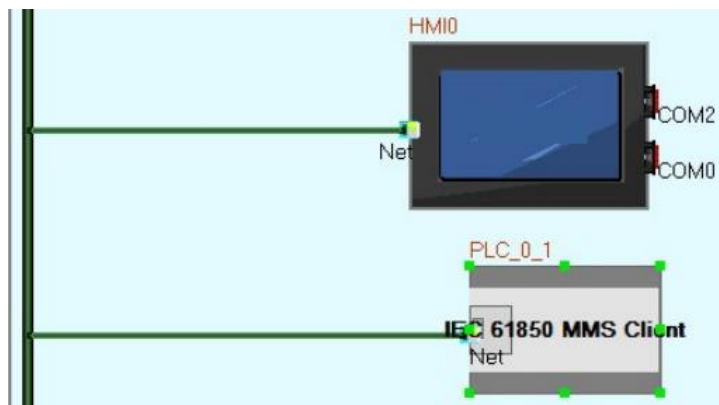


Network Device Setting

Device	IP Addr	Port	Protocol	Master/Slave	Station NO...	Virtual PLC ...
HMI0	192.168.205.40	102	IEC 61850 ...	M		
PLC_0_1	192.168.205.245	102	IEC 61850 ...	S	1	

Label address import

If the server has a password, you need to click IEC Online Parameters to enter the password when importing the label, and then click Cloud Refresh.

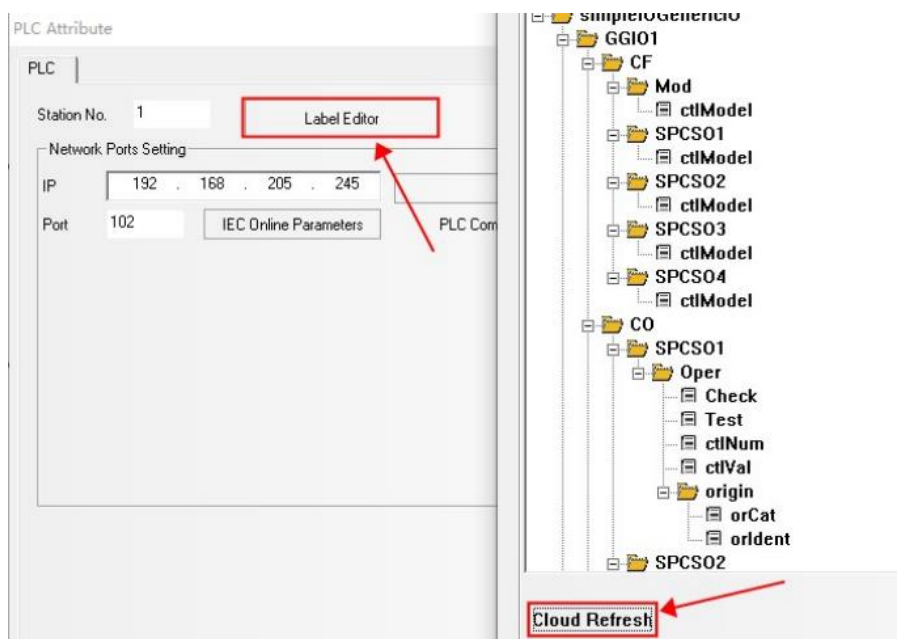

© Cable Diagram

Cross-connection or crossover network cable can be used as communication cable via the hub
Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.39 Inovance Electric Corporation

◎Serial Communication(PLC)

Series	CPU	Link Module	Driver
H2U	H2U-3624MR	CPU direct	Inovance H2u (don't support multi station)
		COM1	
		CPU direct	Modbus RTU*1
		COM1	
H3U	H3U-1616MT-XP	CPU direct	Inovance H3u (don't support multi station)
AM600	AM401-1608TP	RS485	Inovance AM600 Series
H5U	H3U-1614MTD	RS485 on the CPU unit	Inovance H5u/Easy
Easy	Easy301/302/320 Easy501/502/521/522 /523	RS232/485	

NOTE: *1 Support multi-station

◎Serial Communication(Inverter)

Series	CPU	Link Module	Driver
MD	CL100	RS485 on the CPU unit	Inovance Inverter Modbus Protocol

◎Ethernet Communication

Series	CPU	Link Module	Driver
H3U	H3U-1616MT-XP	Ethernet interface on CPU	Inovance H3u Ethernet(TCP Slave)
AM600	AM401-1608TP	Ethernet interface on CPU	Inovance AM600 Ethernet(TCP Slave)
H5U	H5U	Ethernet interface on CPU	Inovance H5u/Easy Ethernet(TCP Slave)
Easy	Easy320 Easy521/522/523	Ethernet interface on CPU	
H5U	H5U	Ethernet interface on CPU	Inovance H5u Series(Ethernet)

◎Serial System configuration

Series	CPU	Driver	Link Module	COMM Type	Parameter	Cable
H2U	3624 MR	Inovance H2u	RS232 on the CPU unit	RS232	Setting	Your owner cable
			RS422 on the CPU unit	RS422	Setting	Your owner cable
			RS485 on the CPU unit	RS485	Setting	Your owner cable
			RS485 on the com1	RS485	Setting	Your owner cable
		Modbus RTU	RS485 on the CPU unit	RS485	Setting	Your owner cable
			RS485 on the com1	RS485	Setting	Your owner cable
H3U	1616MT-XP		RS232 on the CPU unit	RS232	Setting	Your owner cable
			RS422 on the CPU unit	RS422	Setting	Your owner cable

		RS485 on the com1	RS485	Setting	Your owner cable
AM600	AM401-1608TP	RS485 on the CPU unit	RS485	Setting	Your owner cable
H5U Easy	H5U Easy	RS485 on the CPU unit	RS485	Setting	Your owner cable
MD	CL100	RS485 on the CPU unit	RS485	Setting	Your owner cable

◎ Ethernet System configuration

Series	CPU	Link Module	Connect Type	Parameter	Cable
H3U	H3U-1616MT-XP	Ethernet interface on CPU	Ethernet	Setting	Your owner cable
AM600	AM401-1608TP	Ethernet interface on CPU	Ethernet	Setting	Your owner cable
H5U Easy	H5U Easy	Ethernet interface on CPU	Ethernet	Setting	Your owner cable
H5U	H5U	Ethernet interface on CPU	Ethernet	Setting	Your owner cable


◎ Serial Communication Setting

Inovance H2u protocol


HMI Setting

HMI monitor protocol communication: 9600, 7, even, 1; station: 0


RS232

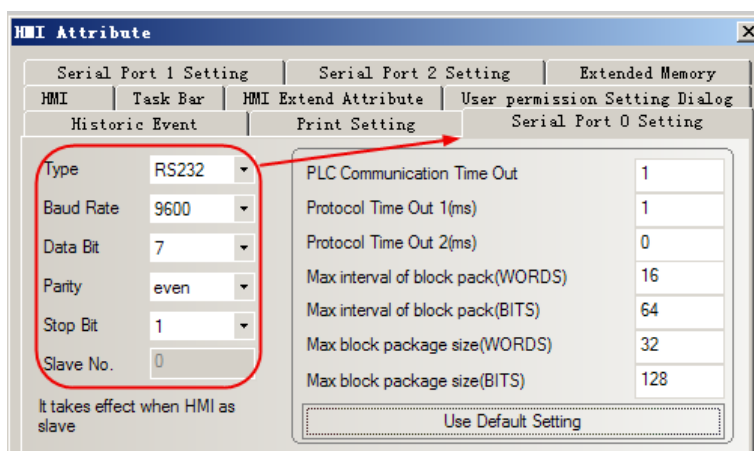

RS422

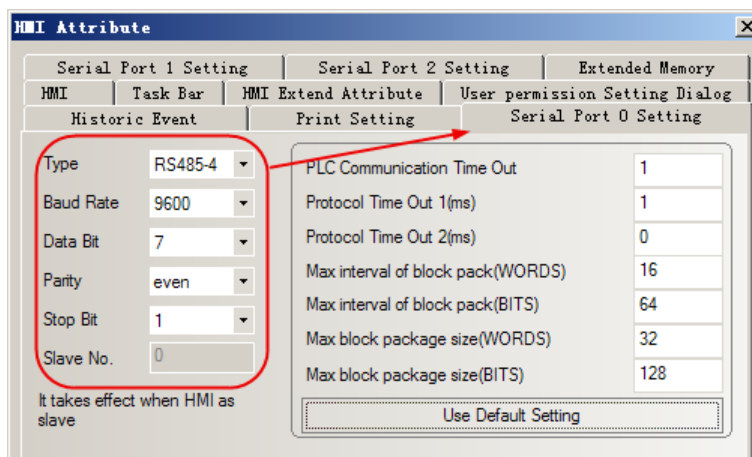


RS485

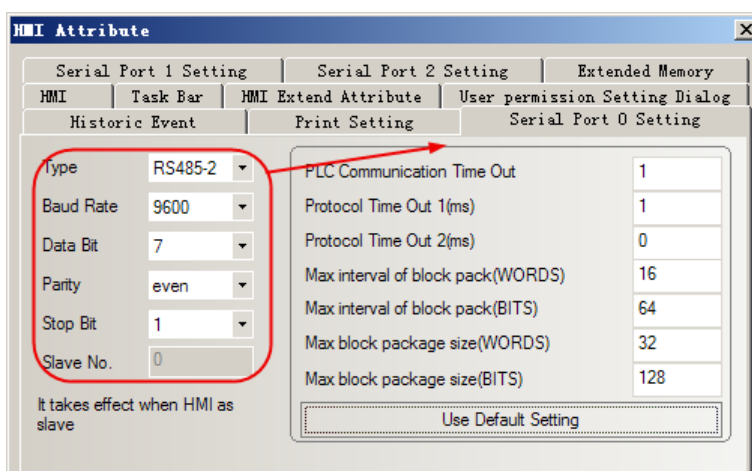

PLC Setting

You should put off JP0, if communication on the COM0, RS485.


You should set D8126=01h, if communication on the COM1, RS485.

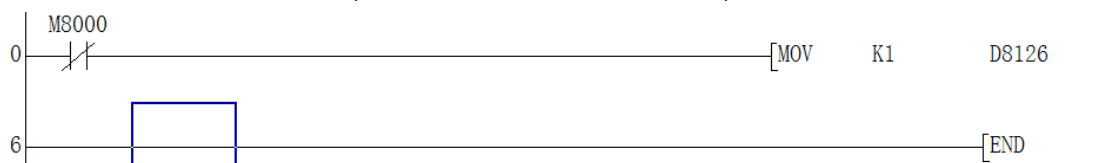

Modbus RTU protocol

HMI Setting


RS485 communication parameter: PLC COM0 port is controlled by D8110; COM1 port is controlled by D8120.

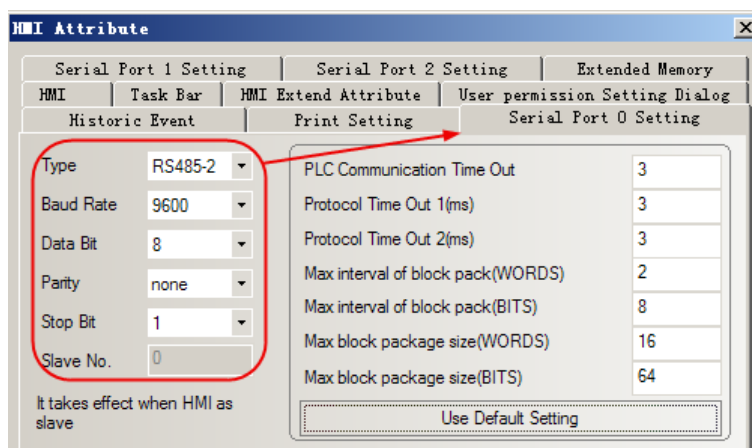

PLC setting

COM0 setting: D8116=02h, modbus-RTU slave protocol; D8111=1, station: 1; D8110=81h, communication parameter: 9600, 8, none, 1.

COM1 setting: D8126=02h, modbus-RTU slave protocol; D8121=1, station: 1; D8120=81h, communication parameter: 9600, 8, none, 1.

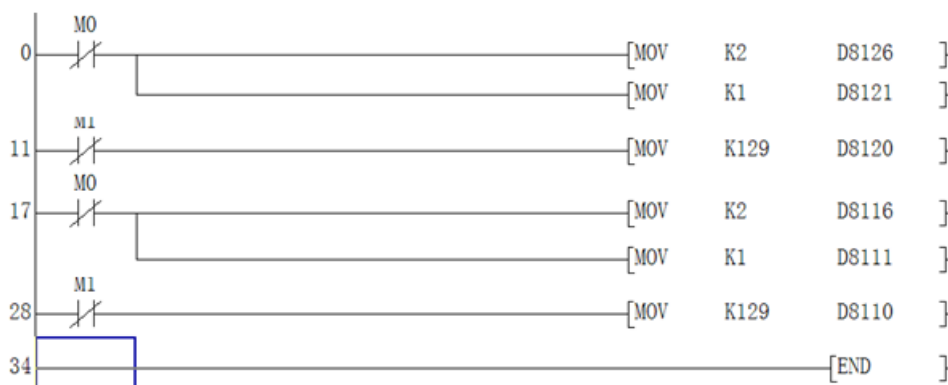


Inovance H3u protocol


HMI Setting

Default parameter: 9600bps, 7, even, 1; station NO.: 0


RS232

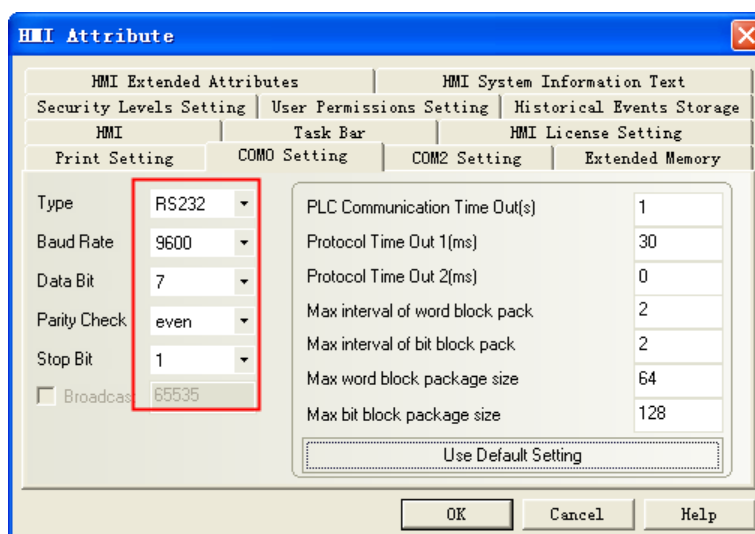


RS422

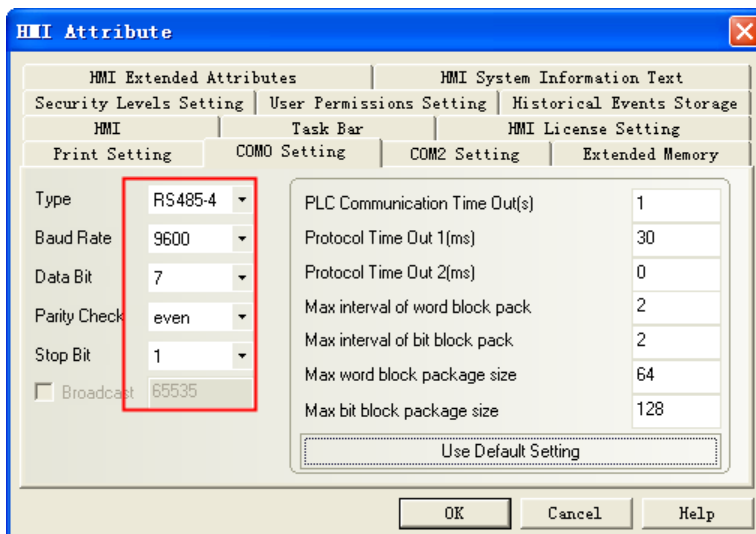


RS485

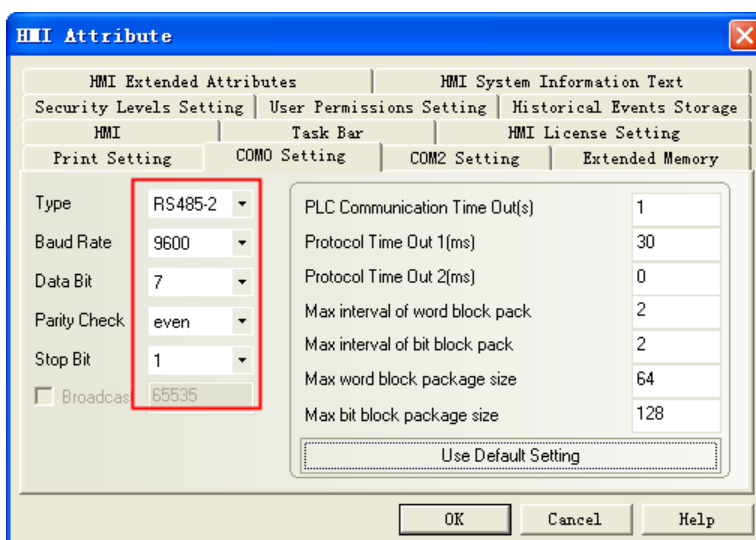

PLC Setting
PLC COMO

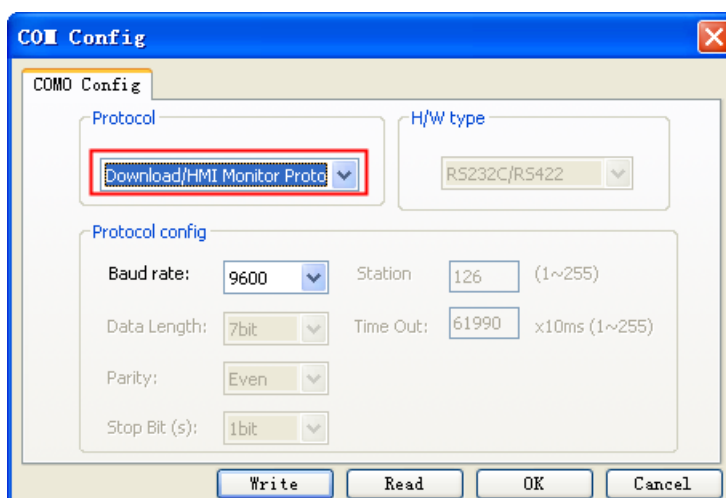

PLC COM1

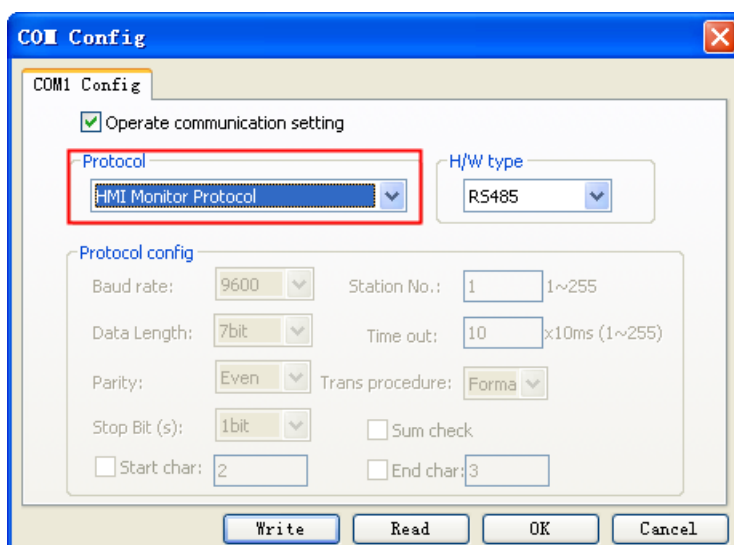


Note: COM1 parameter only support 9600bps;

Inovance AM600 Series protocol


HMI Setting

Default parameter: 115200bps, 8, even, 1; station NO.: 1

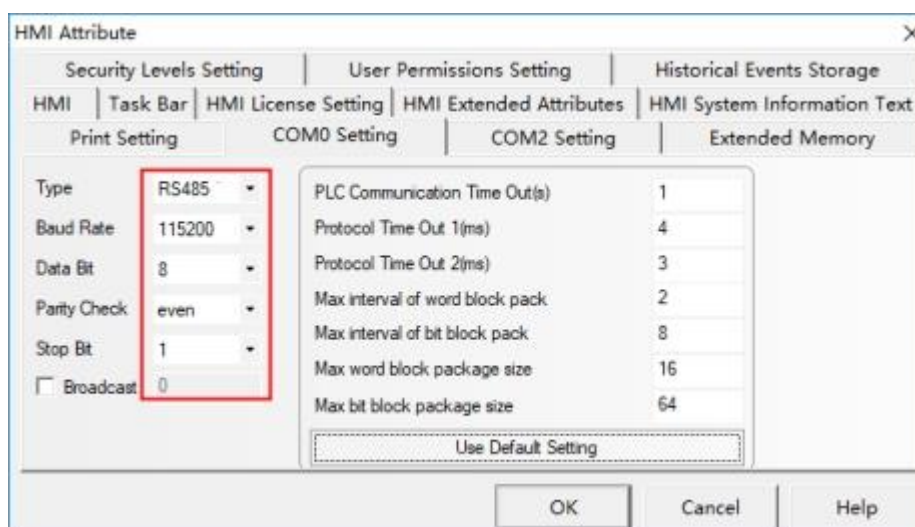


PLC Setting



Connect PLC with PC by USB or network

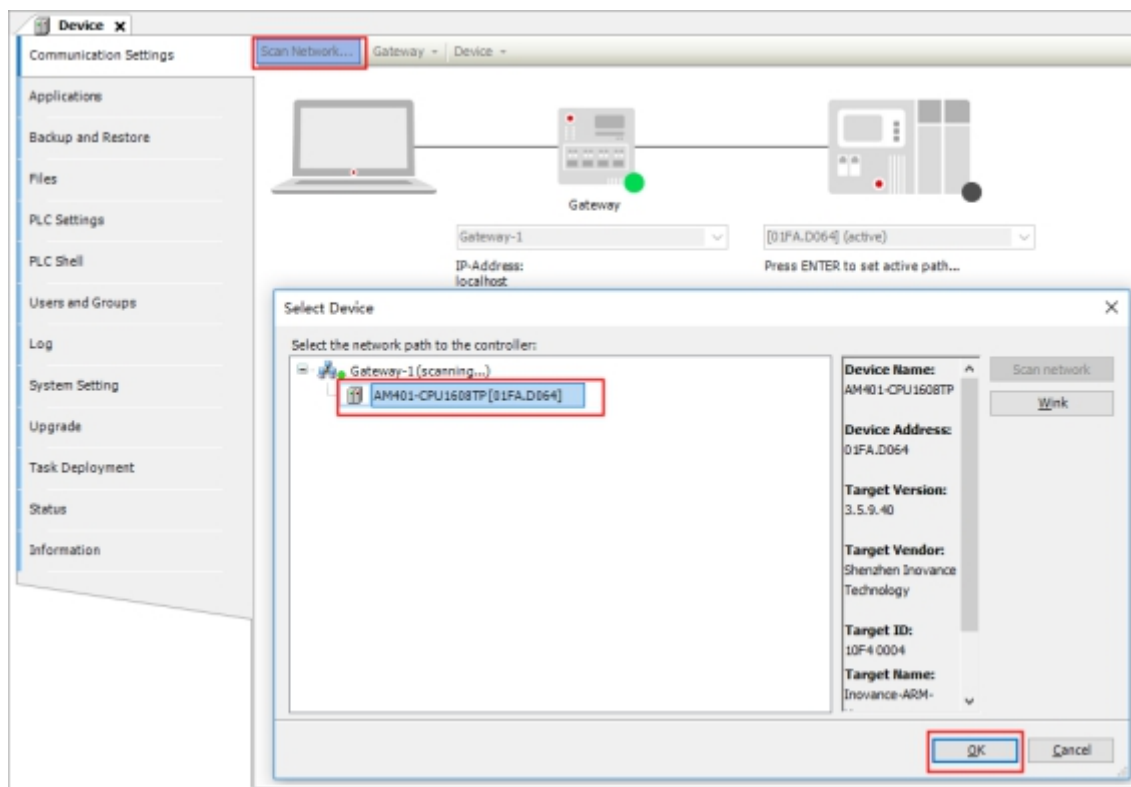

Defining the PLC variable

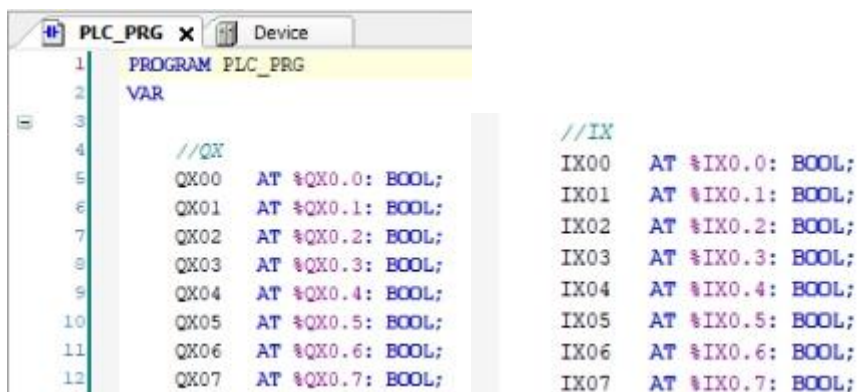

Online login PLC to monitor the value of the PLC variable

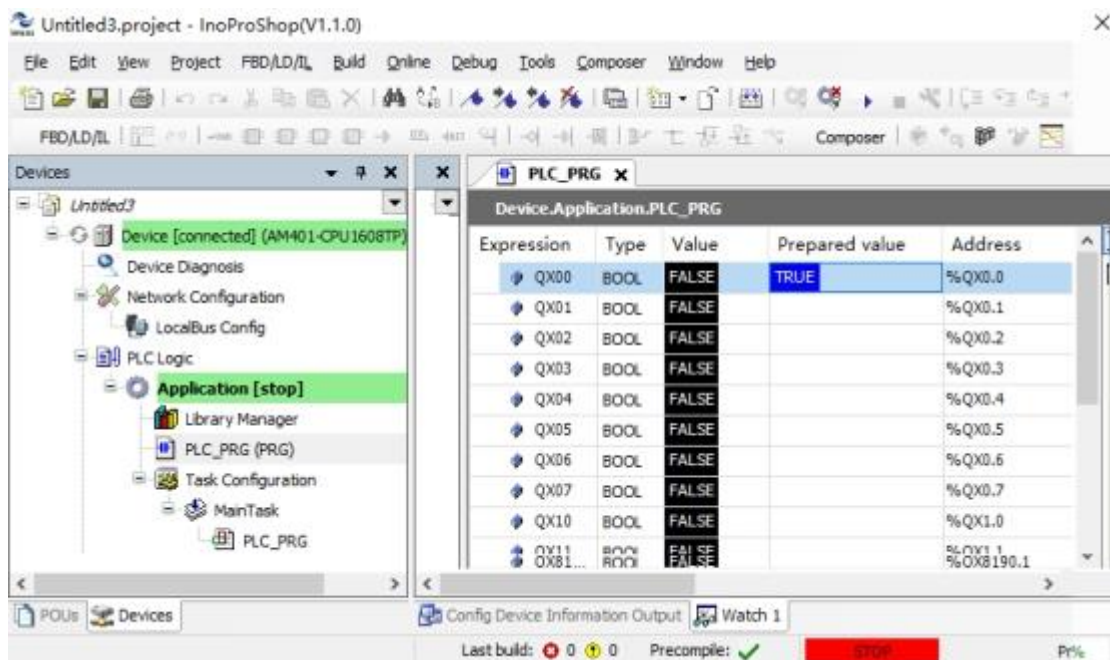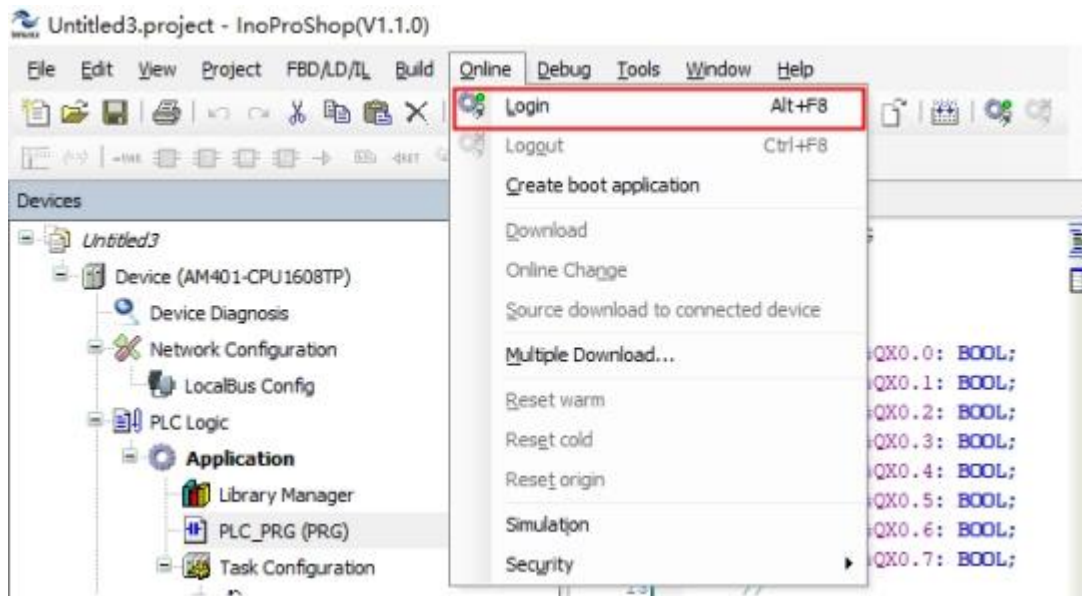

Inovance H5u/Easy **protocol**

HMI Settings

Default parameter: 9600bps, 8, even, 1; Station NO.: 1

HMI Attribute

User Permissions Setting		Historical Events Storage		Print Setting	
HMI	Task Bar	HMI License Setting	HMI Extended Attributes	HMI System Information Text	Security Levels
Internet Time Synchronization/summer time			COM0 Setting	COM2 Setting	Extended Mem
Type	RS485				
Baud Rate	9600				
Data Bit	8				
Parity Check	even				
Stop Bit	1				
<input type="checkbox"/> Broadcast	65535				
Advanced Settings					

PLC Settings

COM通讯参数配置

COM设置

协议选择: MODBUS-RTU从站

H/W类型: RS485


协议配置:

- 通讯速率: 9600
- 站号: 1 (范围 1~247)
- 数据长度: 8位
- 奇偶校验位: 偶
- 停止位: 1位

Inovance Inverter Modbus Protocol

HMI Settings


Default parameter: 38400bps, 8, none, 2; Station NO.: 1

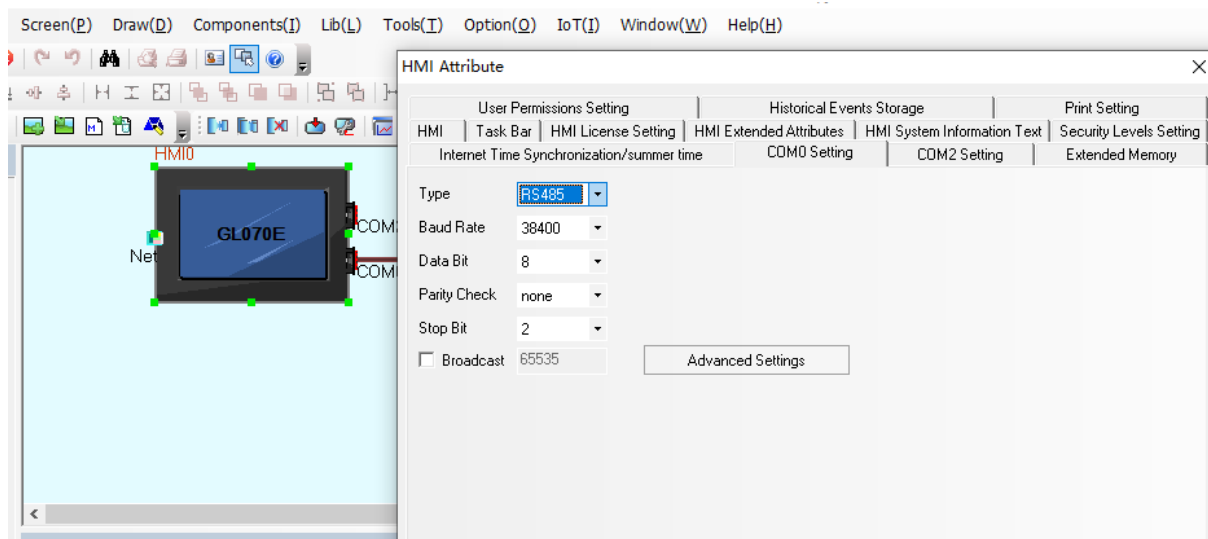

© Ethernet Communication Setting

Inovance H3u Ethernet (TCP Slave) protocol

HMI Setting

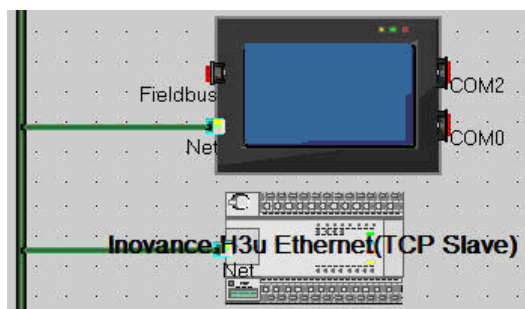


Network Device Setting						
Device	IP Addr	Port	Protocol	Master/...	Stati...	Virtual...
HMIO	192.168.205.68	502	Inovanc...	M		
PLCO	192.168.205.112	502	Inovanc...	S	2	

PLC Setting

Set a right IP address.

Inovance AM600 Ethernet (TCP Slave) protocol

HMI Setting

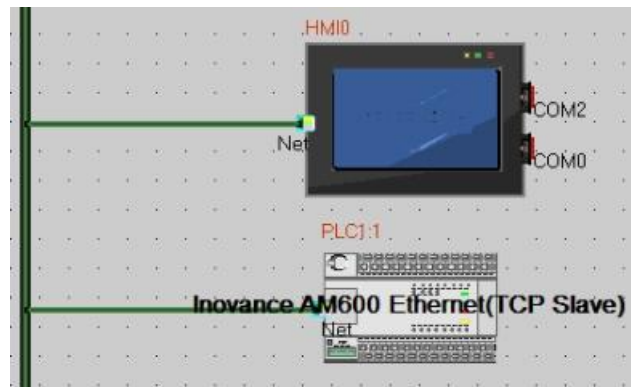

Device	IP Addr	Port	Protocol	Master/...
HMI0	192.168.205.48	502	Inovance AM600 Ethernet	M
PLC1	192.168.205.100	502	Inovance AM600 Ethernet(TCP Slave)	S

PLC Setting

Device x

Communication Settings

Applications

Backup and Restore

Files

PLC Settings

PLC Shell

Users and Groups

Log

Run Mode On Failure

☐ Stopped On Configuration Failure ☐ Stopped On System Failure

☐ Stopped On Flash Failure ☐ Stopped On SDCard Failure

Power-down Save

Saved Location: Local Memory


Network

IP Address: 192 . 168 . 205 . 100

Subnet mask: 255 . 255 . 255 . 0

Inovance H5u/Easy Ethernet (TCP Slave) protocol

HMI Setting

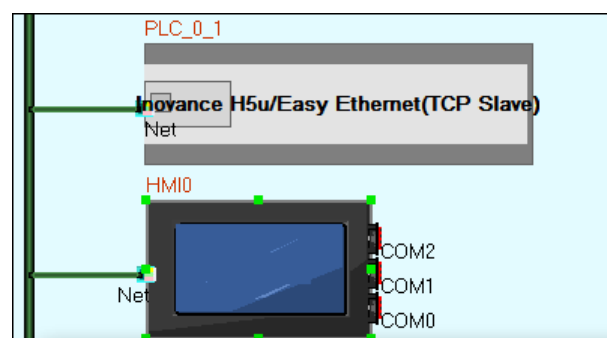

Network Device Setting					
Device	IP Addr	Port	Protocol	Master/Slave	Station N...
HMI0	192.168.1.124	502	Inovance H5u Ethernet(TCP)	M	
PLC_0_1	192.168.1.88	502	Inovance H5u Ethernet(TCP Slave)	S	1

PLC Setting

Set a right IP address.

Inovance H5u Series(Ethernet) protocol

HMI Setting

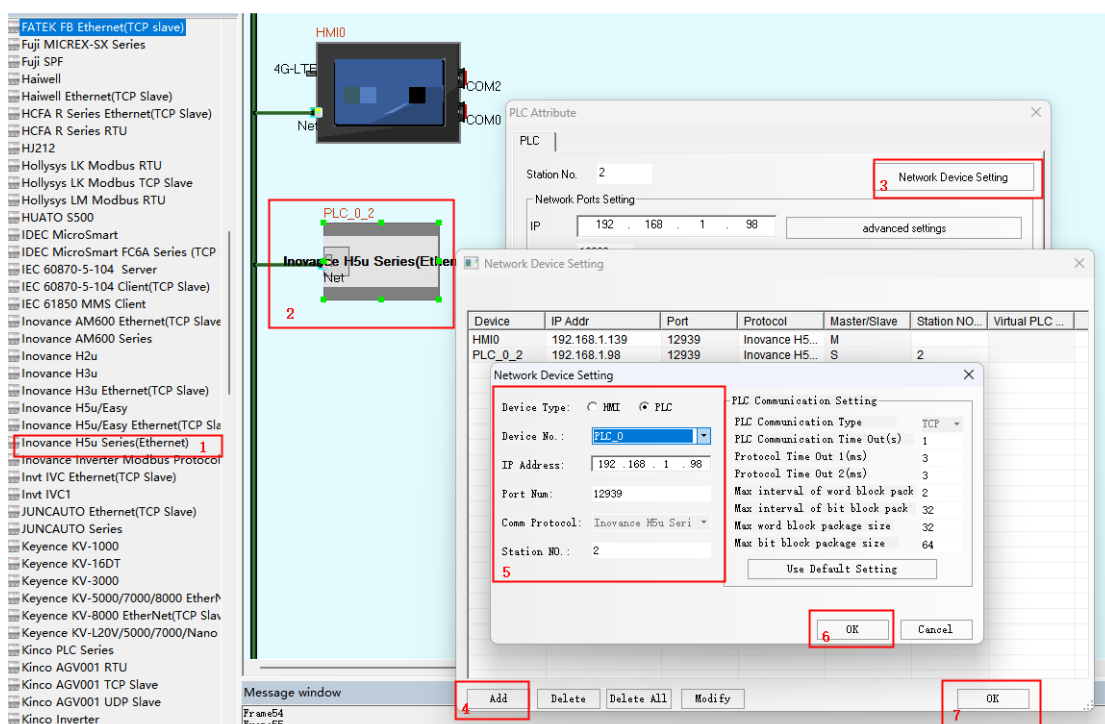


Figure 1

- (1) Click the PLC driver "Inovance H5u Series(Ethernet)" with the left mouse button and pull the driver into the right topology window (i.e., the blue screen on the right). If there is no HMI in the window and HMI needs to be added, the steps are the same as adding the PLC driver;
- (2) Double click HMI or right click HMI, pop-up window appears, left mouse button click "Properties";
- (3) Click "Network Device Configuration" to enter the network device configuration window;
- (4) Click "Add";
- (5) Set the IP address, port number, communication protocol and station number of HMI and PLC. The HMI IP address and PLC IP address must be in the same network segment (that is, the first three fields of the IP address have the same digits, but the last field has different digits), and the communication protocol must be Inovance H5u Series(Ethernet). If there are multiple HMI/ PLCs, change the device number (The default port number is 12939. Do not change the port number; otherwise, communication may fail).
- (6) Click "OK" to complete the steps of adding HMI and plc;
- (7) Click "OK" to complete the network equipment configuration, as shown in Figure 1, HMI and PLC

have been added;

PLC Setting

The software version of AutoShop used in this manual is V4.8.1.0, and the PLC model is H5U-1614MTD-A8.

1. Open the AutoShop software, click "Tools" ---> "Communication Settings", select the corresponding PLC type, select the communication type and click "Test". This step is used to detect whether the communication was successful.

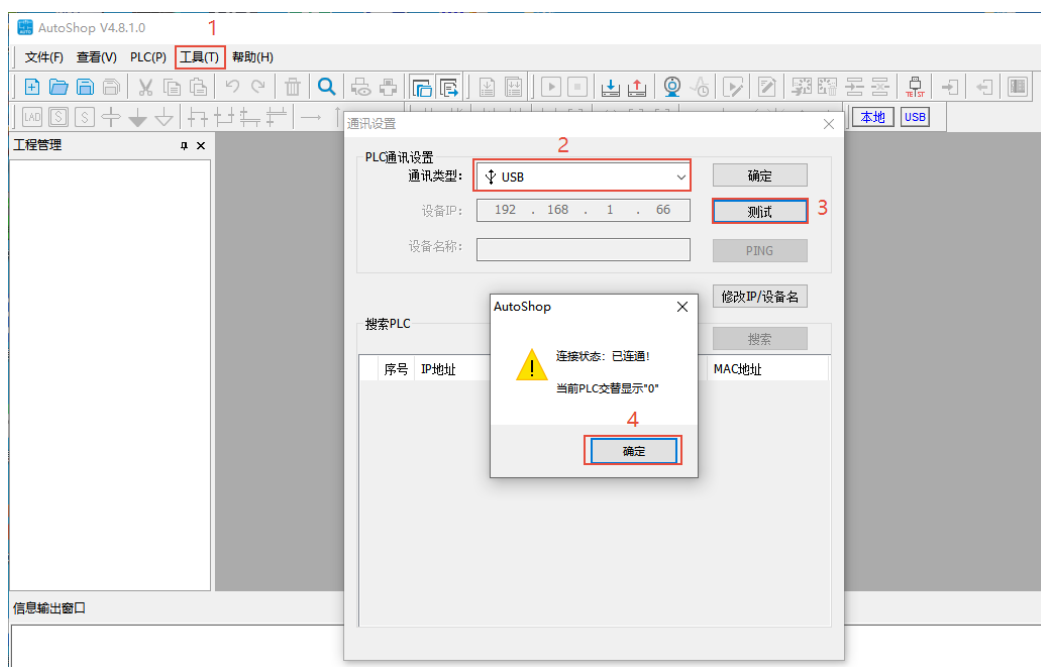
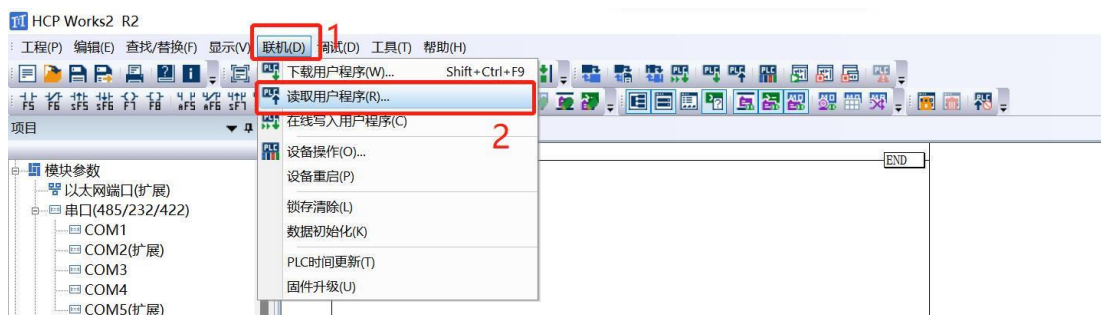


Figure 2

2. Click "PLC", select "Upload", the upload project window pops up, fill in the project name and select the PLC model, click "OK" to complete the PLC program upload.



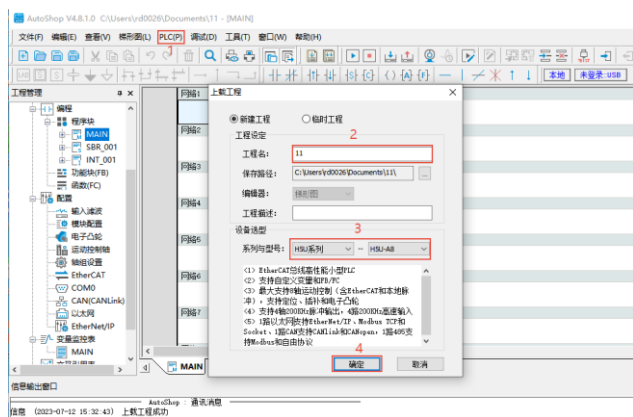


Figure 3

3. Click "Settings" ---> "Communication Settings" ---> "Modify IP/Device Name" to view the current IP address, you can also set a new IP address/device name, and click "Modify IP" after setting the new IP address to successfully modify the IP address of the PLC.

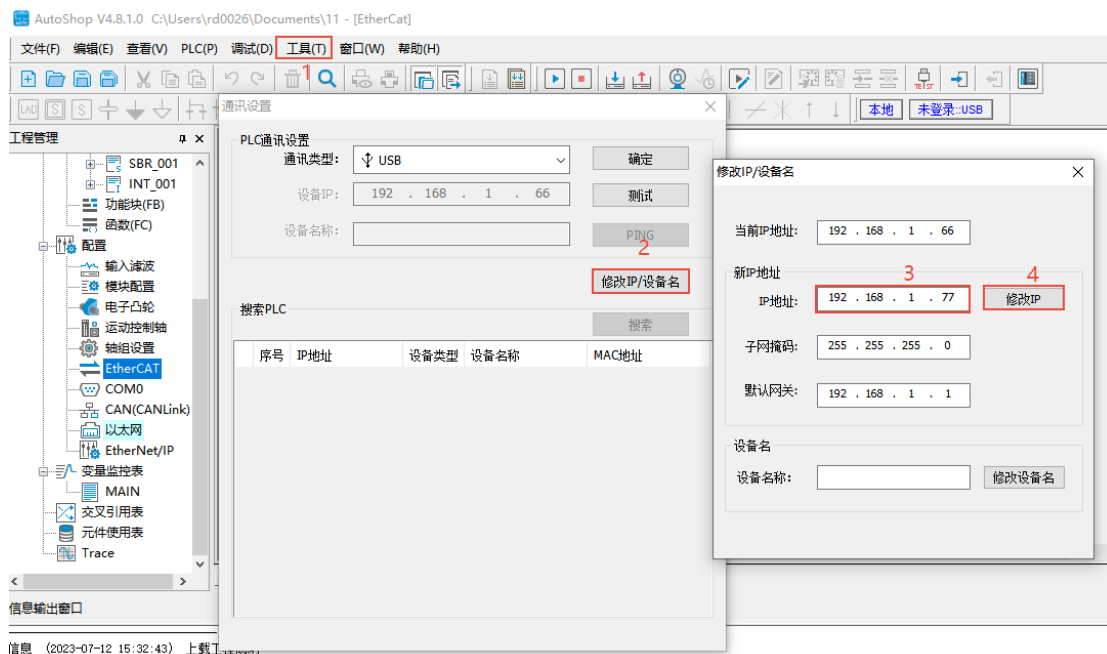


Figure 4

4. Click "Settings" ---> "Communication Settings", set the communication type to Ethernet, if the computer and PLC are in the same network segment, click Search to directly search for the corresponding PLC, showing the PLC model and IP address.

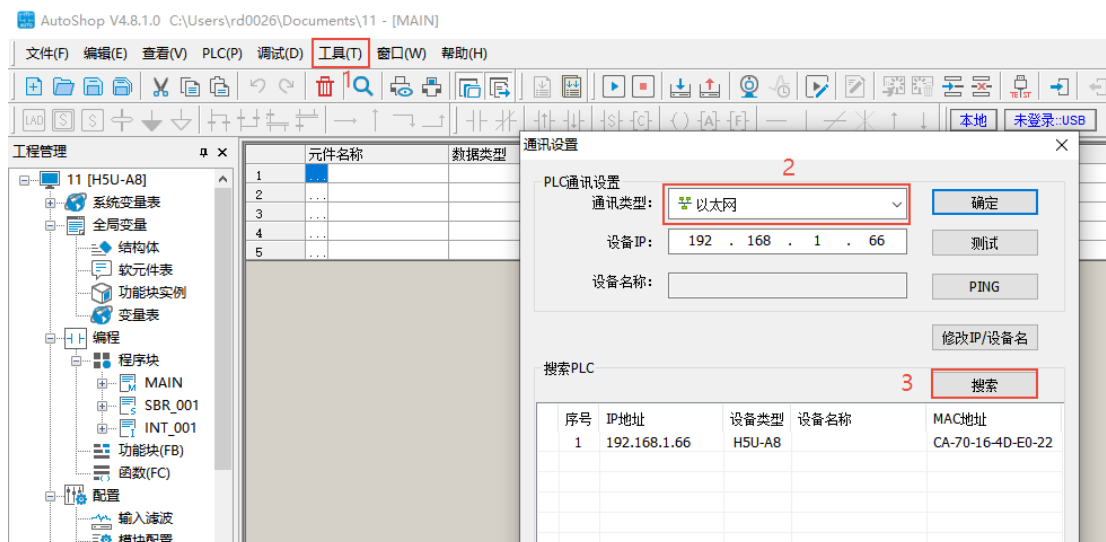


Figure 5

5. How to import labels: Click "Variable Table" to create a new label variable in the PLC software, right-click "Export HMI Monitoring Variable Table (H)" after the variable is created to generate the csv file required for importing tags, and select this file when driving the import of tags to import normally.

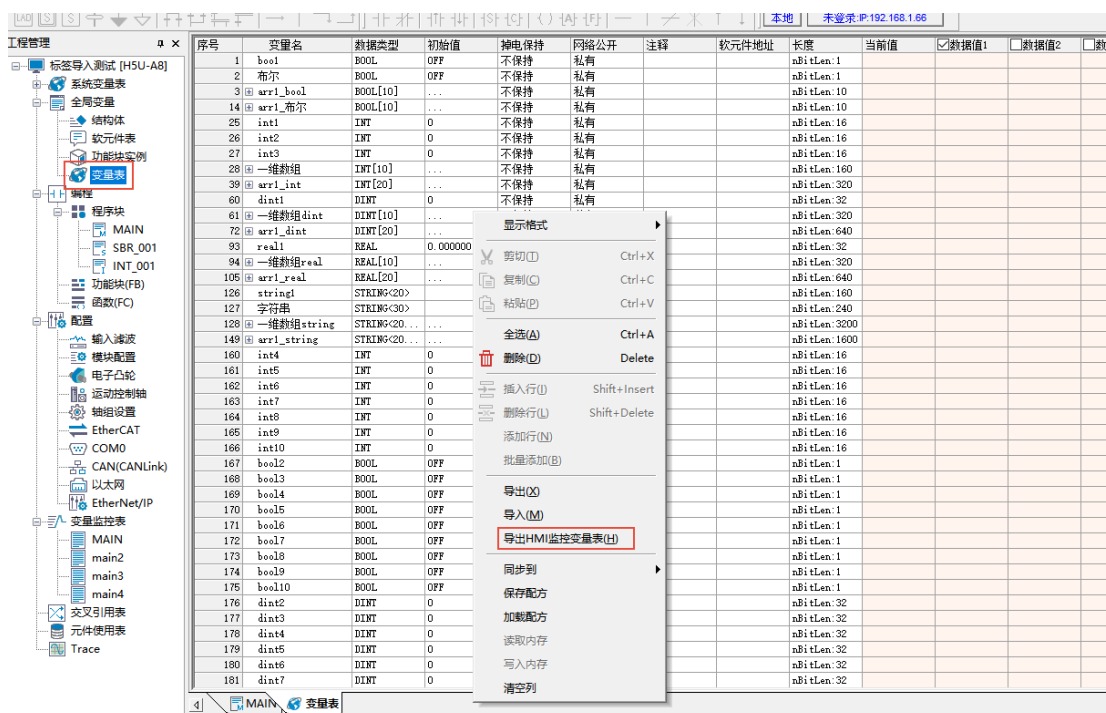


Figure 6

© Supported Device

Inovance H2u

Device	Bit Address	Word Address	Format	Notes
Input Relay	X 000-177	-----	OOO	
Output Relay	Y 000-177	-----	OOO	
Auxiliary Relay	M 0000-1535	-----	DDDD	
Timer Relay	T_bit 000-255	-----	DDD	
Counter Relay	C_bit 000-255	-----	DDD	
Data Register Relay	SM 8000-8255	-----	DDDD	
Status Relay	S 000-999	-----	DDD	
Timer	-----	T 000-255	DDD	
Counter	-----	C 000-255	DDD	
Data register	-----	D 0000-7999	DDDD	
Special Data Register	-----	SD 8000-8255	DDDD	
Counter Memory (DWord)	-----	C_dword 200-255	DDD	

Inovance H3u Ethernet(TCP Slave)

Device	Bit Address	Word Address	Format	Notes
Input Relay	X0-377	-----	OOO	
Output Relay	Y0-377	-----	OOO	
Auxiliary Relay	M0-8511	-----	DDDD	
Data Register Relay	SM0-1023	-----	DDD	
Status Relay	S 0-4095	-----	DDDD	
Timer Relay	T 0-511		DDD	
Counter Relay	C 0-255		DDD	
Timer	-----	T0-511	DDD	
Counter	-----	C0-199	DDD	
Data register	-----	D0-8511	DDDD	
Special Data Register	-----	SD0-1023	DDDD	
R Register	-----	R 0-32767	DDDDD	

Inovance H3u

Device	Bit Address	Word Address	Format	Notes
Input Relay	X 0-377	-----	OOO	
Output Relay	Y 0-377	-----	OOO	
Auxiliary Relay	M 0-8511	-----	DDDD	
Data Register Relay	SM 0-1023	-----	DDDD	
Status Relay	S 0-4095	-----	DDDD	
Timer Relay	T_bit 0-511		DDD	
Counter Relay	C_bit 0-255		DDD	
Timer	-----	T 0-511	DDD	

Counter	-----	C 0-199	DDD	
Data register		C_dword 200-255	DDD	
Special Data Register	-----	D 0-8511	DDDD	
R Register	-----	SD 0-1023	DDDD	
Input Relay	-----	R 0-32767	DDDDD	

AM600 series/Ethernet

Device	Bit Address	Word Address	Format	Notes
Input Relay	IX 0.0-8191.7	-----	DDDD.D	
Output Relay	QX 0.0-8191.7	-----	DDDD.D	
Auxiliary register	-----	MW 0-65535	DDDDD	
Input register	-----	IW 0-4095	DDDD	
Output register	-----	QW 0-4095	DDDD	

Inovance H5u/Easy 、Inovance H5u/Easy Ethernet(TCP Slave)

Device	Bit Address	Word Address	Format	Notes
Input Relay	X0-1777	-----	OOO	
Output Relay	Y0-1777	-----	OOO	
Auxiliary Relay	M0-7999	-----	DDDD	
Status Relay	S 0-4095	-----	DDDD	
	B 0-32767	-----	DDDDD	
	D_bit0-7999.15	-----	DDDD.DD	
	R_bit 0-32767.15	-----	DDDDD.DD	
Data register	-----	D0-7999	DDDD	
R Register	-----	R 0-32767	DDDDD	

Inovance H5u Series(Ethernet)

Device	Bit Address	Word Address	Format	Notes
External input	X 0-1777	----	OOOO	
External output	Y 0-1777	----	OOOO	
Internal auxiliary	M 0-7999	----	DDDD	
	B 0-32767	----	DDDDD	
Status register	S 0-4095	----	DDDD	
	W_Bit 0-32767.15	----	DDDDD.DD	
	R_Bit 0-32767.15	----	DDDDD.DD	
	D_Bit 0-7999.15	----	DDDD.DD	
	UB 0-4c4b400	----	HHHHHHH	
	----	UW 0~4c4b400	HHHHHHH	
	----	W 0~32767	DDDDD	
Data register	----	D 0~7999	DDDD	
Register R	----	R 0~32767	DDDDD	

Inovance Inverter Modbus Protocol

Device	Bit Address	Word Address	Format	Notes
Function code	FUNC 0-FFFF	-----	HHHH	

NOTE

High byte: F0 ~ FF (group F), A0 - AF (group A), 70-7 F (U) low byte: 00 to FF

1: To access function code F3-12, the access address of function code is 0xF30C;

2. To access the function code FP-00, the access address of the function code is 0x1F00(FP group corresponds to 1F);


© Cable Diagram

COM0 port communication cable


RS232

Please uses the programming cable: SC-09

RS422

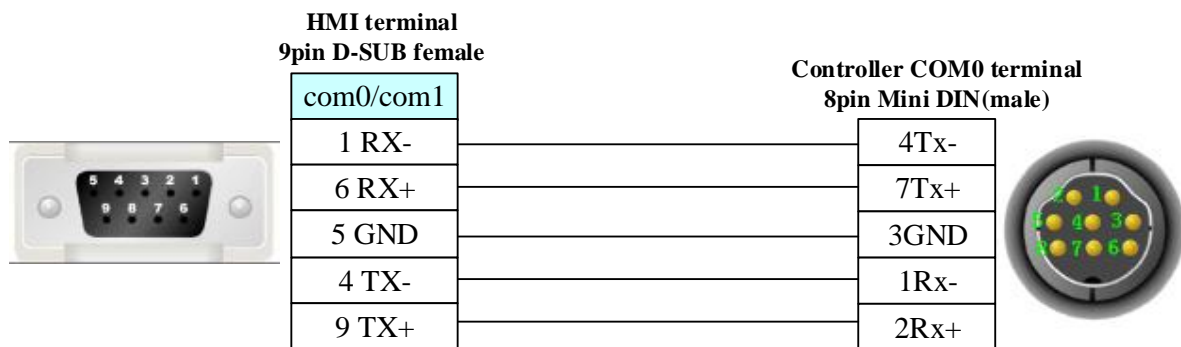





RS485

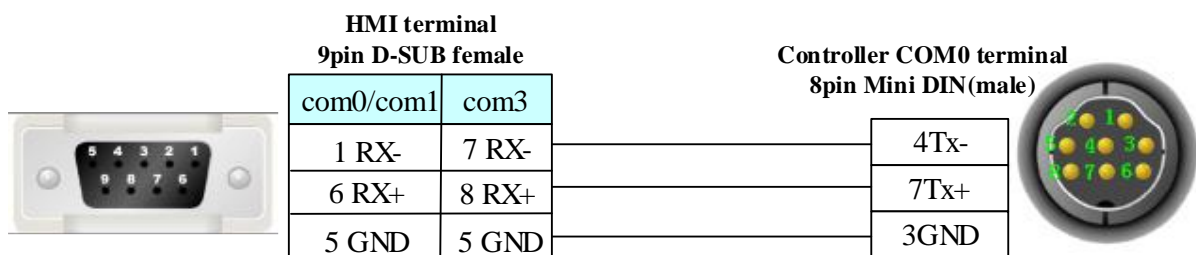

NOTE: Put off JP0 by RS485.

COM1 port communication cable

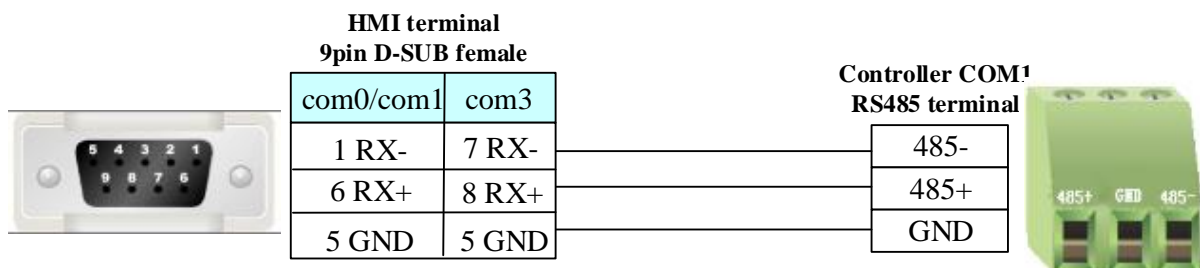

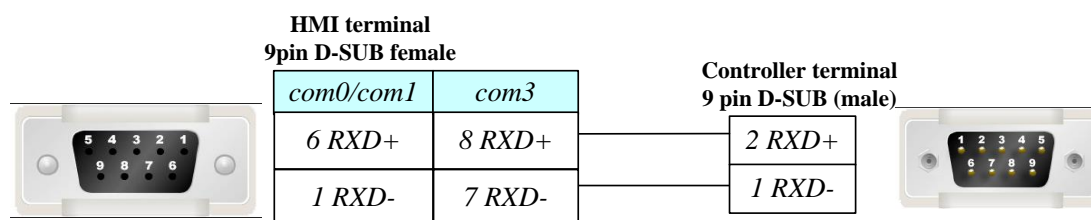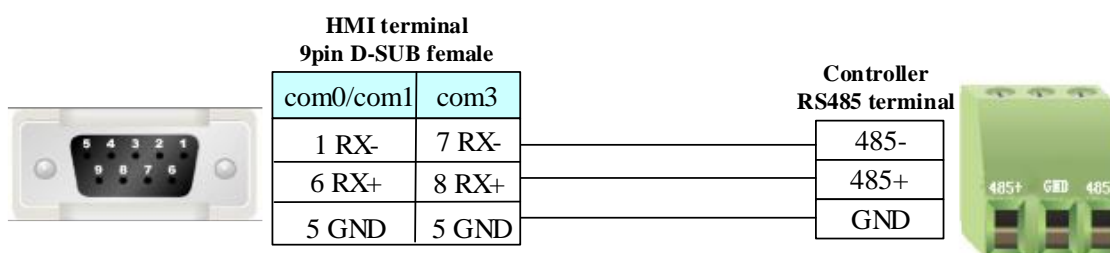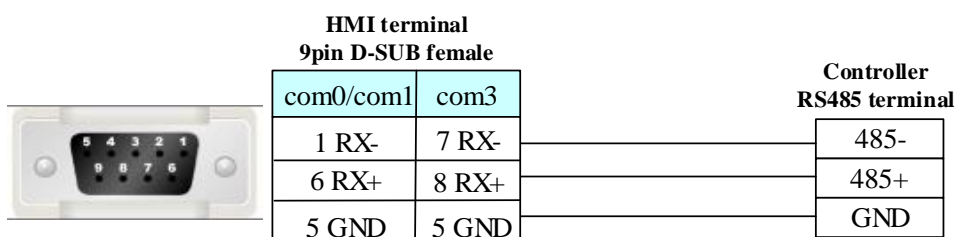AM600 Series cable**H5U Series cable****CL100 cable****Ethernet communication protocol cable**

Cross-connection or crossover network cable can be used as communication cable via the hub
Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.40 Invt**◎ Serial Communication**

Series	CPU	Link Module	Driver
INVT	IVC1	RS232 on the CPU unit	Invt IVC1

◎ Ethernet Communication

Series	CPU	Link Module	Driver
INVT	IVC2-1616MAT	Ethernet interface on CPU	Invt IVC Ethernet(TCP Slave)

◎ Serial System configuration

Series	CPU	Link Module	COM Type	Parameter	Cable
INVT	IVC1	RS232 on the CPU unit	RS232	Setting	Your owner cable
			RS485	Setting	Your owner cable


◎ Ethernet System configuration

Series	CPU	Link Module	Connect Type	Parameter	Cable
INVT	IVC2-1616MAT	Ethernet interface on CPU	Ethernet	Setting	Your owner cable


◎ Serial Communication Setting

HMI Setting

RS232 default communication: 9600, 8, none, 1; station number: 1

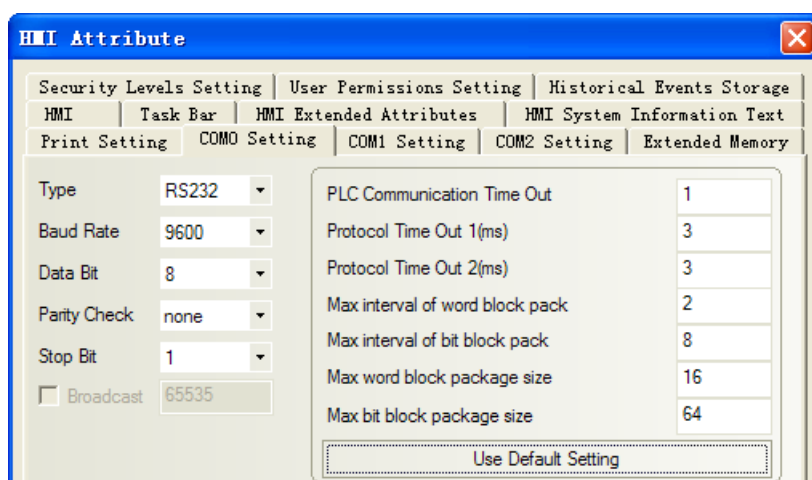


RS485 default communication: 9600, 8, none, 1; station number: 1

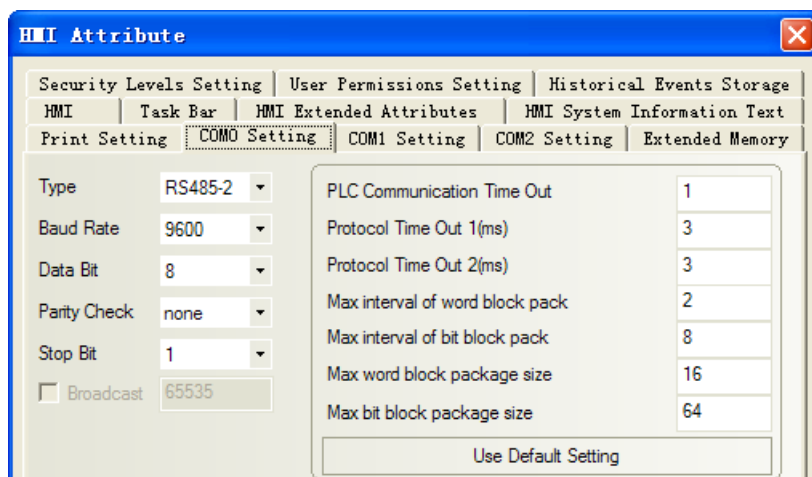


PLC Setting

1. The PLC has two ports: port0 and port1, port1 support RS232 and RS485
2. Port0 configuration as follow:

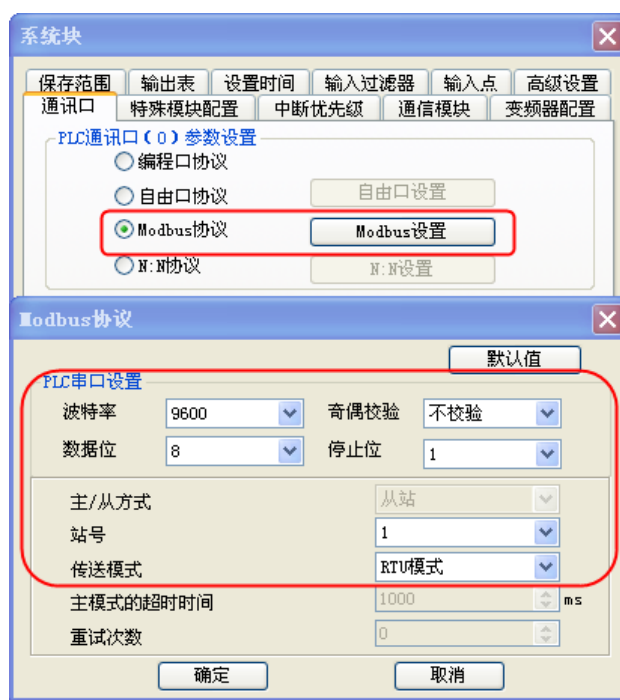


Port1 configuration as follow:

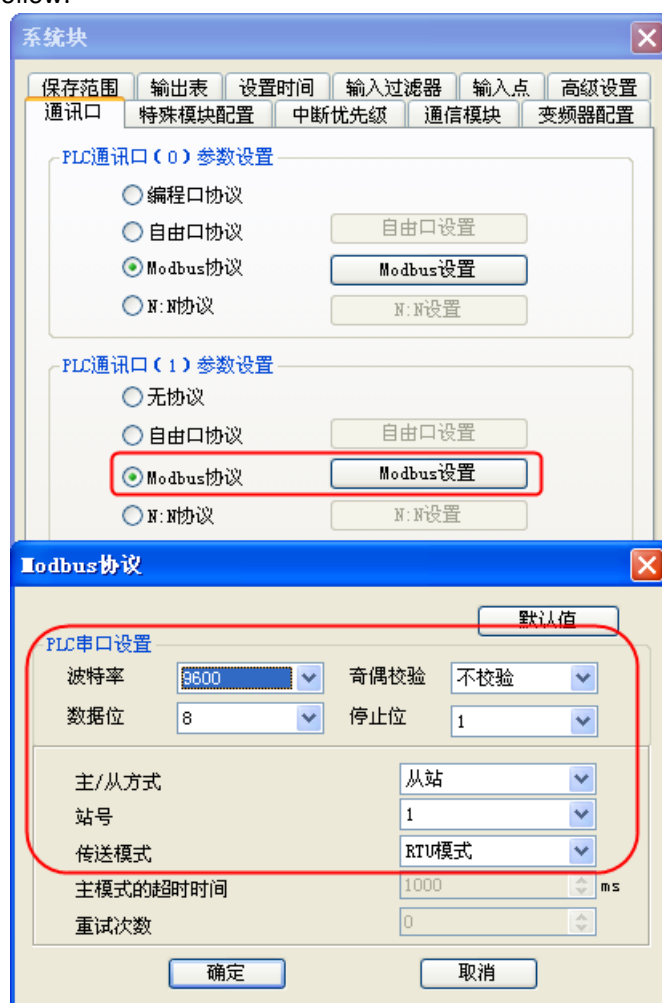


© Ethernet Communication Setting

HMI Setting

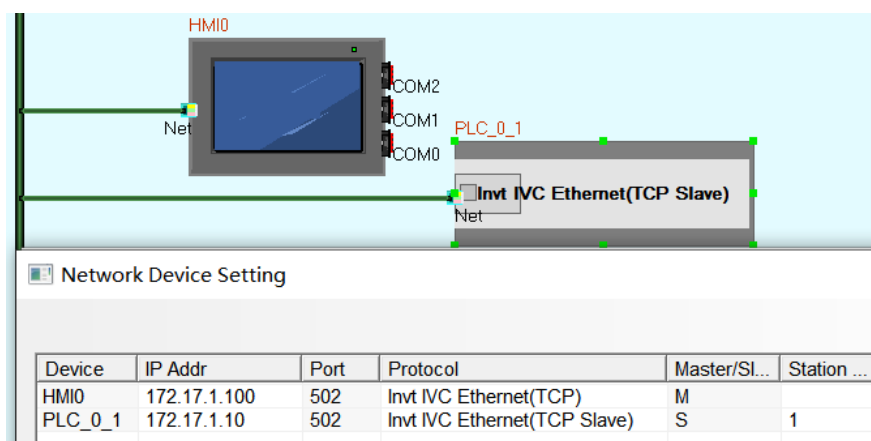

PLC Setting

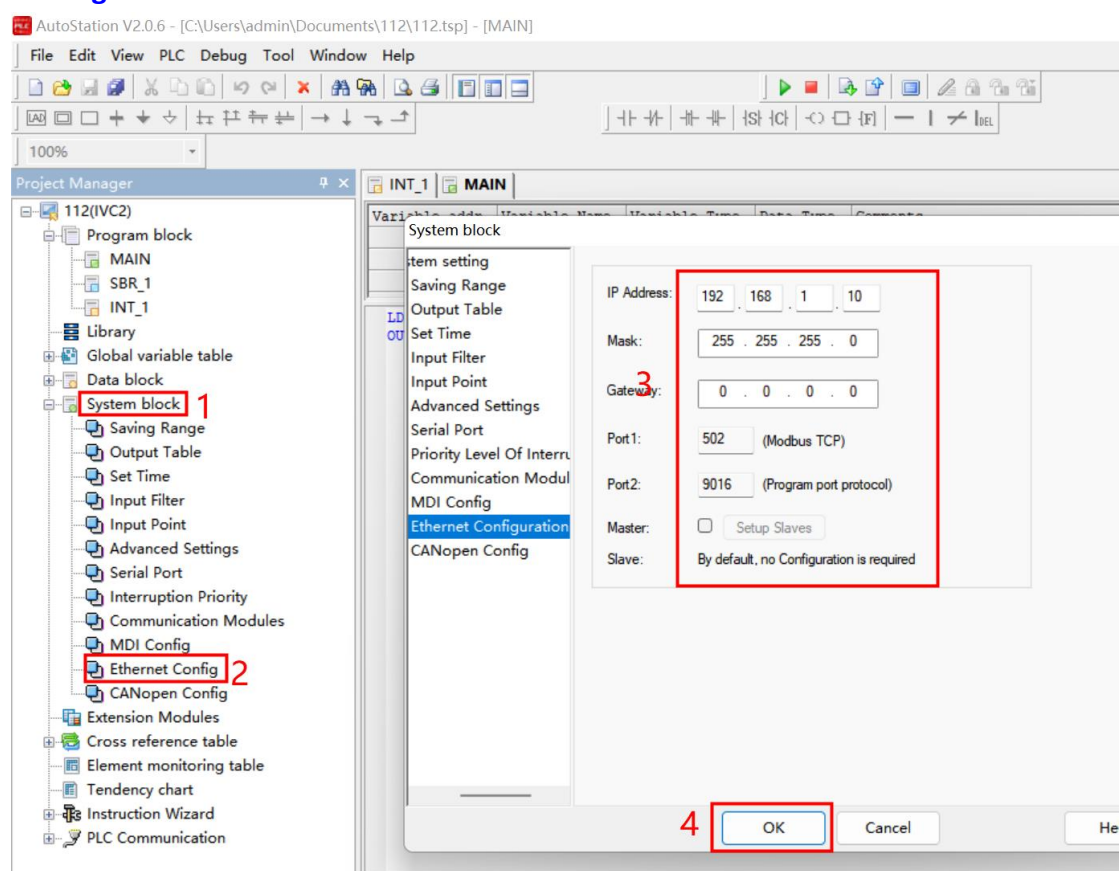

© Supported Device

Invt IVC1

Device	Bit Address	Word Address	Format	Notes
C_bit	C_bit 0-255	-----	DDD	
T_bit	T_bit 0- 255	-----	DDD	
S	S 0-1023	-----	DDDD	
SM	SM 0-255	-----	DDD	
M	M 0-2047	-----	DDDD	
Y	Y 0-177	-----	OOO	


X	X 0-177	-----	OOO	
SD_double	-----	SD_double 0-127	DDD	
D_double	-----	D_double 0-7999	DDD	
C_double	-----	C_double 200-255	DDD	
C_word	-----	C_word 0-199	DDD	
T_word	-----	T_word 0-255	DDD	
Z	-----	Z 0-15	DD	
SD	-----	SD 0-255	DDD	
D	-----	D 0-7999	DDDD	


Invt IVC Ethernet(TCP Slave)

Device	Bit address	Word address	Format	
Input relay	<i>X 0-377</i>	----	<i>OOO</i>	
Output relay	<i>Y 0-377</i>	----	<i>OOO</i>	
Auxiliary relay	<i>M 0-2047</i>	----	<i>DDDD</i>	
State relay	<i>S 0-1023</i>	----	<i>DDDD</i>	
Special auxiliary relay	<i>SM 0-1023</i>	----	<i>DDDD</i>	
counter	<i>C_Bit 0-255</i>	----	<i>DDD</i>	
timer	<i>T_Bit 0-255</i>	----	<i>DDD</i>	
counter	----	<i>C_Dword 200-255</i>	<i>DDD</i>	<i>Double</i>
counter	----	<i>C_word 0-199</i>	<i>DDD</i>	
Timer	----	<i>T_word 0-255</i>	<i>DDD</i>	
Addressable address register	----	<i>Z 0-15</i>	<i>DD</i>	
Data register	----	<i>D 0-7999</i>	<i>DDDD</i>	
Special data register	----	<i>SD 0-1023</i>	<i>DDDD</i>	
Data register	----	<i>D_Dword 0-7998</i>	<i>DDDD</i>	<i>Double</i>
Special data register	----	<i>SD_Dword 0-1022</i>	<i>DDDD</i>	<i>Double</i>


© Cable Diagram

RS232 communication cable

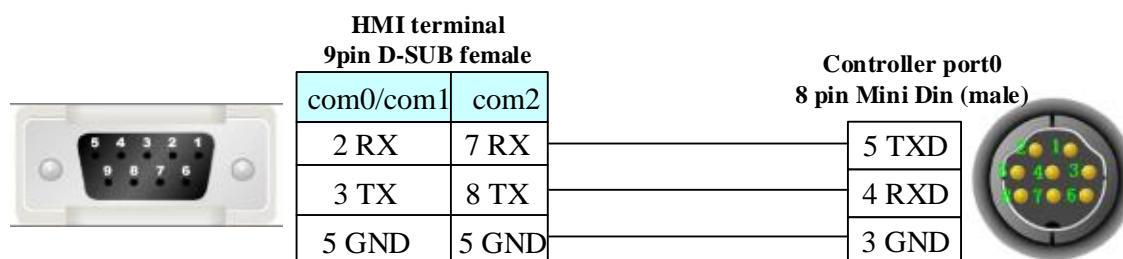

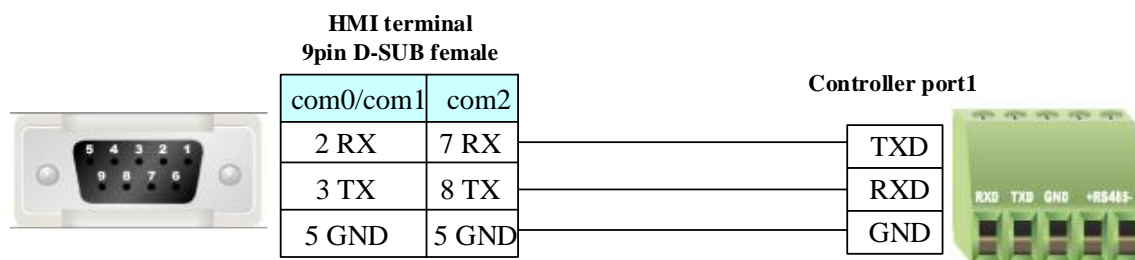

RS485 communication cable

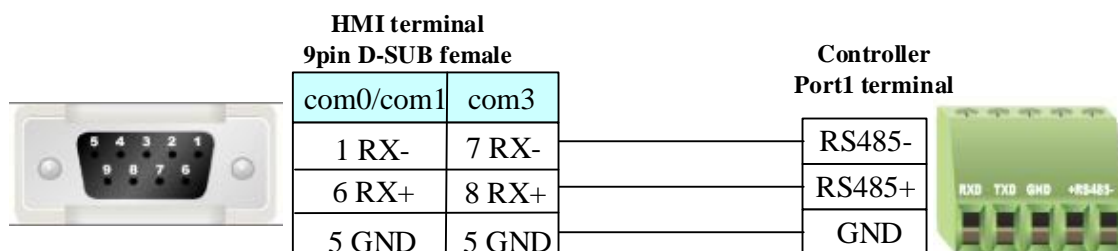

Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.41 JUNCTECH

◎ Serial Communication


Series	CPU	Link Module	Driver
JUNCTECH	J32-16T-D	RS232 on the CPU unit	JUNCTECH JC_JS_JM Series

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
JUNCTECH	J32-16T-D	RS232 on the CPU unit	RS232	Setting	Your owner cable

◎ Communication Setting

RS232 communication

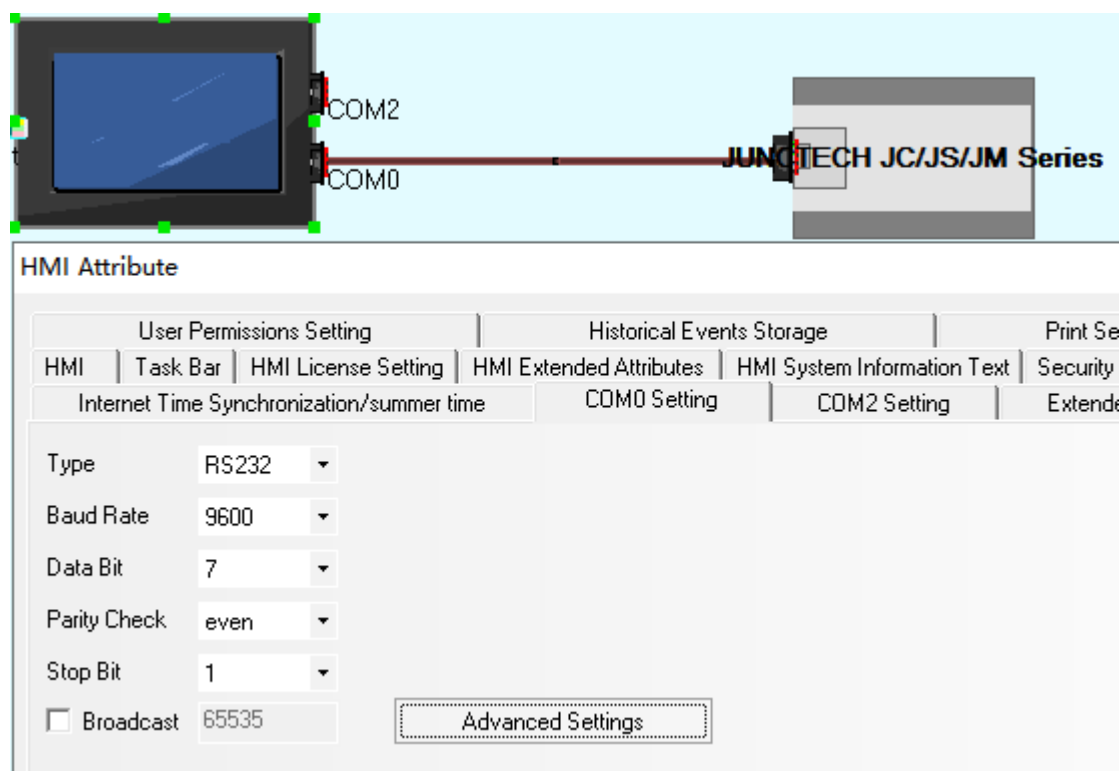


© Supported Device

Device	Bit Address	Word Address	Format	Notes
C	C0-9999	-----	DDDD	
T	T0-9999	-----	DDDD	
S	S0-9999	-----	DDDD	
M	M0-9999	-----	DDDD	
Y	Y0-23417	-----	OOOOO	
X	X0-23417	-----	OOOOO	
D	-----	D0-12000	DDDDD	
TV	-----	TV0-9999	DDDD	
CV	-----	CV0-199	DDD	
CV2	-----	CV200-255	DDD	

© Cable Diagram

RS232 communication cable

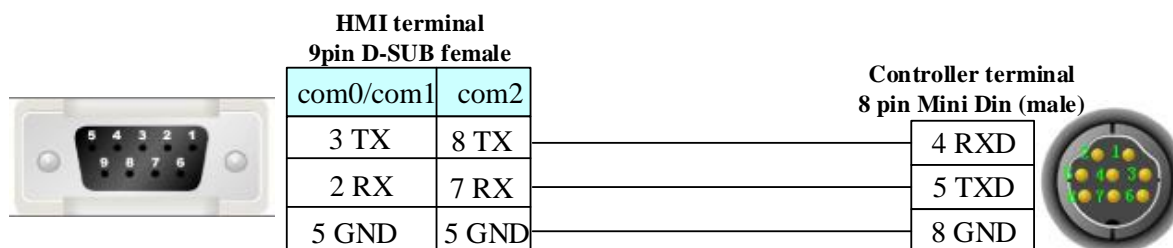

4.42 KDN Corporation

◎ Serial Communication

Series	CPU	Link Module	Driver
KDN-K3	KDN-K304-14AR	RS232 on the CPU unit	KDN-K3

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
KDN-K3	K304-14AR	RS232 on the CPU unit	RS232	Setting	Your owner cable

◎ Communication Setting

KDN-K3 RS232 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS232'. The 'Baud Rate' is '9600', 'Data Bit' is '8', 'Parity' is 'none', 'Stop Bit' is '1', and 'Slave No.' is '1'. On the right, the 'PLC Communication Time Out' is '3', 'Protocol Time Out 1(ms)' is '3', 'Protocol Time Out 2(ms)' is '3', 'Max interval of block pack(WORDS)' is '16', 'Max interval of block pack(BITS)' is '32', 'Max block package size(WORDS)' is '32', and 'Max block package size(BITS)' is '64'. There is a 'Use Default Setting' button and 'OK' and 'Cancel' buttons at the bottom.

◎ Supported Device

KDN-K3


Device	Bit Address	Word Address	Format	Notes
Discrete inputs and image Relay	I0.0-7.7	-----	D.O	
Discrete outputs and image Relay	Q0.0-7.7	-----	D.O	
Internal memory Relay	M0.0-31.7	-----	DD.O	
Analog inputs	-----	AIW0-30	DD	
Analog outputs	-----	AQW0-30	DD	
Internal register	-----	VW0-4094	DDDD	
Internal register(double word)	-----	VD0-4092	DDDD	

NOTE:

- 1) AIW, AQW, VW, VD address must be an even number.
- 2) AIW and I device read only.
- 3) The single floating VR of PLC corresponds with the VD of the Ev5000 (choose single floating).

◎ Cable Diagram

RS232 communication cable

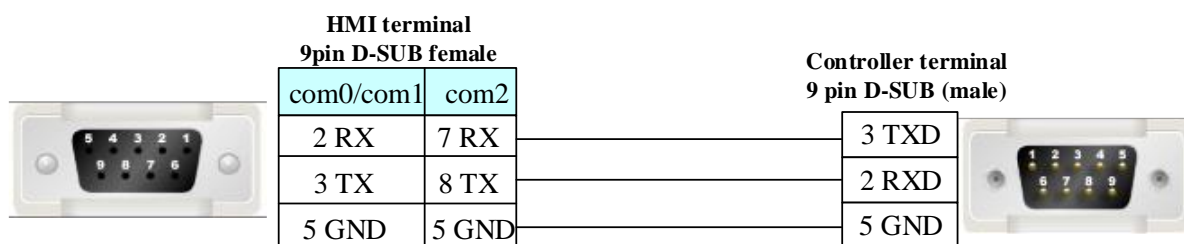

4.43 Kinco Corporation

◎Serial Communication

Series	CPU	Link Module	Driver
PLC	K2 Series	RS485 on the CPU port	Kinco PLC Series
	K3 Series	RS232 on the CPU unit	
		RS485 on the CPU port	
	K5 Series	RS232 on the CPU unit	
		RS485 on the CPU port	
	KW Series	RS232 on the CPU unit	
		RS485 on the CPU port	
	KS Series	RS232 on the CPU unit	
		RS485 on the CPU port	
AGV	AGV001	RS232 on the CPU unit	Kinco AGV001 RTU
		RS485 on the CPU unit	

◎Network communication

Series	CPU	Link Module	Driver
PLC	KS101	EtherNet/IP port on CPU Unit	Kinco PLC Ethernet(TCP Slave)
AGV	AGV001	EtherNet/IP port on CPU Unit	Kinco AGV001 TCP Slave
			Kinco AGV001 UDP Slave

◎Serial System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
PLC	K2 Series	RS485 on the port	RS485	Setting	Your owner cable
	K3 Series	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485 on the port	RS485	Setting	Your owner cable
	K5 Series	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485 on the port	RS485	Setting	Your owner cable
	KW Series	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485 on the port	RS485	Setting	Your owner cable
	KS Series	RS232 on the CPU unit	RS232	Setting	Your owner cable

		RS485 on the port	RS485	Setting	Your owner cable
AGV	AGV001	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485 on the CPU unit	RS485	Setting	Your owner cable

◎ Network System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
PLC	KS101	EtherNet/IP port on CPU Unit	Ethernet (TCP Slave)	Setting	Your owner cable
AGV	AGV001	EtherNet/IP port on CPU Unit	Ethernet (TCP Slave)	Setting	Your owner cable
			Ethernet (UDP Slave)	Setting	Your owner cable

◎ Serial Communication Setting

PLC:

RS232 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS232'. The 'Baud Rate' is '9600', 'Data Bit' is '8', 'Parity' is 'none', 'Stop Bit' is '1', and 'Slave No.' is '1'. On the right, communication parameters are listed: 'PLC Communication Time Out' (3), 'Protocol Time Out 1(ms)' (3), 'Protocol Time Out 2(ms)' (3), 'Max interval of block pack(WORDS)' (16), 'Max interval of block pack(BITS)' (32), 'Max block package size(WORDS)' (32), and 'Max block package size(BITS)' (64). A 'Use Default Setting' button is at the bottom of the parameter list. 'OK' and 'Cancel' buttons are at the bottom right.


RS485 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS485-2'. The 'Baud Rate' is '9600', 'Data Bit' is '8', 'Parity' is 'none', 'Stop Bit' is '1', and 'Slave No.' is '1'. On the right, communication parameters are listed: 'PLC Communication Time Out' (3), 'Protocol Time Out 1(ms)' (3), 'Protocol Time Out 2(ms)' (3), 'Max interval of block pack(WORDS)' (16), 'Max interval of block pack(BITS)' (32), 'Max block package size(WORDS)' (32), and 'Max block package size(BITS)' (64). A 'Use Default Setting' button is at the bottom of the parameter list. 'OK' and 'Cancel' buttons are at the bottom right.


AGV:

Default: 9600, 8, none, 1; station number: 1

RS232 communication:

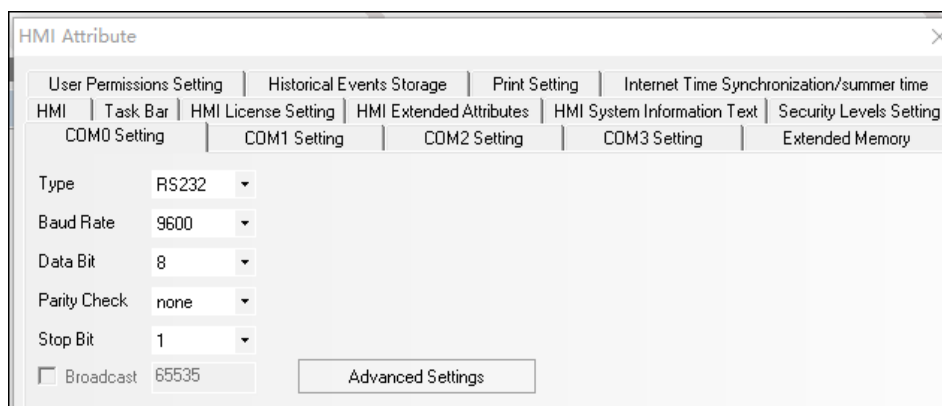

RS485 communication

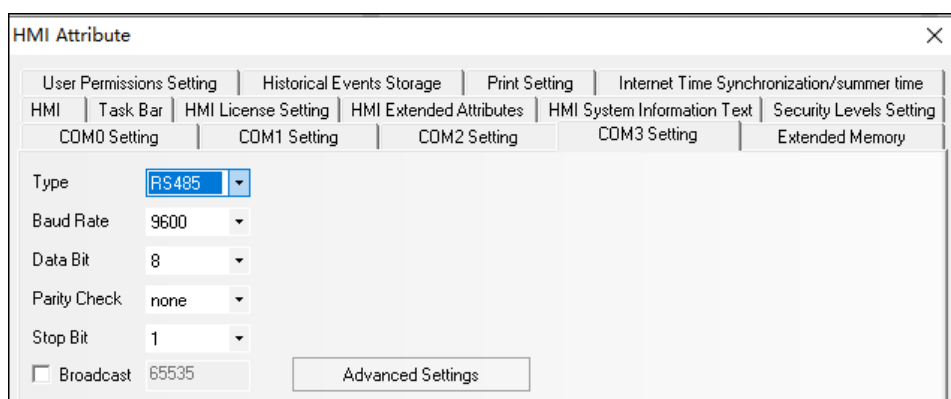


PLC Setting

1. Open Codesys V3.5 SP16 software to construct a new project, and then right-click to update the device, choose PLC->SotMotion PLCs->kinco AGV001, and update the device, at last close it
2. Select Device, click Scan- Network in the communication settings, after the device is scanned, click OK
3. Click [Login in] in [Online] in the menu bar to connect to the device
4. Add the library kinco_Modbus_v1.7, 3.5.13.50 (kinco) and Standard=Standard, 3.5.15.0 (System), right-click to add an object in Application-task configuration, select the task in the task below to call PLC_PRG (Adding library specific refers to AGV001 Controller Programming Manual)
5. Write the required serial port parameters in the PLC_PRG program
6. Recompile and download the project to the controller


◎ Network Communication Setting

PLC:

HMI Setting

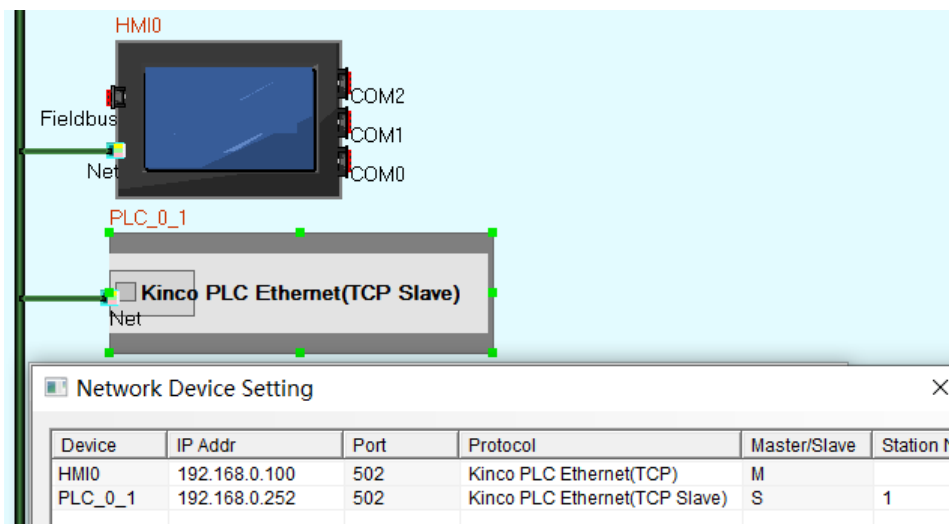


PLC Setting

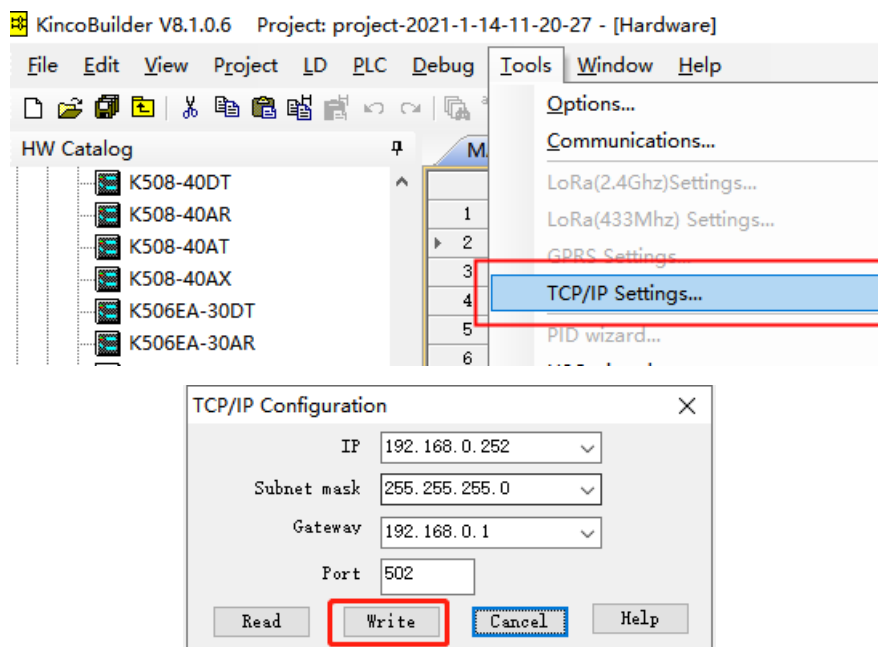

AGV:

Kinco AGV001 (TCP Slave) protocol:


HMI Settings

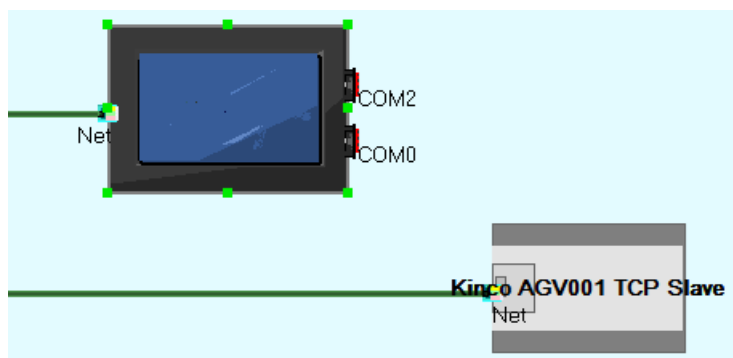

Network Device Setting				
Device	IP Addr	Port	Protocol	Master/Slave
HMI0	192.168.0.53	503	Kinco AGV001 TCP	M
PLC_0_1	192.168.0.250	503	Kinco AGV001 TCP Slave	S

Kinco AGV001 (TCP Slave) protocol:

HMI Settings

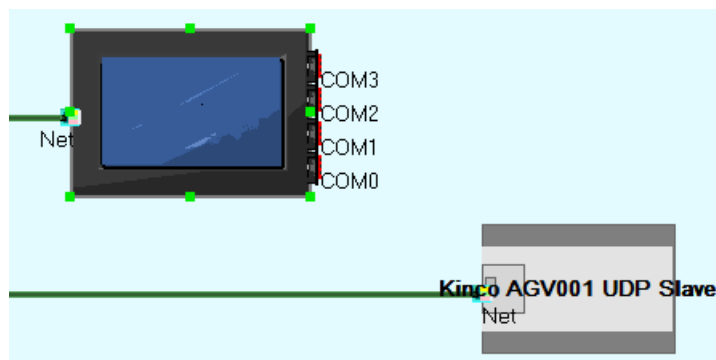

Network Device Setting				
Device	IP Addr	Port	Protocol	Master/Slave
HMI0	192.168.1.73	504	Kinco AGV001 UDP	M
PLC_0_0	192.168.1.250	504	Kinco AGV001 UDP Slave	S

PLC Setting

The operation steps for connecting the device are the same as the serial port driver, please refer to the serial port driver operation steps for the connection method;

Here is a detailed description of how to modify the IP address and query the IP address after modification:

1. The default IP address of the controller is ETH0: 192.168.0.250 ETH1: 192.168.1.250
2. After connecting the device, select the plc command under Device, and then enter the command in the blank box: `ipconfig eth0 -print`

The obtained IP address is 192.168.0.250 (both network ports have network cables connected, enter `ipconfig eth1 -print`, the IP address of network port 1 is 192.168.1.250)

3. If you need to modify the IP address, enter the command in the blank box to modify the IP of network port 0: `ipconfig eth0 -ip 192.168.205.180 -mask 255.255.255.0 -gate 192.168.205.1`, to modify the IP of network port 1, just change eth0 to eth1.

(Note: The programming software fixes ETH0 as the programming port, and scanning only displays the IP of ETH0, regardless of which port is actually connected.)

It is recommended to restart the controller after modifying the IP)

©Supported Device

Kinco PLC Series

Device	Bit Address	Word Address	Format	Notes
Discrete inputs and image Relay	I0.0-124.7	-----	D.O	

Discrete outputs and image Relay	Q0.0-124.7	-----	D.O	
Internal memory Relay	M0.0-4095.7	-----	DD.O	
Internal register	VW.B0.0-16383.7	-----	DDDDD.O	
Analog inputs	-----	AIW 0-999	DD	
Analog outputs	-----	AQW 0-999	DD	
Internal register	-----	VW 0-16384	DDDD	
Internal register		VB 0-16384	DDDDD	
Internal register(double word)	-----	VD 0-16384	DDDDD	
Internal register(double word)	-----	VR 0-16384	DDDDD	
ERR	-----	ERR 0~127 ^{*1} ERR 128~255 ^{*2} ERR 256~383 ^{*3} ERR 384~511 ^{*4}	DDDDD	

NOTE:

- 1) AIW, AQW, VW, VD address must be an even number.
 - 2) AIW and I device read only.
 - 3) The single floating VR of PLC corresponds with the VD of the Ev5000 (choose single floating).
- *1 ERR0~127 indicate the recent 128 common errors. ERR0 is the latest error, ERR1 is the later error, and so on.
- *2 ERR128~255 indicate the recent 128 serious errors. ERR128 is the latest error, ERR129 is the later error, and so on.
- *3 ERR256~383 indicate the last 128 common errors the last time PLC is powered on. ERR256 is the last error, ERR257 is the previous error, and so on.
- *4 ERR384~511 indicate the last 128 serious errors the last time PLC is powered on. ERR 384 is the last error, ERR385 is the previous error, and so on.




Kinco PLC Ethernet(TCP Slave)






Device	Bit Address	Word Address	Format	Notes
Discrete inputs and image Relay	I0.0-31.7	-----	DD.O	
Discrete outputs and image Relay	Q0.0-31.7	-----	DD.O	
Internal memory Relay	M0.0-4095.7	-----	DDDD.O	
Internal register	VW.B0.0-8191.7	-----	DDDD.O	
Analog inputs	-----	AIW 0-198	DDD	
Analog outputs	-----	AQW 0-198	DDD	
Internal register	-----	VW 0-16384	DDDDD	
Internal register		VB 0-16384	DDDDD	
Internal register(double word)	-----	VD 0-8191	DDDD	
Internal register(double word)		VR 0-8191	DDDD	
ERR	-----	ERR 0~127*1 ERR 128~255*2 ERR 256~383*3	DDD	

		ERR 384~511*4		
--	--	---------------	--	--

AGV:

Device	Bit Address	Word Address	Format	Notes
System internal input node	IX0.0-7999.7	-----	DDDD.0	
System external input node	QX0.0-7999.7	-----	DDDD.0	
Intermediate register node	MX0.0-99999.7	-----	DDDDD.0	
Intermediate register	MW_Bit 0-49999.15		DDDDD.H	
Input register	-----	IW0-49999	DDDDD	
Output register	-----	QW0-15399	DDDDD	
Intermediate register	-----	MW0-49999	DDDDD	

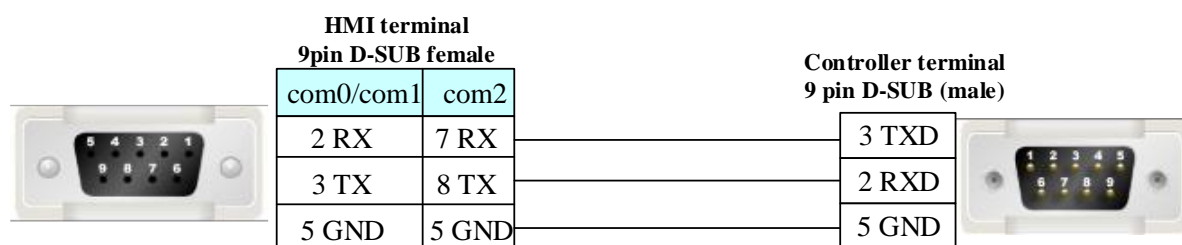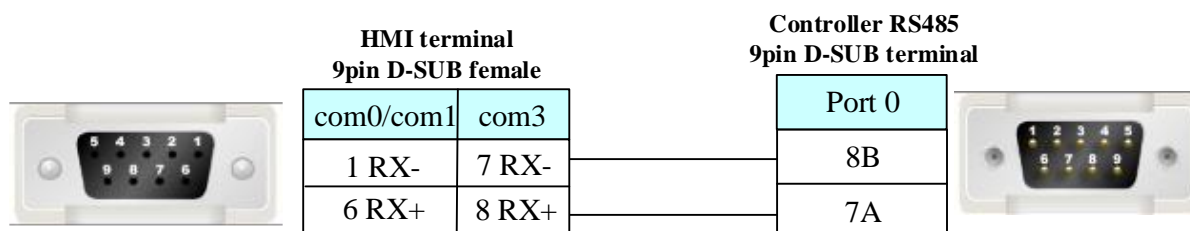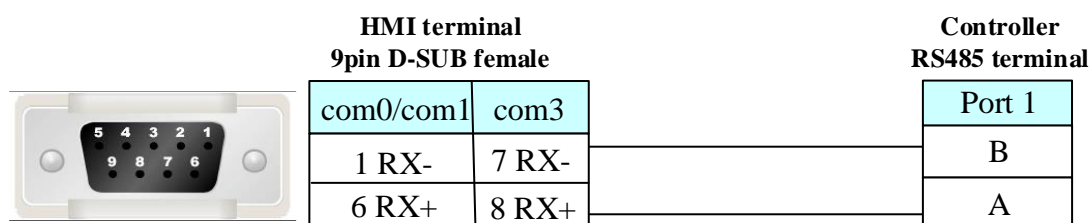© Cable Diagram**RS232 communication cable****CPU304/CPU304EX/CPU306****RS485 communication cable****CPU306EX /308/504/KS Series****RS485 communication cable****CPU506EA****RS485 communication cable**

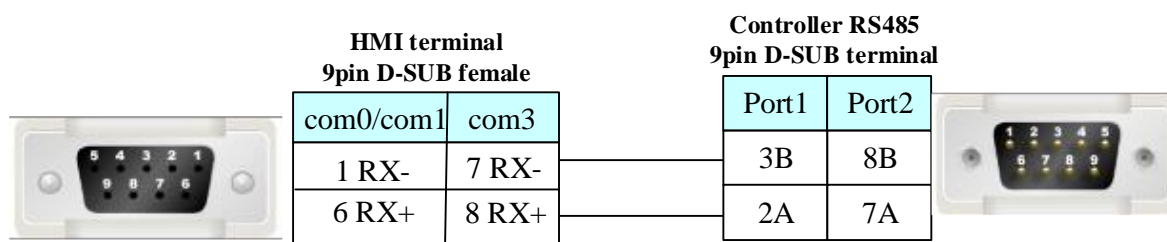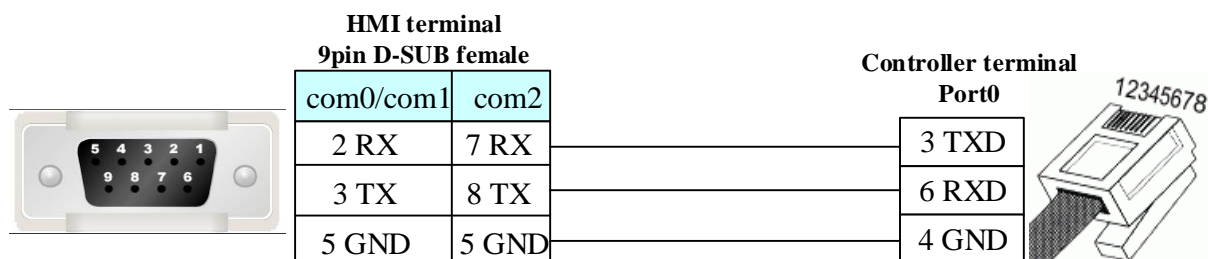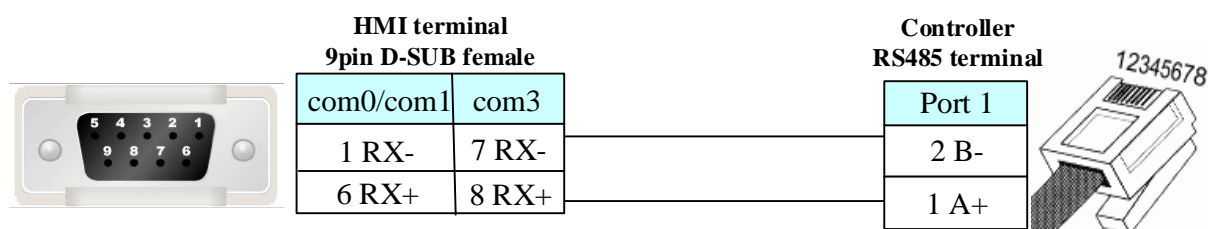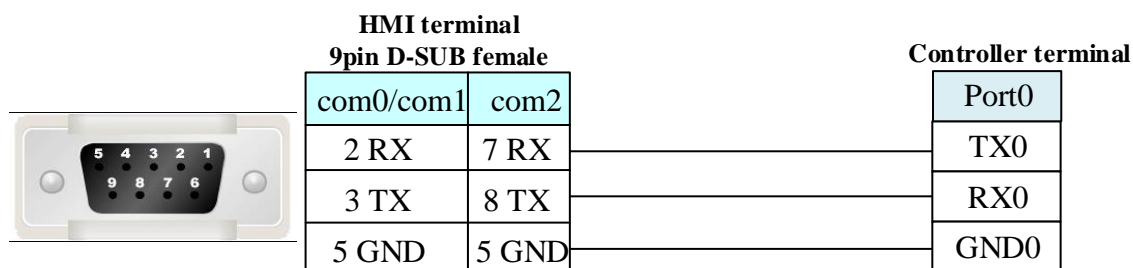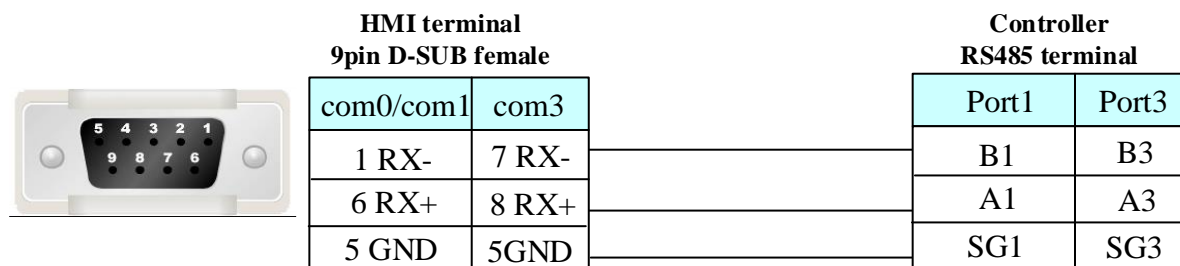**KW/KS Series****RS232 communication cable****KW Series****RS485 communication cable****AGV Series****RS232 communication cable****RS485 communication cable****Ethernet communication protocol cable**

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.44 Kinco Inverter

◎ Serial Communication

Series	CPU	Link Module	Driver
Kinco	FV100	RS485 on the CPU unit	Kinco Inverter
	FV20		
	CV20		
	CV100		


◎ Serial Communication Parameters and Cables Production

Series	CPU	Link Module	COMM Type	Parameter	Cable
Kinco	FV100	RS485 on the CPU unit	RS485	Setting	Your owner cable
	FV20				
	CV20				
	CV100				

◎ Serial Communication Parameters

HMI Setting

Default communication: 9600bps, 8, even, 1; station: 5

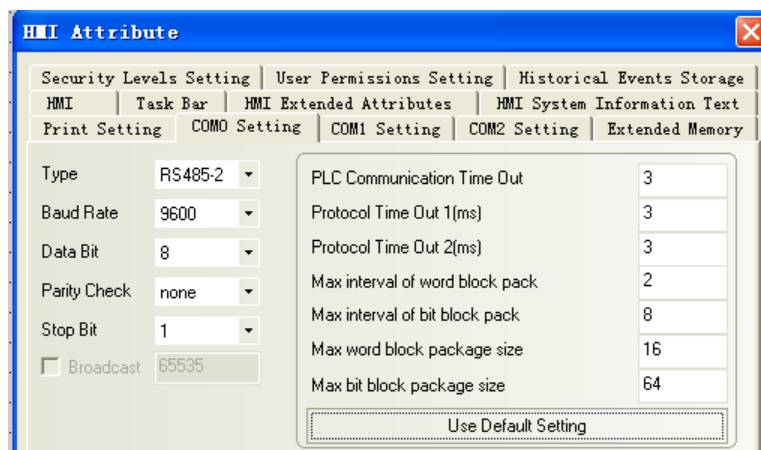

PLC Setting

A. Inverter operation panel menu

Key	Name	Function
MENU	Programming / Exit key	Enter or exit the programming status
ENTER	Function / Data key	Enter the submenu or confirm data
∧	Increase key	Incremental data or function code
∨	Decrease key	Decreasing the data or function code
SHIFT	Shift key	In edit mode, you can choose to modify the bit setting data; in other states, you can switch the display status

		parameters
M	Multifunction key	The key functions are set by b4.01
RUN	Run key	In the operation panel mode, press this key to run
STOP/RST	Stop / Reset key	Shutdown or fault reset

B.Inverter function code parameters

b3: Communication parameters

Function Code	Name	Range	Minimum unit	Factory setting	Change	machine setting range
b3.00	Communication Configuration	LED ones: Baud Rate Selection 0: 4800BPS 1: 9600BPS 2: 19200BPS 3: 38400BPS 4: 115200BPS 5: 125000BPS LED tens: Data Format 0: 1-8-2-N, RTU 1: 1-8-1-E, RTU 2: 1-8-1-O, RTU 3: 1-7-2-N, ASCII 4: 1-7-1-E, ASCII 5: 1-7-1-O, ASCII LED hundreds: Connection mode 0: Direct Cable Connection (232/485) 1: MODEM(232)	1	001	X	0~155H
b3.01	Machine Address	0~127, 0: Broadcast address	1	5	X	0~127

X: Operation can not be changed

C.Function code parameters of the inverter, control parameters and status parameters are mapped to Modbus read and write registers; inverter control parameters and status parameters are virtual inverter function code group; Function code group and its high byte register address map correspondence shown in the following table

Inverter parameter group	Mapped address high byte	Inverter parameter group	Mapped address high byte
A0	0x00	B2	0x0C
A1	0x01	B3	0x0D
A2	0x02	B4	0x0E
A3	0x03	C0	0x14
A4	0x04	C1	0x15
A5	0x05	D0	0x1E
A6	0x06	D1	0x1F
A7	0x07	D2	0x20
A8	0x08	U0	0x5A

B0	0x0A	Control parameters group	0x32
B1	0x0B	Status parameter group	0x33

Note: With function code parameter A3.02 example, the register address A3.02 to 0x0302, converted to decimal number 770, so the HMI set the address to 770 + 1 = 771 (decimal)

◎Supported Device

Device	Bit Address	Word Address	Format
Internal system / external output node	0X 1-65535	-----	DDDDD
Internal system / external input node	1X 1-65535	-----	DDDDD
Analog input data node	3X_bit 0.01-65535.15	-----	DDDDD.DD
Data Node	4X_bit 0.01-65535.15	-----	DDDDD.DD
4X single write data node	6X_bit 0.01-65535.15	-----	DDDDD.DD
Analog Input Data Register	-----	3X 1-65535	DDDDD
Data register	-----	4X 1-65535	DDDDD
Data register	-----	5X 1-65535	DDDDD
4X single write register	-----	6X 1-65535	DDDDD
Data register	-----	41X 1-65535	DDDDD
Data register	-----	43X-DINV 1-65535	DDDDD
Data register	-----	4X-DINV 1-65535	DDDDD
Data register	-----	3X-DINV 1-65535	DDDDD


Notes: 1.5X :Anti-byte; 4X-DINV, 3X-DINV: word high and low bit-reversed;

2.41X:Rewrite a single 16-length inverter function code parameter or control parameters, parameter values after the drive is powered down to save;

3.43X-DINV:Rewrite multiple inverter function code parameter or control parameters, parameter values after the drive is powered down to save;

◎Cables Production

RS485 communication cable

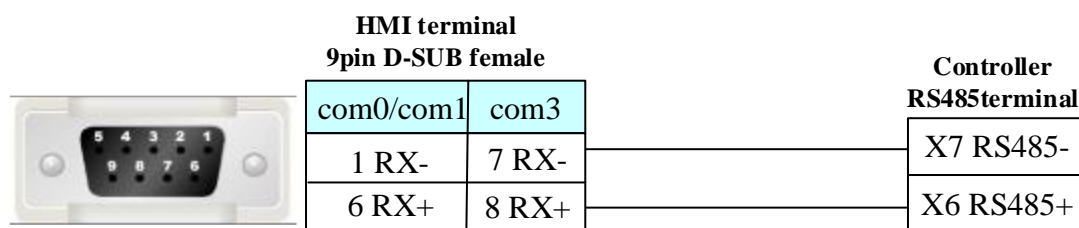

4.45 Kinco EB-MOD2P-01(Kinco Bus Bridge)

◎Serial Communication

Series	CPU	Link Module	Driver
--------	-----	-------------	--------

FieldBus Bridge	EB-MOD2P-01	RS232 on the CPU unit	Kinco EB-MOD2P-01 Modbus RTU
		RS485 on the CPU unit	
		RS422 on the CPU unit	

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
FieldBus Bridge	EB-MOD2P-01	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS422 on the CPU unit	RS422	Setting	Your owner cable
		RS485 on the CPU unit	RS485	Setting	Your owner cable

◎ Communication Setting

EB-MOD2P-01 RS232 communication

HMI Attribute

Print Setting | Serial Port 0 Setting | Serial Port 1 Setting

Type: RS232

Baud Rate: 9600

Data Bit: 8

Parity: even

Stop Bit: 1

Slave No.: 0

PLC Communication Time Out: 1

Protocol Time Out 1(ms): 200

Protocol Time Out 2(ms): 3

Max interval of block pack(WORDS): 0

Max interval of block pack(BITS): 0

Max block package size(WORDS): 1

Max block package size(BITS): 1

Use Default Setting

OK Cancel

NOTE: Communication parameter must be the same as the controller panel.

EB-MOD2P-01 RS422 communication

HMI Attribute

Print Setting | Serial Port 0 Setting | Serial Port 1 Setting

Type: RS485-4

Baud Rate: 9600

Data Bit: 8

Parity: even

Stop Bit: 1

Slave No.: 0

PLC Communication Time Out: 1

Protocol Time Out 1(ms): 200

Protocol Time Out 2(ms): 3

Max interval of block pack(WORDS): 0

Max interval of block pack(BITS): 0


Max block package size(WORDS): 1

Max block package size(BITS): 1

Use Default Setting

OK Cancel

EB-MOD2P-01 RS485 communication

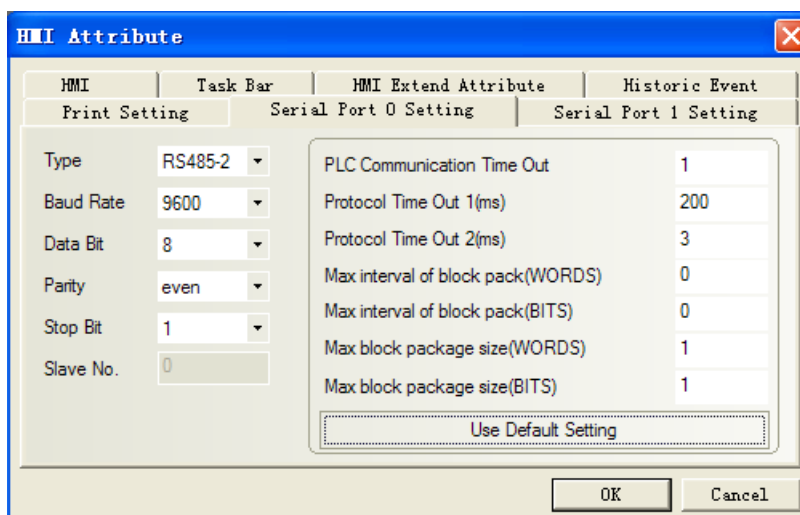

© Supported Device

EB-MOD2P-01

Device	Bit Address	Word Address	Format	Notes
Internal/External Output bit	0X1-60	-----	DDDDD	
Internal/External Input bit	1X1-60	-----	DDDDD	
Data Register bit	3X_bit1-60	-----	DDDDD	
Data Register bit	4X_bit1-60	-----	DDDDD	
Simulate Input Register bit	-----	3X1-60	DDDDD	
Data Register	-----	4X1-60	DDDDD	
Data Register	-----	5X1-60	DDDDD	
Data Register	-----	6X1-60	DDDDD	
Data Register	-----	3X-DINV 1-60	DDDDD	
Data Register	-----	4X-DINV 1-60	DDDDD	

NOTE: The correspondence between the device of EV5000 and the s7-300 software, as follows:

4X-DINV-----PID
 e.g.: 4X-DINV1-----PID256 4X-DINV3-----PID260

3X-DINV-----PQD
 e.g.: 3X-DINV1-----PQD256 3X-DINV3-----PQD260

4X-----PIW
 e.g.: 4X1-----PIW256 4X2-----PIW258

3X-----PQW
 e.g.: 3X1-----PQW256 3X2-----PQW258

0X-----I
 e.g.: 0X1-----I0.0 0X9-----I1.0

1X-----Q
 e.g.: 1X1-----Q0.0 1X9-----Q1.0

4X_BIT-----PIW (binary)
 e.g.: 4X_BIT1.0~~1.15-----PIW256 (binary)

3X_BIT-----PQW (binary)

e.g. : 3X_BIT1.0~~1.15-----PQW256 (binary)

PLC software setting

Setup the GSD in the S7-300 software

Procedure :


- (1) .Close all stations in "HW Config".
- (2) .And select "option"-->"setup GSD".
- (3) . In the "installation *.GSD file" dialog box, select Source: folders contain *. GSD file, or the STEP 7 project contain *. GSD file
- (4) .Select one or more files from *.GSD file list, and then click on "install" button.

Copy the icon (. BMP file) to the relevant path, such as BRIDGE product: Bitmap_Device = "EVIEW", that copy the "EVIEW" BMP file to the relevant path: c:\siemens\step7\s7data\nsbmp or c:\siemens\cpbv51\bitmaps


After installation, you can find the appropriate symbol in "PROFIBUS DP\GATWAY".

Project configuration

- (1) Use the guide to set up projects in the s7-300 software.
- (2) Double click "DP" of "HW Config"->attribute->new

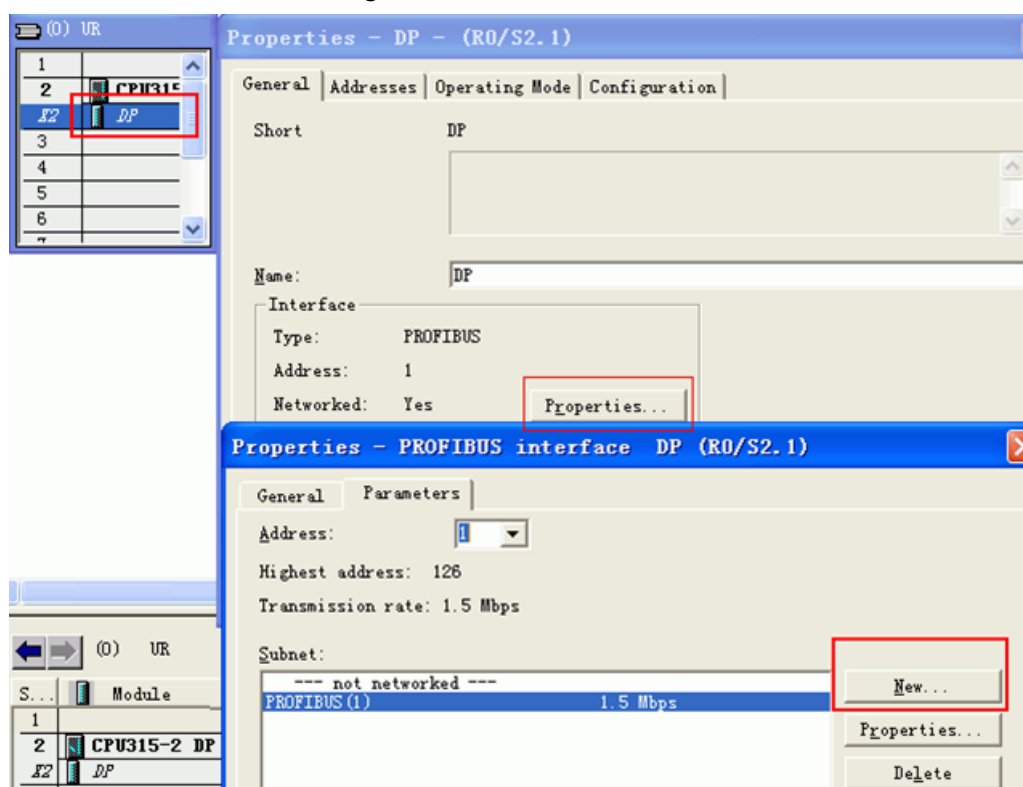


- (3) After press "ok", and then give a connection as follows:

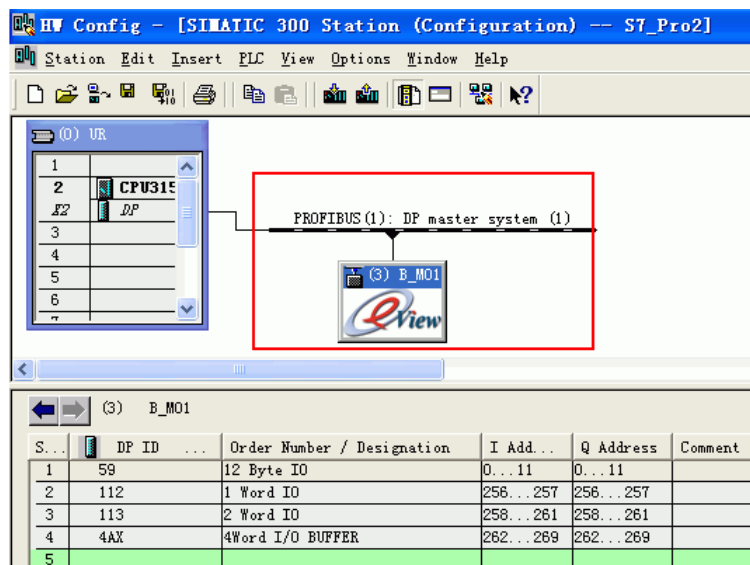


NOTE: the address of DP can't be the same as MPI's. Double click the address number to change.

(4) Double click "GATEWAY" -> "eview" -> "B_MO1" to extend device.

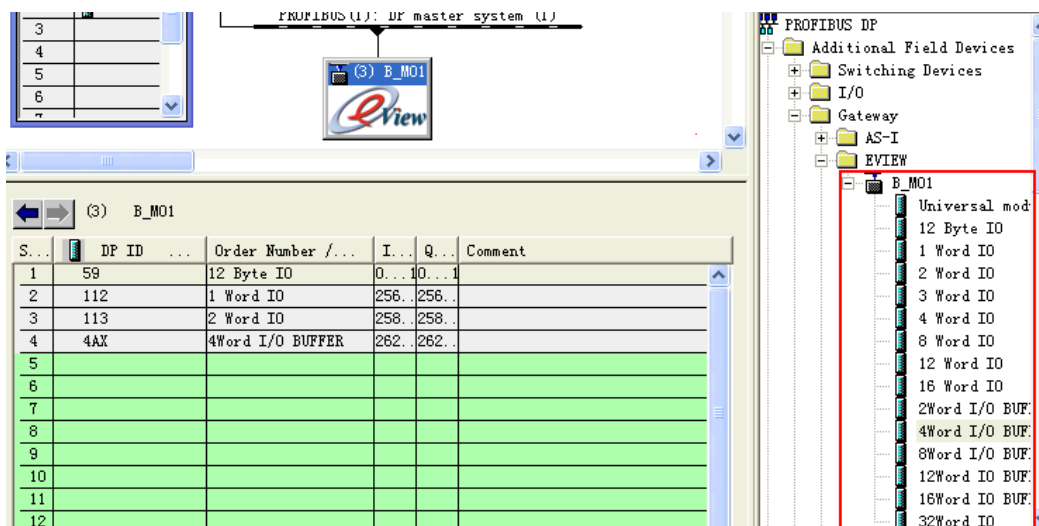

NOTE: for project configuration of BRIDGE, you must configure DI/D0 resource of 12 bytes firstly. AI/AO is optional.

(5) Must Use OB82,OB86,OB100,OB121,OB122 in the ladder program of the external device, otherwise you need to manually operate the RUN switch of the external device as "RUN,STOP,RUN" in this order upon restart the display or PLC. When you use those special OB block, the communication will be automatically recovered even if you restart the display or PLC.

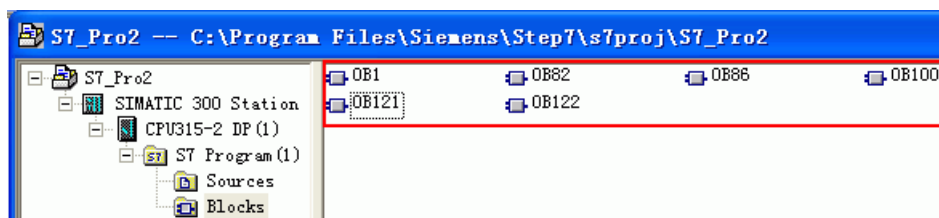

(6) Save and compile, and download to module, then the light of profibus is on.

(7) After configuration, and then you can program.

Bus Bridge setting:

(1) Setting ID of Profibus by switching 8-bit Dip(DIP1 is lowest bit, DIP8 is highest bit),range is from 3 to 125;

ID must be the same as its configuration in Siemens software. As above picture for example, setting is "3", that the switch DIP1 and DIP2 on the panel of profibus are set ON, others are OFF.

(2) Profibus support baudrate as follows: 9.6Kbit/s, 19.2Kbit/s, 45.45Kbit/s, 93.75Kbit/s, 187.5Kbit/s, 0.5Mbit/s, 1.5Mbit/s, 3Mbit/s, 6Mbit/s, 12Mbit/s, and interface is automatically adaptive.

(3) A cable (purple),connect DP interface of s7-300 and bus bridge of profibus. Two sides have active terminal resistors; Switch on the s7-300 PLC is off, on the busbridge is on.


(4) Setting baudrate of modbus by switching DIP1-3 of modbus ID port, support 8 kinds of baudrate .Setting as follows:

1	2	3	Baud
OFF	OFF	OFF	1200
ON	OFF	OFF	2400
OFF	ON	OFF	4800
ON	ON	OFF	9600
OFF	OFF	ON	19200
ON	OFF	ON	38400
OFF	ON	ON	57600
ON	ON	ON	115200


(5) Setting station number of modbus by switching DIP4-8 of modbus ID port ,support 1 to 30 kinds of station number(DIP4 is lowest bit,DIP8 is highest bit, if DIP4 is on and DIP5~8 is off, it means station number is 00001,that is No. 1 station).

◎ Cable Diagram


RS232 communication cable

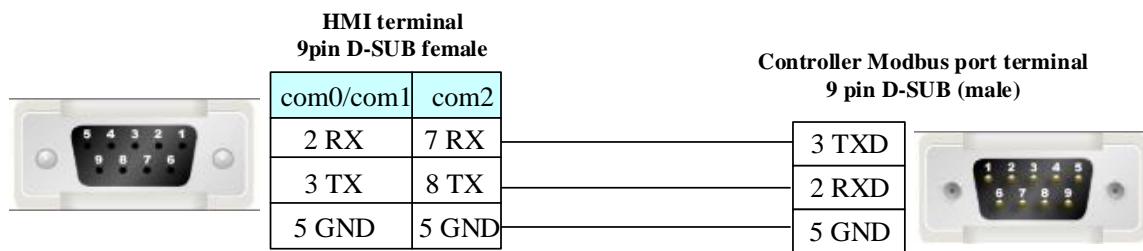

RS422 communication cable

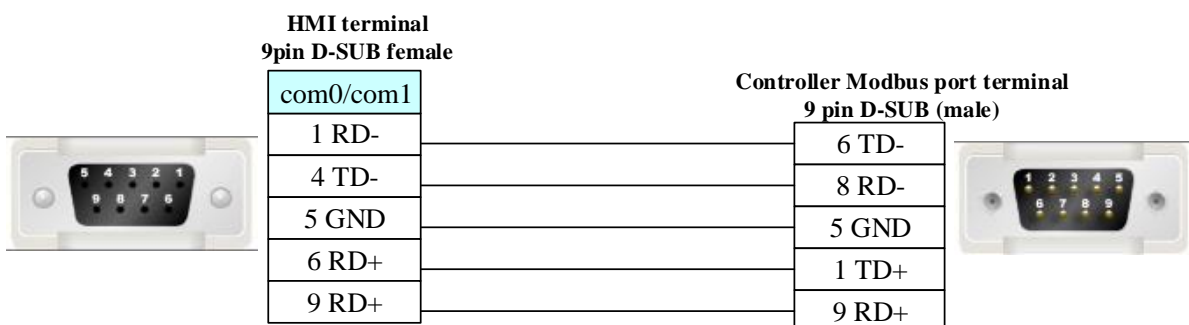

RS485 communication cable

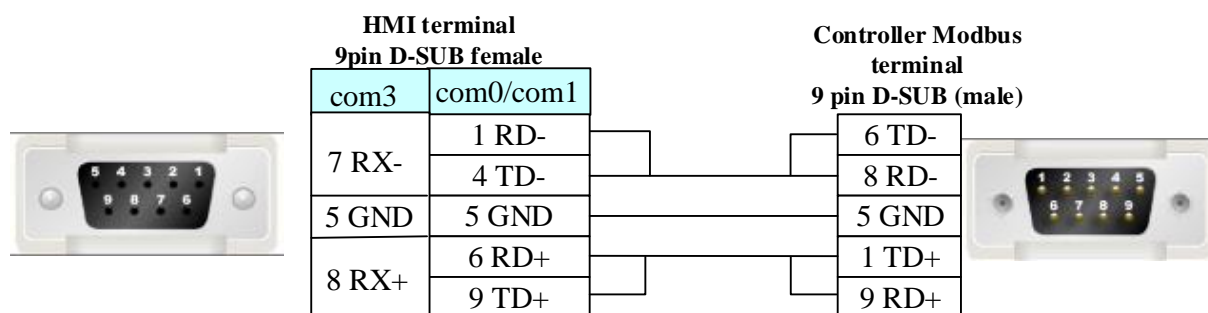

4.46 Kinco Servo Series

◎ Serial Communication

Series	CPU	Link Module	Driver
ED	ED100	RS232 on the CPU unit	Kinco Servo Series
	ED430	RS485 on port	
	ED620		
	ED630		
CD	CD420	RS232 on the CPU unit	
	CD430		
	CD620		


◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
ED	ED100	RS232 on the CPU unit	RS232	Setting	Your owner cable
	ED430	RS485 on port	RS485	Setting	Your owner cable
	ED620				
	ED630				
CD	CD420	RS232 on the CPU unit	RS232	Setting	Your owner cable
	CD430				
	CD620				

◎ Communication Setting


Default communication: 9600, 8, none, 1; station: 1

RS232 communication

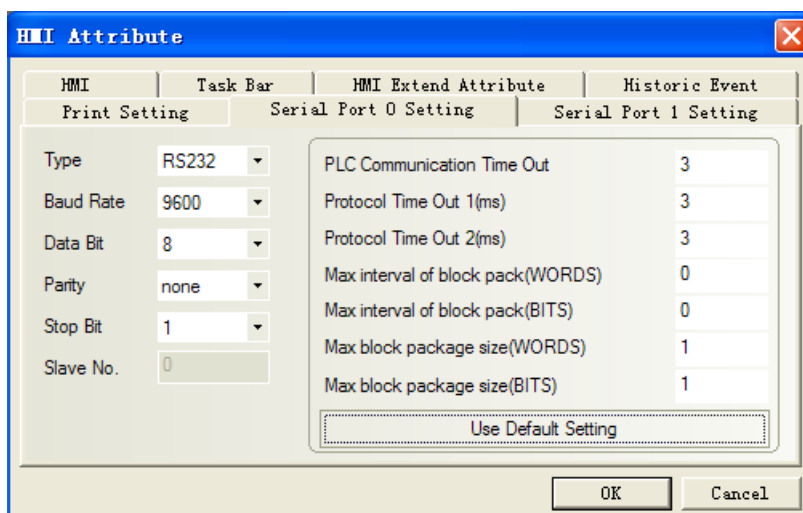

NOTE: If the servo controller to modify the station number, the servo power needed to restart, the station number to take effect, otherwise the communication is incorrect.

RS485 communication

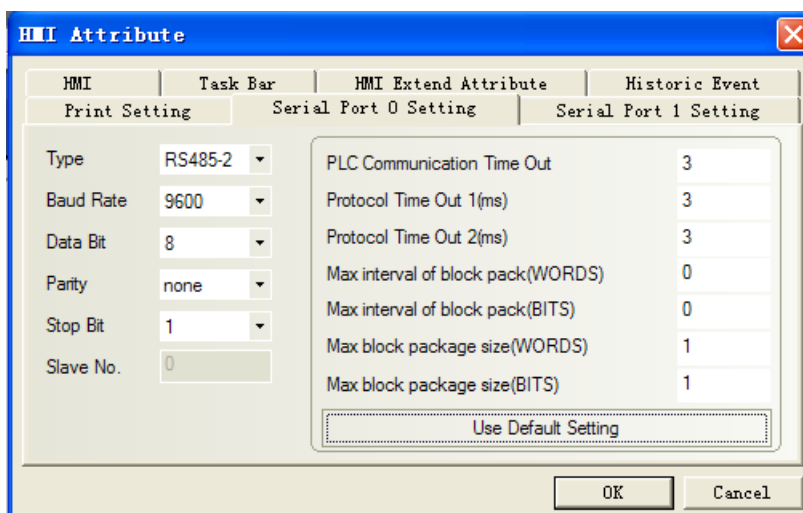

© Supported Device

Device	Bit Address	Word Address	Range	Notes
Dword	-----	20	Refer to the kinco manual	
word	-----	10	Refer to the kinco manual	
word	-----	8	Refer to the kinco manual	
Dword	-----	TBL	Refer to the kinco manual	

NOTE: Use the touch screen, pay attention to the rules addressing. The specific reference to the following description.

Touch-screen type of address: according to the number of bits to the servo. Can only be 20, 10, 8.

Address of the touch screen: master address, and sub address

For example, kinco servo drive manual on page 117, the address 2509, sub-address 06, median 20, addressing the touch screen as shown:

Data Input Component Attribute

Basic Attribute | Numeric Data | Trigger Address | Font | Graphics | Position

Priority: Normal

Input Address: HMI: HMI1, PLC: 1, Addr.Type: 20, Addr.: 2509.06

Output Address: HMI: HMI1, PLC: 1, Addr.Type: LW, Addr.: 0

Code Type: BIN, Format: HHHHHH.HH, WordNo.: 2, Use Addr Tag: ☐


Description:

OK Cancel


© Cable Diagram

ED Series

RS232 communication cable

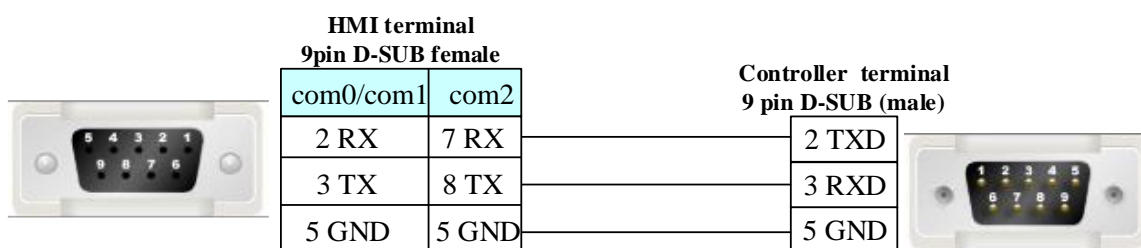


RS485 communication cable

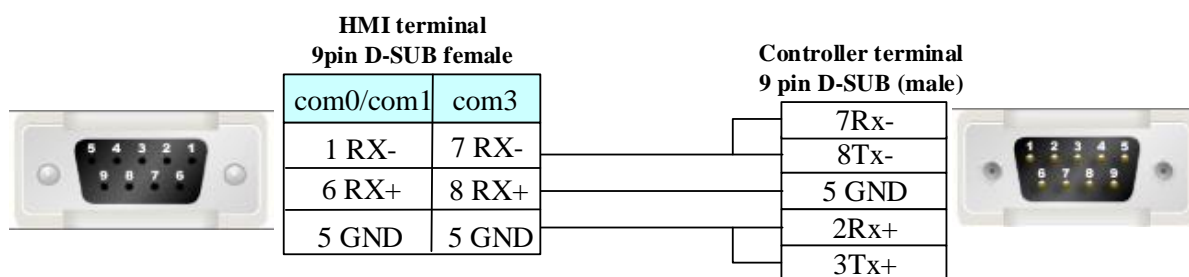

CD Series

RS232 communication cable

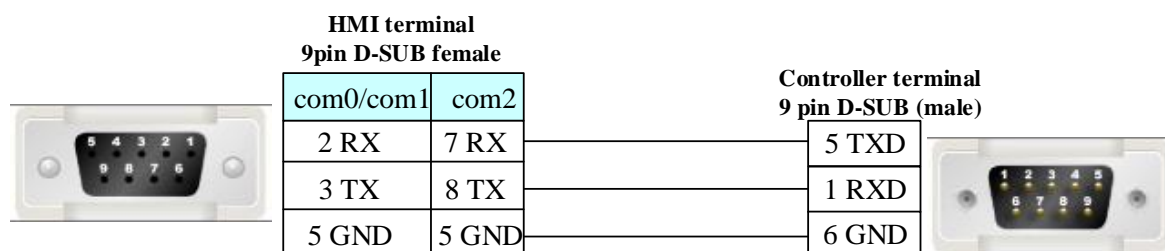

4.47 Kinco Master & Kinco Slave(Master/Slave Protocol Connection)

◎Serial Communication

Series	CPU	Link Module	Driver
Kinco Master			Kinco Master
Kinco Slave			Kinco Slave

◎System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
Kinco Master				Setting	Your owner cable
Kinco Slave				Setting	Your owner cable

◎Communication Setting

Kinco Master

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to RS232, Baud Rate to 9600, Data Bit to 8, Parity to even, Stop Bit to 1, and Slave No. to 0. The right side of the dialog lists various communication parameters with their default values: PLC Communication Time Out (1), Protocol Time Out 1(ms) (50000), Protocol Time Out 2(ms) (0), Max interval of block pack(WORDS) (2), Max interval of block pack(BITS) (2), Max block package size(WORDS) (56), and Max block package size(BITS) (128). A 'Use Default Setting' button is located at the bottom of the parameter list. The 'OK' and 'Cancel' buttons are at the bottom right of the dialog.


Kinco Slave

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to RS232, Baud Rate to 9600, Data Bit to 8, Parity to even, Stop Bit to 1, and Slave No. to 1. The right side of the dialog lists various communication parameters with their default values: PLC Communication Time Out (1), Protocol Time Out 1(ms) (50000), Protocol Time Out 2(ms) (0), Max interval of block pack(WORDS) (2), Max interval of block pack(BITS) (2), Max block package size(WORDS) (56), and Max block package size(BITS) (128). A 'Use Default Setting' button is located at the bottom of the parameter list. The 'OK' and 'Cancel' buttons are at the bottom right of the dialog.

◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
	B 0 – 65535	-----	DDDDD	
Broadcast Relay	F_B 0 – 65535	-----	DDDDD	
	-----	W 0 – 65535	DDDDD	
Broadcast Register	-----	F_W 0 – 65535	DDDDD	

◎ Cable Diagram

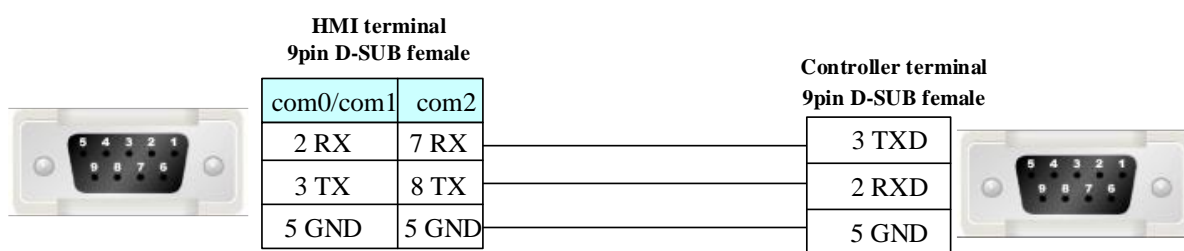

4.48 Keyence Corporation

◎ Serial Communication

Series	CPU	Link Module	Driver
KV-16DT	KV-16DT	CPU Direct	Keyence KV-16DT
KV-1000	KV-1000	CPU Direct	Keyence KV-1000
KV-3000	KV-3000	CPU Direct	Keyence KV-3000
KV-Nano Series	KV-N60AT	CPU Direct	Keyence KV-N60AT/7000

◎ Network communication

Series	CPU	Link Module	Driver
KV-5000	KV-5000	CPU Direct	Keyence KV-5000/7000 EtherNet Slave
KV-7000	KV-7500	CPU Direct	
KV-8000	KV-8000	Ethernet interface on CPU	Keyence KV-8000 EtherNet(TCP Slave)(Free Tag Names)

◎ Serial System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
KV-16DT	KV-16DT	CPU Direct	RS232	Setting	Your owner cable
KV-1000	KV-1000	CPU Direct	RS232	Setting	Your owner cable
KV-3000	KV-3000	CPU Direct	RS232	Setting	Your owner cable
KV-Nano Series	KV-N60AT	CPU Direct	RS232	Setting	Your owner cable
			RS485		Your owner cable

◎ Network System configuration

Series	CPU	Link Module	Connect Type	Parameter	Cable
KV-5000	KV-5000	CPU Direct	Ethernet	Setting	Your owner cable
KV-7000	KV-7500	CPU Direct	Ethernet		
Keyence	KV-8000	Ethernet interface on CPU	Ethernet	Setting	Your owner cable

◎ Serial Communication Setting

Keyence KV-16DT protocol


Default communication: 9600, 8, 1, even; station: 0

Keyence KV-1000 protocol

Default communication: 9600, 8, 1, even; station: 0

Keyence KV-3000 protocol


Default communication: 9600, 8, 1, even; station: 0 (Don't support station No.)

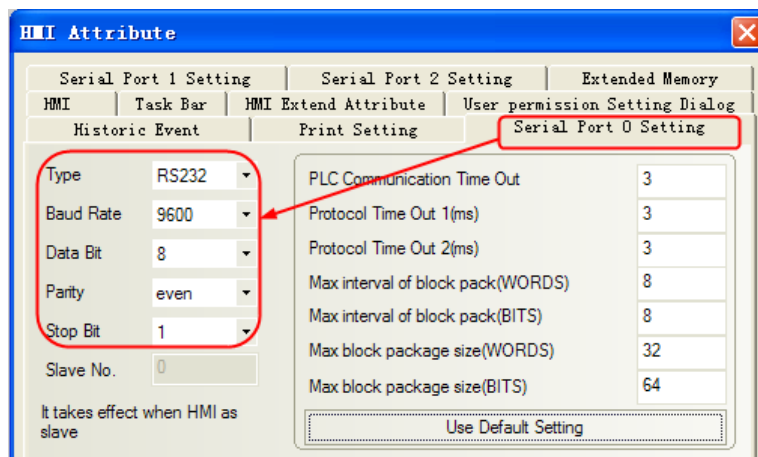

Keyence KV-N60AT protocol

Default communication parameters, 9600bps, 8, even, 1,; station NO: 0

RS232

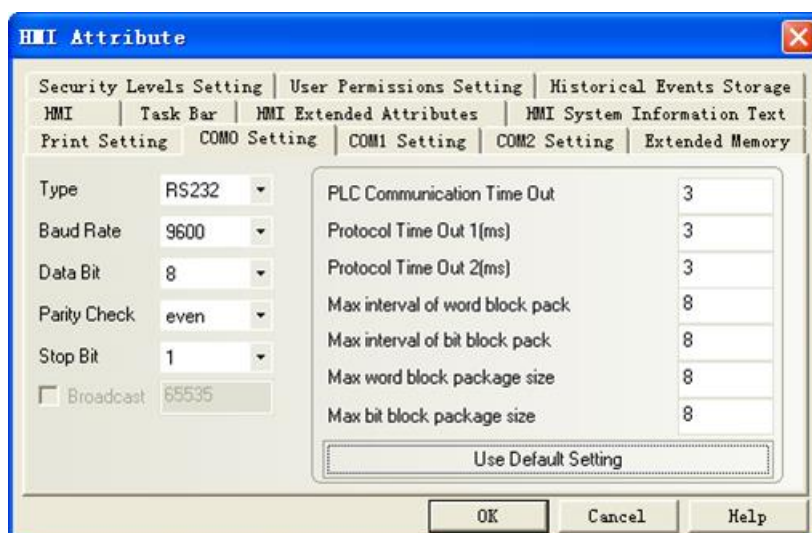

PLC setting

1. In the [Confirm unit setting information] dialog box click [Yes], and the [Unit Editor] window will display. On the [Select unit] tab, from the displayed list of units select “KV-N60”, then drag &drop to the unit placement area. Configure the setup items as follows.

Operation Mode: KV STUDIO mode; Baud Rate: 9600 bps.


Note: 1. Timer and counter register must be programmed in the KV STUDIO software before it be used in the HMI.

2. If the communication is slower, you can change the baud rate and the Protocol time out 1(ms)

© Network Communication Setting

Keyence KV-5000/7000 EtherNet Slave protocol

HMI Setting

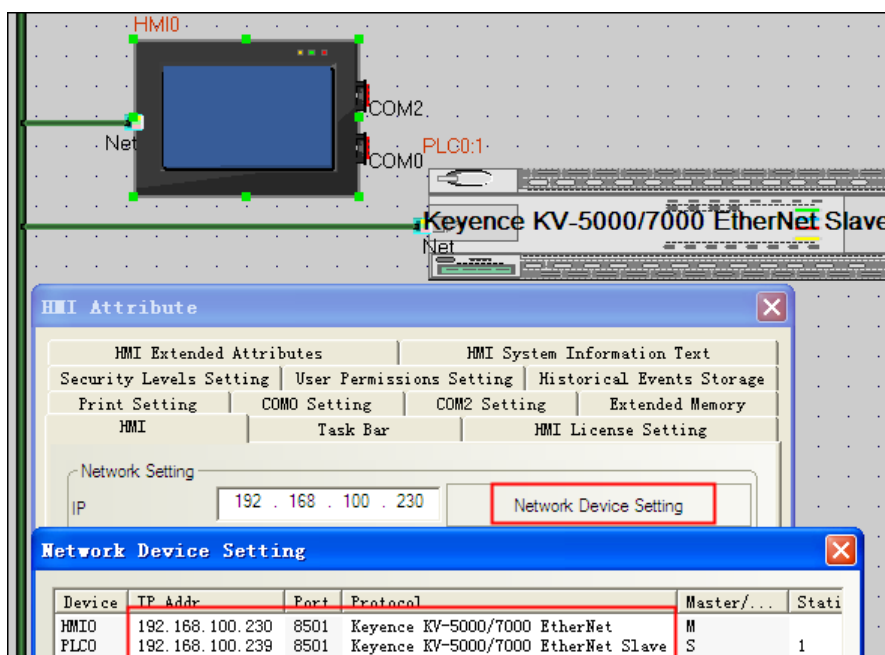


PLC configuration

1. "Editor" window, click [Configure unit] in the "[0] KV-5000 R30000" to modify the IP address of the PLC, PLC and PC in the same segment, modify the IP address of the test shown, click [confirm] to save the modifications
2. Switch to the "Monitor" window to see the changes of the figure will pop up window, Click [PLC transfer -> Monitor mode (T)], pop-up "transmission program [communication goals: KV-5000 path: USB]", Click [implementation], content writing, once again view the "[0] KV-5000 R30000" in the PLC's IP address in the "Monitor" window [unit configuration], This indicates that the address has been modified over.


Keyence KV-8000 EtherNet(TCP Slave)(Free Tag Names)

HMI Setting

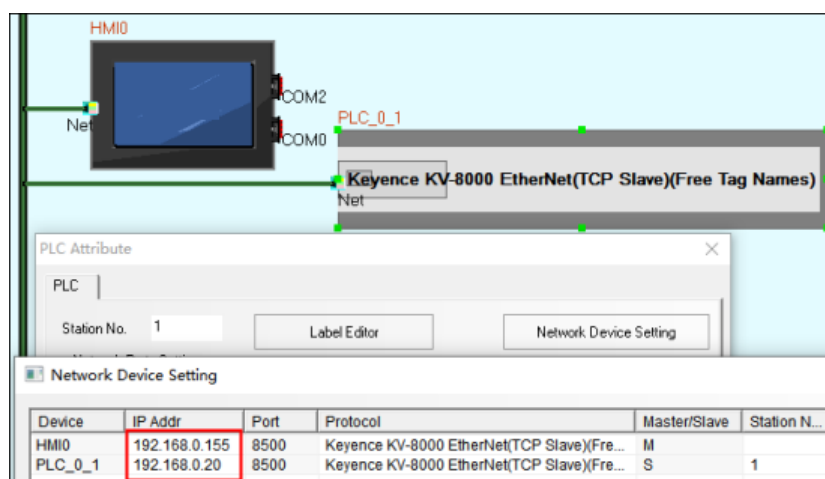


PLC Setting

1. IP Setting

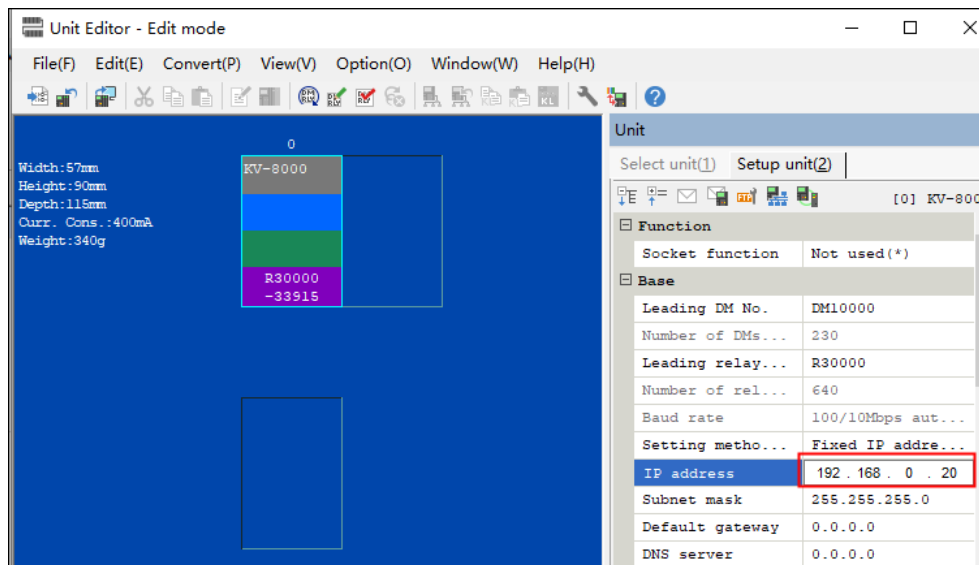


2. Create variables


1) Variable->Global or Local, create variables.

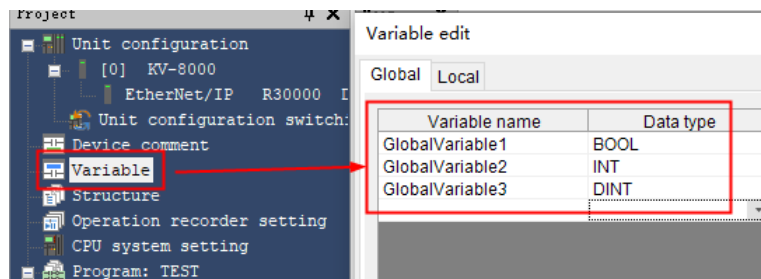


2) Create struct variables, right click and select new

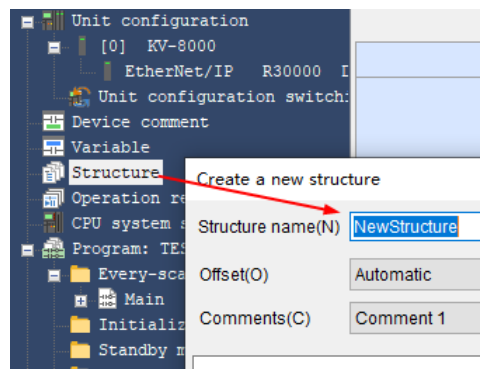

3) Export variable: File->Output CSV/TXT file->Variable information

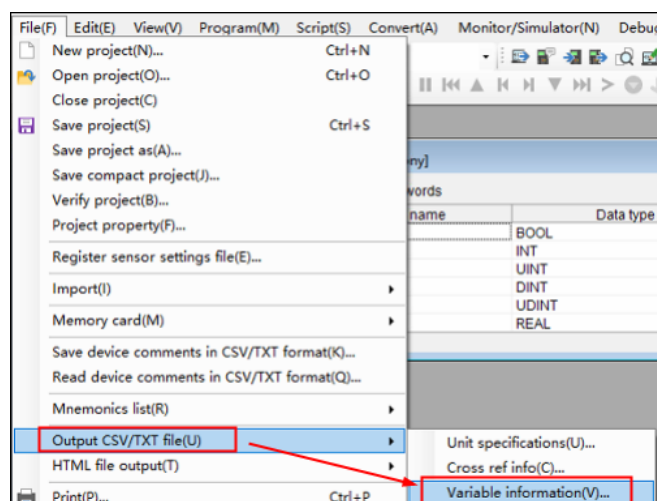

3. Import variable

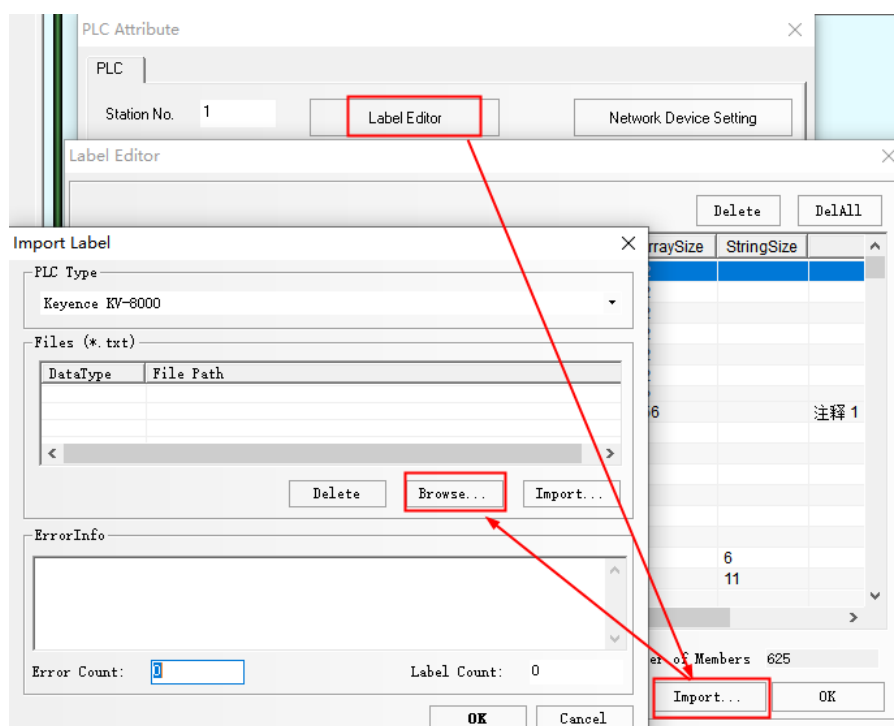

© Supported Device

KV-16DT

Device	Bit Address	Word Address	Format
Counter Relay	Counter_contact0- 59915	-----	DDDDD
Timer Relay	Timer_contact0- 65535	-----	DDDDD
High speed counter	CTH_contact0- 511	-----	DDD
High speed counter Comparator	CTC_contact0- 511	-----	DDD
Relay	Relay0- 32766	-----	DDDDD
Counter current	-----	Counter_current0- 3915	DDDD
Counter preset	-----	Counter_preset0- 65535	DDDDD

Timer current	-----	Timer_current0- 65534	DDDDD
Timer preset	-----	Timer_preset0- 11998	DDDDD
High speed counter	-----	CTH_current0- 65534	DDDDD
High speed counter	-----	CTH_preset0- 32766	DDDDD
High speed counter Comparator	-----	CTC_current0-65534	DDDDD
High speed counter Comparator	-----	CTC_preset0- 32766	DDDDD
Data memory	-----	DM0- 32766	DDDDD
Temporary data memory	-----	TM0- 32766	DDDDD

Note: Non-supported batch transfer of bits or words for this protocol.

KV-1000

Device	Bit Address	Word Address	Format	Notes
Relay	R0-599.15	-----	DDDDD	
Control Relay	CR0-39.15	-----	DDDD	
Internal auxiliary relay	MR0-999.15	-----	DDDDD	
Latch Relay	LR0-999.15	-----	DDDDD	
Data Memory	-----	DM0-65534	DDDDD	
Control Memory	-----	CM0-11998	DDDDD	
Temporary data memory	-----	TM0-511	DDD	
Extended Data memory	-----	EM0-65534	DDDDD	
Extended Data memory	-----	FM0-32766	DDDDD	

KV-3000

Device	Bit Address	Word Address	Format	Notes
Relay	R0-999.15	-----	DDD.DD	
Control Relay	CR0-39.15	-----	DD.DD	
Internal auxiliary relay	MR0-999.15	-----	DDD.DD	
Latch Relay	LR0-999.15	-----	DDD.DD	
Data Memory	-----	DM0-65534	DDDDD	
Control Memory	-----	CM0-5999	DDDD	
Temporary data memory	-----	TM0-511	DDD	
Extended Data memory	-----	EM0-65534	DDDDD	
Extended Data memory	-----	FM0-32767	DDDDD	

Note: PLC bit address without a decimal point in the distinction, in fact, the last two addresses corresponding to the fractional part, makes a distinction between the touch screen.

成批监控器				
● 软元件 (M) ○ 扩展单元缓冲存储器 (G)				
模块/宏	软元件	当前值	显示格式	
全局	R000	-	1	位二进制数
全局	R001	-	1	位二进制数
全局	R002	-	1	位二进制数
全局	R003	-	1	位二进制数
全局	R004	-	1	位二进制数
全局	R005	-	1	位二进制数
全局	R006	-	1	位二进制数
全局	R007	-	1	位二进制数
全局	R008	-	1	位二进制数
全局	R009	-	1	位二进制数
全局	R010	-	1	位二进制数
全局	R011	-	1	位二进制数
全局	R012	-	1	位二进制数
全局	R013	-	1	位二进制数
全局	R014	-	1	位二进制数
全局	R015	-	1	位二进制数
全局	R100	-	1	位二进制数
全局	R101	-	1	位二进制数
全局	R102	-	1	位二进制数
全局	R103	-	1	位二进制数
全局	R104	-	1	位二进制数
全局	R105	-	1	位二进制数
全局	R106	-	1	位二进制数
全局	R107	-	1	位二进制数
全局	R108	-	1	位二进制数
全局	R109	-	1	位二进制数
全局	R110	-	1	位二进制数
全局	R111	-	1	位二进制数
全局	R112	-	1	位二进制数
全局	R113	-	1	位二进制数
全局	R114	-	1	位二进制数
全局	R115	-	1	位二进制数
全局	R200	-	1	位二进制数

Example, PLC which corresponds to R009, the touch screen address is R0.09; PLC which corresponds to R015, the touch screen address is R0.15.

KV-5000/7000

Device	Bit Address	Word Address	Format	Notes
Relay	R0-1999.15	-----	DDDD.DD	
Control Relay	CR0-79.15	-----	DD.DD	
Internal auxiliary relay	MR0-3999.15	-----	DDDD.DD	
Latch Relay	LR0-999.15	-----	DDD.DD	
Timer	T0~3999	-----	DDD	
Counter	C0~3999	-----	DDDD	
Data Relay	DM_bit 0~65535.15	-----	DDDDD.DD	
High-speed Counter Comparator (Contact)	CTC_contact 0~7	-----	D	
High-speed Counter (Current Value)	CTH_contact 0~3	-----	D	
Link Relay	B 0~7FFF	-----	HHHH	
Work Relay	VB 0~F9FF	-----	HHHH	
Temporary Data Relay	TM_bit 0-511.15		DDD.DD	
Extension Data Relay	EM_bit 0-65534.15		DDDDD.DD	
High-speed Counter Comparator (Setting Value)	-----	CTC_preset 0~7	D	
High-speed Counter	-----	CTC_current 0~7	D	

Comparator (Current Value)				
High-speed Counter (Setting Value)	-----	CTH_preset 0~3	D	
High-speed Counter (Current Value)	-----	CTH_current 0~3	D	
Data Memory	-----	DM0-65534	DDDDDD	
Control Memory	-----	CM0-7599	DDDD	
Temporary Data Memory	-----	TM0-511	DDD	
Extension Data Memory	-----	EM0-65534	DDDDDD	
File Register	-----	FM0-32767	DDDDDD	
File Register	-----	ZF 0~524287	DDDDDD	
Work Memory	-----	VM 0~59999	DDDDDD	
Link Register	-----	W 0~7FFF	HHHH	
Timer (Current Value)	-----	TC 0-3999	DDDD	
Timer (Setting Value)	-----	TS 0-3999	DDDD	
Counter (Current Value)	-----	CC 0-3999	DDDD	
Counter (Setting Value)	-----	CS 0-3999	DDDD	
Index Register	-----	Z 1-23	DD	

Note: PLC bit address without a decimal point in the distinction, in fact, the last two addresses corresponding to the fractional part, makes a distinction between the touch screen.


KV-N60AT

Device	Bit Address	Word Address	Format	Notes
Relay	R0-999.15	-----	DDD.DD	
Control Relay	CR0-89.15	-----	DD.DD	
Internal auxiliary relay	MR0-999.15	-----	DDD.DD	
Latch Relay	LR0-999.15	-----	DDD.DD	
Link Relay	B0-7FFF	-----	HHHH	
Work Relay	VB0-F9FF	-----	HHHH	
Extension Data Relay	EM_bit 0-65535.15	-----	DDDD.DD	
Temporary Data Relay	TM_bit 0-511.15	-----	DDD.DD	
High-speed Counter Comparator (Setting Value)	-----	CTC 0~7	D	
High-speed Counter (Current Value)	-----	CTH 0~3	D	
Counter (Current Value)	-----	CC 0~3999	DDDD	
Timer (Current Value)	-----	TC 0~3999	DDDD	
Data Memory	-----	DM0-65534	DDDDDD	
Control Memory	-----	CM0-8999	DDDD	
Temporary Data Memory	-----	TM0-511	DDD	
Link Register	-----	W0-7FFF	HHHH	
Work Memory	-----	VM0-59999	DDDDDD	
File Register	-----	ZF0-131071	DDDDDD	
File Register	-----	FM0-32767	DDDDDD	
Extension Data Memory	-----	EM0-65534	DDDDDD	


Date Type	data format	Notes
Bool	bit	
Int	16-bit BCD, Hex, Binary, signed	
UInt	16-bit BCD, Hex, Binary, Unsigned	
DInt	32-bit BCD, Hex, Binary, signed	
UDInt	32-bit BCD, Hex, Binary, Unsigned	
Real	32-bit Float	
LReal	64-bit Float	
String	Ascii component	Array limit cannot exceed 128
Struct		Not support array

© Cable Diagram


KV Series RS232 communication cable

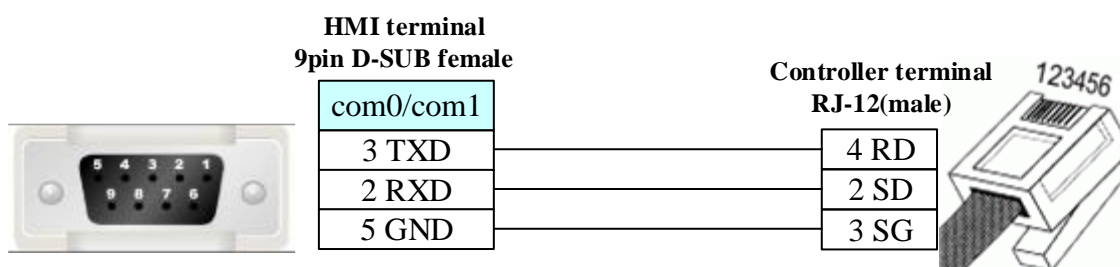


KV Series RS485 communication cable

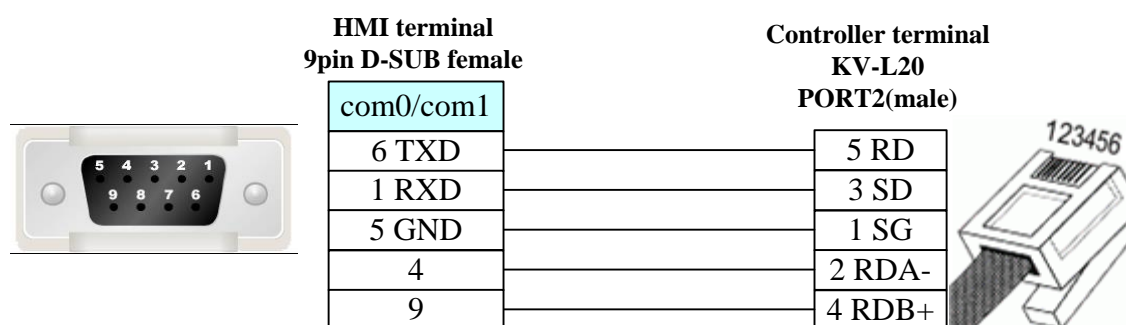


KV L20 module RS232 communication cable

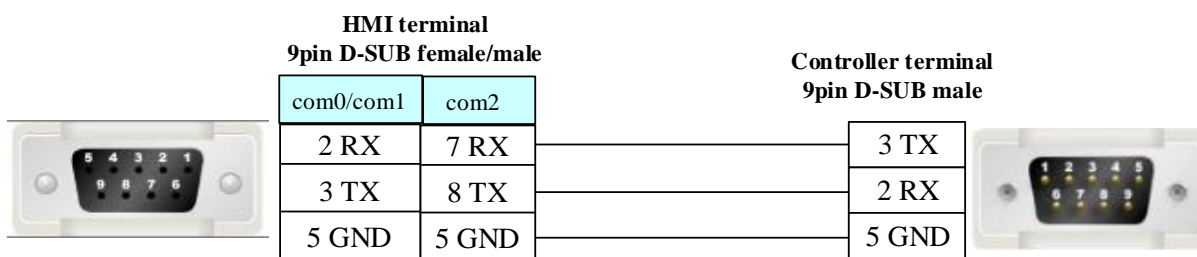

KV L20 module RS422 communication cable

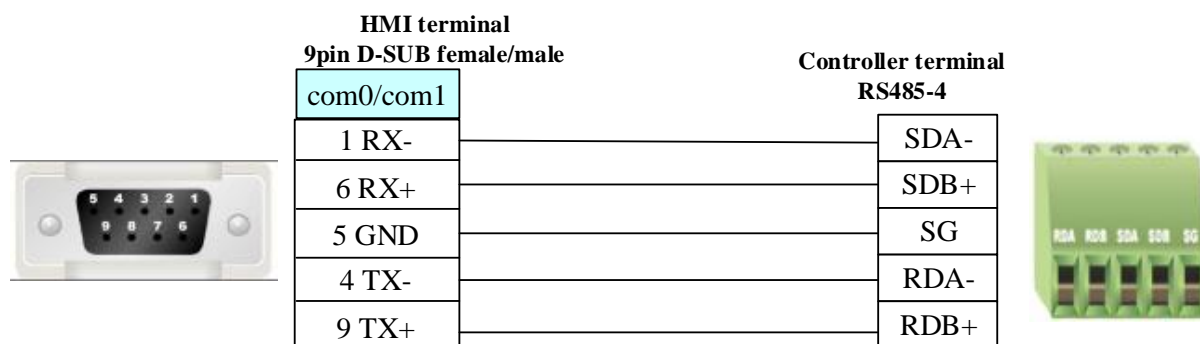

KV L20module RS485-2 communication cable

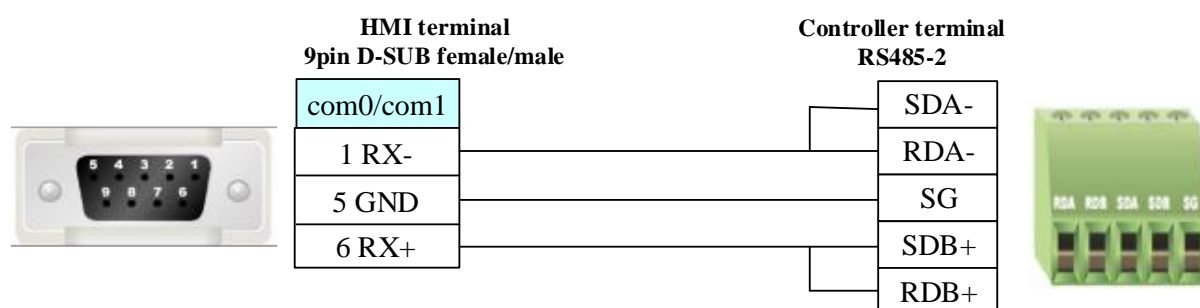

Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.49 Koyo Corporation

◎ Serial Communication

Series	CPU	Link Module	Driver
KOYO DIRECT	SM24-T	RS232 on the CPU unit	Koyo Direct
	DL06	RS232 on the port1	
	DL105		
	DL230	RS232\RS422 on the port2	
	DL240		
	DL250		
	DL350		
DL450			

◎ Network Communication

Series	CPU	Link Module	Driver
KOYO	NK1	CPU Direct	Koyo NK1 Ethernet(TCP Slave)

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
KOYO	SM24-T	RS232 on the CPU unit	RS232	Setting	Your owner cable

DIRECT			RS485	Setting	Your owner cable
	DL05	RS232 on the port1	RS232	Setting	Your owner cable
	DL06	RS232 on the port2	RS232	Setting	Your owner cable
	DL105				
	DL230		RS422	Setting	Your owner cable
	DL240				
	DL250				
	DL350				
	DL450				

◎ Network configuration

Series	CPU	Link Module	Connect Type	Parameter	Cable
KOYO	NK1	CPU Direct	Ethernet	Setting	Your owner cable

◎ Series Communication Setting

KOYO series RS232 communication setting

HMI Attribute

Task Bar | HMI Extend Attribute | Historic Event

Print Setting | **Serial Port 0 Setting** | Serial Port 1 Setting


Type: RS232
 Baud Rate: 9600
 Data Bit: 8
 Parity: odd
 Stop Bit: 1
 Slave No.: 0

PLC Communication Time Out	3
Protocol Time Out 1(ms)	3
Protocol Time Out 2(ms)	3
Max interval of block pack(WORDS)	2
Max interval of block pack(BITS)	64
Max block package size(WORDS)	16
Max block package size(BITS)	128


Use Default Setting

OK Cancel

KOYO series RS485 communication setting

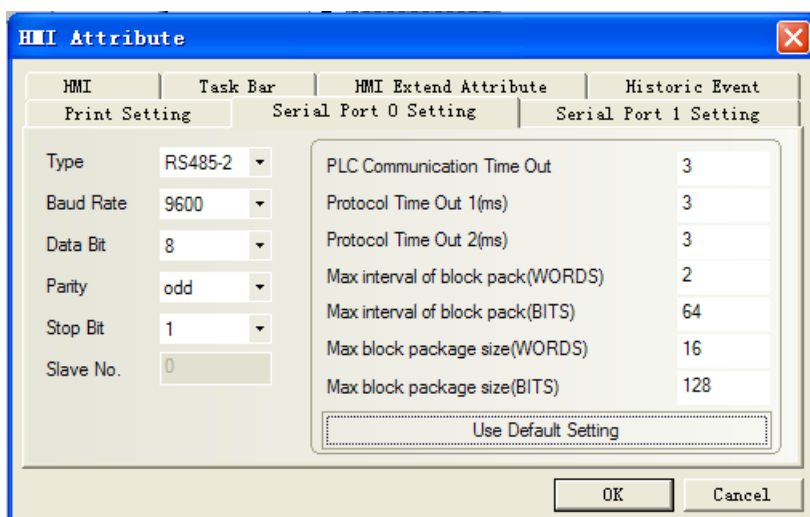

KOYO DL06 series RS422 communication setting

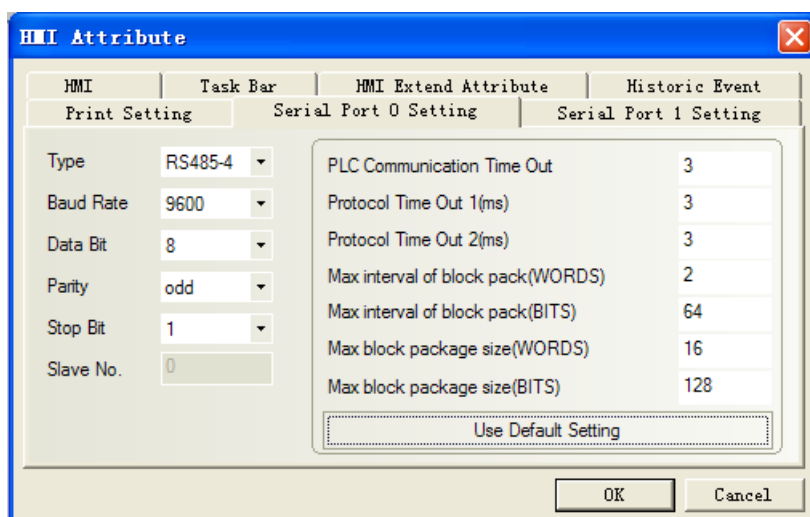


PLC software setting

1. The security password function must be disabled.
2. The COM port must adopt K sequence protocol.
3. Set the switch of the CPU with working mode setting switch to the TERM state.

◎ Network Communication Setting

HMI Setting

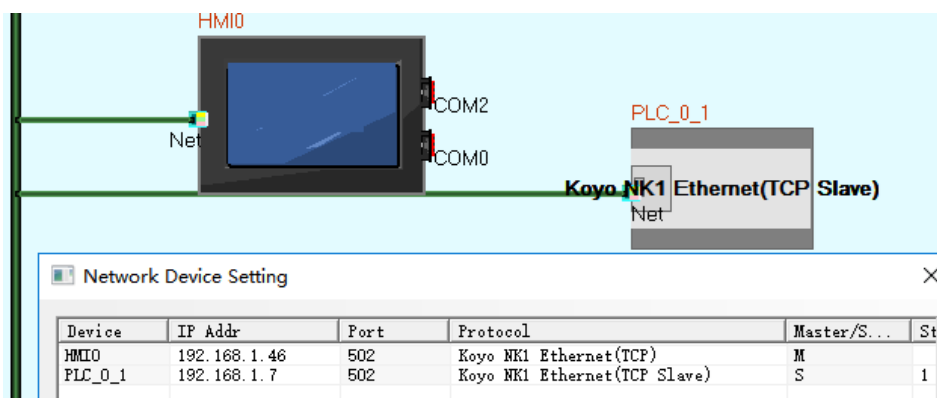

PLC Setting




◎ Supported Device


Koyo Direct

Device	Bit Address	Word Address	Format	Notes
Input	I(X) 0-77777	-----	00000	
Output	Q(Y) 0-77777	-----	00000	
variable	M(C) 0-77777	-----	00000	
Timer Status	T(T) 0-77777	-----	00000	
Counter Status	C(CT) 0-77777	-----	00000	
Input	GX 0-10000	-----	00000	
Output	GY 0-10000	-----	00000	
	S 0-2000	-----	0000	
	SP 0-2000			
Data Register	-----	R(V) 0-77777	00000	
Counter	-----	Counter 0-2000	0000	
Timer	-----	Timer 0-2000	0000	


Koyo NK1 Ethernet(TCP Slave)

Device	Bit Address	Word Address	Format	Notes
Input	I 0-1777	-----	00000	
Output	Q 0-1777	-----	00000	
variable	M 0-3777	-----	00000	
Timer Status	T 0-777	-----	00000	
Counter Status	C 0-777	-----	00000	
Input	GI 0-3777	-----	00000	
Output	GQ 0-3777	-----	00000	
	S 0-1777	-----	0000	
	SP 0-1777	-----	0000	
Data Register	-----	R 0-37777	00000	

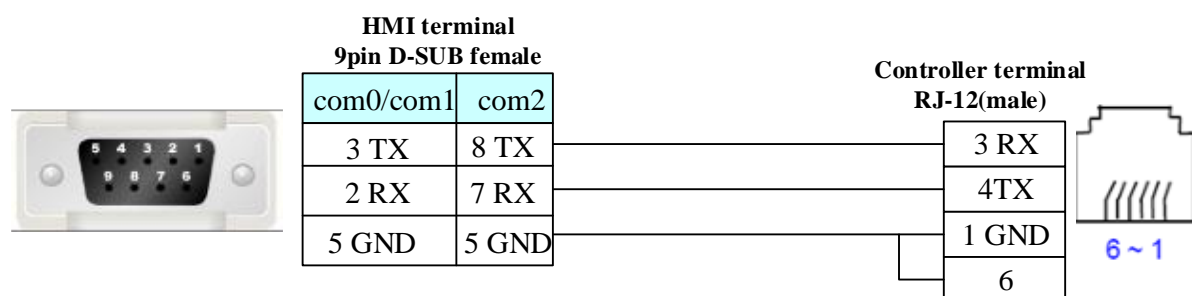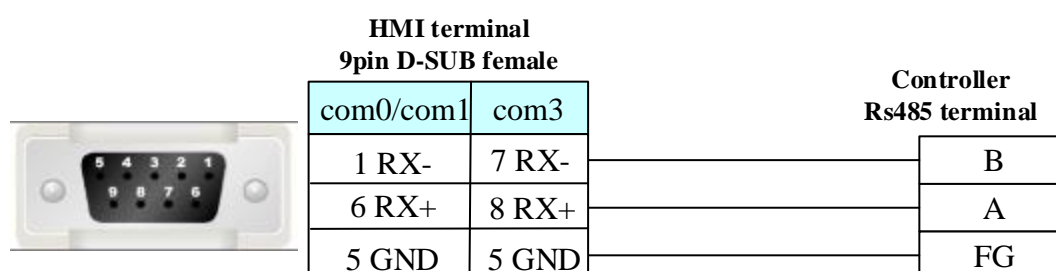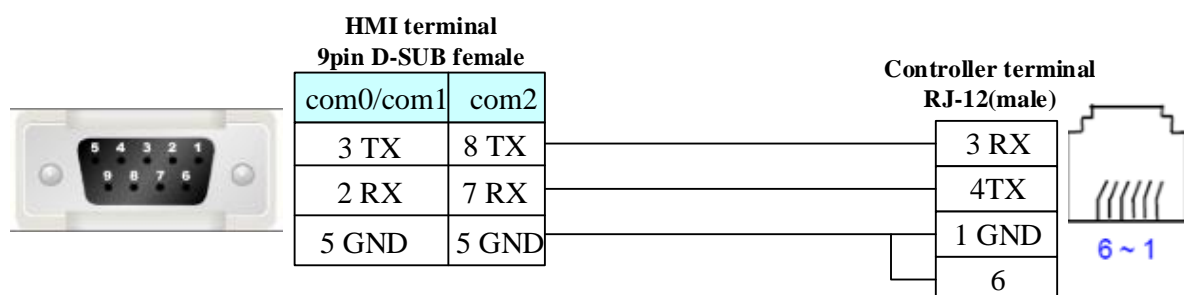© Cable Diagram**KOYO SM24-T series RS232 communication cable****KOYO SM24-T series RS485 communication cable****KOYO DL06 series RS232 communication cable**

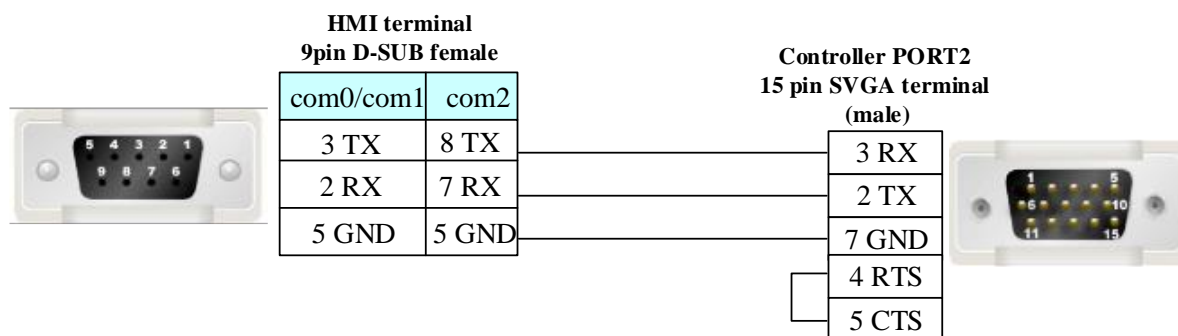

KOYO DL06 series RS422 communication cable

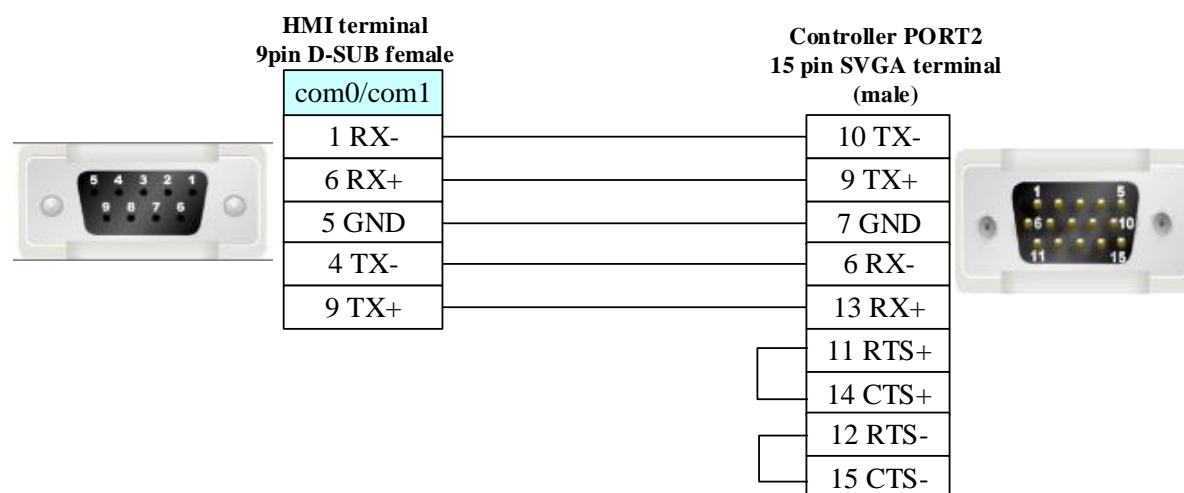

Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub
Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.50 KTC Srdlink

◎ Serial Communication

Series	CPU	Link Module	Driver
SRD	SRD2211	RS232 on CPU unit	KTC SRDLINK
		RS485 on CPU unit	
COM	COM2023	RS232 on CPU unit	
		RS485 on CPU unit	

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
SRD	SRD2211	RS232 on CPU unit	RS232	Setting	Your owner cable

		RS485 on CPU unit	RS485	Setting	Your owner cable
COM	COM2023	RS232 on CPU unit	RS232	Setting	Your owner cable
		RS485 on CPU unit	RS485	Setting	Your owner cable

◎ Communication Setting

KTC RS232 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS232'. The 'Baud Rate' is '9600', 'Data Bit' is '8', 'Parity' is 'none', 'Stop Bit' is '1', and 'Slave No.' is '0'. On the right, the 'PLC Communication Time Out' is '1', 'Protocol Time Out 1(ms)' is '1', 'Protocol Time Out 2(ms)' is '0', 'Max interval of block pack(WORDS)' is '20', 'Max interval of block pack(BITS)' is '7', 'Max block package size(WORDS)' is '20', and 'Max block package size(BITS)' is '7'. A 'Use Default Setting' button is at the bottom of the right panel. 'OK' and 'Cancel' buttons are at the bottom of the dialog.

KTC RS485 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS485-2'. The 'Baud Rate' is '115200', 'Data Bit' is '8', 'Parity' is 'none', 'Stop Bit' is '1', and 'Slave No.' is '0'. On the right, the 'PLC Communication Time Out' is '1', 'Protocol Time Out 1(ms)' is '1', 'Protocol Time Out 2(ms)' is '0', 'Max interval of block pack(WORDS)' is '20', 'Max interval of block pack(BITS)' is '7', 'Max block package size(WORDS)' is '20', and 'Max block package size(BITS)' is '7'. A 'Use Default Setting' button is at the bottom of the right panel. 'OK' and 'Cancel' buttons are at the bottom of the dialog.

NOTE: Must modify communication parameter in the programming software.


◎ Supported Device

Please refer to the PLC manual for details.


◎ Cable Diagram

KTC RS232 communication cable

Direct connect (cable by KTC Corporation)

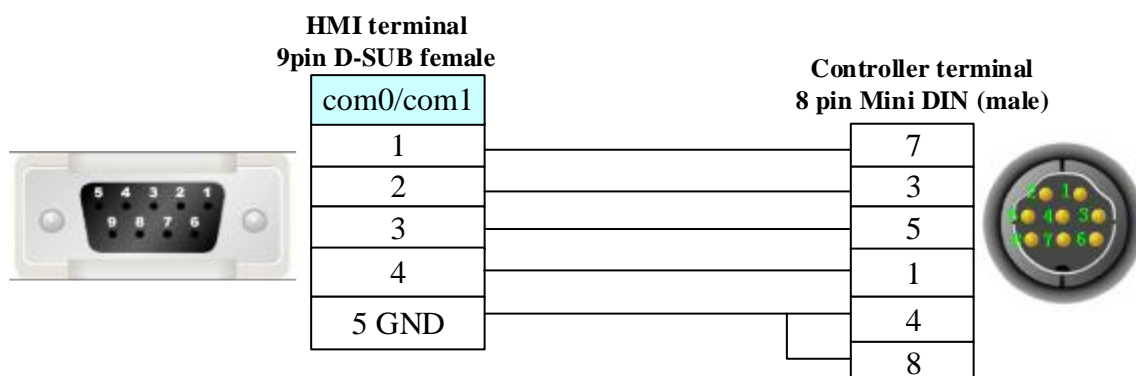

KTC RS485 communication cable

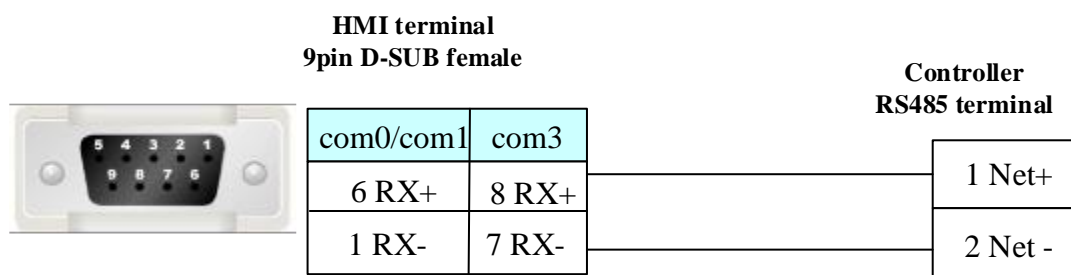

4.51 KYL Slave

◎ Serial Communication


Series	CPU	Link Module	Driver
KYL Slave	KYL	RS232 on the CPU unit	KYL Slave

◎ System configuration

Series	CPU	Link Module	COM Type	Parameter	Cable
KYL Slave	KYL	RS232 on the CPU unit	RS232	Setting	Your owner cable

◎ Communication Setting

RS232

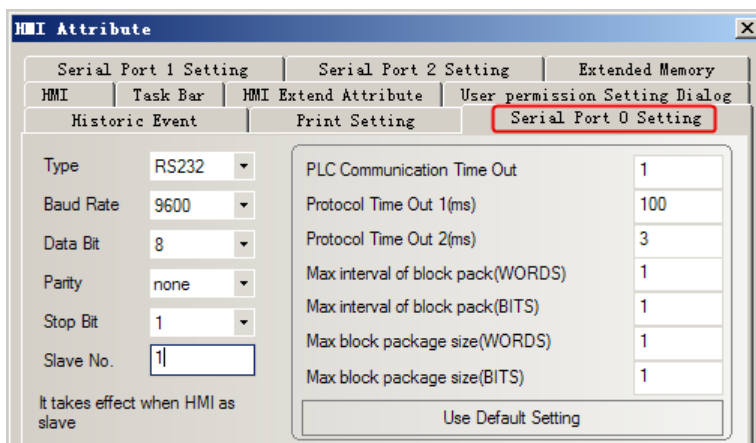


◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
Group close instruction	LB0	-----	DD	Station:1; LB address
Remote valve open operation	LB1	-----	DD	
Remote valve close operation	LB2	-----	DD	
Remote valve address set operation	LB3	-----	DD	
Set gain current state	LB4	-----	DD	
flase valve open	LB8	-----	DD	
flase valve close	LB9	-----	DD	
valve open feedback	LB10	-----	DD	
valve close feedback	LB11	-----	DD	
valve uncap alarm	LB12	-----	DD	
valve hypopiesis alarm	LB13	-----	DD	
Show current valve state	LB14	-----	DD	
Show valve state	LB15	-----	DD	
Group close instruction	LB17	-----	DD	Staion:2, LB address(LB is on the base of 1station+16)
Remote valve open operation	LB18	-----	DD	
Remote valve close operation	LB19	-----	DD	
Remote valve address set operation	LB20	-----	DD	
Set gain current state	LB24	-----	DD	
flase valve open	LB25	-----	DD	
flase valve close	LB26	-----	DD	
valve open feedback	LB27	-----	DD	
valve close feedback	LB28	-----	DD	
valve uncap alarm	LB29	-----	DD	
valve hypopiesis alarm	LB30	-----	DD	
Show current valve state	LB31	-----	DD	

◎ Cable Diagram

RS232

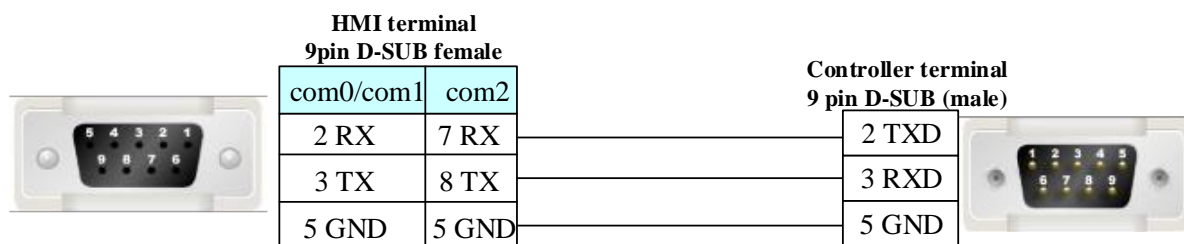

4.52 Leadshine

◎Serial Communication

Series	CPU	Link Module	Driver
Leadshine MS	MS2-32A4	RS485/232 on the CPU unit	Leadshine MS Series RTU

◎Network Communication

Series	CPU	Link Module	Driver
Leadshine MS	MS2-32A4	Ethernet port on the CPU unit	Leadshine MS Ethernet (TCP Slave)

◎Serial System Configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
Leadshine MS	MS2-32A4	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485 on the CPU unit	RS485	Setting	Your owner cable

◎Network System Configuration

Series	CPU	Link Module	Connect Type	Parameter	Cable
Leadshine MS	MS2-32A4	Ethernet port on the CPU unit	Ethernet	Setting	Your owner cable


◎Serial Communication Setting

Leadshine MS Series RTU protocol:


HMI Setting

Default communication: 9600bps, 8, none, 1; Station: 1


[RS232 communication](#)

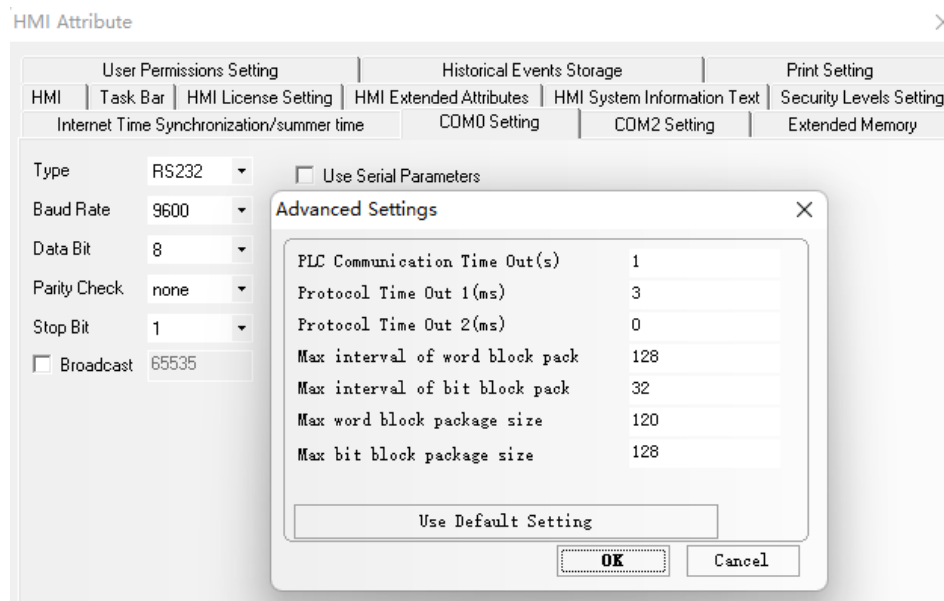

RS485 communication

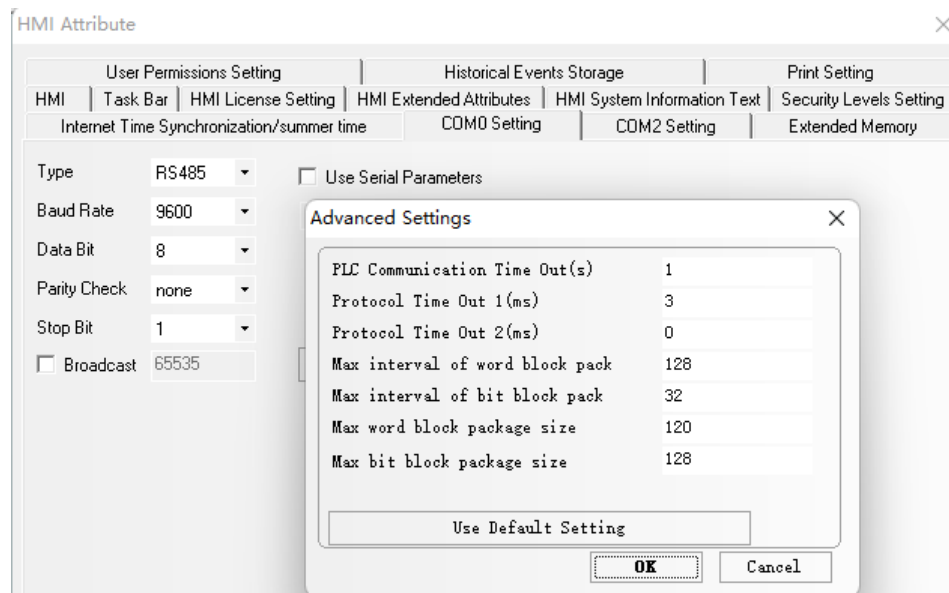


PLC Setting

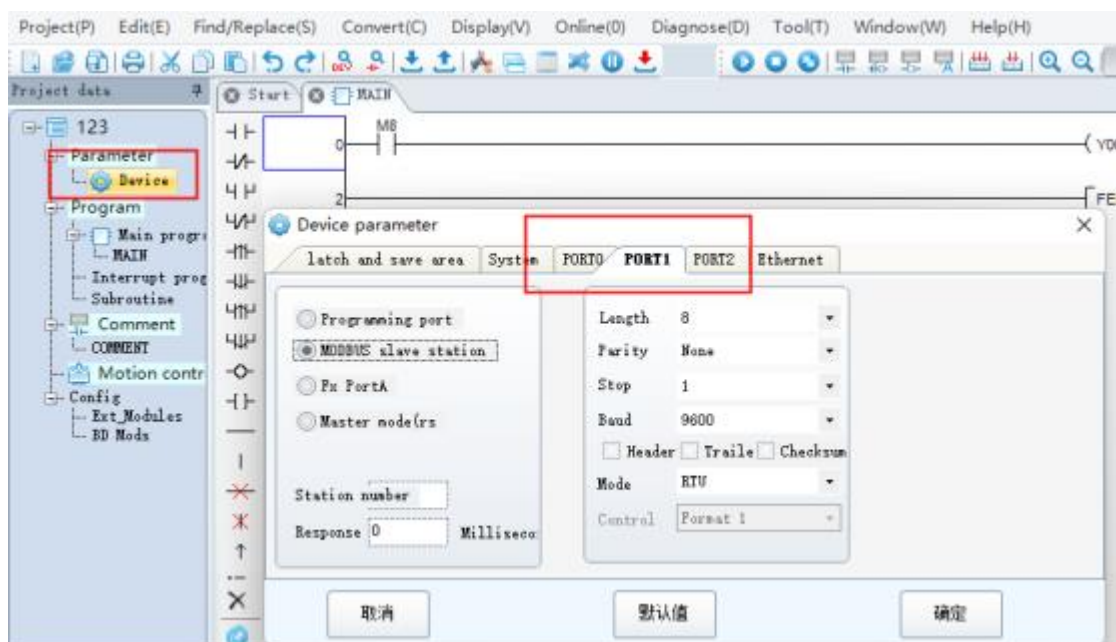


◎Network Communication Setting

HMI Setting

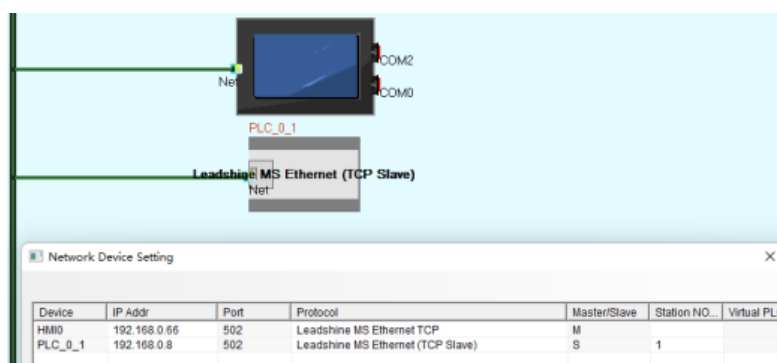

PLC Setting

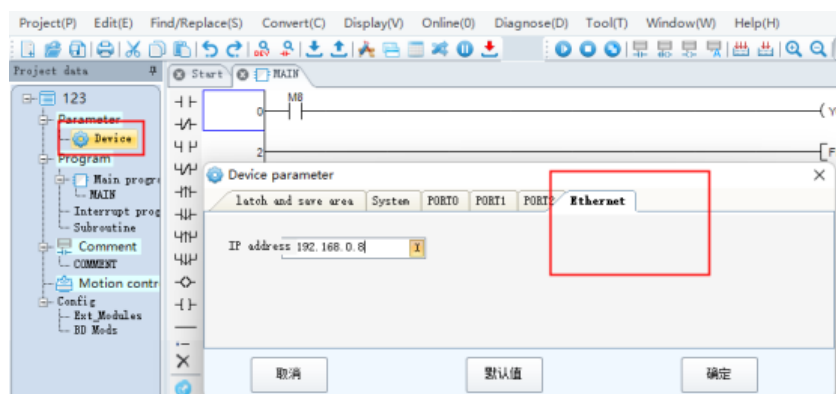


◎Supported Device

Device	Bit Address	Word Address	Format	Notes
Auxiliary relay	M0-M7679	--	DDDD	--
	M8000-8511	--	DDD	--
Input relay	X0-X1777	--	0000	--


Output relay	Y0-Y1777	--	0000	--
State relay	S0-S4095	--	DDDD	--
Timer contact	T0-T511	--	DDD	--
Counter contacts	C0-C255	--	DDD	--
Relay	F0-F7999	--	DDDD	--
Relay	B0-B32767	--	DDDDD	--
Relay	L0-L32767	--	DDDDD	--
Register	--	D0-D7999	DDDD	--
	--	D8000-D8511	DDD	--
Register	--	R0-R16383	DDDDD	--
Register	--	VD0-VD16383	DDDDD	--
Register	--	RD0-RD16383	DDDDD	--
Timer	--	T0-T511	DDD	--
Counter(16-bit)	--	C0-C199	DDD	--
Counter(32-bit)	--	C200-C255	DD	--

© Cable Diagram

RS232 Communication Cable

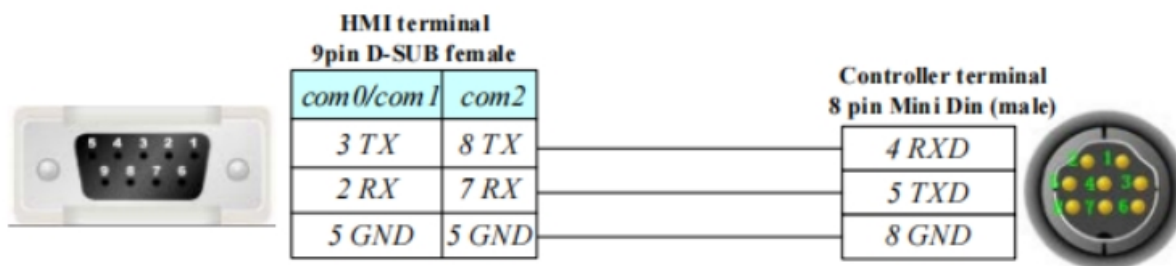

RS485 Communication Cable

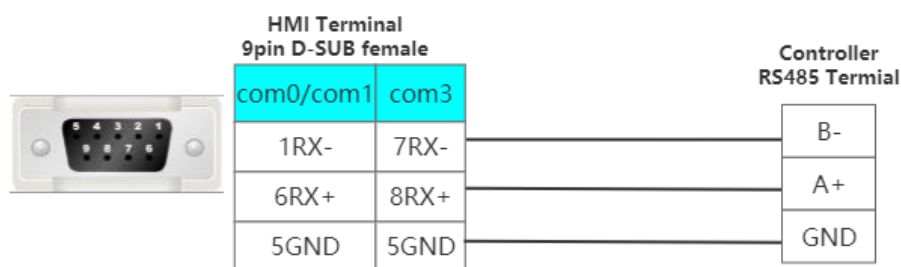

Ethernet Cable

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.53 LENZE Inverter

◎ Serial Communication

Series	CPU	Link Module	Driver
Lenze Lecom A/B	EVF9323-EV	RS232 on the CPU unit	Lenze Lecom_AB

◎ System configuration

Series	CPU	Link Module	COM Type	Parameter	Cable
Lenze Lecom A/B	EVF9323-EV	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485 on the CPU unit	RS485	Setting	Your owner cable

◎ Communication Setting

Lecom AB RS232 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS232'. The 'Baud Rate' is '9600', 'Data Bit' is '7', 'Parity' is 'even', 'Stop Bit' is '1', and 'Slave No.' is '0'. On the right, the 'PLC Communication Time Out' is '1', 'Protocol Time Out 1(ms)' is '3', 'Protocol Time Out 2(ms)' is '3', 'Max interval of block pack(WORDS)' is '0', 'Max interval of block pack(BITS)' is '0', 'Max block package size(WORDS)' is '1', and 'Max block package size(BITS)' is '1'. There is a 'Use Default Setting' button at the bottom right of the settings area. 'OK' and 'Cancel' buttons are at the bottom of the dialog.

Lecom AB RS485 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS485-2'. The 'Baud Rate' is '9600', 'Data Bit' is '7', 'Parity' is 'even', 'Stop Bit' is '1', and 'Slave No.' is '0'. On the right, the 'PLC Communication Time Out' is '1', 'Protocol Time Out 1(ms)' is '3', 'Protocol Time Out 2(ms)' is '3', 'Max interval of block pack(WORDS)' is '0', 'Max interval of block pack(BITS)' is '0', 'Max block package size(WORDS)' is '1', and 'Max block package size(BITS)' is '1'. There is a 'Use Default Setting' button at the bottom right of the settings area. 'OK' and 'Cancel' buttons are at the bottom of the dialog.

◎ Supported Device

Refer to the PLC software for details; Global drive control


Note: code_H: Data type is HEX

code_F: Data type is Floating


code_D: Data type is Decimal

◎ Cable Diagram

Lecom AB RS232 communication cable

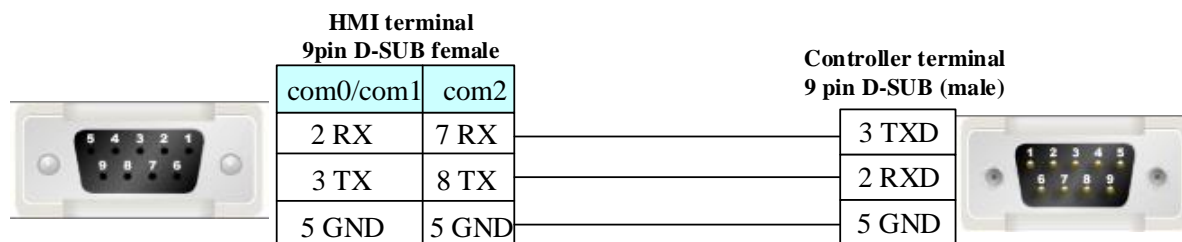

Lecom AB RS485 communication cable

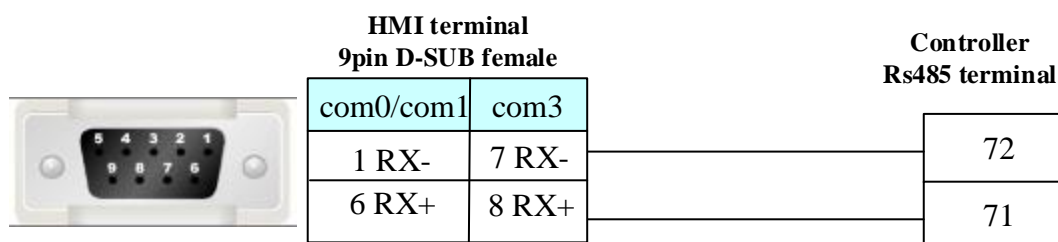

4.54 Liteon Corporation

◎ Serial Communication

Series	CPU	Link Module	Driver
ISA_7X	ISA_7X-100-A1	RS232 on the CPU unit	Liteon Servo Driver
		RS485 on the CPU unit	
EVO Series	EVO6000	RS232 on the CPU unit	Liteon Inverter Driver
	EVO6800	RS485 on the CPU unit	
	EVO8000		

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
ISA_7X	ISA_7X-100-A1	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485 on the CPU unit	RS485	Setting	Your owner cable
EVO Series	EVO6000	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485 on the CPU unit	RS485	Setting	Your owner cable

	EVO8000				
--	---------	--	--	--	--


◎ Communication Setting

Liteon Servo Driver protocol


HMI Setting

Default communication: 9600, 8, none, 2; station: 127

RS232 communication

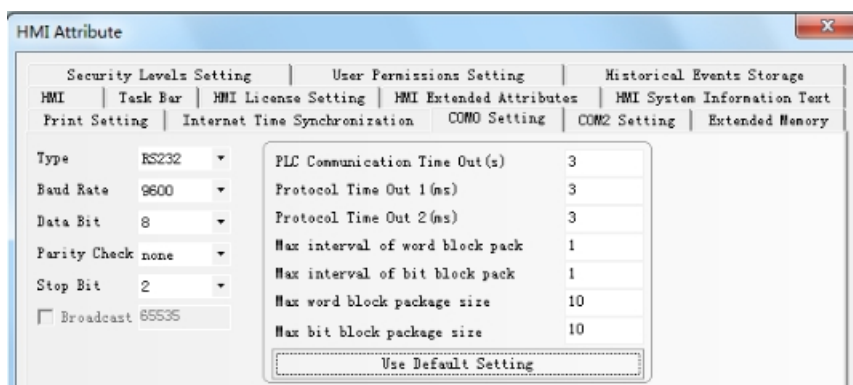

RS485 communication

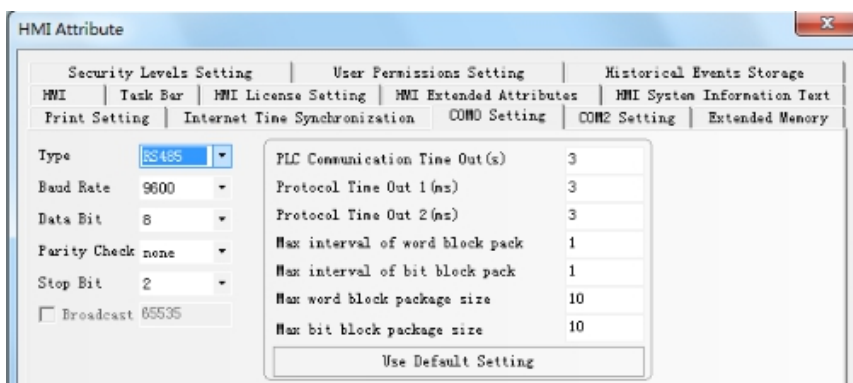

PLC Setting


For related parameter settings, please refer to the relevant instructions of the communication equipment.

Liteon Servo Driver protocol


HMI Setting

Default communication: 19200, 8, None, 1; station: 1

RS232 communication

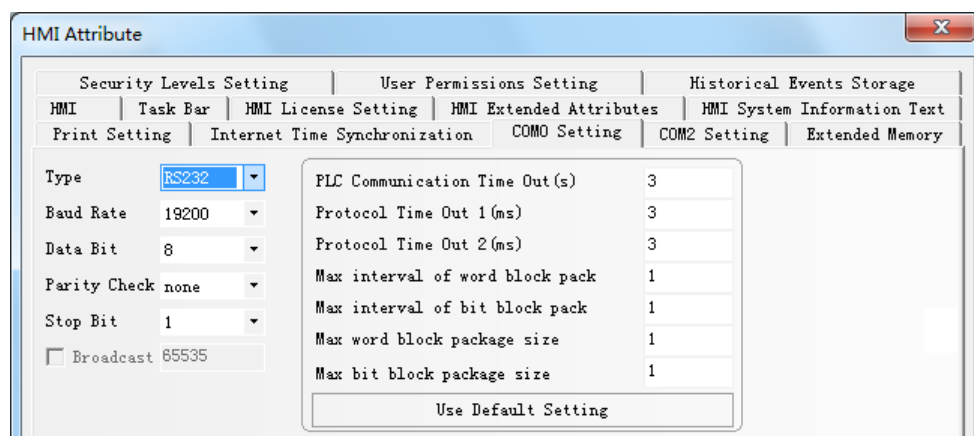

RS485 communication

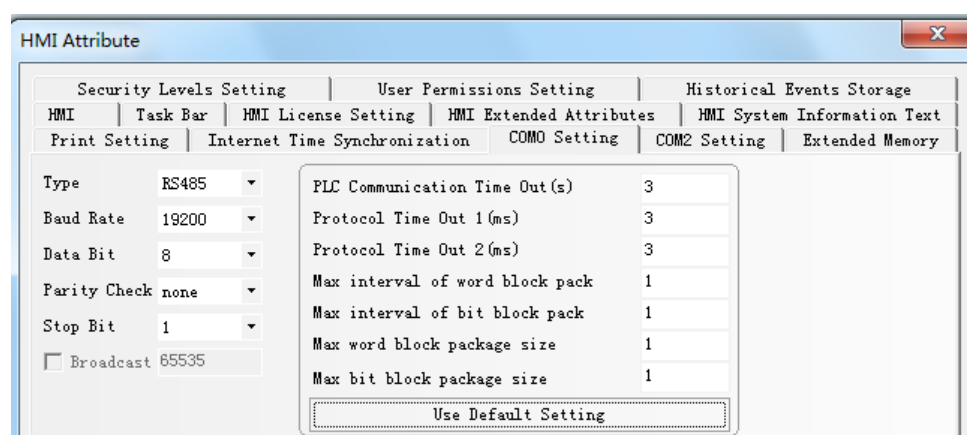

◎ Supported Device

Liteon Servo Driver


Device	Bit Address	Word Address	Format	Notes
word	———	4X 0--91D	HHH	

Liteon Inverter Driver


Device	Bit Address	Word Address	Range	Notes
word	———	4X0--FFFF	Refer to the Liteon manual	

◎ Cable Diagram

RS232 communication cable

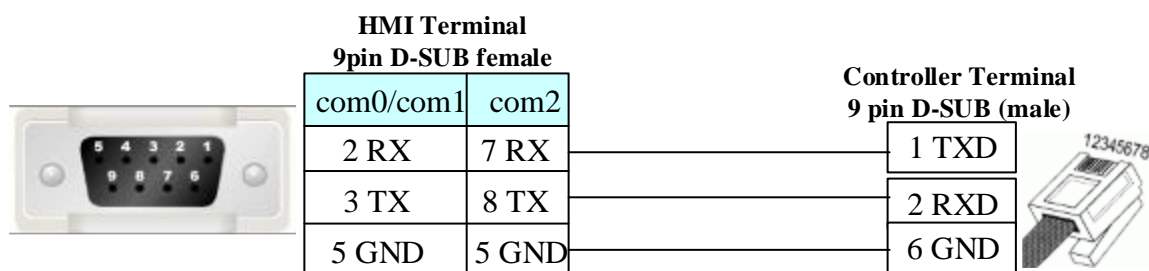

RS485 communication cable

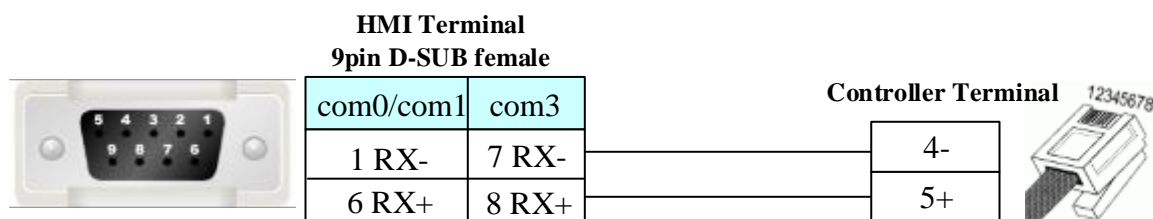

4.55 LS Industrial Systems (LG)

◎Serial Communication

Series	Type	CPU	Link Module	Driver
Master-K	K120S	K7M-DR10UE K7M-DR20U K7M-DT30U K7M-DT40U K7M-DT60U	Port1 on CPU unit Port2 on CPU unit	LS Master-K CPU Direct LS Master-K Cnet LS Master-K Modbus RTU
	K200S	K3P-07AS	RS232 on the CPU unit	
XGT		XGK-CPUH	RS232 on the CPU unit	LS XBC/XGK CPU Direct
XGB		XBC-DN64H XBC-DR32H XBC-DR40EB XBC-DN30S	Built-in RS-232C/RS-485	LS XBC/XGK Cnet
		XEC-DN20SU XEC-DR32H XEC-DN32UA	RS232 on the CPU unit	LS XEC CPU Direct
			Built-in RS-232C/RS-485	LS XEC CPU Cnet
GLOFA	GM	GM6	RS232 on the CPU unit	LS GLOFA Cnet
			G6L-CUEB	
			G6L-CUEC	
		GM7	RS232 on the CPU unit	
			G7L-CUEB	
			G7L-CUEC	
Inverter	iG5A	SV008iG5A-2	RS485on the CPU unit	LS iG5A
	iG5	SV004iG5-1	RS485 on the CPU unit	LS iG5

C100	LV0002C100-2N	RS485on the CPU unit	LS C100 Series Inverter
iGxA	SV008iGXA-4	RS485on the CPU unit	LS iGxA Series Inverter
iS7	SV0550-0750iS7-4	RS485on the CPU unit	LS iS7 Series Inverter
S100	LV0004S100-4EONNS	RS485on the CPU unit	LS S100 Series Inverter

The difference of LS Master-K CPU Direct、LS Master-K Cnet、LS Master-K Modbus RTU

Protocol	PLC Setting	Communication Mode	Multi-station	Baud(bps)
LS Master-K Cnet	Switch the DIP2 to be ON, DIP1 to be OFF	RS232/RS485	support	9600/19200 /38400
LS Master-K MODBUS RTU	Switch the DIP2 to be ON, DIP1 to be OFF	RS232/RS485	support	9600/19200 /38400
LS Master-K CPU Direct	Switch the DIP1 and DIP2 to be OFF	RS232	non-support	38400

◎ Ethernet communication

Series	CPU	Link Module	Driver
GLOFA	GM6-CPUA	G6L-EUTP	LS GLOFA FEnet
XGT	XGK-CPUE	XGL-EFMT	LS XGT Ethernet
XGT	XMC-32EA	XMC-32EA	LS XMC FEnet Slave
XGB	XBC-DR60SU	XBL-EMTA	LS XBC FEnet Slave

◎ Serial System Configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
K120S	K7M-DR10UE	Port1 on CPU unit	RS232	Setting	Your owner cable
		Port2 on CPU unit	RS485	Setting	Your owner cable
	K7M-DR20U	Port1 on CPU unit	RS232	Setting	Your owner cable
		Port2 on CPU unit	RS485	Setting	Your owner cable
K200S	K3P-07AS	RS232 on the CPU unit	RS232	Setting	Your owner cable
XGT	XGK-CPUH	RS232 on the CPU unit	RS232	Setting	Your owner cable
XGB	XBC-DN64H XBC-DR32H XBC-DR40EB XBC-DN30S	RS232 on the CPU unit	RS232	Setting	Your owner cable
		Built-in RS-232C	RS232	Setting	Your owner cable
		Built-in RS-485	RS485	Setting	Your owner cable
	XEC-DN20SU XEC-DR32H XEC-DN32UA	RS232 on the CPU unit	RS232	Setting	Your owner cable
		Built-in RS-232C	RS232	Setting	Your owner cable
		Built-in RS-485	RS485	Setting	Your owner cable
	GLOFA	GM6	RS232 on the CPU unit	RS232	Setting
G6L-CUEB					
G6L-CUEC			RS422/RS485	Setting	Your owner cable
GM7		RS232 on the CPU unit	RS232	Setting	Your owner cable
		G7L-CUEB			
		G7L-CUEC	RS422/RS485	Setting	Your owner cable
iG5A	SV008iG5A-2	on the CPU unit	RS485	Setting	Your owner cable

iG5	SV004IG5-1	R485 on the CPU unit	RS485	Setting	Your owner cable
C100	LV0002C100-2 N	on the CPU unit	RS485	Setting	Your owner cable

◎ Ethernet System Configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
GLOFA	GM6-CPUA	ETH on the CPU unit	ETH	Setting	Your owner cable
XGT	XGK-CPUE	XGL-EFMT	ETH	Setting	
XGB	XBC-DR60SU	XBL-EMTA	ETH	Setting	
XGT	XMC-32EA	XMC-32EA	ETH	Setting	Your owner cable

◎ Serial Communication Setting

LS Master-K Cnet protocol

Default communication: 38400, 8, none, 1; station:1

HMI Setting


RS232 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS232'. The 'Baud Rate' is '38400', 'Data Bit' is '8', 'Parity' is 'none', 'Stop Bit' is '1', and 'Slave No.' is '0'. On the right, the 'PLC Communication Time Out' is '1', 'Protocol Time Out 1(ms)' is '30', 'Protocol Time Out 2(ms)' is '3', 'Max interval of block pack(WORDS)' is '2', 'Max interval of block pack(BITS)' is '2', 'Max block package size(WORDS)' is '16', and 'Max block package size(BITS)' is '16'. There is a 'Use Default Setting' button and 'OK' and 'Cancel' buttons at the bottom.

RS485 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS485-2'. The 'Baud Rate' is '38400', 'Data Bit' is '8', 'Parity' is 'none', 'Stop Bit' is '1', and 'Slave No.' is '0'. On the right, the 'PLC Communication Time Out' is '1', 'Protocol Time Out 1(ms)' is '30', 'Protocol Time Out 2(ms)' is '3', 'Max interval of block pack(WORDS)' is '2', 'Max interval of block pack(BITS)' is '2', 'Max block package size(WORDS)' is '16', and 'Max block package size(BITS)' is '16'. There is a 'Use Default Setting' button and 'OK' and 'Cancel' buttons at the bottom.

PLC setting

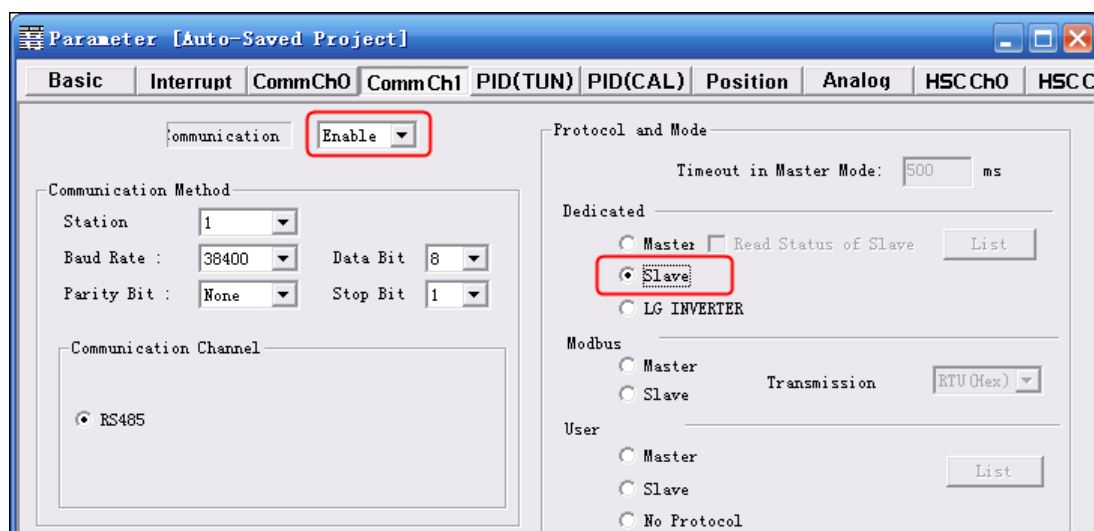


If click “Connect+Write+Run+Monitor Start”, it will give a “Cannot Change PLC Mode”. Need to let the run light go out by manual control, and then download. After download, let the run light keep on.

LS Master-K CPU Direct protocol

HMI Setting

Default communication: 38400, 8, none , 1; station:1

RS232 communication

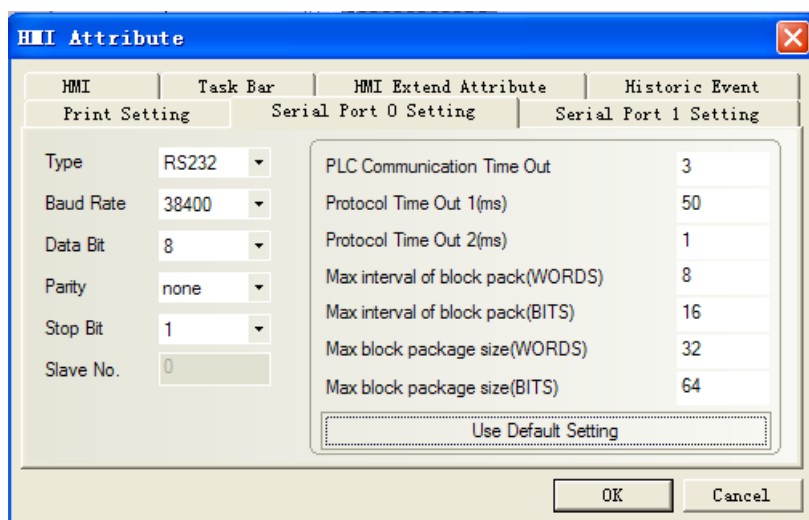


NOTE: Only support 38400 baud rate for the protocol

LS Master-K Modbus RTU protocol


HMI Setting

Default communication: 38400, 8, none , 1; station:1

RS232 communication

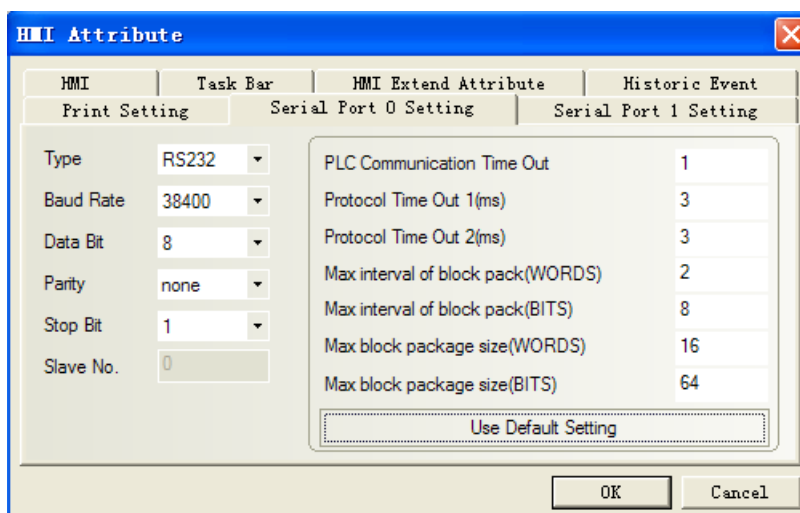

PLC Setting

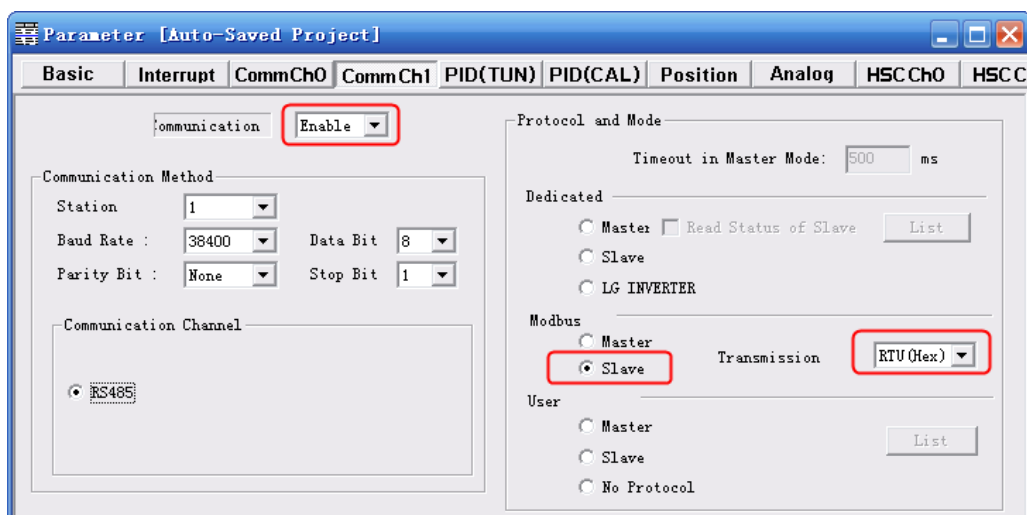


If click “Connect+Write+Run+Monitor Start”, it will give a “Cannot Change PLC Mode”. Need to let the run light go out by manual control, and then download. After download, let the run light keep on.

LS XBC/XGK CPU Direct protocol

Default communication: 115200, 8, none, 1; station: 0

RS232 communication

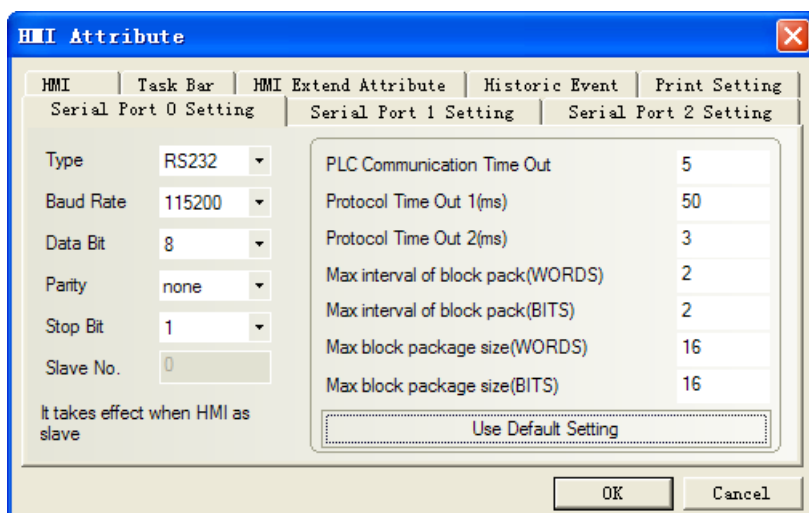


NOTE: Only support 115200 baud rate for the protocol; station number disable.

LS XBC/XGK Cnet protocol


Default communication: 9600, 8, none, 1; station: 0

HMI Setting

RS232 communication

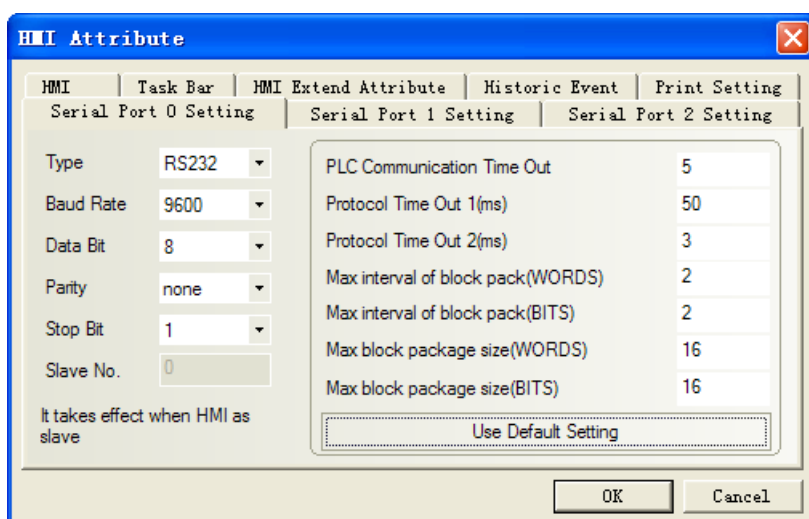


RS485 communication

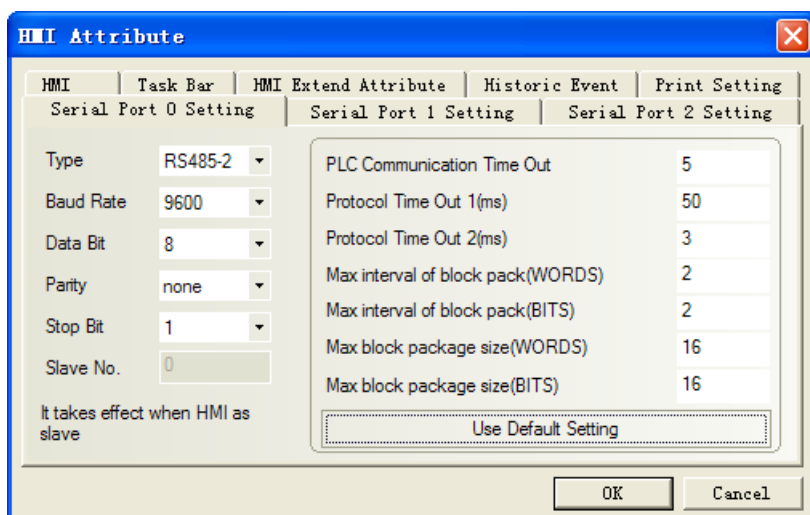

PLC Setting

1. "Tools"---"Network Manager" set communication

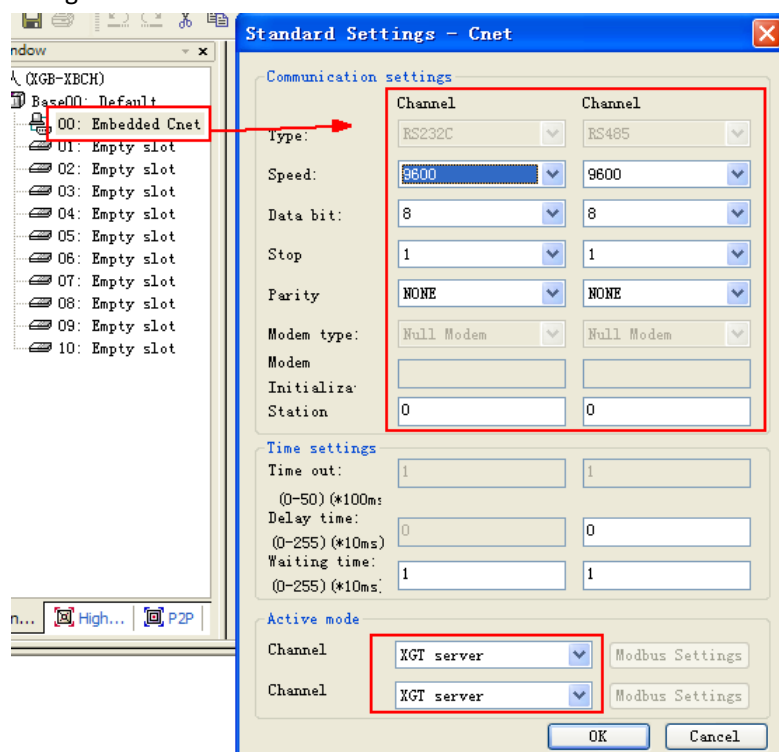


2. Communicating in the OPR mode

LS XEC CPU Direct

HMI Setting

Default communication parameters: 115200bps, 8, 1, none; PLC station No.:0

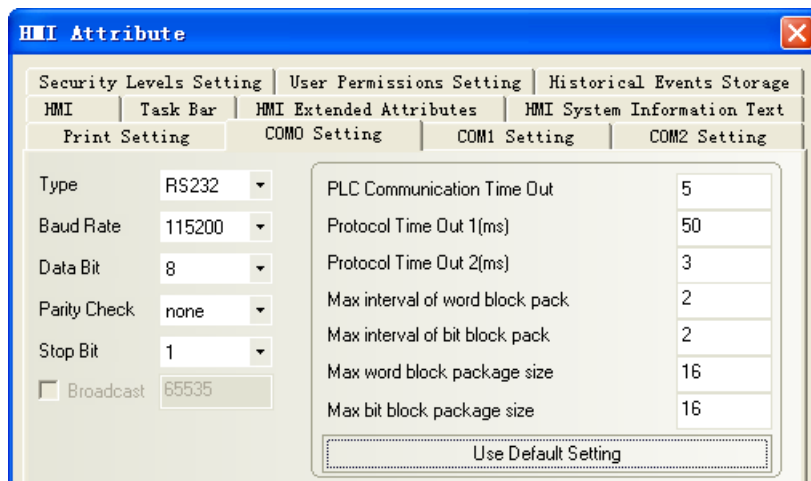


NOTE:Only support 115200 baud rate for the protocol; station number disable.

LS XEC Cnet protocol


HMI Setting

Default communication parameters: 9600bps, 8, 1, none; PLC station No.:0

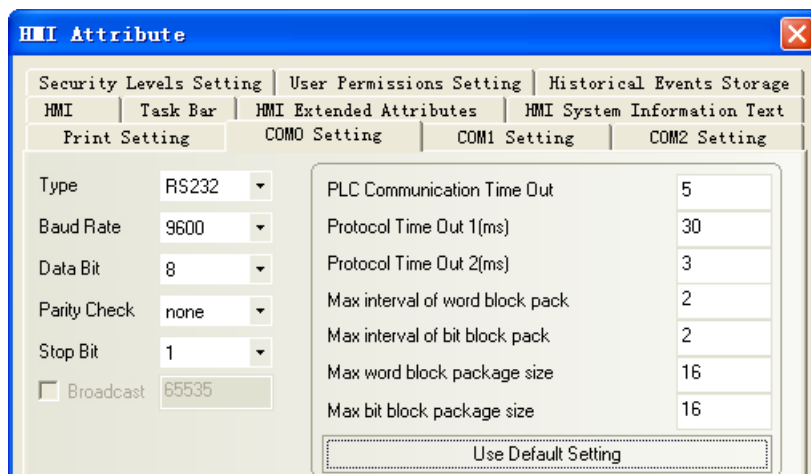


PLC Setting


1. PLC parameter settings:[Tools]-[Network Manager].

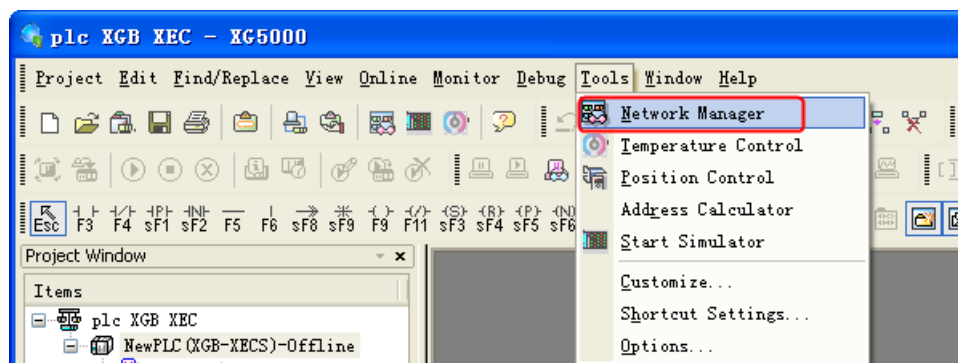

2. In the pop-up window "XG-PD", create a new file, select the correct CPU kind.

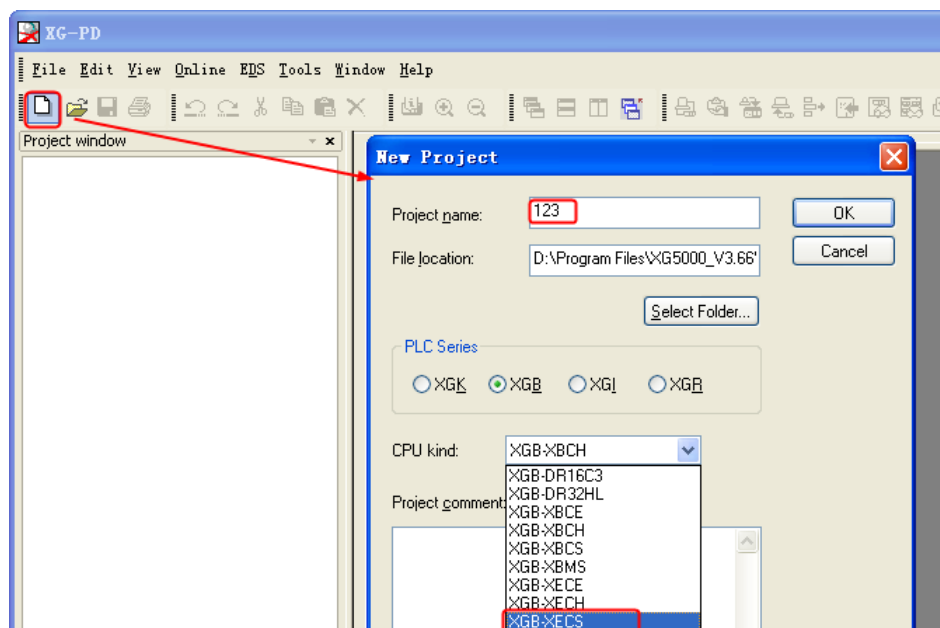

3. Double click the [00:Embedded Cnet], in the pop-up window “Standard Settings-Cnet” to set communication.

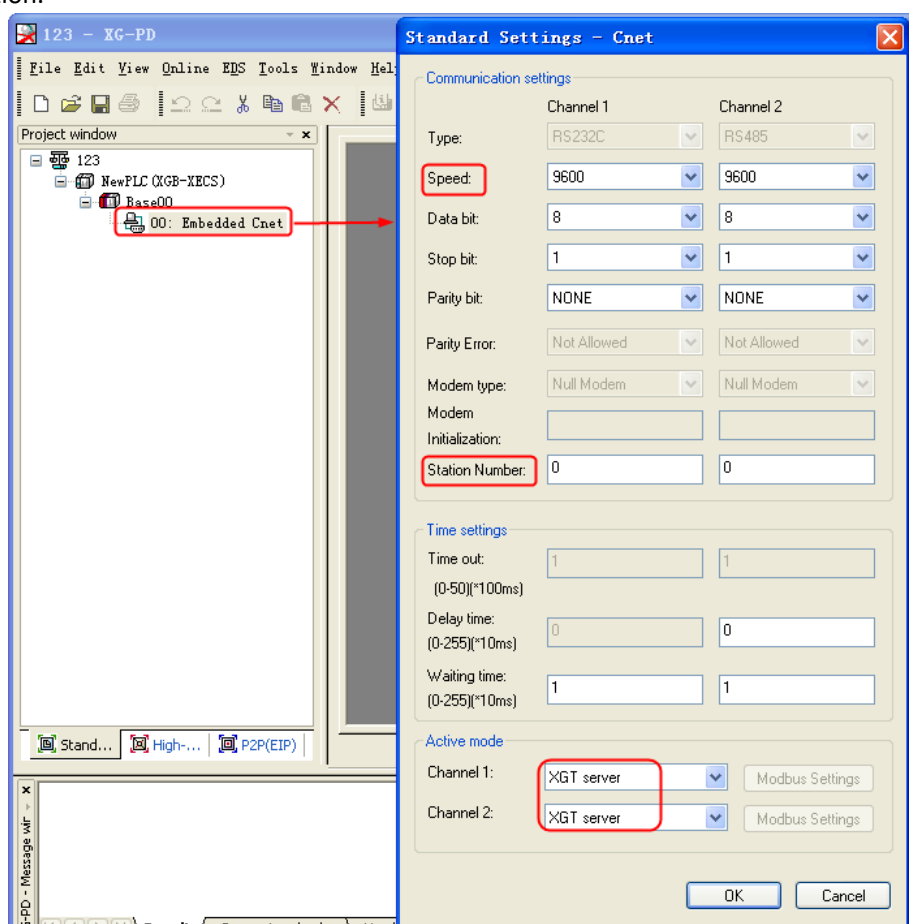


LS GLOFA Cnet protocol


Default communication: 9600, 8, none, 1; station: 0

HMI Setting

RS232 communication

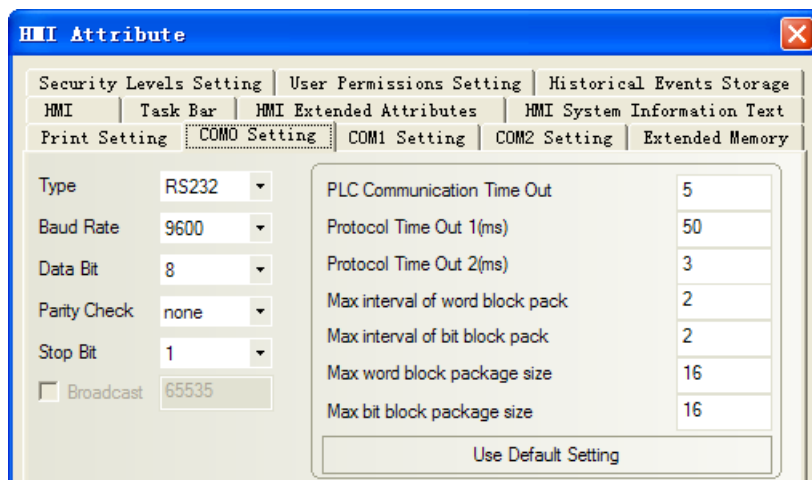


RS422 communication

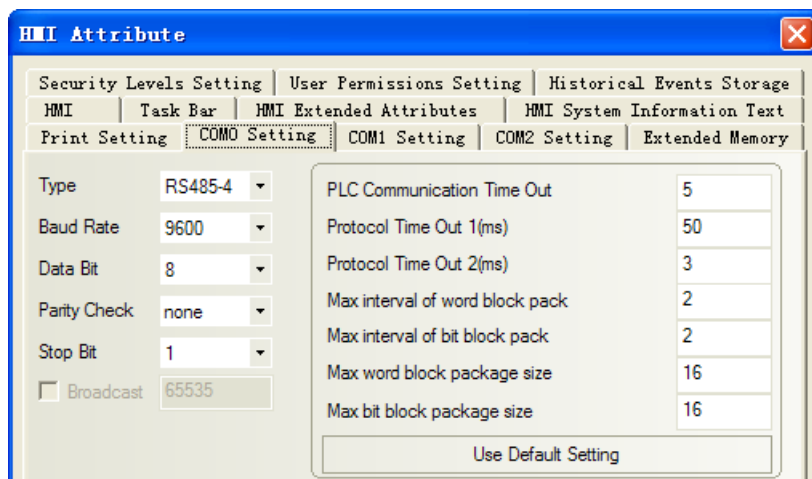

PLC Setting

1. Set the parameters of CPU module


Open GMWIN, "Parameters" → "Basic Parameters" set "Communication":

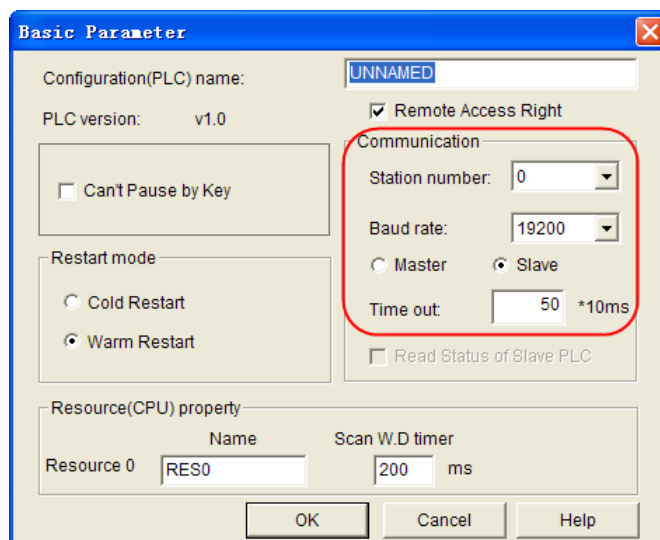


2. Set the parameters of module

Take G6L-CUEC for example,

Open GMWIN, select "Tool"→"Cnet Frame Editor",

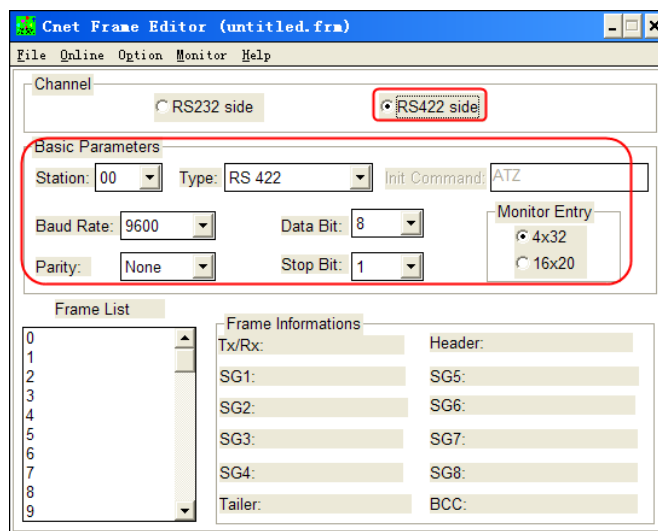

As G6L-CUEC is RS422/485 module, the channel should be selected "RS422 side". After set the parameters, click "Online"→"Connect", and then click "Online"→"Write" after the communication is built, pay attention to choose the correct Slot No..

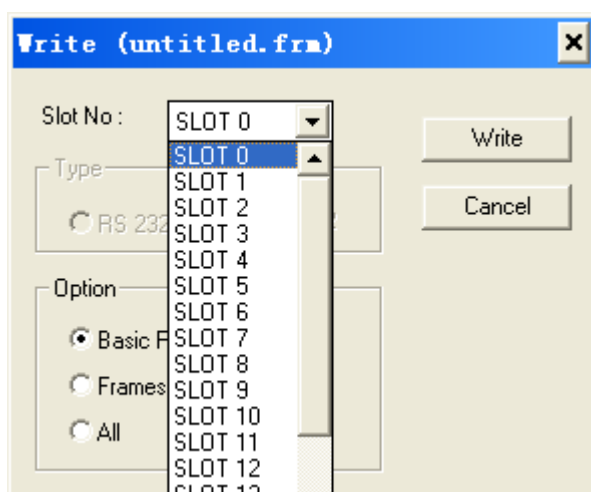


The Slot No. is the I/O slot position where the communication module is. For example, G6L-CUEC is plugged in the I/O 1, the Slot No. should be selected SLOT 1.

NOTE: Be sure to put the switch of the module to 9 (ON-LINE) position when communicating.

LS ig5A Protocol

HMI Setting

Default communication: 9600bps, 8, none, 1 ; PLC station: 1

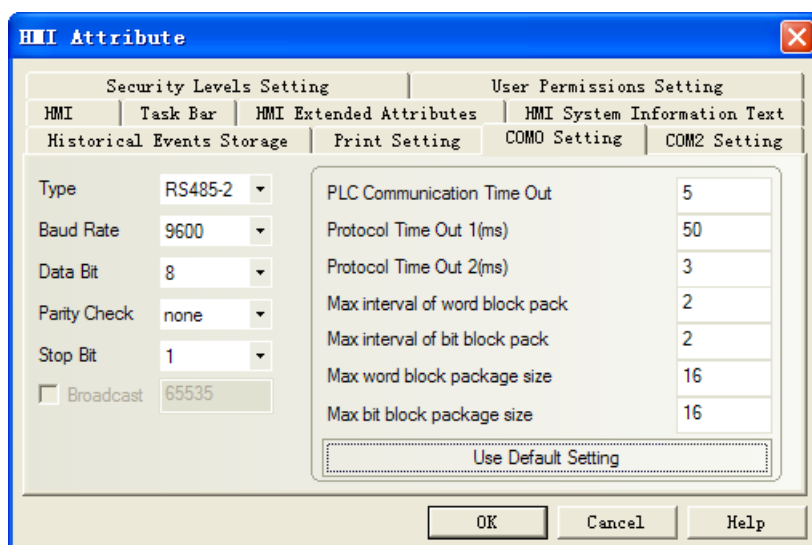

PLC Setting

Settings		Parameter	directions	
panel display	Addr			
I59	A43B	Protocol	0	Modbus RTU
			1	LS BUS
I60	A43C	Station	1-250	
I61	A43D	Baud Rate	0	1200[bps]
			1	2400[bps]
			2	4800[bps]
			3	9600[bps]
			4	19200[bps]
I65	A441	Parity Check	0	none, stop bit:1
			1	none, stop bit:2
			2	even, stop bit:1
			3	odd, stop bit:1




The controller also supports the standard Modbus RTU protocol, set the agreement with LS ig5A.

LS Ig5 Protocol

HMI Setting

Default communication: 9600bps, 8, none, 1; station: 1

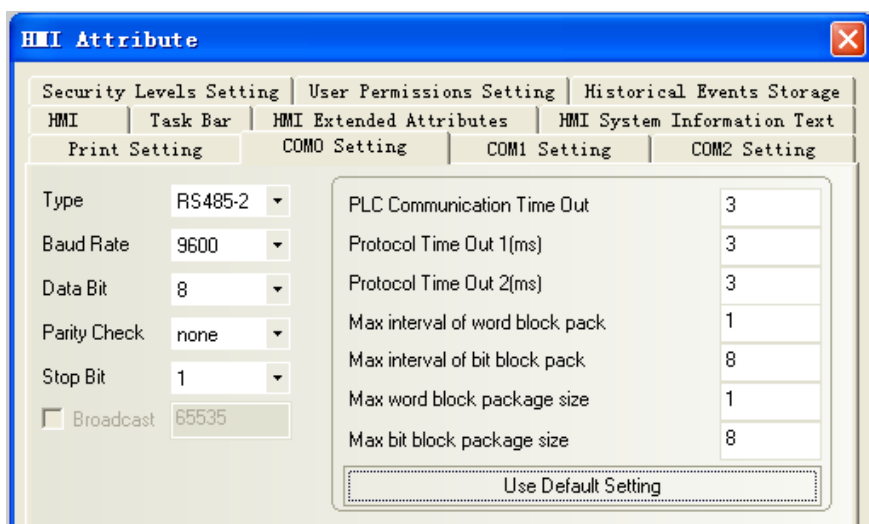

PLC Setting

Setting in operation panel:

Code	Name	Display	Range	Unit	Factory setting	Change
I/O-46	Inverter No.	I46	1 to 32	1	1	yes
I/O-47	Baud rate	I47	0: 1200bps 1: 2400bps 2: 4800bps 3: 9600bps 4: 19200bps	-	3: 9600bps	yes
I/O-50	Communication protocol	I50	0: LS-BUS 1-6: MODBUS ASCII 7-9: MODBUS-RTU		7	yes

Note: Setting communication protocol in operation panel(0: LS-BUS),when use inverter


LS C100 Series Inverter Protocol

HMI Setting

Default communication:9600bps, 8, non, 1; station: 1

(Attention, parity check : non , no modification)

RS485


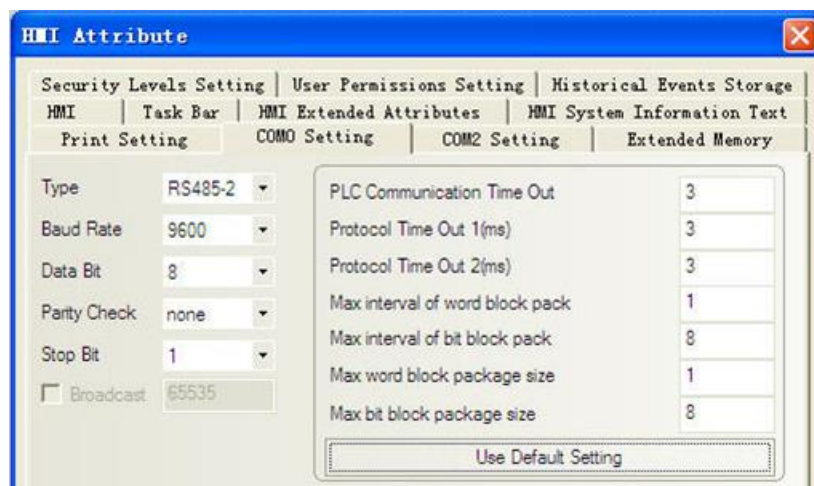


◎ Ethernet Communication Setting

LS GLOFA FEnet protocol


GM6-CPU Setting

HMI Setting

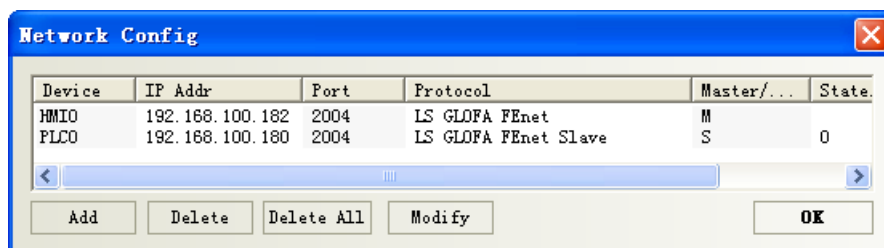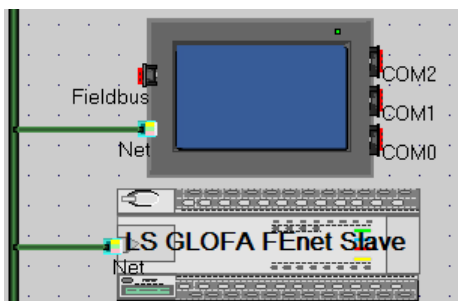


PLC Setting

1. Modify the parameters of PLC: “Tools”→“Enet Frame Editor”, set the type as “FENET”:

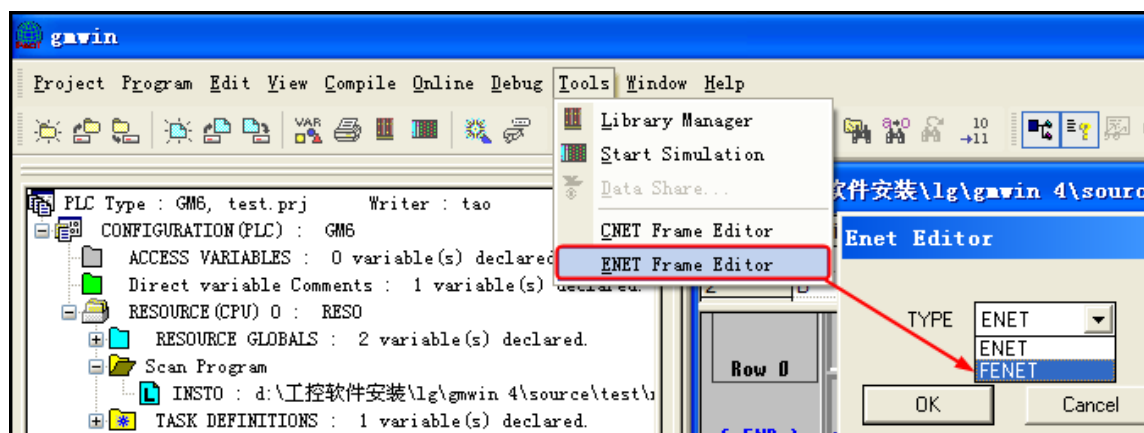


NOTE: Modify the IP address only via serial communication, and in the offline.


2. On the “Enet Editor” and select “Edit”, set the PLC series and IP address

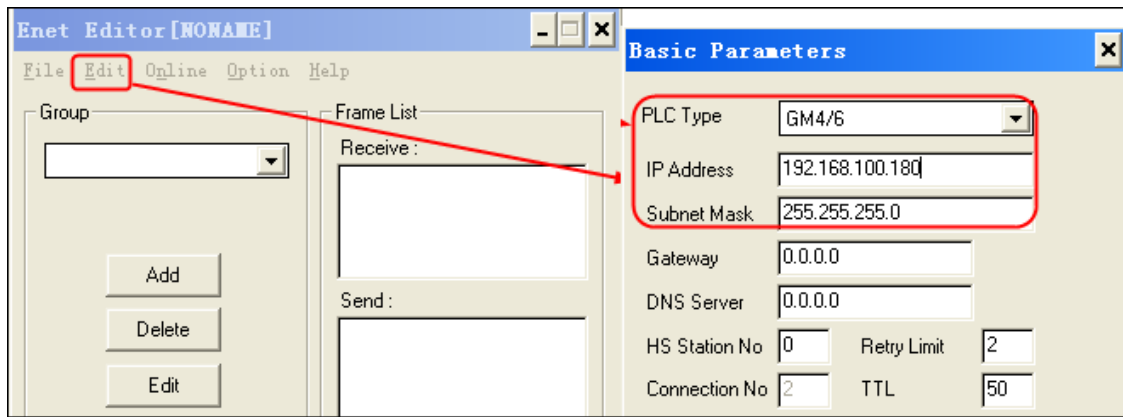

3. On the "Option" and select "COM Port", set the serial port of PC

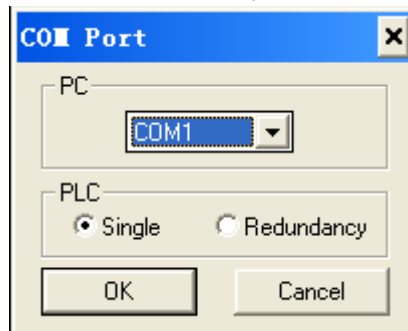


4. Download: "Online"→"Connect"→"Write"

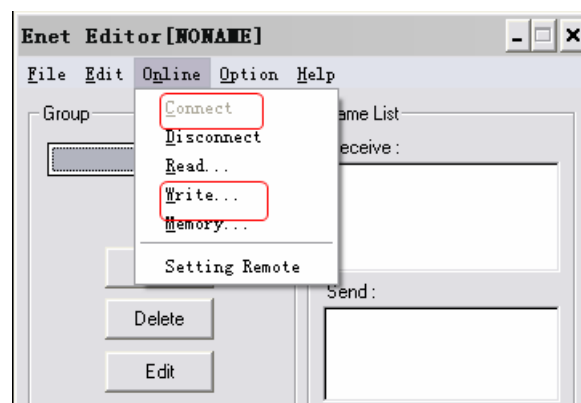


XGK-CPUE Setting

HMI setting

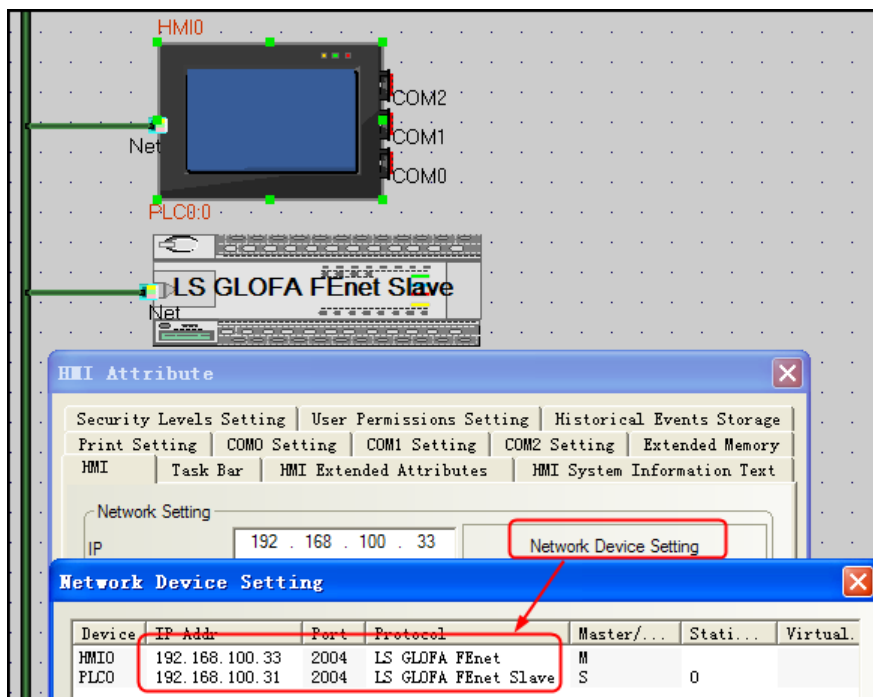


PLC setting


1. PLC parameter settings: [Tools] - [network management] , in the pop-up window XG-PD , create a new file , select the correct CPU kind .

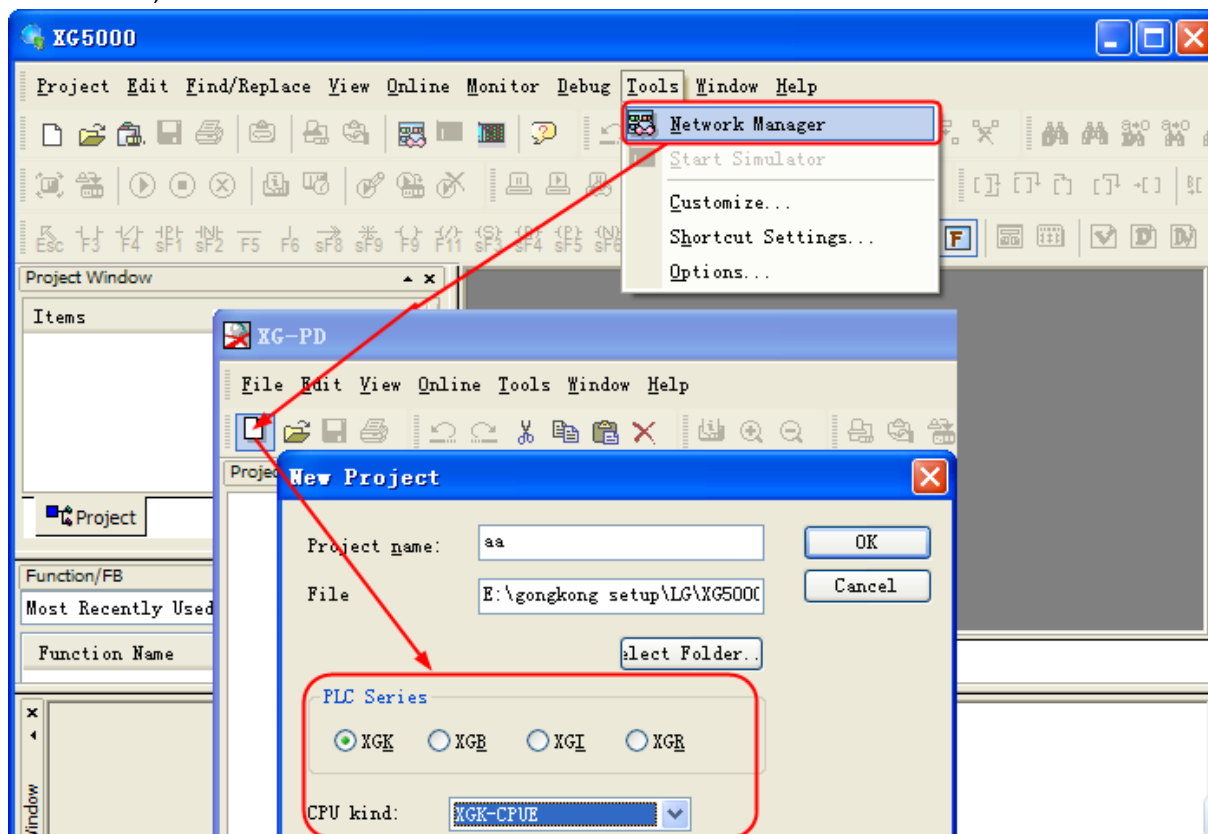

2. Double click the [base 00], in the pop-up window [communication module Settings], select the category FEnet .

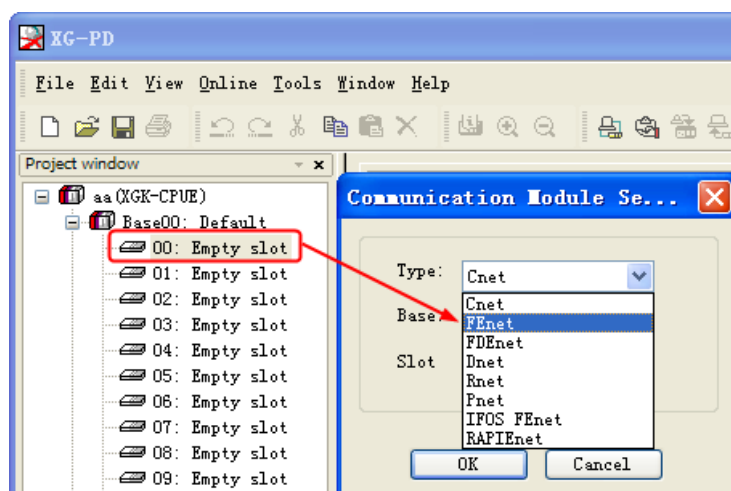


3. Double click the FEnet, in the pop-up window [Standard Settings] to set the IP address and drive .

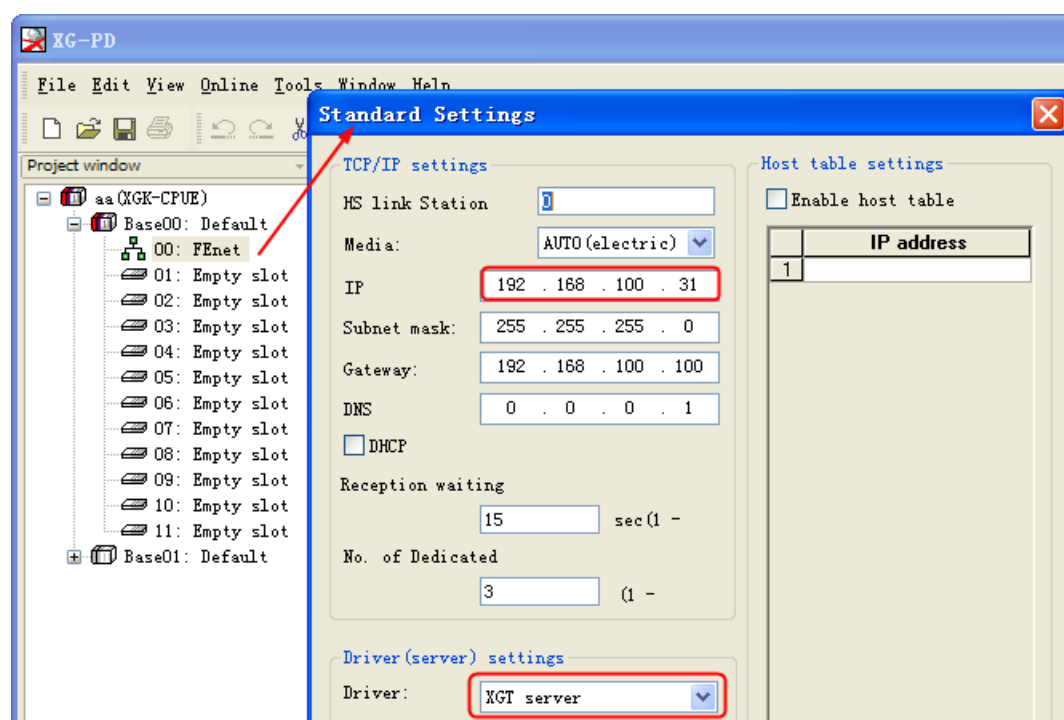


LS XBC FEnet Slave

HMI Setting

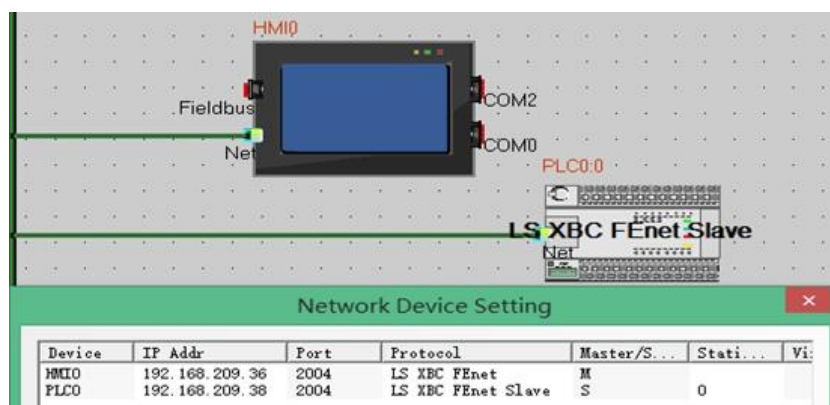


PLC Setting

1. Open XG5000, new project aaa, choosing the right CPU ;

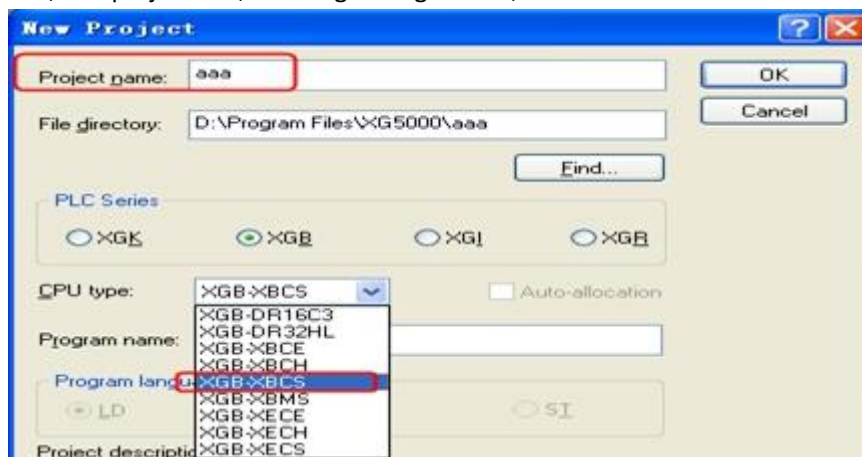


2. PLC parameter setting (IP setting) :


- A. **【Tools】** → **【Network Manager】** ,new project bbb in XG-PD,choosing the right CPU;

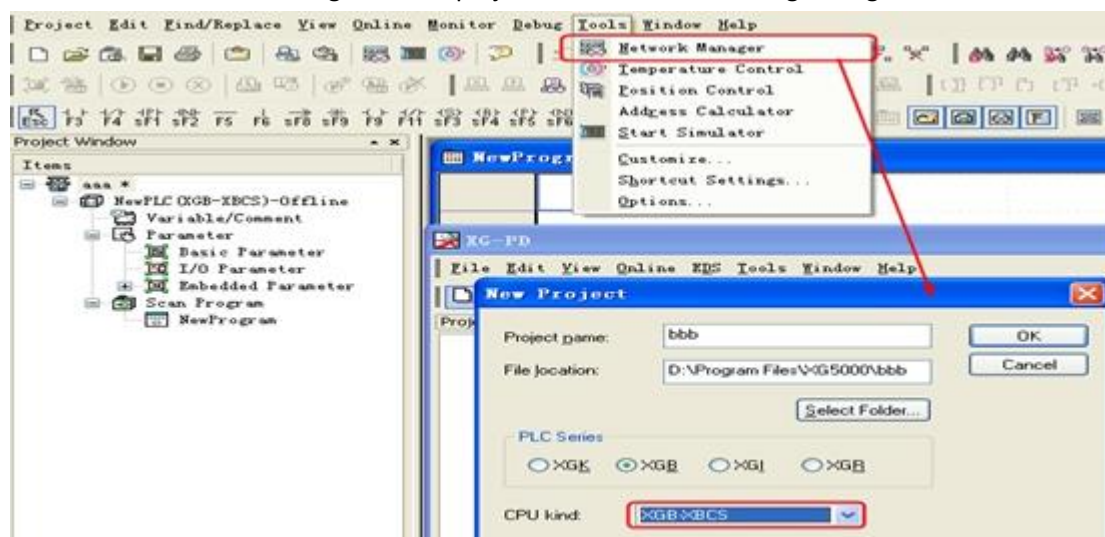

- B. Right click **【Base00】** → **【Add Communication Module】** , Select FENet;

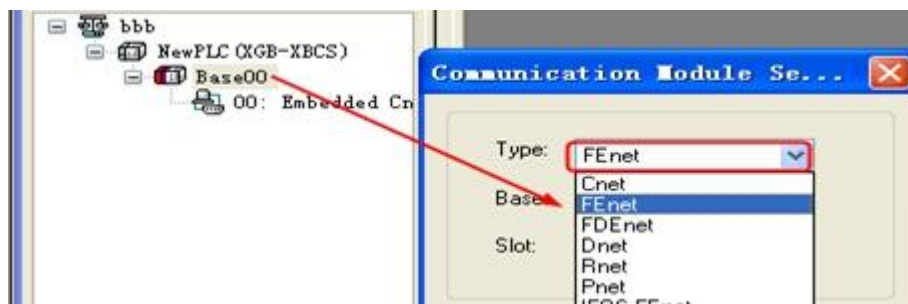


- C. Setting IP and Driver in **【Standard Settings】** ;

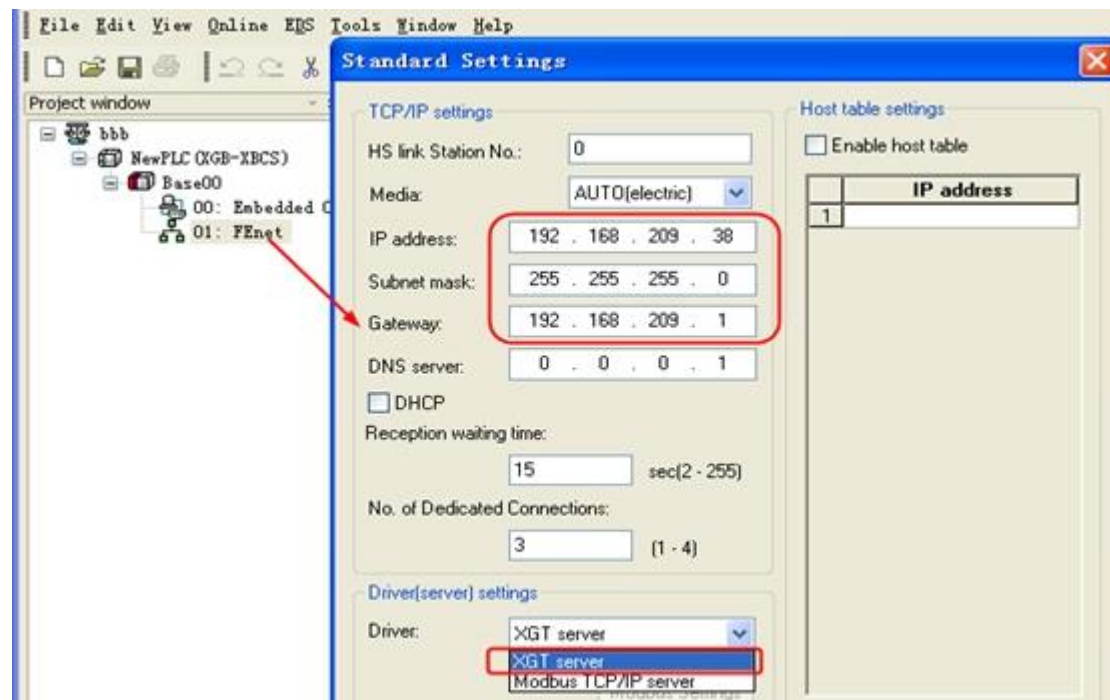


3. Setting OK, writer parameters to PLC;

LS XMC FEnet Slave

HMI Setting

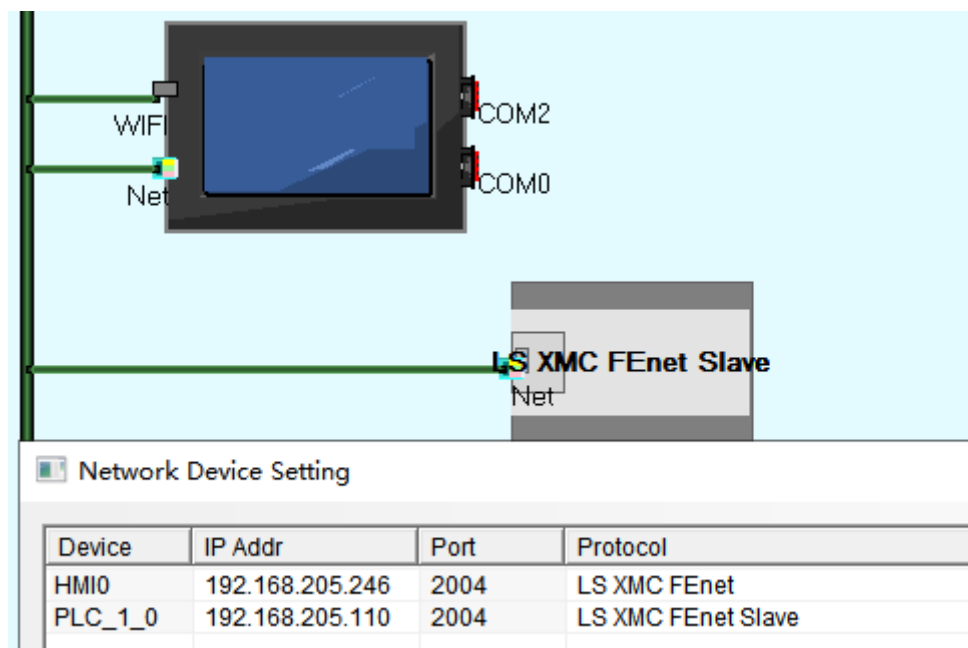

PLC Setting

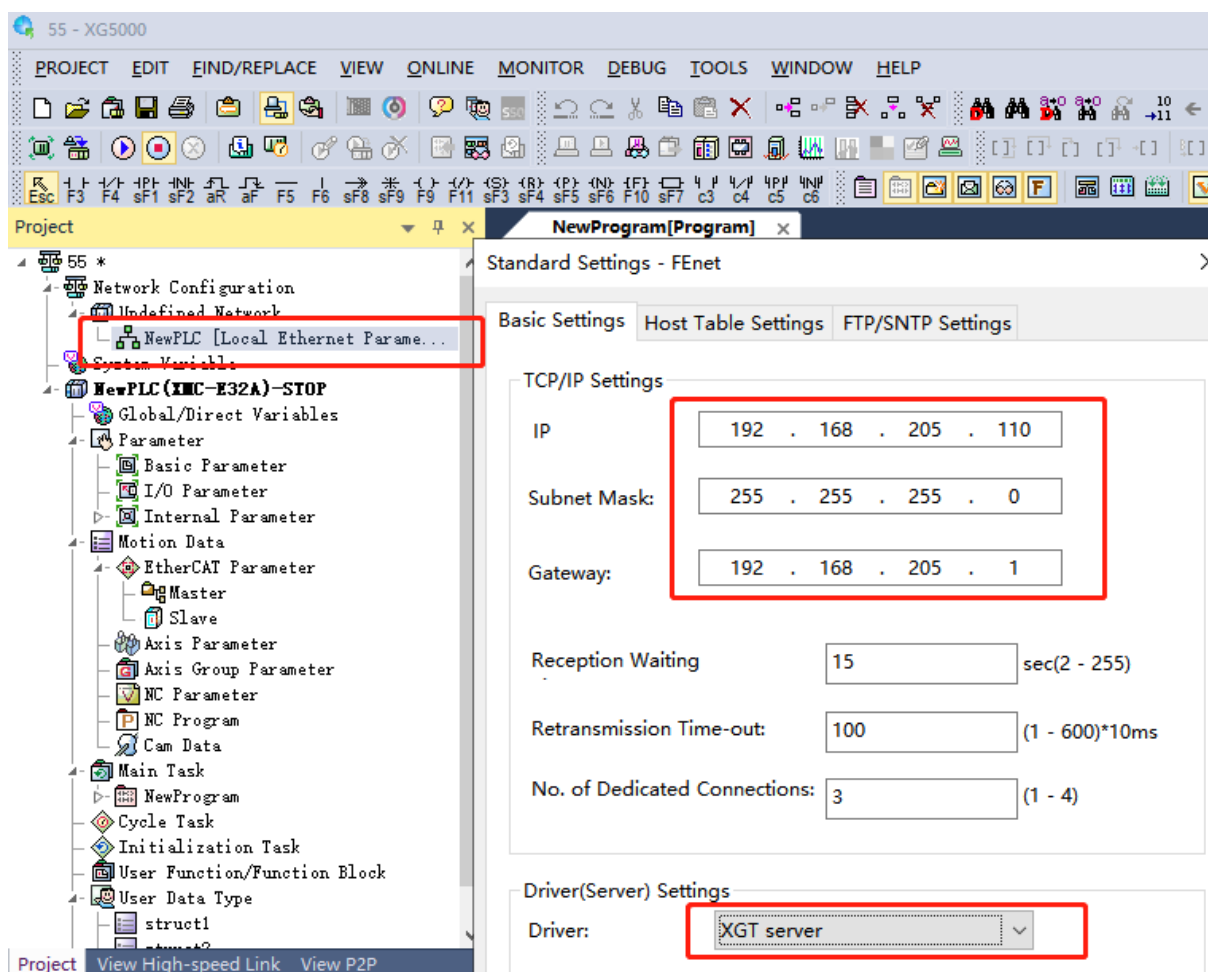

© Supported Device

LS Master-K CPU Direct

Device	Bit Address	Word Address	Format	Notes
I/O Relay	P 0.0-256.0	-----	DDD.H	
Auxiliary Relay	M 0.0-256.0	-----	DDD.H	
Link Relay	L 0.0-256.0	-----	DDD.H	
Keep Relay	K 0.0-256.0	-----	DDD.H	
Special Relay	F 0.0-256.0	-----	DDD.H	
Counter	C 0-255	-----	DDD	
Timer	T 0-255	-----	DDD	
I/O Relay	-----	P 0-255	DDD	
Auxiliary Relay	-----	M 0-255		
Link Relay	-----	L 0-255		
Keep Relay	-----	K 0-255		
Special Relay	-----	F 0-255		
S	-----	S 0-255		

Timer	-----	T 0-4096	DDDD	
Counter	-----	C 0-4096	DDDD	
Data Register	-----	D 0-9999	DDDD	

NOTE: F address: 01 in the PLC corresponds to 0.1 in the HMI;

F address: 2A in the PLC corresponds to 2.A in the HMI.

Other register addresses, and so on.

LS Master K-cnet

Device	Bit Address	Word Address	Format	Notes
I/O Relay	P 0.0-256.0	-----	DDD.H	
Auxiliary Relay	M 0.0-256.0	-----	DDD.H	
Link Relay	L 0.0-256.0	-----	DDD.H	
Keep Relay	K 0.0-256.0	-----	DDD.H	
Special Relay	F 0.0-256.0		DDD.H	
Counter	C 0-255	-----	DDD	
Timer	T 0-255	-----	DDD	
Timer	-----	T 0-255	DDD	
Counter	-----	C 0-255	DDD	
Data Register		D 0-9999	DDDD	
I/O Relay	-----	P 0-255	DDD	
Auxiliary Relay	-----	M 0-255	DDD	
Link Relay	-----	L 0-255	DDD	
Keep Relay	-----	K 0-255	DDD	
Special Relay	-----	F 0-255	DDD	
S	-----	S 0-255	DDD	

LS Modbus RTU

Device	Bit Address	Word Address	Format	Notes
I/O Relay	P 0.0-1023.F	-----	DDD.H	
Auxiliary Relay	M 0.0-1023.F	-----	DDD.H	
Link Relay	L 0.0-2047.F	-----	DDD.H	
Keep Relay	K 0.0-4095.F	-----	DDD.H	
Special Relay	F 0.0-1023.F	-----	DDD.H	
Timer	-----	T 0-255	DDD	
Counter	-----	C 0-255	DDD	
Data Register	-----	D 0-9999	DDDD	

LS XBC/XGK Cnet

Device	Bit Address	Word Address	Format
	ZR_bit 0.0-65535.F		

	U_bit 0.0-4095.F		
File Relay	R_bit 0.0-32767.F		DDDDD.H
Data Relay	D_bit 0.0-32767.F		DDDDD.H
Communication Relay	N_bit 0.0-21503.F		DDDD.H
Link Relay	L_bit 0.0-11263.F		DDDD.H
	S_bit 0.0-127.F		
Index Relay	Z_bit 0.0-624.F	-----	DDD.H
Counter Contact Relay	C_bit 0-32767	-----	DDDD
Timer Contact Relay	T_bit 0-32767	-----	DDDD
Special Relay	F_bit 0.0-2047.F	-----	DDDD.H
Keep Relay	K_bit 0.0-8191.F	-----	DDDD.H
Auxiliary Relay	M_bit 0.0-2047.F	-----	DDDD.H
I/O Relay	P_bit 0.0-2047.F	-----	DDDD.H
		ZR 0-65535	
		U 0-4095	
File Register	-----	R 0-32767	DDDDD
Data Register	-----	D 0-32767	DDDDD
Communication Register	-----	N 0-21503	DDDD
Link Register	-----	L 0-11263	DDDD
Step Control Register		S 0-127	DDDD
Index Register		Z 0-9999	DDDD
Counter	-----	C 0-2047	DDDD
Timer	-----	T 0-2047	DDDD
Special Register	-----	F 0-2047	DDDD
Keep Register	-----	K 0-8191	DDDD
Auxiliary Register	-----	M 0-2047	DDDD
I/O Register	-----	P 0-2047	DDDD

NOTE: T_bit、C_bit are not supported to be transferred quantities

LS XBC/XGK CPU Direct

Device	Bit Address	Word Address	Format
	S_bit 0-127.F		
	U_bit 0-4095.F		

File Relay	R_bit 0.0-32767.F	-----	DDDDD.H
Data Relay	D_bit 0.0-32767.F	-----	DDDDD.H
Communication Relay	N_bit 0.0-21503.F	-----	DDDD.H
Link Relay	L_bit 0.0-11263.F	-----	DDDD.H
Index Relay	Z_bit 0.0-624.F	-----	DDD.H
	ZR_bit 0.0-65535.F	-----	DDDDD.H
Counter Contact Relay	C_bit 0-32767	-----	DDDD
Timer Contact Relay	T_bit 0-32767	-----	DDDD
Special Relay	F_bit 0.0-2047.F	-----	DDDD.H
Keep Relay	K_bit 0.0-4095.F	-----	DDDD.H
Auxiliary Relay	M_bit 0.0-2047.F	-----	DDDD.H
I/O Relay	P_bit 0.0-2047.F	-----	DDDD.H
		U 0-4095	
File Register	-----	R 0-32767	DDDDD
Data Register	-----	D 0-32767	DDDDD
Communication Register	-----	N 0-21503	DDDD
Link Register	-----	L 0-11263	DDDD
Step Control Register	-----	S 0-127	DDDD
Index Register	-----	Z 0-9999	DDDD
	-----	ZR 0-65535	DDDDD
Counter Set Value	-----	C_SV 0-2047	DDDD
Timer Set Value	-----	T_SV 0-2047	DDDD
Counter Current Value	-----	C_CV 0-9999	DDDD
Timer Current Value	-----	T_CV 0-9999	DDDD
Special Register	-----	F 0-2047	DDDD
Keep Register	-----	K 0-4095	DDDD
Auxiliary Register	-----	M 0-2047	DDDD
I/O Register	-----	P 0-2047	DDDD

LS XEC CPU Direct

Device	Bit Address	Word Address	Format	
	A_Bit 0-262143	-----	DDDDDD	
Special Relay	F_Bit 0-16383	-----	DDDDD	
	W_Bit 0-163839	-----	DDDDDD	Same area with R
File Relay	R_Bit 0-163839	-----	DDDDDD	
Communication Relay	N_Bit 0-81919	-----	DDDDD	
Special module Relay	U_Bit 0-8191	-----	DDDD	
Keep Relay	K_Bit 0-65535	-----	DDDDD	
Link Relay	L_Bit 0-32767	-----	DDDDD	
Auxiliary Relay	M_Bit 0-131071	-----	DDDDDD	

Output Relay	Q_Bit 0-16383	-----	DDDDD	
Input Relay	I_Bit 0-16383	-----	DDDDD	
	-----	A 0-16383	DDDDD	
Special Register	-----	F 0-1023	DDDD	
	-----	W 0-10239	DDDDD	
File Register	-----	R 0-10239	DDDDD	
Communication Register	-----	N 0-5119	DDDD	
Special module Register	-----	U 0-511	DDD	
Keep Register	-----	K 0-4095	DDDD	
Link Register	-----	L 0-2047	DDDD	
Auxiliary Register	-----	M 0-8191	DDDD	
Output Register	-----	Q 0-1023	DDDD	
Input Register	-----	I 0-1023	DDDD	

LS XEC Cnet

Device	Bit Address	Word Address	Format	
	A_Bit 0-524287	-----	DDDDDD	
Special Relay	F_Bit 0-32767	-----	DDDDD	
	W_Bit 0-524287	-----	DDDDDD	Same area with R
File Relay	R_Bit 0-262143	-----	DDDDDD	
Special module Relay	U_Bit 0-15511	-----	DDDDD	
Keep Relay	K_Bit 0-131071	-----	DDDDD	
Link Relay	L_Bit 0-65535	-----	DDDDD	
Auxiliary Relay	M_Bit 0-262143	-----	DDDDDD	
Communication Relay	N_Bit 0-163839	-----	DDDDD	
Output Relay	Q_Bit 0-151563	-----	DDDDDD	
Input Relay	I_Bit 0-151563	-----	DDDDDD	
	-----	A 0-32767	DDDDD	
Special Register	-----	F 0-2047	DDDD	
	-----	W 0-32767	DDDDD	
File Register	-----	R 0-16383	DDDDD	
Special module Register	-----	U 0-1531	DDDD	
Keep Register	-----	K 0-8191	DDDD	
Communication Register	-----	N 0-10239	DDDD	
Link Register	-----	L 0-4095	DDDD	
Auxiliary Register	-----	M 0-16383	DDDD	
Output Register	-----	Q 0-15153	DDDDDD	
Input Register	-----	I 0-15153	DDDDDD	



1. The address format of %UX is D.DD.DDD (0.0.0-0.15.511) in the PLC, it correspond to DDDDD (0-15511) in the HMI. And the %UX 0.m.n in the PLC is U_Bit $m*512+n$ in the HMI.

For example,

Internal address: %UX 0.1.0 in the PLC correspond to U_Bit 512 in the HMI

Internal address: %UX 0.15.511 in the PLC correspond to U_Bit 8191 in the HMI

Similarly, the %UW 0.0.0-0.15.511 in the PLC correspond to U_Word 0-1531 in the HMI. The %UW 0.m.n in the PLC is U_Word $m*32+n$.

For example,

Internal address: %UW 0.1.0 in the PLC correspond to U_Word 32 in the HMI

Internal address: %UW 0.15.31 in the PLC correspond to U_Word 511 in the HMI

2. The address format of %QX/IX is DD.DD.DD (0.0.0-15.15.63) in the PLC, it correspond to DDDDD (0-151563) in the HMI. And the %QX/IX a.b.c in the PLC is Q_Bit/I_Bit $a*1024+b*64+c$ in the HMI.

For example,

Internal address: %QX/IX 0.1.0 in the PLC correspond to Q_Bit/I_Bit 64 in the HMI

Internal address: %QX/IX 15.15.63 in the PLC correspond to Q_Bit/I_Bit 16383 in the HMI

Similarly, the %QW/IW 0.0.0-15.15.3 in the PLC correspond to Q_Word/I_Word 0-15153 in the HMI. The %QW/IW a.b.c in the PLC is Q_Word/I_Word $a*64+b*4+c$.

For example,

Internal address: %QW/IW 0.1.0 in the PLC correspond to Q_Word/I_Word 4 in the HMI

Internal address: %QW/IW 15.15.63 in the PLC correspond to Q_Word/I_Word 1023 in the HMI

LS GLOFA Cnet

Device	Bit Address	Word Address	Format	Notes
Buffer Memory(Bit)	MX0-32767	-----	DDDDD	
Output(Bit)	QX0-1763	-----	DDDD	
Input(Bit)	IX0-1763	-----	DDDD	
Buffer Memory(Dword)	-----	MD0-16368	DDDDD	
Output(Dword)	-----	QD0.0-17.1	DD.D	
Input(Dword)	-----	ID0.0-17.1	DD.D	
Buffer Memory(Word)	-----	MW0-32767	DDDDD	
Output(Word)	-----	QW0.0-17.3	DD.D	
Input(Word)	-----	IW0.0-17.3	DD.D	

LS GLOFA FNet

Device	Bit Address	Word Address	Format	Notes
Buffer Memory(Bit)	MX0-131056	-----	DDDDD	
Output(Bit)	QX0-1763	-----	DDDD	
Input(Bit)	IX0-1763	-----	DDDD	

Buffer Memory(Dword)	-----	MD0-4095	DDDD	
Output(Dword)	-----	QD0.0-17.1	DD.D	
Input(Dword)	-----	ID0.0-17.1	DD.D	
Buffer Memory(Word)	-----	MW0-8191	DDDD	
Output(Word)	-----	QW0.0-17.3	DD.D	
Input(Word)	-----	IW0.0-17.3	DD.D	

NOTE:

1. The address format of %QX\IX is DD.D.DD (00.0.00~63.7.63) in the PLC, it correspond to DD D DD (0~63763) in the HMI; Note that put 0 before the address if the address is less than two bits.

For example,

Internal address : %QX\IX **0.3.1** in the PLC correspond to QX\IX **301** in the HMI;

Internal address : %QX\IX **1.4.63** in the PLC correspond to QX\IX **1463** in the HMI;

2. The address format of %QD\ID is D.D.D (0.0.0~1.7.1) in the PLC, it correspond to D D.D (0.0~17.1) in the HMI;

For example,

Internal address : %QD\ID **0.3.1** in the PLC correspond to QD\ID **3.1** in the HMI;

Internal address : %QD\ID **1.5.1** in the PLC correspond to QD\ID **15.1** in the HMI;

3. The address format of %QW\IW is D.D.D (0.0.0~1.7.3) in the PLC, it correspond to D D.D (0.0~17.3) in the HMI;

For example,

Internal address : %QW\IW **0.3.1** in the PLC correspond to QW\IW **3.1** in the HMI;

Internal address : %QW\IW **1.5.3** in the PLC correspond to QW\IW **15.3** in the HMI;

LS iG5A protocol

Device	Bit Address	Word Address	Format
Bits	AB 0.0-65535.F	-----	DDDDD
Words	-----	AW 0-65535	DDDDD

- 1、The representation of address is hexadecimal in the Inverter User's Manual , used in the project must be converted to decimal.Such as universal domain address 0000 corresponds to AW0, The address of the function list A100 corresponds AW41216.

NOTE:

- 2、Register more than eight consecutive addresses will not be properly read.
- 3、Some address may affect the surrounding register read, should used separately:
H8 and H10, H42 and H44,do not show put together
H20, H30, H36, H37, H42, H50, H51, H52, H70, H90
F30, F37, F60, I27, I57

MODUS RTU protocol (support LS iG5A)

Device	Bit Address	Word Address	Format
Read Holding Registers	-----	3X 1-65535	DDDDD
Read Input Registers	-----	4X 1-65535	DDDDD

NOTE:

Inverter address converted to decimal, the address of the function list A100 corresponds AW41216.

Modbus address starting from 1, the general field of 0000 address is inaccessible.

LS C100 Series Inverter protocol

Device	Bit Address	Word Address	Format	Notes
Driver	-----	Fbr 0	D	
	-----	rEF 0	D	
	-----	Fra 0	D	
	-----	drv2 0	D	
	-----	drC 0	D	
	-----	nOn 0	D	
	-----	vOL 0	D	
	-----	dCL 0	D	
	-----	rPM 0	D	
	-----	CUr 0	D	
	-----	St3 0	D	
	-----	St2 0	D	
	-----	St1 0	D	
	-----	Frq 0	D	
	-----	drv 0	D	
	-----	dEC 0	D	
	-----	ACC 0	D	
	-----	DRIVER_0 0	D	
I/O	-----	I 0-87	DD	
Funcation 1	-----	F0-72	DD	
Funcation 2	-----	H0-95	DD	

LS XBC FEnet Slave protocol

Device	Bit Address	Word Address	Format	Notes
I/O Relay	P_Bit 0.0-2047.F	-----	DDDD.H	
Link Relay	L_Bit 0.0-11263.F	-----	DDDDD.H	
Counter Contact Relay	C_Bit 0-2047	-----	DDDD	
Timer Contact Relay	T_Bit 0-2047	-----	DDDD	
Special Relay	F_Bit 0.0-2047.F	-----	DDDD.H	
Keep Relay	K_Bit 0.0-4095.F	-----	DDDD.H	
Auxiliary Relay	M_Bit 0-8191.F	-----	DDDD.H	
Analog Data	-----	U_Word 0.00-127.31	DDD.DD	
	-----	ZR_Word 0-65535	DDDDD	

File Register	-----	R_Word 0-32767	DDDDDD	
Data Register	-----	D_Word 0-32767	DDDDDD	
Communication Register	-----	N_Word 0-21503	DDDDDD	
Counter Register	-----	C_Word 0-2047	DDDD	
Timer Register	-----	T_Word 0-2047	DDDD	
Link Register	-----	L_Word 0-11263	DDDDDD	
Step Control Register	-----	S_Word 0-127	DDD	
Index Register	-----	Z_Word 0-127	DDD	
Special Register	-----	F_Word 0-2047	DDDD	
Keep Register	-----	K_Word 0-4095	DDDD	
Auxiliary Register	-----	M_Word 0-2047	DDDD	
I/O Register	-----	P_Word 0-2047	DDDD	

LS XMC FEnet Slave protocol


Device	Bit Address	Word Address	Format	Notes
I/O Relay	IX 0-131071	-----	DDDDDD	
I/O Relay	QX 0-131071	-----	DDDDDD	
MX	MX 0-16777215	-----	DDDDDDDD	
UX	UX 0-8191	-----	DDDD	
KX	KX 0-146015	-----	DDDDDD	
FX	FX 0-1048575	-----	DDDDDDDD	
IW	-----	IW 0-8191	DDDD	
QW	-----	QW 0-8191	DDDD	
MW	-----	MW 0-1048575	DDDDDDDD	
UW	-----	UW 0-511	DDD	
KW	-----	KW 0-9125	DDDD	
FW	-----	FW 0-65535	DDDDDD	
ID	-----	ID 0-4095	DDDD	
QD	-----	QD 0-4095	DDDD	
MD	-----	MD 0-524287	DDDDDD	
UD	-----	UD 0-255	DDD	
KD	-----	KD 0-4562	DDDD	
FD	-----	FD 0-32767	DDDDDD	
IB	-----	IB 0-16383	DDDDDD	
QB	-----	QB 0-16383	DDDDDD	

MB	-----	MB 0-2097151	DDDDDDDD	
UB	-----	UB 0-1023	DDDD	
KB	-----	KB 0-18251	DDDDDD	
FB	-----	FB 0-131071	DDDDDDDD	


◎ Cable Diagram

LS Master-K Cnet/ LS Master-K Modbus RTU protocol

RS232 communication cable

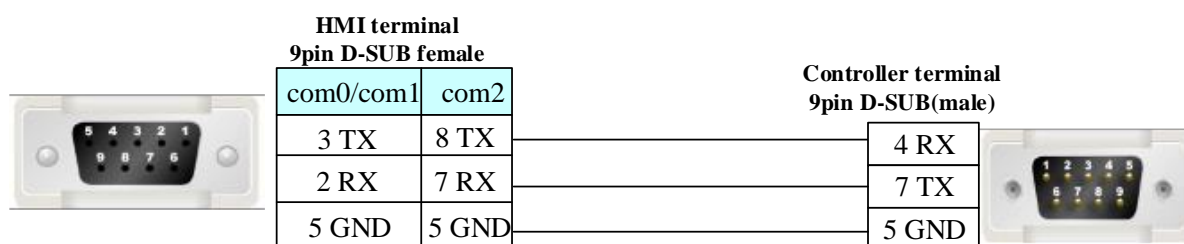


RS485 communication cable

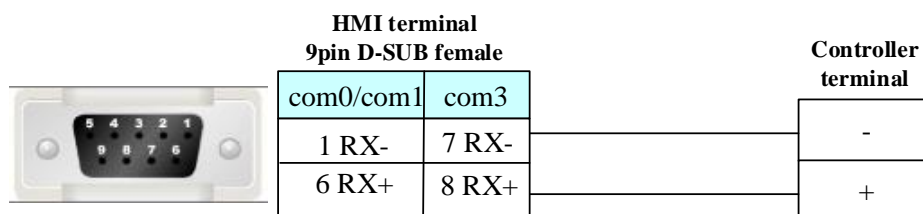






LS Master-K CPU Direct protocol

RS232 communication cable

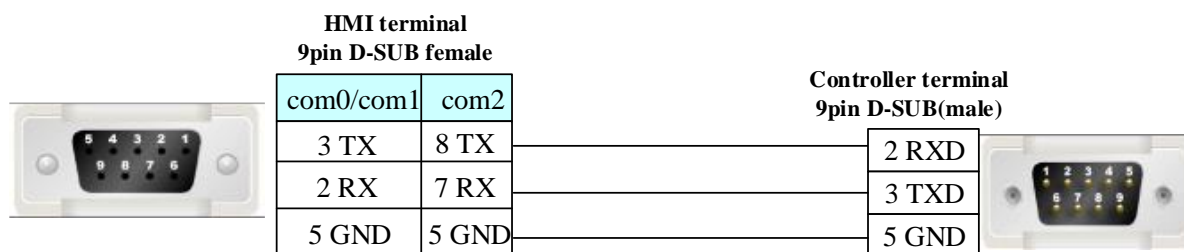


LS XBC/XGK/XEC CPU Direct protocol

RS232 communication cable

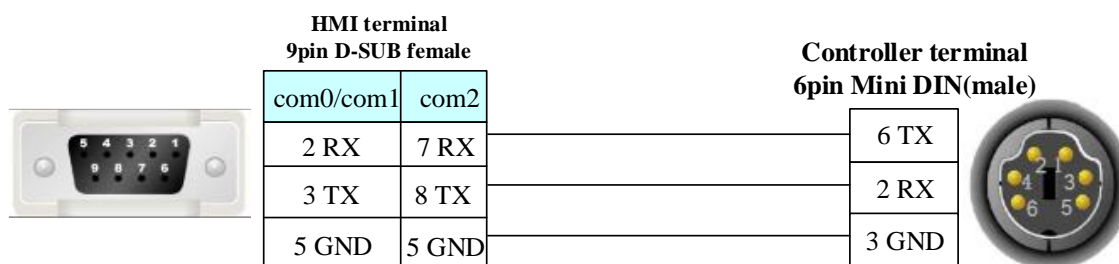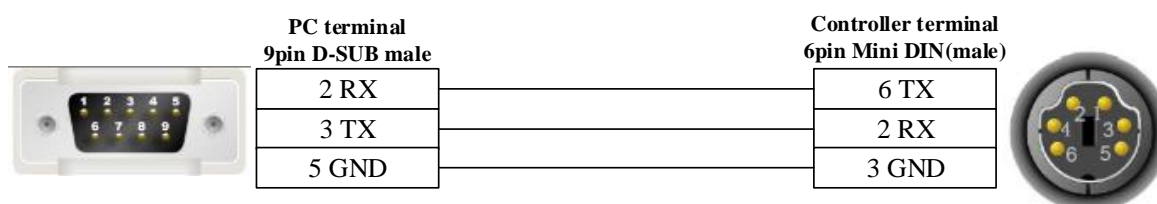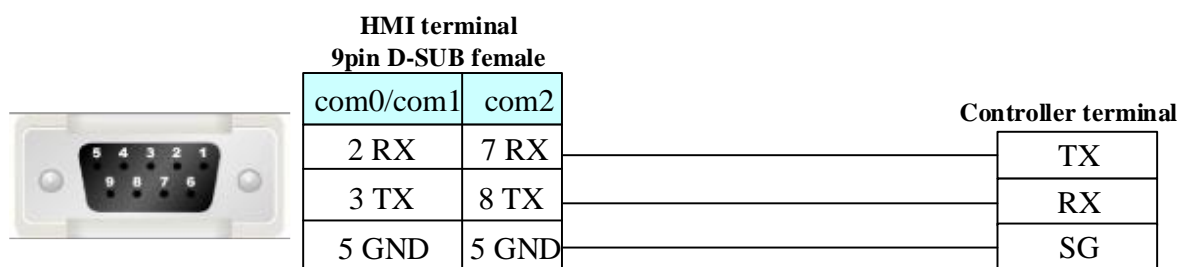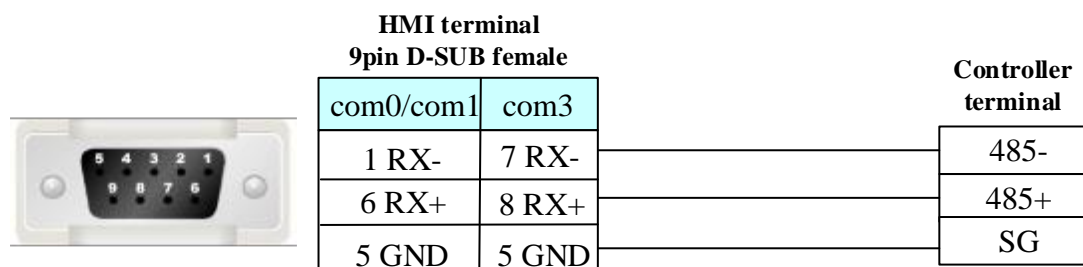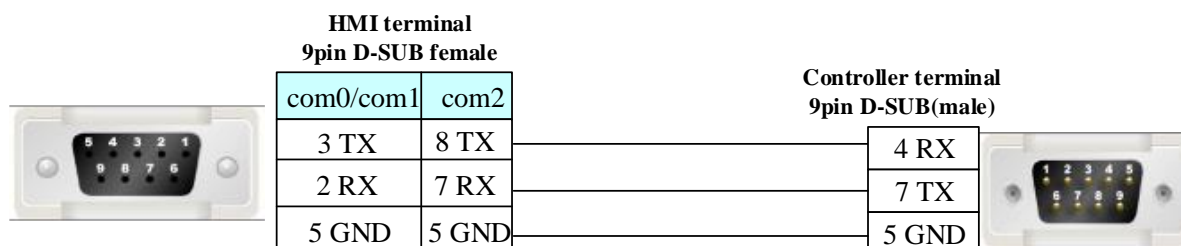
**LS XBC/XGK/XEC Cnet protocol****RS232 programming cable****RS232 communication cable****RS485 communication cable****LS GLOFA Cnet protocol****RS232 communication cable**

RS422 communication cable

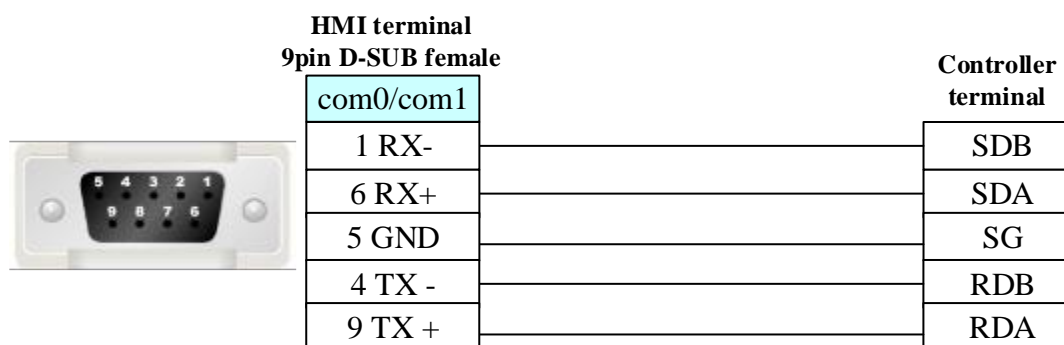

NOTE: Be sure to put the switch of the module to 9 (ON-LINE) position when communicating.


LS iG5A protocol

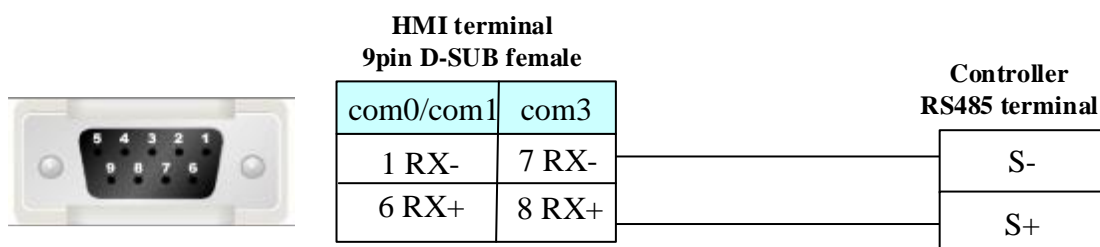

Ethernet Cable

Cross-connection or crossover network cable can be used as communication cable via the hub
Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

LS C100 Series Inverter protocol

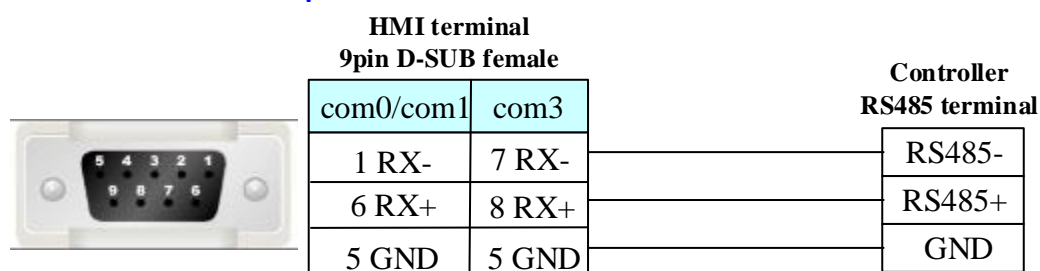

4.56 LUST

© Serial Communication

Series	CPU	Link Module	Driver
CDE34.008	CDE34.008	RS232 on the CPU unit	LustBus

© Network communication (direct online simulation disable)

Series	CPU	Link Module	Driver
--------	-----	-------------	--------

ServoOne junior	Lust	ETH on the CPU	Lust Ethernet Slave
-----------------	------	----------------	---------------------

◎ Serial System configuration


Series	CPU	Link Module	COM Type	Parameter	Cable
CDE34.008	CDE34.008	RS232 on the CPU unit	RS232	Setting	Your owner cable

◎ Network System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
ServoOne junior	Lust	ETH on the CPU	ETH	Setting	Your owner cable



◎ Serial Communication Setting

Lustbus RS232 default communication: 57600, 7, even, 1; station: 1

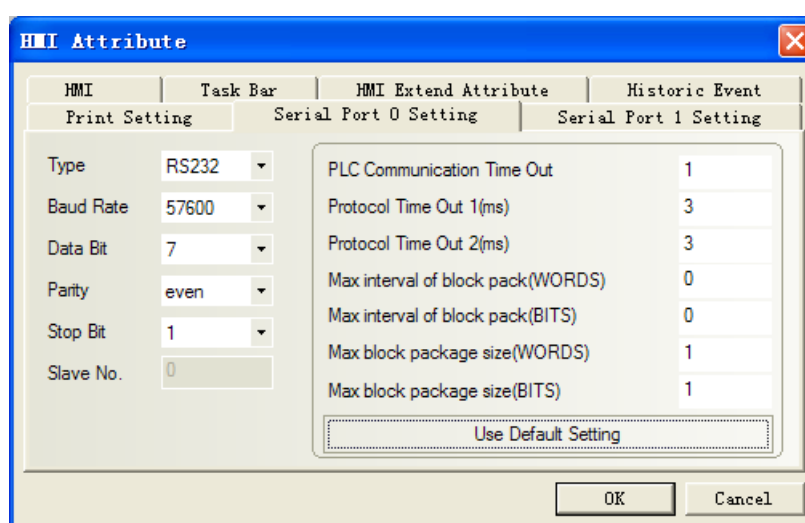

◎ Network Communication Setting

HMI Setting

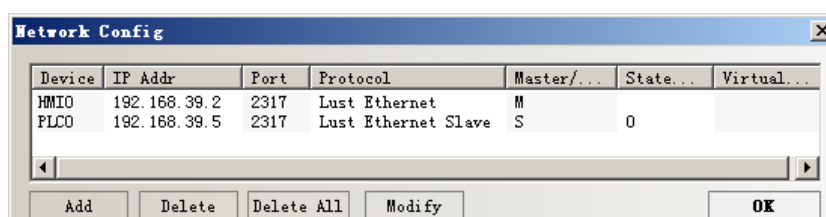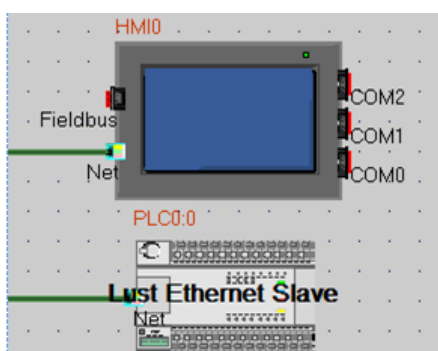

The way to change IP of Servo drive system

Plug the 24-volt power supply on the X2, plug the network cable on the X9.

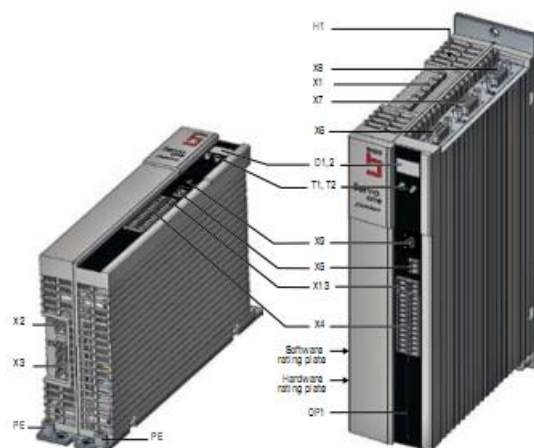


Figure 3.1 Layout

No.	Designation	No.	Designation
D1, D2	7-segment display	X4	Control terminals
H1	DC link voltage indicator LED	X5	Motor temperature monitoring
OP1	Installation space for option 1 (Communication)	X6	Resolver connection
PE	Protective conductor connection	X7	Connection for high-resolution encoders
T1, T2	Button	X8	Option 2 - Technology
X1	Power connection	X9	Ethernet port
X2	Connection of control supply U_v	X13	Connection of motor brake
X3	AC mains connection		



Figure 4.1 Integrated operator control unit

Refer to the map, press the T1 or T2 to modify the IP

Menu level 1	Menu level 2	Parameter	Value range	Meaning	Explanation
IP	lu	b0	00..FF	IP address update Byte 0	Setting of byte 0 of the IP address in hexadecimal format (e.g. "05" for 192.168.39.5)
		b1	00..FF	IP address update Byte 1	Setting of byte 1 of the IP address in hexadecimal format (e.g. "27" for 192.168.39.5)
		b2	00..FF	IP address update Byte 2	Setting of byte 2 of the IP address in hexadecimal format (e.g. "A8" for 192.168.39.5)
		b3	00..FF	IP address update Byte 3	Setting of byte 3 of the IP address in hexadecimal format (e.g. "C0" for 192.168.39.5)
	lr	-	-	IP reset to factory setting	Reset IP address to factory default (192.168.39.5)
	Su	b0	00..FF	Subnetmask update Byte 0	Setting of byte 0 of the subnet mask in hexadecimal format (e.g. "00" for 255.255.255.0)
		b1	00..FF	Subnetmask update Byte 1	Setting of byte 1 of the subnet mask in hexadecimal format (e.g. "FF" for 255.255.255.0)
		b2	00..FF	Subnetmask update Byte 2	Setting of byte 2 of the subnet mask in hexadecimal format (e.g. "FF" for 255.255.255.0)
		b3	00..FF	Subnetmask update Byte 3	Setting of byte 3 of the subnet mask in hexadecimal format (e.g. "FF" for 255.255.255.0)
	Sr	-	-	Subnetmask reset to factory setting	Reset subnet mask to factory default setting (255.255.255.0)
	Po	-	0..3 or --	Transmit power	Setting of fibre-optic power output (only with SERCOS II option), otherwise display "--"

Table 4.12 IP address menu

Parameter		b3	b2	b1	b0
Initial IP	int	192	168	39	5
	hex	C0	A8	27	05
Modified IP	int	192	168	100	240
	hex	C0	A8	64	F0

Parameter		b3	b2	b1	b0
Initial IP	int	192	168	39	5
	hex	C0	A8	27	05
Modified IP	int	192	168	100	240
	hex	C0	A8	64	F0

The following description of specific processes, after the servo power

D1	D2
5.	1.

Press key T1 of about 1s

D1	D2
P	R

Press key T1 of about 1s

D1	D2
I	P

Press key T2 of about 1s

D1	D2
I	u

Press key T2 of about 1s

D1	D2
b	0

Press key T2 of about 1s

D1	D2
b	0

1s at about T2 button to display the value of d0, the initial value is 05

D1	D2
0	5

Press T1, respectively, and T2, you can adjust the value of b0, After release, while at T1 and T2 key until the display or can be, Then press and T1 and T2, also show b0, then press the key T1 of about 1s, can switch to b2, empathy can be modified the value of b2, b3, b4, modify the good, the same press T1 and T2 until display "or" (where press T1 and T2 at the same time is the key to save and exit).


Well, after the change, restart the power, and then ping.

```
C:\WINDOWS\system32\ping.exe

Pinging 192.168.100.240 with 32 bytes of data:

Reply from 192.168.100.240: bytes=32 time=1ms TTL=255
Reply from 192.168.100.240: bytes=32 time<1ms TTL=255
Reply from 192.168.100.240: bytes=32 time<1ms TTL=255
```

After the software is connected

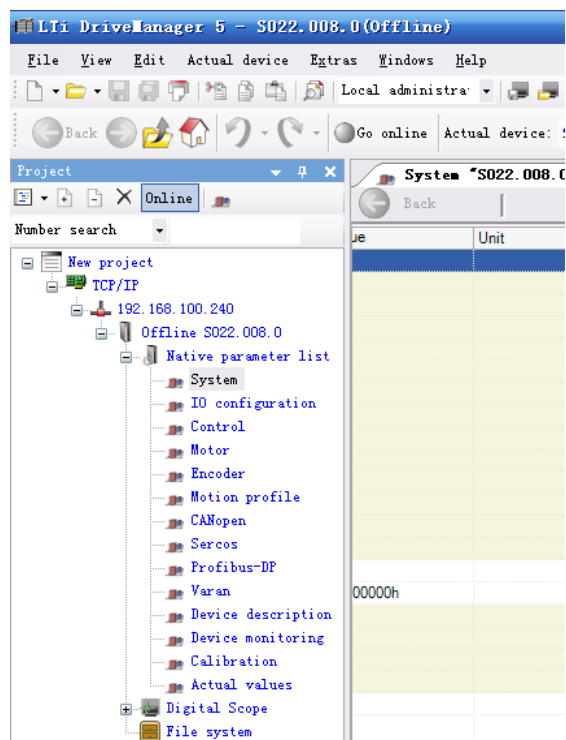

© Supported Device

CDE34.008


Refer to the Controller software for details: DriveManager for c-line drives

ServoOne junior

Device	Bit Address	Word Address	Format	Notes
Array_DWord32	-----	0.00000-32767.65535	DDDDD.DDDDD	
Array_DWord16	-----	0.00000-32767.65535	DDDDD.DDDDD	
DWord32	-----	0-32767	DDDDD	
Word16	-----	0-32767	DDDDD	

Note: Array_DWord32/Array_DWord16 the address format is the primary address + decimal point + sub-address, such as the address for the save as shown below, the main address is 11, sub-address is 0, the data type is int16, then the touch screen corresponding to the address is Array_DWord16 11.00000.


11		PARA_SetCmd		Commands for actually active parameter da
11	0	Save	0	Save actually active parameter data set
11	1	Restore	0	Restore actually active parameter data set
11	2	Reset	0	Reset actually active parameter data set to
11	3	Check	0	Check validity of actually active parameter
11	4	Register upload	0	Register start and end of data set upload

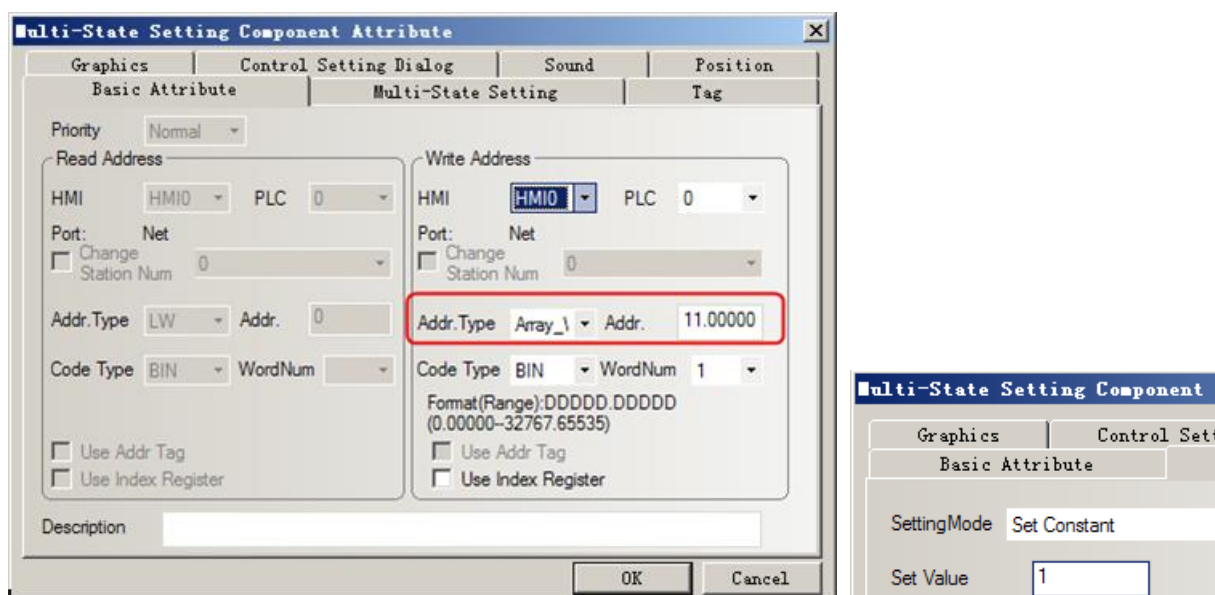

The primary address is 11, sub-address is 1, the data type is int16, then the touch screen corresponding to the address is Array_DWord16 11.00001. In addition, INT8 address, select Word16, but also through the conversion can be displayed, as should show -3, while the display 253, which can be done in the macro data conversion, so $253-256 = -3$, that is in need of special address type conversion .

© Cable Diagram

Lustbus RS232 communication cable

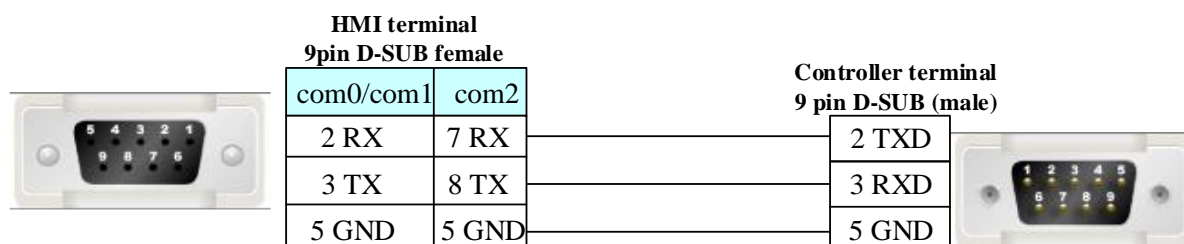

Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.57 Memory map

© Serial Communication

Series	CPU	Link Module	Driver
BMS005A-MC11	BMS005A-MC11	RS422 on the CPU unit	MemoryMap(Master-Slave)

© System configuration


Series	CPU	Link Module	COMM Type	Parameter	Cable
--------	-----	-------------	-----------	-----------	-------

BMS005A-MC11	BMS005A-MC11	RS422 on the CPU unit	RS422	Setting	Your owner cable
--------------	--------------	-----------------------	-------	-------------------------	----------------------------------

◎ Communication Setting

HMI Setting

Default communication: 57600, 8, none, 1; station: 1

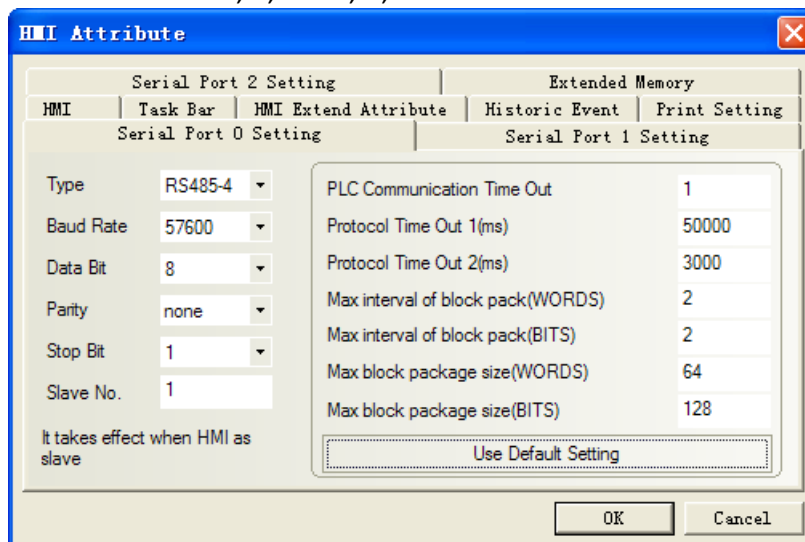


PLC Setting

Please refer to the manual of PLC for the configuration.

◎ Supported Device

Device	Bit Address	Word Address	Format
	LW.B 8000.0-8999.15	-----	DDDD.DD
	-----	LW8000-8999	DDDD

◎ Cable Diagram

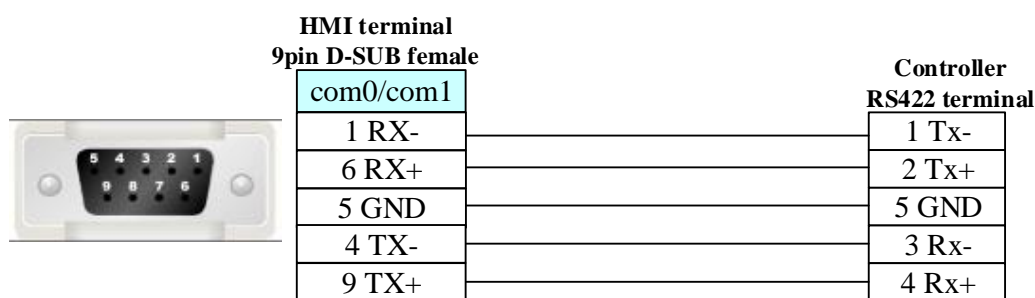

4.58 MEGMEET

◎ Serial Communication

Series	CPU	Link Module	Driver
--------	-----	-------------	--------

MEGMEET MC280	MC280-1616BTA4	RS232 on the CPU unit	MEGMEET MC Series
---------------	----------------	-----------------------	-----------------------------------

◎ Network communication

Series	CPU	Link Module	Driver
MC Series	MC 5100	CPU Direct	MEGMEET MC Series Ethernet (TCP Slave)

◎ Serial Communication Parameters and Cables Production

Series	CPU	Link Module	COMM Type	Parameter	Cable
MEGMEET MC280	MC280-1616 BTA4	RS232 on the CPU unit	RS232/RS485	Setting	Your owner cable

◎ Network System configuration


Series	CPU	Link Module	Connect Type	Parameter	Cable
MC Series	MC Series	CPU Direct	Ethernet	Setting	Your owner cable

◎ Serial Communication Parameters


HMI Setting

Default communication: 9600bps, 8, even, 1; station: 1

RS232

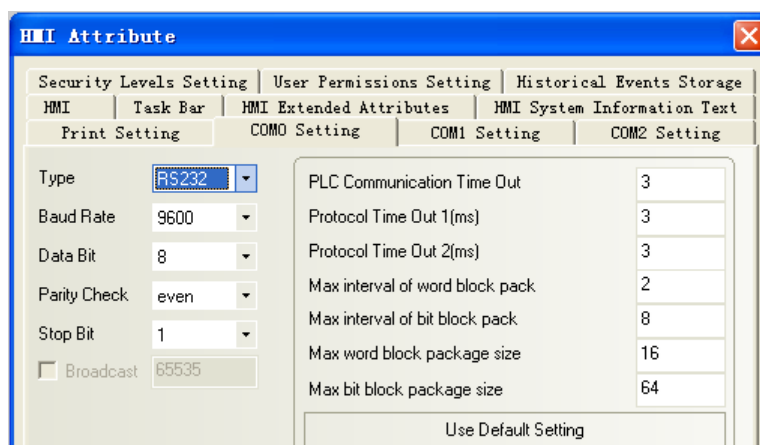


RS485

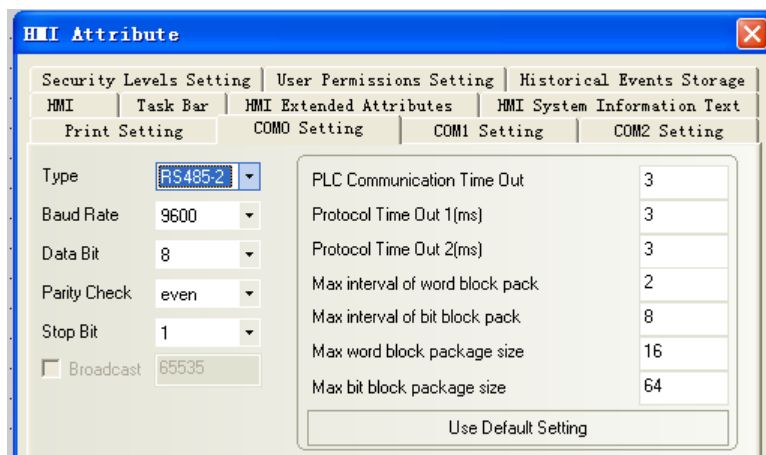


PLC Setting


1. Open X_builder, New project, select PLC type (MC280)

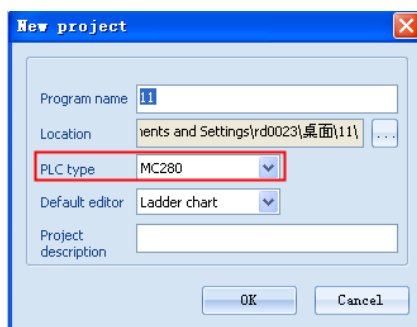


2. Open System block→Comm Port, set comm port (support Modbus)

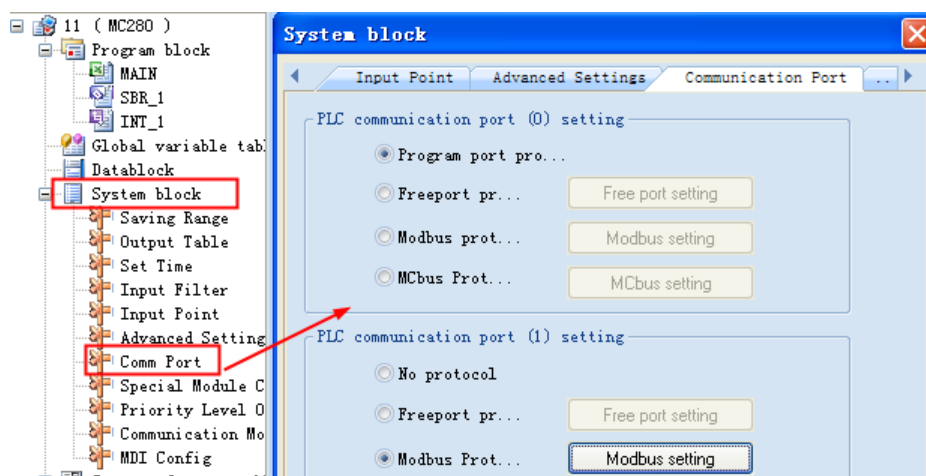

- (1) Port0 setting (RS232)

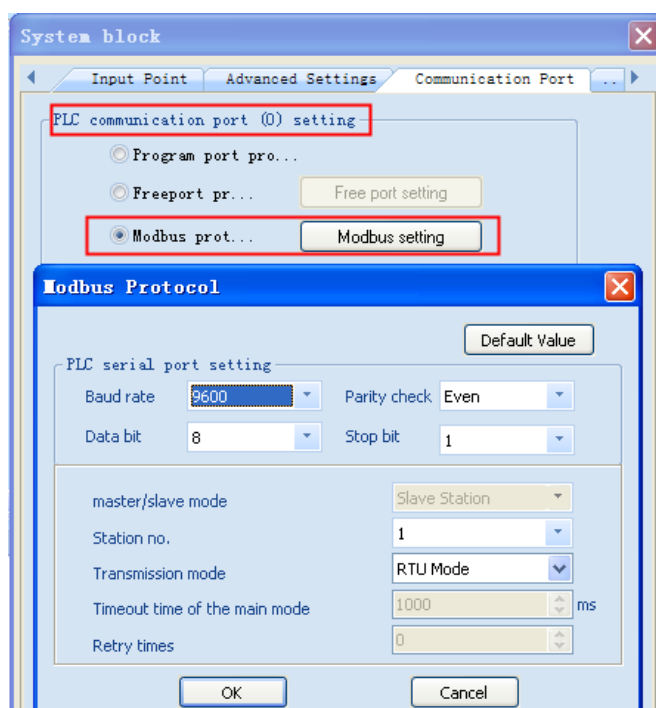


(2) PortlandPort2 setting (RS485)

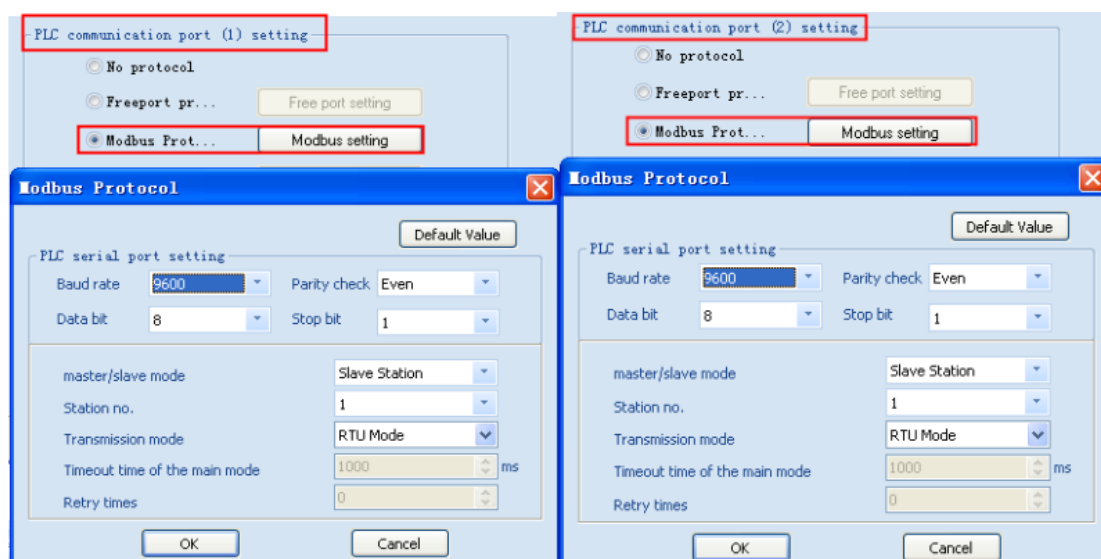


Notes: Using X_builder, Main routine cannot be empty

© Network Communication Setting

HMI Setting

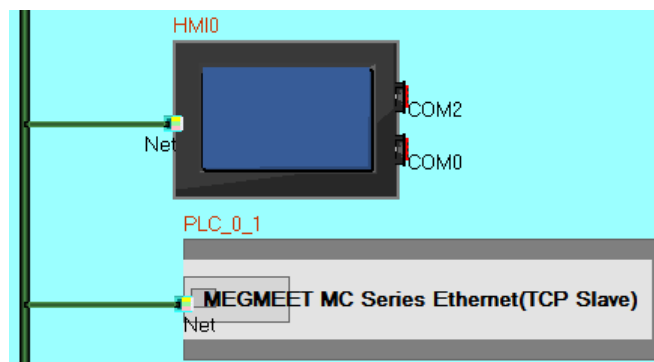

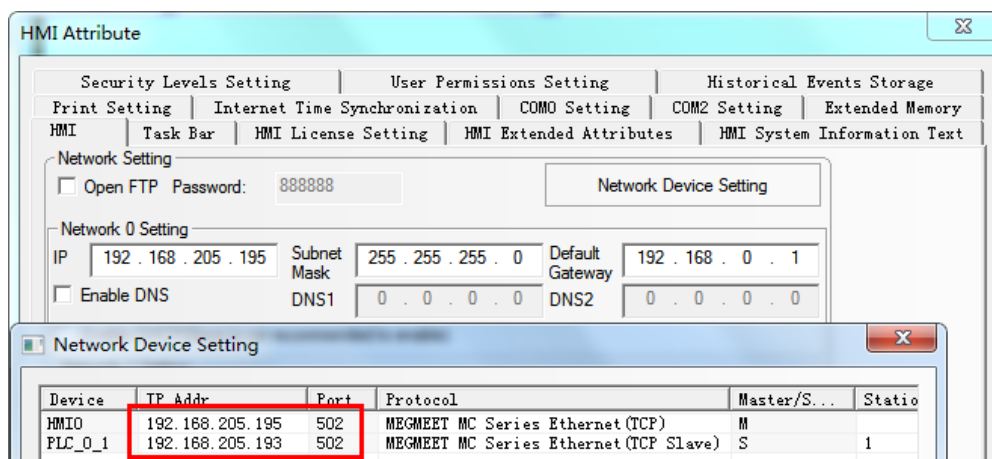

PLC configuration


1. Open MEGreator programming tool software, create new project, project name is optional, PLC type selects MC5100, and then click OK
2. Select the Ethernet connection in the PLC connection, the connecting IP input is the same PLC IP address that in the HMI settings, finally click OK.

© Supported Device


Device	Bit Address	Word Address	Format	Notes
Input Relay	X 0-377	-----	OOO	R
Output Relay	Y 0-377	-----	OOO	
Internal Relay	M 0-10239	-----	DDDDD	
Special Relay	SM 0-511	-----	DDD	
Step Relay	S 0-4095	-----	DDDD	
Timer Relay	T_BIT 0-511	-----	DDD	
Counter Relay	C_BIT 0-306	-----	DDD	
Data register	-----	D 0-7999	DDDD	
Special Register	-----	SD 0-511	DDD	
Index Register	-----	Z 0-15	DD	
Timer	-----	T_Word 0-511	DDD	
Counter	-----	C_Word 0-199	DDD	
Counter(double word)	-----	C_DWord 200-306	DDD	
	-----	R 0-32767	DDDDD	
	-----	R_DWord 0-32767	DDDDD	
Special Register(double word)	-----	SD_DWord 0-511	DDD	
Data register(double word)	-----	D_DWord 0-7999	DDDD	

© Cables Production

RS232

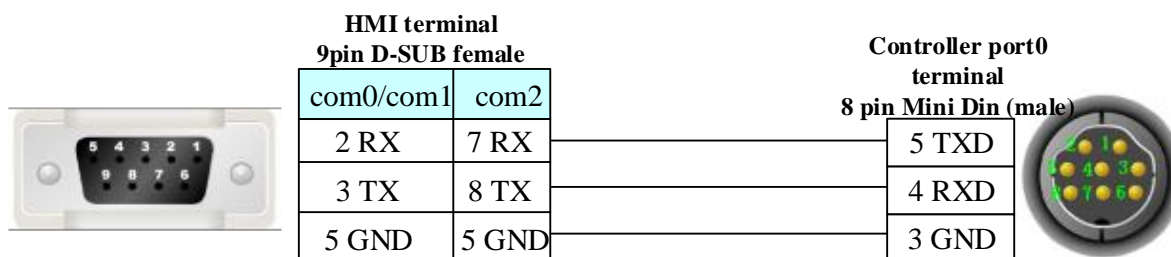

RS485

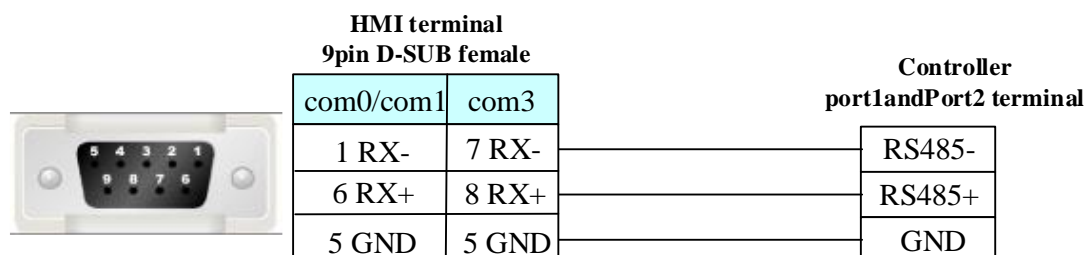

Ethernet Cable

Cross-connection or crossover network cable can be used as communication cable via the hub
Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.59 Mikom

◎ Serial Communication

Series	CPU	Link Module	Driver
MX2H	MX2H-3232M	RS232 on the CPU unit	Mikom MXxh
		RS485 on port	


◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
MX2H	MX2H-3232M	Port 0	RS232	Setting	Your owner cable
		Port 1	RS485	Setting	Your owner cable

◎ Communication Setting

HMI Setting

Default communication parameters 19200, 7, 1, even; Station: 1

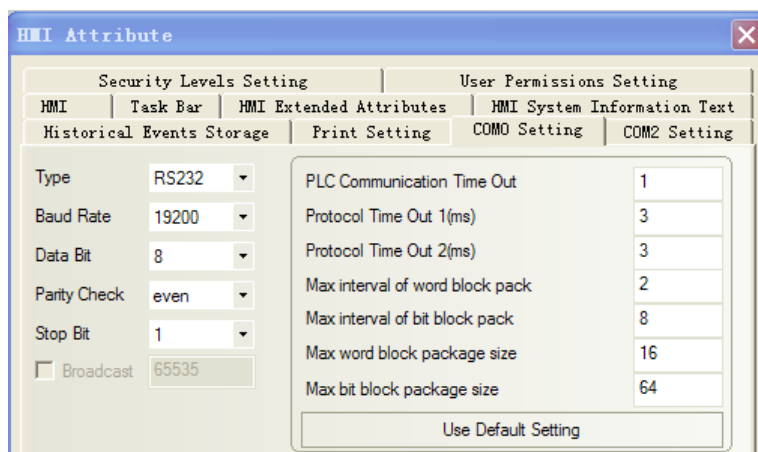

PLC Setting



◎ Supported Device



Device	Bit Address	Word Address	Format
Input Relay	X 0-777		OOO
Output Relay	Y 0-777		OOO
Counter	C_bit 0-511		DDD
Timer	T_bit 0-511		DDD
Status Relay	S 0-1535		DDDD
Special Relay	SM 0-511		DDD
Internal Relay	M 0-4095		DDDD
Data register		D 0-7999	DDDD
Special Register(double word)		SD 0-511	DDD
Index Register		Z 0-255	DDD
Timer		T_word 0-255	DDD
Counter		C_word 0-199	DDD

NOTE:


The PLC MODBUS protocol does not support double-word data type, so the protocol does not support the bulk of the word read and write .

◎ Cable Diagram

RS232 Communication

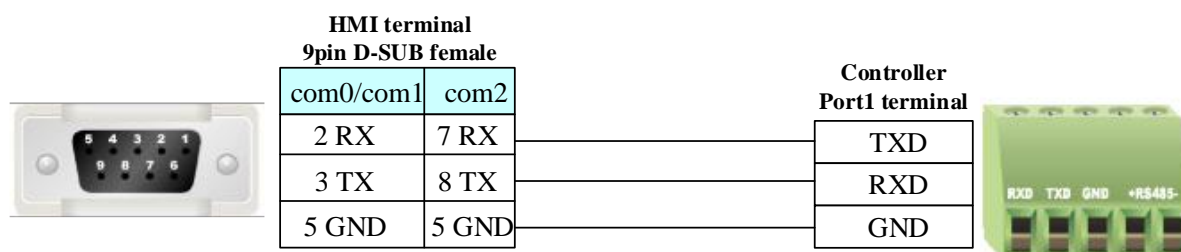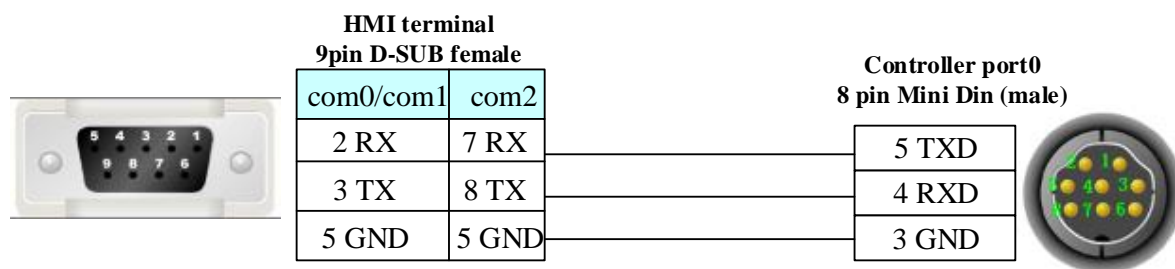

RS485 Communication

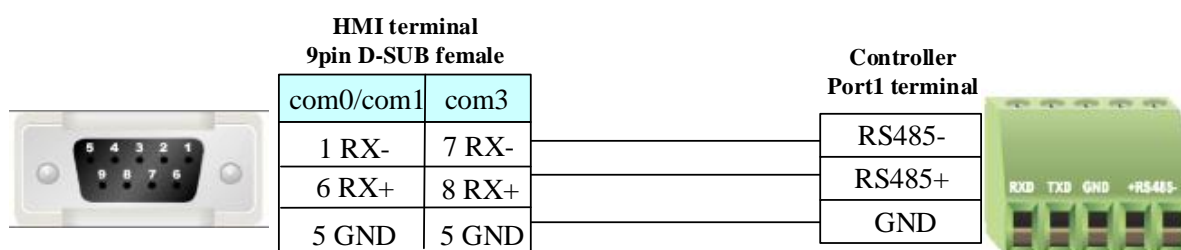

4.60 Millenium3

◎Serial Communication

Series	CPU	Link Module	Driver
Millenium 3	Millenium 3	RS232 on the CPU unit	Millenium 3
		RS485 on the CPU unit	

◎System configuration


Series	CPU	Link Module	COM Type	Parameter	Cable
Millenium 3	Millenium 3	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485 on the CPU unit	RS485	Setting	Your owner cable

◎Communication Setting


HMI Setting

Default communication parameters 115200, 7, 1, even; Station: 1

RS232 Communication:

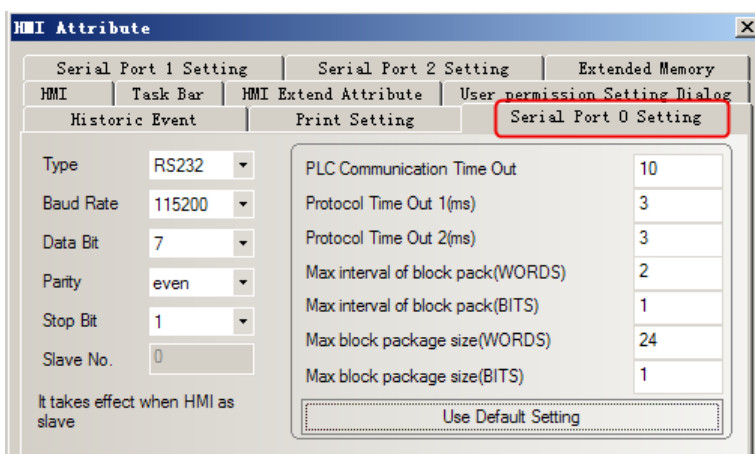

RS485 Communication:

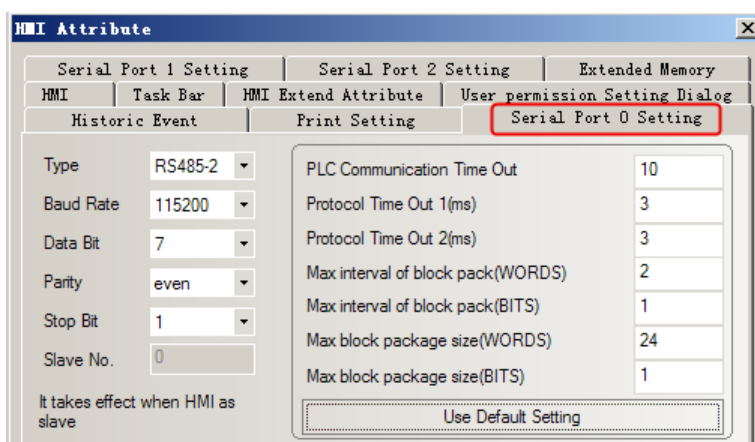


◎ Supported Device


Device	Bit Address	Word Address	Format	Notes
Register	-----	Register 0~23	DD	Write only
Register	-----	Register 24~47	DD	Read only

◎ Cable Diagram

RS232

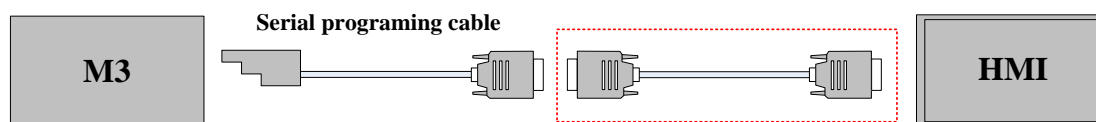


Users need to make the communication cable for M3 and HMI (region of red marquee as shown above)
M3 communicate with COM0/COM1 of HMI, the cable connection is as follow:

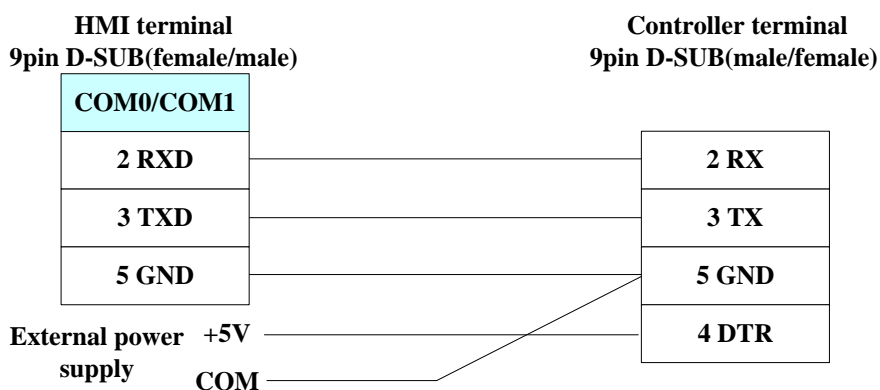

NOTE: Provide 5V DC high level for the pin 4 of M3 9-pin D-Sub.

RS485

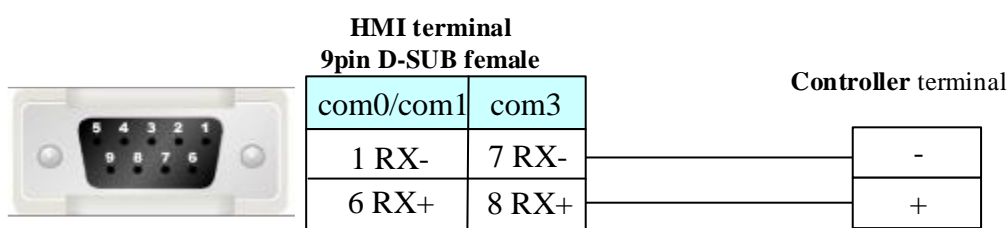

4.61 Mitsubishi Electric Corporation

◎ Serial Communication

Series	CPU	Link Module	Driver
FXCPU	FX0S	CPU Direct	Mitsubishi FX1S*2
	FX1S	FX□□-422-BD*3	
	FX0N		Mitsubishi FX1S*2
	FX1N	FX□□-485-BD*3	Mitsubishi FX-485ADP/485BD/232BD (Multi-station)*1
	FX2	FX□□-485-ADP*3	
	FX3S		
	FX1NC	CPU Direct	Mitsubishi FX 2N/3G*2
	FX2N	FX□□-422-BD*3	
	FX2NC	FX□□-485-BD*3	Mitsubishi FX2N/3G*2
	FX3SA	FX□□-485-ADP*3	Mitsubishi FX-485ADP/485BD/232BD (Multi-station)*1
	FX2N-10GM		
	FX2N-20GM	CPU Direct	Mitsubishi FX2N_10GM/20GM
	FX3U	CPU Direct	Mitsubishi FX3U*2
	FX3UC	FX□□-422-BD*3	
		FX□□-485-BD*3	Mitsubishi FX3U*2
		FX□□-485-ADP*3	Mitsubishi FX-485ADP/485BD/232BD (Multi-station)

		FX□□-232-BD* ³	* ¹
	FX5U-32M	RS422 on the CPU unit	Mitsubishi FX5U
		FX5-232ADP	
	FX3G FX3GE	CPU Direct	Mitsubishi FX2N/3G* ²
	FX3G/3GA	FX3GA-40MT	Mitsubishi 3G/3GA
QCPU	Q00jCPU	RS232 on the CPU unit	Mitsubishi Q00J (CPU Port)
		QJ71C24 QJ71C24-R2 QJ71C24N QJ71C24N-R2 QJ71C24N-R4	1. Mitsubishi Q_QnA (Link Port) 2. Mitsubishi Melsec Q
		RS232 on the CPU unit	1. Mitsubishi Q_QnA (Link Port) 2. Mitsubishi Melsec Q
		QJ71C24 QJ71C24-R2 QJ71C24N QJ71C24N-R2 QJ71C24N-R4	
		QJ71C24 QJ71C24-R2 QJ71C24N QJ71C24N-R2 QJ71C24N-R4	
	Q01UCPU Q03UDCPU Q06UDHCPU	RS232 on the CPU unit	Mitsubishi Q series (CPU Port)
	Q02CPU Q02HCPU Q25HCPU	RS232 on the CPU unit	Mitsubishi Q series (CPU Port) Mitsubishi Q06Hv2* ⁴
		QJ71C24 QJ71C24-R2 QJ71C24N QJ71C24N-R2 QJ71C24N-R4	1. Mitsubishi Q_QnA (Link Port) 2. Mitsubishi Melsec Q
		QJ71C24 QJ71C24-R2 QJ71C24N QJ71C24N-R2 QJ71C24N-R4	1. Mitsubishi Q_QnA (Link Port) 2. Mitsubishi Melsec Q
	Q12HCPU	RS232 on the CPU unit	Mitsubishi Q06Hv2* ⁴
LCPU	Q00UJCPU	RS232 on the CPU unit	Mitsubishi Q_QnA (Link Port)
	Q02UCPU	RS232 on the CPU unit	Mitsubishi Melsec Q
	Q06HCPU	RS232 on the CPU unit	Mitsubishi Q06H Mitsubishi Q06Hv2* ⁴
	L02CPU	LJ71C24-CM	Mitsubishi Q_QnA (Link Port)
	L02SCPU	RS232 on the CPU unit	

- NOTE:** 1. *¹ The protocol support multi-station
2. *² The protocol don't support multi-station
3. *³ □□ means the module that is suitable for the PLC
4. *⁴ The protocol support to modify the device points, only to support Q06HCPU and Q02HCPU.

◎ Network Communication (Direct online simulation disable)

Series	CPU	Link Module	Driver
FXCPU	FX3GE-24M	Ethernet port on CPU unit	Mitsubishi FX Series Ethernet(TCP Slave)
	FX3U-32M	FX3U-ENET-L	
	FX5U-32MT/ES	Ethernet port on CPU unit	Mitsubishi FX5U Series Ethernet(TCP Slave)
			Mitsubishi FX5U-ASCII Ethernet(TCP Slave)
QCPU	Q00CPU Q00JCPU Q01CPU Q02CPU Q02HCPU Q06HCPU Q12HCPU Q25HCPU Q03UDECPU Q04UDEHCPU Q06UDEHCPU Q13UDEHCPU Q26UDEHCPU	QJ71E71 QJ71E71-B2 QJ71E71-B5 QJ71E71-100	Mitsubishi QJ71E71 EtherNet Slave
	Q02UCPU Q03UDCPU Q04UDHCPU Q06UDHCPU Q13UDHCPU Q26UDHCPU	QJ71E71 QJ71E71-B2 QJ71E71-B5 QJ71E71-100	
LCPU	L02CPU L26CPU-BT	Ethernet port on CPU unit	Mitsubishi QnA 3EBin Ethernet(TCP Slave)
QCPU	Q03UDECPU Q04UDEHCPU Q26UDV CPU	Ethernet port on CPU unit	
iQ-R	R04ENCPU	Ethernet port on CPU unit	

◎ Serial System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
FXCPU	FX0S	RS485 on the CPU unit	RS232	Setting	Your owner cable
	FX1S	FX□□-422-BD	RS422	Setting	Your owner cable
	FX0N	FX□□-485-BD FX□□-485-ADP	RS422	Setting	Your owner cable
	FX1N				
	FX2				
	FX3S				
	FX1NC	RS485 on the CPU unit	RS232	Setting	Your owner cable

	FX2N FX2NC FX3SA	FX□□-422-BD	RS422	Setting	Your owner cable
		FX□□-485-BD	RS422	Setting	Your owner cable
		FX□□-485-ADP			
		FX□□-232-BD	RS232	Setting	Your owner cable
	FX2N-10GM FX2N-20GM	RS485 on the CPU unit	RS232	Setting	Your owner cable
			RS422	Setting	Your owner cable
	FX3G FX3GE	RS485 on the CPU unit	RS232	Setting	Your owner cable
			RS422	Setting	Your owner cable
	FX3UC FX3U	RS485 on the CPU unit	RS232	Setting	Your owner cable
		FX□□-422-BD	RS422	Setting	Your owner cable
		FX□□-485-BD	RS422	Setting	Your owner cable
		FX□□-485-ADP			
		FX□□-232-BD	RS232	Setting	Your owner cable
	FX5U	RS485 on the CPU unit	RS422	Setting	Your owner cable
		FX5-232ADP	RS232	Setting	Your owner cable
	FX3G/3GA	FX3GA-40MT	RS232	Setting	Your owner cable
Melsec Q	Q00jCPU	RS232 on the CPU unit	RS232	Setting	Your owner cable
	Q00CPU Q01CPU	RS232 on the CPU unit	RS232	Setting	Your owner cable
	Q00jCPU Q00CPU Q01CPU Q02CPU	QJ71C24 QJ71C24-R2 QJ71C24N QJ71C24N-R2	RS232	Setting	Your owner cable
	Q02HCPU Q03UDCPU Q25HCPU	QJ71C24 QJ71C24N QJ71C24N-R4	RS422	Setting	Your owner cable
	Q00UJCPU	RS232 on the CPU unit	RS232	Setting	Your owner cable
	Q02CPU Q02HCPU Q01UCPU Q02UCPU Q03UDCPU Q06HCPU Q06UDHPU Q25HCPU	RS232 on the CPU unit	RS232	Setting	Your owner cable
	Q06HCPU Q12HCPU	RS232 on the CPU unit	RS232	Setting	Your owner cable
	LCPU	LJ71C24-CM	RS232	Setting	Your owner cable
			RS422		Your owner cable
		L02SCPU	RS232 on the CPU unit	Setting	Your owner cable

◎ Network System configuration

Series	CPU	Link Module	Connect Type	Parameter	Cable
--------	-----	-------------	--------------	-----------	-------

FXCPU	FX3GE-24M	Ethernet port on CPU unit	Ethernet	Setting	Your owner cable
	FX3U-32M	FX3U-ENET-L			
	FX5U-32MT/ES	Ethernet port on CPU unit	Bin Ascii	Setting Setting	Your owner cable Your owner cable
Melsec Q	Q00CPU Q00JCPU Q01CPU Q02CPU Q02HCPU Q06HCPU Q12HCPU Q25HCPU Q03UDECPU Q04UDEHCPU Q06UDEHCPU Q13UDEHCPU Q26UDEHCPU	QJ71E71 QJ71E71-B2 QJ71E71-B5 QJ71E71-100	Ethernet	Setting	Your owner cable
	Q02UCPU Q03UDCPU Q04UDHCPU Q06UDHCPU Q13UDHCPU Q26UDHCPU	QJ71E71 QJ71E71-B2 QJ71E71-B5 QJ71E71-100	Ethernet		
MELSEC L	L02CPU L26CPU-BT	Ethernet port on CPU unit	Ethernet	Setting	Your owner cable
QCPU	Q26UDV CPU Q04UDEHCPU Q03UDECPU	Ethernet port on CPU unit	Ethernet	Setting	Your owner cable
iQ-R	R04ENCPU	Ethernet port on CPU unit	Ethernet	Setting	Your owner cable


◎Serial Communication Setting

Mitsubishi FX1S、Mitsubishi FX0N/1N/2N/3G、Mitsubishi FX3U protocol 、Mitsubishi 3G/3GA


HMI Setting

Default communication: 9600, 7, even, 1; station: 0

[RS232 communication](#)

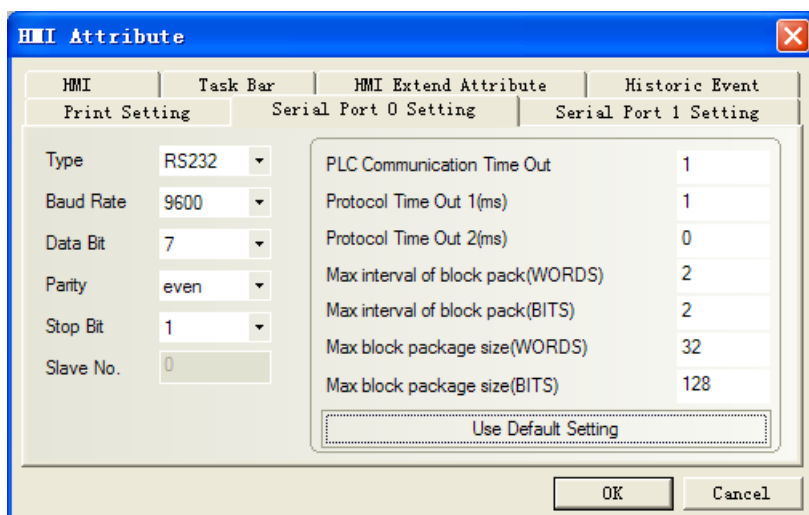


RS422 communication

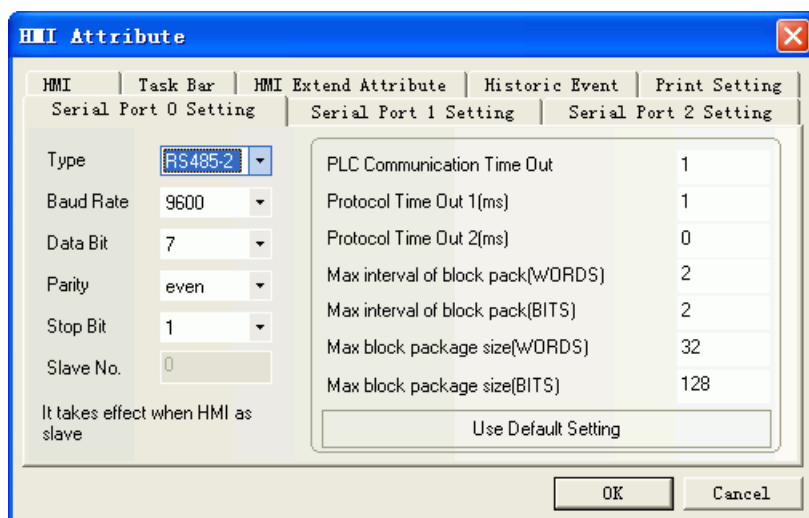

HMI Setting

When using the Mitsubishi FX1S、Mitsubishi FX0N/1N/2N/3G、Mitsubishi FX3U protocol, PLC configuration is as follow:


Don't select "Operate communication setting", and click "default"

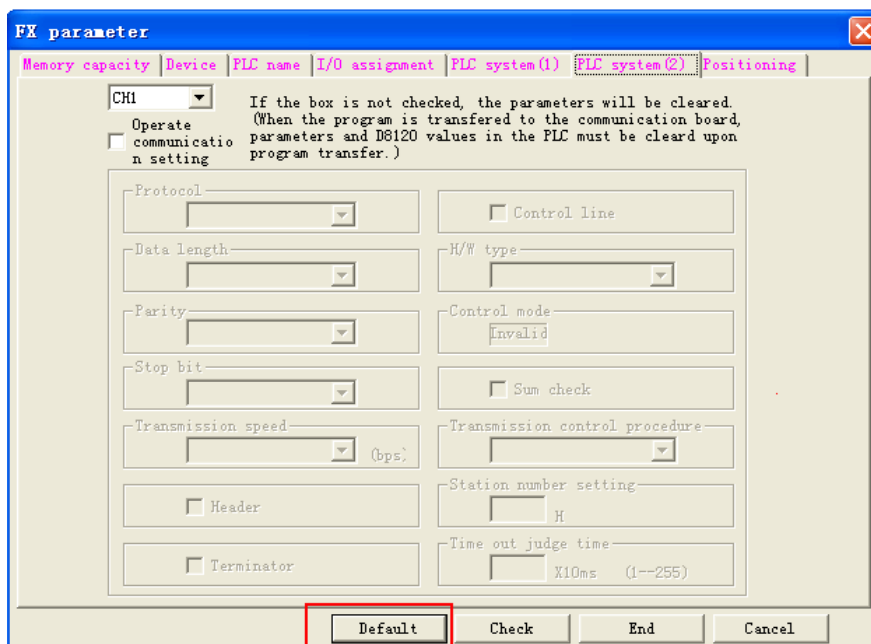**NOTE:**

1. If you do not use the multi-station when using communication module, you can choose the protocol of Mitsubishi FX1S、Mitsubishi FX0N/1N/2N/3G、Mitsubishi FX3U etc. according to the PLC model
2. Make sure that the value of D8120 is 0 when using the communication module

Mitsubishi FX-485ADP/485BD/232BD (Multi-station) protocol**HMI Setting**

Default communication: 19200, 7, even, 2; station: 0

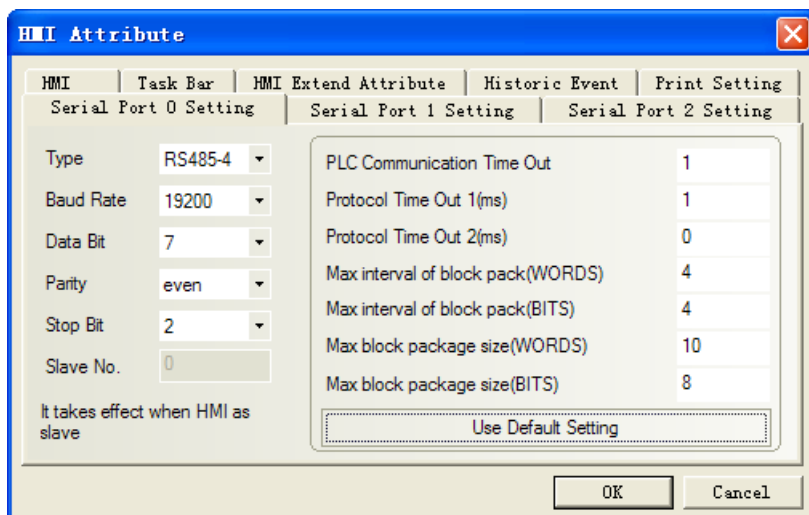**PLC Setting**

Select the "Operate communication setting"

NOTE:

1. FX0N series don't support the "Operate communication setting", but the communication parameters can be modified by setting the value of D8120、D8121、D8129
2. If series of PLC is FX3U/3UC, you must select "CH1"
3. Select the "Dedicated protocol" and check "Sum check" option, Transmission control procedure must be Form4
4. If you use the FX□□-232-BD module, set H/W type to Regular/RS-232C; if you use the FX□□-485-BD/FX□□-485-ADP module, set H/W type to RS-485

The communication parameters can be modified by setting the value of D8120/D8121/D8129

Special register	Description
D8120	Communication format
D8121	Station number
D8129	Overtime

For example

The communication parameters of PLC as follow:

Communication format: 9600bps, 7, even, 2;

Station No.:1;

H/W type: RS485;

Time out: 1

Set the value of D8120/D8121/D8129:

D8120=0xE08E;

D8121=1;

D8129=1;

NOTE: Restart the PLC after setting the value of D8120.

FX2N-10G/20GM protocol

Default communication: 9600, 8, even, 1; station: 0

RS232 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS232'. The 'Baud Rate' is '9600', 'Data Bit' is '8', 'Parity' is 'even', 'Stop Bit' is '1', and 'Slave No.' is '0'. The 'PLC Communication Time Out' is '1'. The 'Protocol Time Out 1(ms)' is '30', 'Protocol Time Out 2(ms)' is '0', 'Max interval of block pack(WORDS)' is '16', 'Max interval of block pack(BITS)' is '1', 'Max block package size(WORDS)' is '32', and 'Max block package size(BITS)' is '1'. There is a 'Use Default Setting' button and 'OK' and 'Cancel' buttons at the bottom.

Serial Port 0 Setting	Serial Port 1 Setting	Serial Port 2 Setting
Type: RS232		
Baud Rate: 9600		
Data Bit: 8		
Parity: even		
Stop Bit: 1		
Slave No.: 0		
PLC Communication Time Out: 1		
Protocol Time Out 1(ms): 30		
Protocol Time Out 2(ms): 0		
Max interval of block pack(WORDS): 16		
Max interval of block pack(BITS): 1		
Max block package size(WORDS): 32		
Max block package size(BITS): 1		

RS422 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS485-4'. The 'Baud Rate' is '9600', 'Data Bit' is '8', 'Parity' is 'even', 'Stop Bit' is '1', and 'Slave No.' is '0'. The 'PLC Communication Time Out' is '1'. The 'Protocol Time Out 1(ms)' is '30', 'Protocol Time Out 2(ms)' is '0', 'Max interval of block pack(WORDS)' is '16', 'Max interval of block pack(BITS)' is '1', 'Max block package size(WORDS)' is '32', and 'Max block package size(BITS)' is '1'. There is a 'Use Default Setting' button and 'OK' and 'Cancel' buttons at the bottom.

Serial Port 0 Setting	Serial Port 1 Setting	Serial Port 2 Setting
Type: RS485-4		
Baud Rate: 9600		
Data Bit: 8		
Parity: even		
Stop Bit: 1		
Slave No.: 0		
PLC Communication Time Out: 1		
Protocol Time Out 1(ms): 30		
Protocol Time Out 2(ms): 0		
Max interval of block pack(WORDS): 16		
Max interval of block pack(BITS): 1		
Max block package size(WORDS): 32		
Max block package size(BITS): 1		

Mitsubishi FX5U protocol**HMI Setting**

The screenshot shows the 'HMI Attribute' dialog box with the 'COMO Setting' tab selected. The 'Type' is set to 'RS485-4'. The 'Baud Rate' is '19200', 'Data Bit' is '8', 'Parity Check' is 'none', 'Stop Bit' is '1', and 'Broadcast' is '65535'. The 'PLC Communication Time Out(s)' is '1'. The 'Protocol Time Out 1(ms)' is '30', 'Protocol Time Out 2(ms)' is '0', 'Max interval of word block pack' is '100', 'Max interval of bit block pack' is '100', 'Max word block package size' is '137', and 'Max bit block package size' is '137'. There is a 'Use Default Setting' button and 'OK' and 'Cancel' buttons at the bottom.

COMO Setting	COM2 Setting	Extended Memory
Type: RS485-4		
Baud Rate: 19200		
Data Bit: 8		
Parity Check: none		
Stop Bit: 1		
Broadcast: 65535		
PLC Communication Time Out(s): 1		
Protocol Time Out 1(ms): 30		
Protocol Time Out 2(ms): 0		
Max interval of word block pack: 100		
Max interval of bit block pack: 100		
Max word block package size: 137		
Max bit block package size: 137		

PLC Setting

a. CPU 485 Serial Port Setting

The first screenshot shows the 'Module Parameter 485 Serial Port' window. The 'Setting Item List' on the left has 'Basic Settings' selected. The 'Setting Item' table on the right shows the following settings:

Item	Setting
Communication Protocol Type	MC Protocol
Data Length	8bit
Parity Bit	None
Stop Bit	1bit
Baud Rate	19,200bps
Sum Check Code	Added

The second screenshot shows the 'Module Parameter 485 Serial Port' window. The 'Setting Item List' on the left has 'Fixed Setting' selected. The 'Setting Item' table on the right shows the following settings:

Item	Setting
Station No.	0
Message Pattern	Pattern 5
Time-out Period	10 ms
Message Waiting Time	0 ms

The third screenshot shows the 'Module Parameter 485 Serial Port' window. The 'Setting Item List' on the left has 'Advanced Settings' selected. The 'Setting Item' table on the right shows the following settings:

Item	Setting
Communication Protocol Type	MC Protocol
Data Length	8bit
Parity Bit	None
Stop Bit	1bit
Baud Rate	19,200bps
Sum Check Code	Added

b. FX5-232ADP Setting

The first screenshot shows the 'ADP1:FX5-232ADP Module Parameter' window. The 'Setting Item List' on the left has 'Basic Settings' selected. The 'Setting Item' table on the right shows the following settings:

Item	Setting
Communication Protocol Type	MC Protocol
Data Length	8bit
Parity Bit	None
Stop Bit	1bit
Baud Rate	19,200bps
Sum Check Code	Added


The second screenshot shows the 'ADP1:FX5-232ADP Module Parameter' window. The 'Setting Item List' on the left has 'Fixed Setting' selected. The 'Setting Item' table on the right shows the following settings:

Item	Setting
Station No.	0
Message Pattern	Pattern 5
Time-out Period	10 ms
Message Waiting Time	0 ms

The third screenshot shows the 'ADP1:FX5-232ADP Module Parameter' window. The 'Setting Item List' on the left has 'Advanced Settings' selected. The 'Setting Item' table on the right shows the following settings:

Item	Setting
Communication Protocol Type	MC Protocol
Data Length	8bit
Parity Bit	None
Stop Bit	1bit
Baud Rate	19,200bps
Sum Check Code	Added

c. After setting, click [Apply] button, then write to PLC.

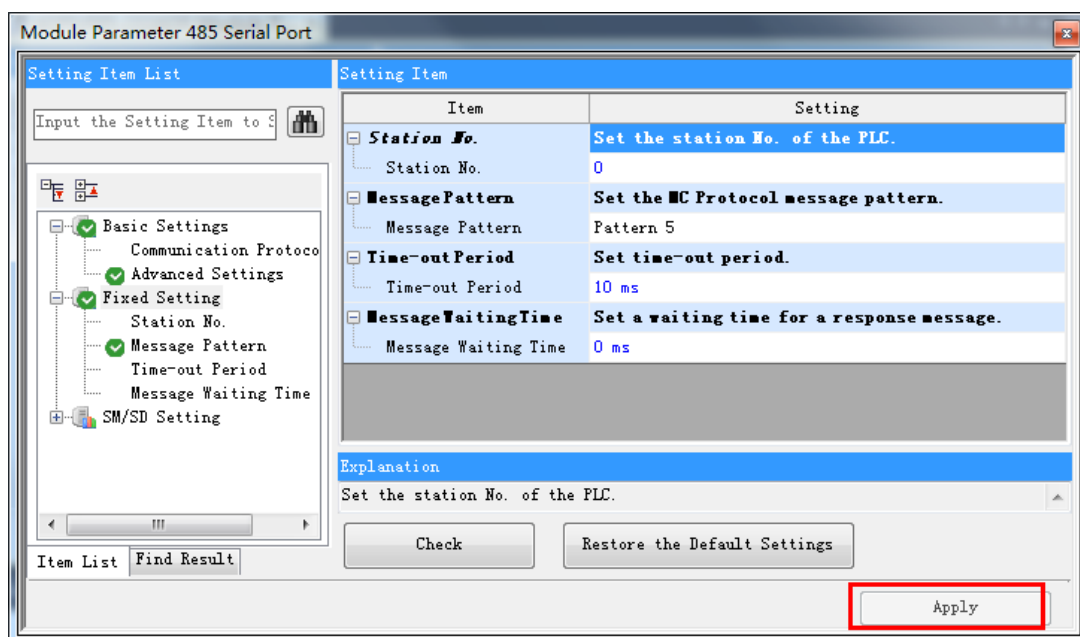


Mitsubishi Q00J (CPU Port) protocol

HMI Setting

Default parameters: 19200, 8, odd, 1; Station No.: 0(Non-support station number, only one HMI connect to one PLC)

RS232 communication

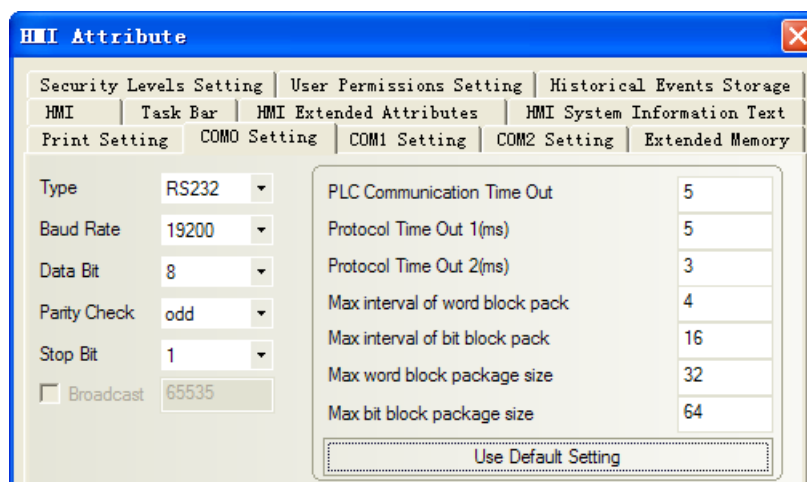

NOTE:


- 1、 If communication baudrate is error, HMI automatically set PLC baudrate for the HMI baudrate. It is not necessary to consider whether the PLC communications baudrate being true.
- 2、 This drives support password protection model Q00J.

Mitsubishi Q series (CPU Port) protocol

HMI Setting

Default parameters :115200, 8, odd, 1 ; Station No. : 0(Non-support station number, only one HMI connect to one PLC)

RS232 communication

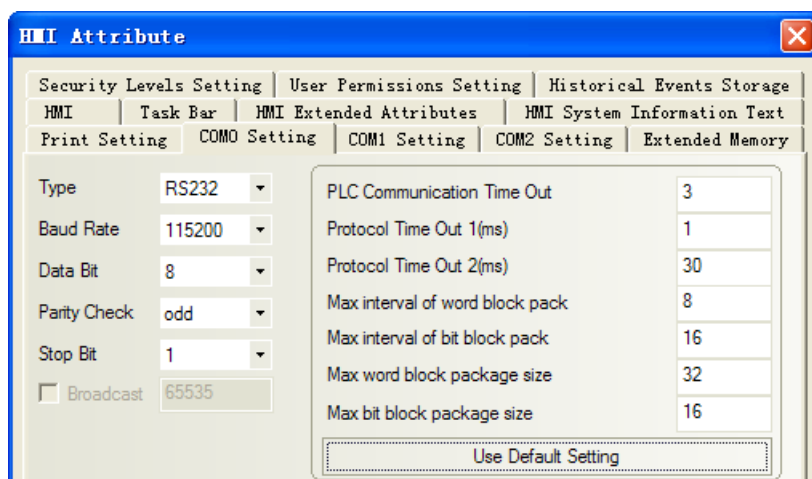


NOTE: If communication baudrate is error, HMI automatically set PLC baudrate for the HMI baudrate. It is not necessary to consider whether the PLC communications baudrate being true.

Mitsubishi Q06H 、 Mitsubishi Q06Hv2 protocol

HMI Setting

Default parameters :115200, 8, odd, 1 ; Station No. : 0(Non-support station number, only one HMI connect to one PLC)

RS232 communication

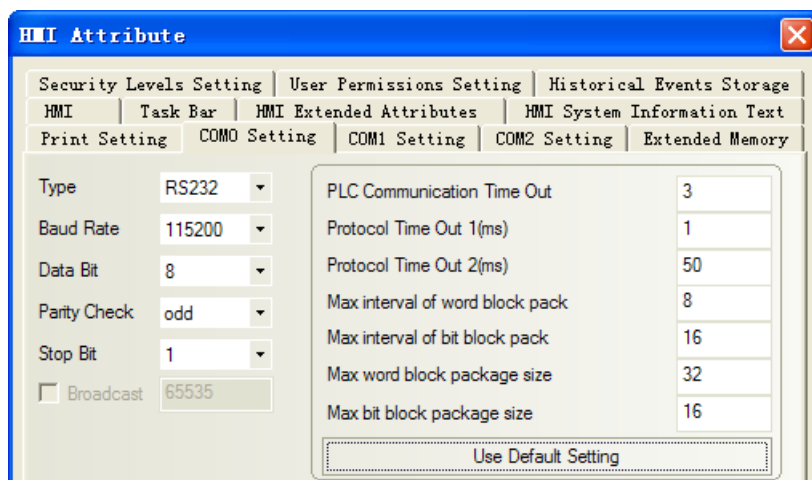


NOTE: If communication baudrate is error, HMI automatically set PLC baudrate for the HMI baudrate. It is not necessary to consider whether the PLC communications baudrate being true.

Mitsubishi Q_QnA (Link Port) & Mitsubishi Melsec Q protocol


HMI Setting

Default parameters :9600, 8, odd, 1 ; Station No. : 0

RS232 communication

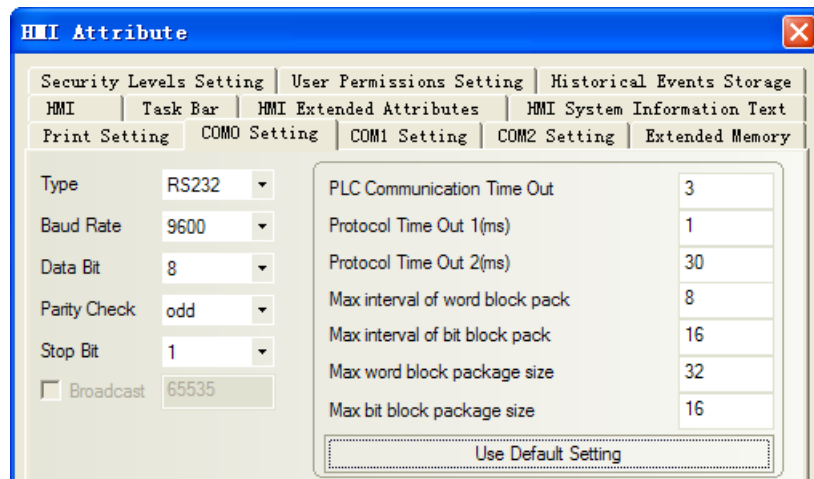

RS422 communication

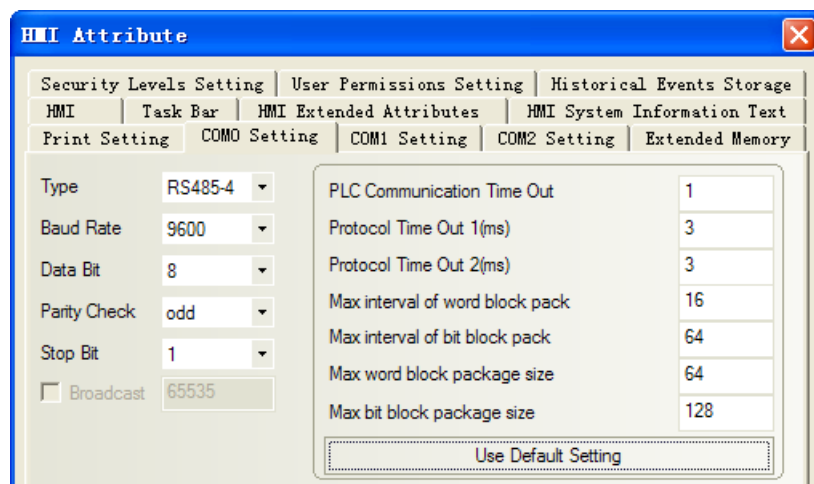


The differences of Mitsubishi Q_QnA (Link Port)、Mitsubishi Melsec Q:

1. Mitsubishi Q_QnA (Link Port) protocol advantage is communication speed
2. Mitsubishi Melsec Q protocol advantages is that it support RS232 and RS485 communication modules, disadvantage is that communication is slow.


HMI Setting

1. CPU port communication

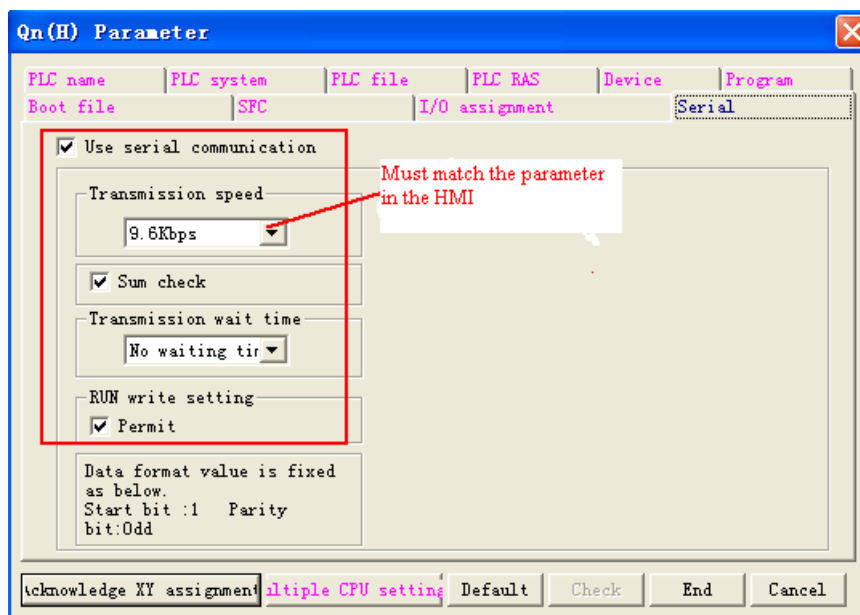

2. C24 module communication

- a. "Parameter" double-click "PLC parameter", select "I/O assignment".

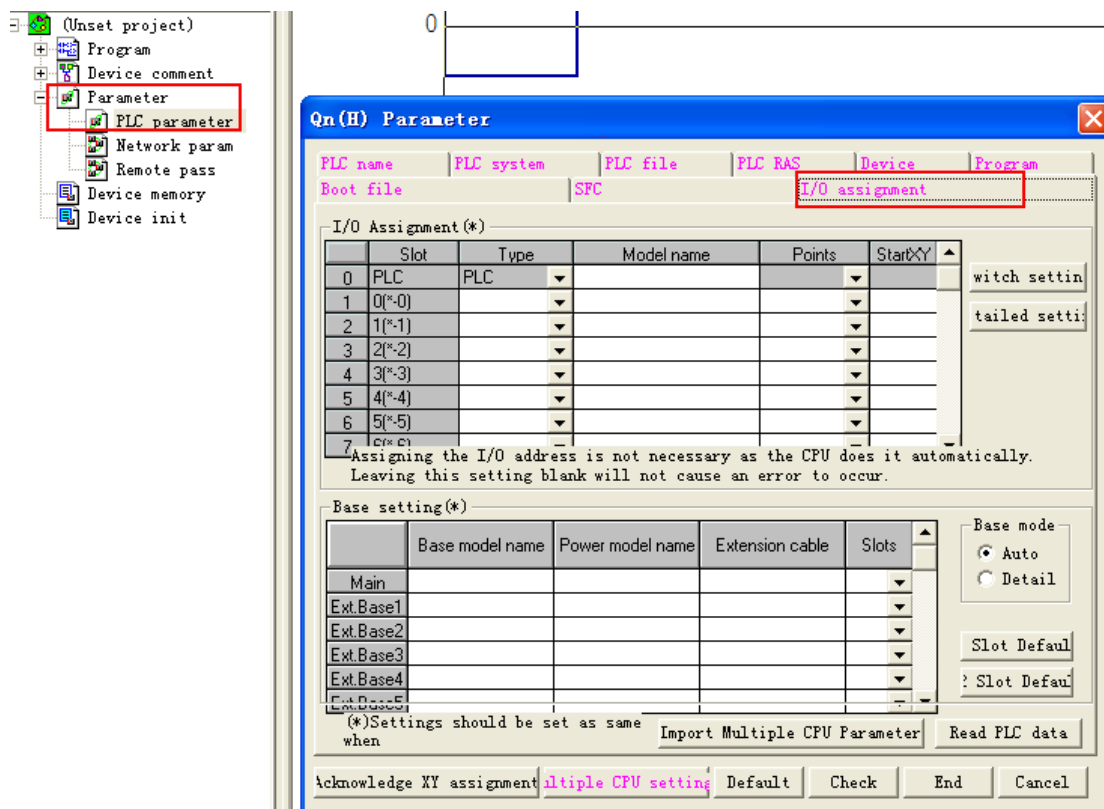

- b. Click "type" to select "intelligent"

Qn(H) Parameter

PLC name	PLC system	PLC file	PLC RAS	Device	Program
Boot file	SFC	I/O assignment			

I/O Assignment(*)

Slot	Type	Model name	Points	StartXY	
0	PLC				switch settin
1	0(*-0) Intelli.		32points		
2	1(*-1) Empty				tailed setti
3	2(*-2) Input				
4	3(*-3) Hi. input				
5	4(*-4) Output				
6	5(*-5) I/O mix				
7	6(*-6) Intelli.				

Assigning the I/O address is not necessary as the CPU does it automatically.
Leaving this setting blank will not cause an error to occur.

Base setting(*)

	Base model name	Power model name	Extension cable	Slots
Main				
Ext.Base1				
Ext.Base2				
Ext.Base3				
Ext.Base4				
Ext.Base5				

Base mode
☒ Auto
☐ Detail

Slot Default
 ? Slot Default

(*)Settings should be set as same when

Import Multiple CPU Parameter Read PLC data

Acknowledge XY assignment Multiple CPU setting Default Check End Cancel

c. Click "switch setting" and set

Qn(H) Parameter

PLC name	PLC system	PLC file	PLC RAS	Device	Program
Boot file	SFC	I/O assignment			

I/O Assignment(*)

Slot	Type	Model name	Points	StartXY	
0	PLC				switch settin
1	0(*-0) Intelli.		32points		
2	1(*-1)				tailed setti

Switch setting for I/O and intelligent function module

Input HEX.

Slot	Type	Model name	Switch 1	Switch 2	Switch 3	Switch 4	Switch 5
0	PLC						
1	0(*-0) Intelli.						
2	1(*-1)						
3	2(*-2)						
4	3(*-3)						
5	4(*-4)						
6	5(*-5)						
7	6(*-6)						
8	7(*-7)						
9	8(*-8)						
10	9(*-9)						
11	10(*-10)						
12	11(*-11)						
13	12(*-12)						
14	13(*-13)						
15	14(*-14)						

End Cancel

Setting the intelligent function unit switch

switch	content	example
--------	---------	---------

Switch1	CH1:transmission rate, transmission setting			0BEEH																																																		
<div>Bit 15 ~ 8 7 ~ 0</div> <div><div>Transmission rate</div><div>Transmission setting</div></div> <div><table><tr><th>bps</th><th>value</th></tr><tr><td>4800</td><td>04H</td></tr><tr><td>9600</td><td>05H</td></tr><tr><td>19200</td><td>07H</td></tr><tr><td>38400</td><td>09H</td></tr><tr><td>57600</td><td>0AH</td></tr><tr><td>1E+05</td><td>0BH</td></tr></table><table><tr><th>Bit</th><th>content</th><th>OFF</th><th>ON</th></tr><tr><td>0</td><td>Motion Setting</td><td>inching</td><td>cont</td></tr><tr><td>1</td><td>data bit</td><td>7</td><td>8</td></tr><tr><td>2</td><td>parity check bit</td><td>N</td><td>Y</td></tr><tr><td>3</td><td>parity check</td><td>odd</td><td>even</td></tr><tr><td>4</td><td>stop bit</td><td>1</td><td>2</td></tr><tr><td>5</td><td>sum check</td><td>N</td><td>Y</td></tr><tr><td>6</td><td>RUN read-in</td><td>forbid</td><td>allow</td></tr><tr><td>7</td><td>change</td><td>forbid</td><td>allow</td></tr></table></div> <div>115Kbps 8 bit 1 bit even</div>					bps	value	4800	04H	9600	05H	19200	07H	38400	09H	57600	0AH	1E+05	0BH	Bit	content	OFF	ON	0	Motion Setting	inching	cont	1	data bit	7	8	2	parity check bit	N	Y	3	parity check	odd	even	4	stop bit	1	2	5	sum check	N	Y	6	RUN read-in	forbid	allow	7	change	forbid	allow
bps	value																																																					
4800	04H																																																					
9600	05H																																																					
19200	07H																																																					
38400	09H																																																					
57600	0AH																																																					
1E+05	0BH																																																					
Bit	content	OFF	ON																																																			
0	Motion Setting	inching	cont																																																			
1	data bit	7	8																																																			
2	parity check bit	N	Y																																																			
3	parity check	odd	even																																																			
4	stop bit	1	2																																																			
5	sum check	N	Y																																																			
6	RUN read-in	forbid	allow																																																			
7	change	forbid	allow																																																			
Switch2	CH1:communication protocol	MC protocol type5 binary		0005H																																																		
Switch3	CH2:transmission rate, transmission setting (the same as switch 1)			0BEEH																																																		
Switch4	CH2:communication protocol	MC protocol type5 binary		0005H																																																		
Switch5	Station No. setting	0~31		0000H																																																		

If the communication parameters of CH2 485 is 19200/8/odd/1, station:0, set as follows “switch setting” in “PLC parameters” and “I/O assignment”.

Setting Switch	Setting Value	Setup Description
Switch 3	07E6	19200/8/With/Odd/1
Switch 4	0005	Mode = Form 5
Switch 5	0000	Station No. = 0

Switch setting for I/O and intelligent function module

Input: HEX

Slot	Type	Model name	Switch 1	Switch 2	Switch 3	Switch 4	Switch 5
0	PLC	PLC					
1	0(*-0)	Intelli.			07E6	0005	0000
2	1(*-1)						
3	2(*-2)						
4	3(*-3)						
5	4(*-4)						
6	5(*-5)						
7	6(*-6)						
8	7(*-7)						
9	8(*-8)						
10	9(*-9)						
11	10(*-10)						
12	11(*-11)						
13	12(*-12)						
14	13(*-13)						
15	14(*-14)						

End Cancel

If the communication parameters of CH1 232 is 19200/8/odd/1, station:0, set as follows “switch setting” in “PLC parameters” and “I/O assignment”.


Setting Switch	Setting Value	Setup Description
Switch 1	07E6	19200/8/With/Odd/1
Switch 2	0005	Mode = Form 5
Switch 5	0000	Station No. = 0

NOTE: After setting the switches, reset the PLC or turn the power off and then back on again.

© Network Communication Setting

Mitsubishi FX Series Ethernet(TCP Slave) protocol

HMI Setting

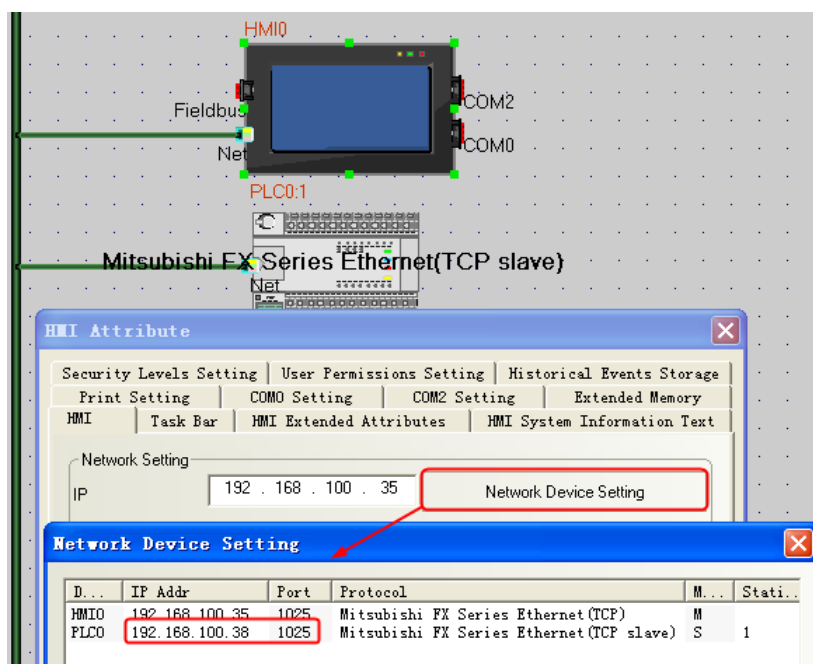


NOTE: Data format of PORT number is decimalism


PLC Setting

FX3GE-24M

1. Double click "PLC Parameters", select "Built-in Ethernet Port Settings", the parameters configuration as follow:

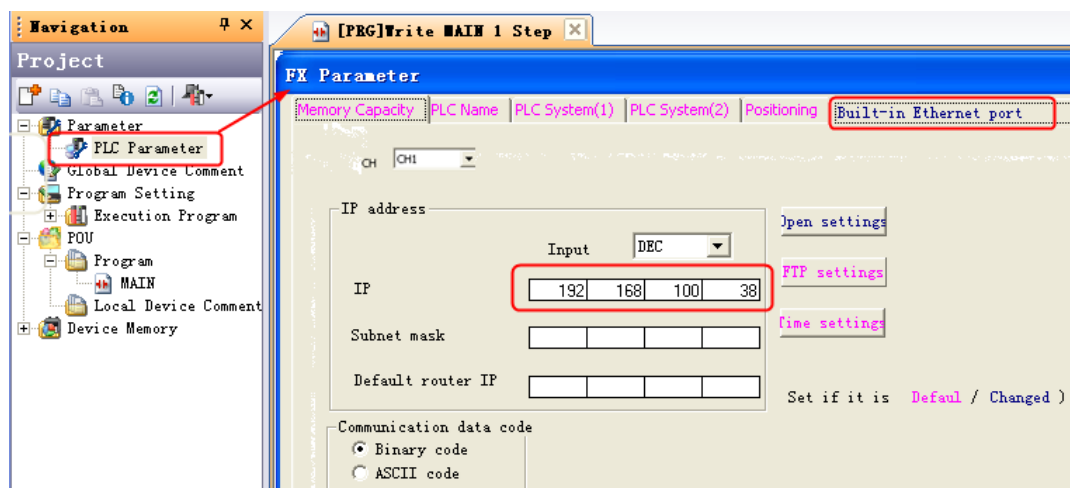


2. Click “Open Setting”, the parameters configuration as follow:

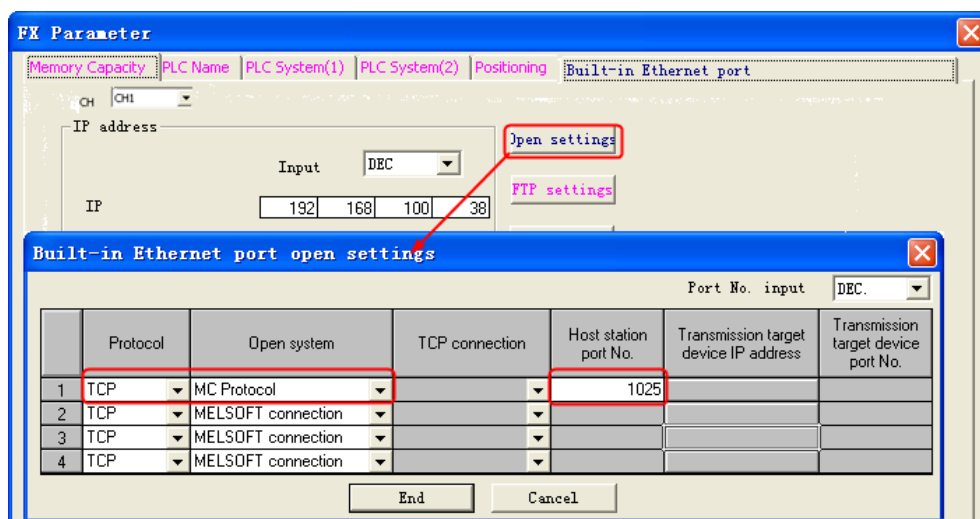


NOTE: Data format of PORT number is decimalism

FX3U-ENET-L


1. Open “FX3U-ENET-L Configuration Tool”, the parameters configuration as follow:

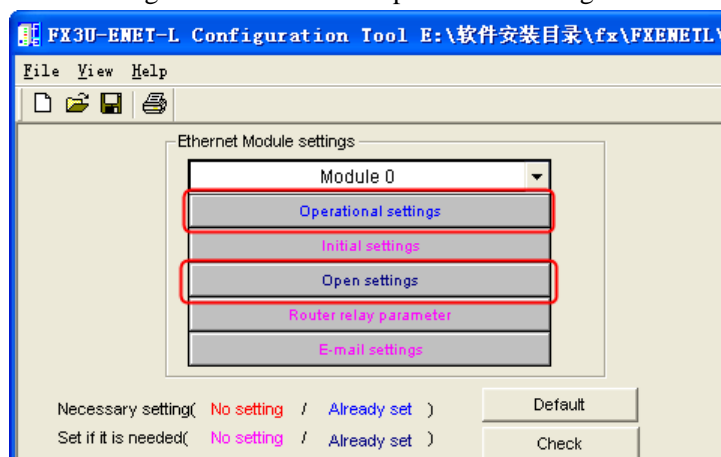

3. Click “Operational settings”, the parameters configuration as follow:

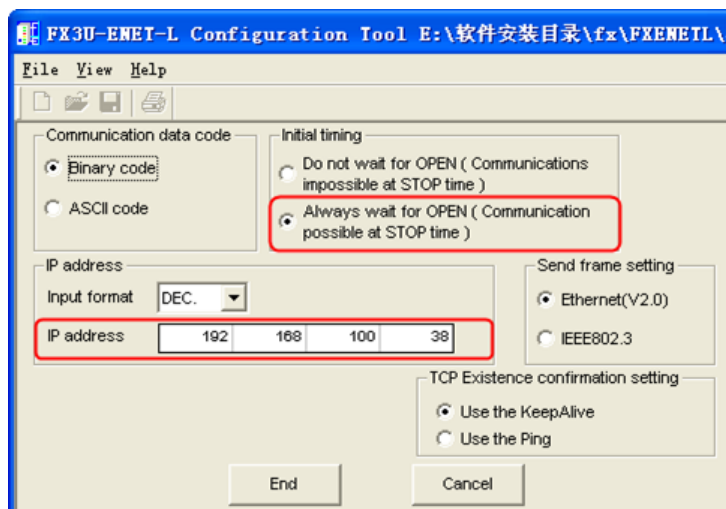


4. Click “Open settings”, the parameters configuration as follow:

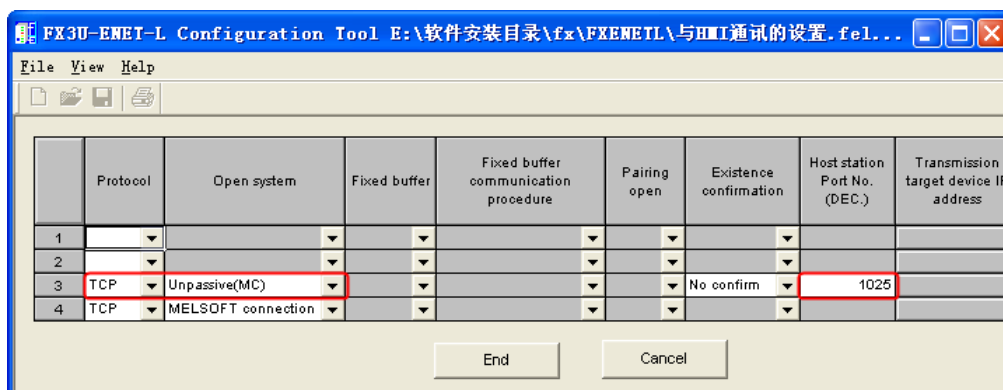

NOTE: Data format of PORT number is decimalism

Mitsubishi FX5U Series Ethernet(TCP Slave) protocol

HMI Setting

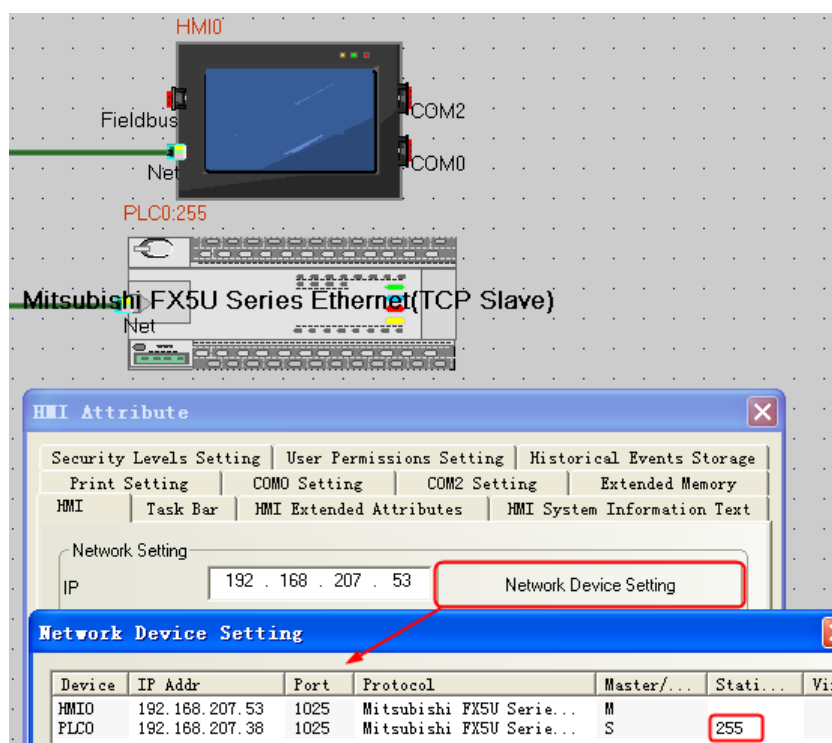


NOTE: 1.Data format of PORT number is decimalism


2. PLC station must be 255

PLC Setting

1. Click "Parameter" ---- "FX5UCPU" ---- "Module Parameter" ---- "Ethernet Port"

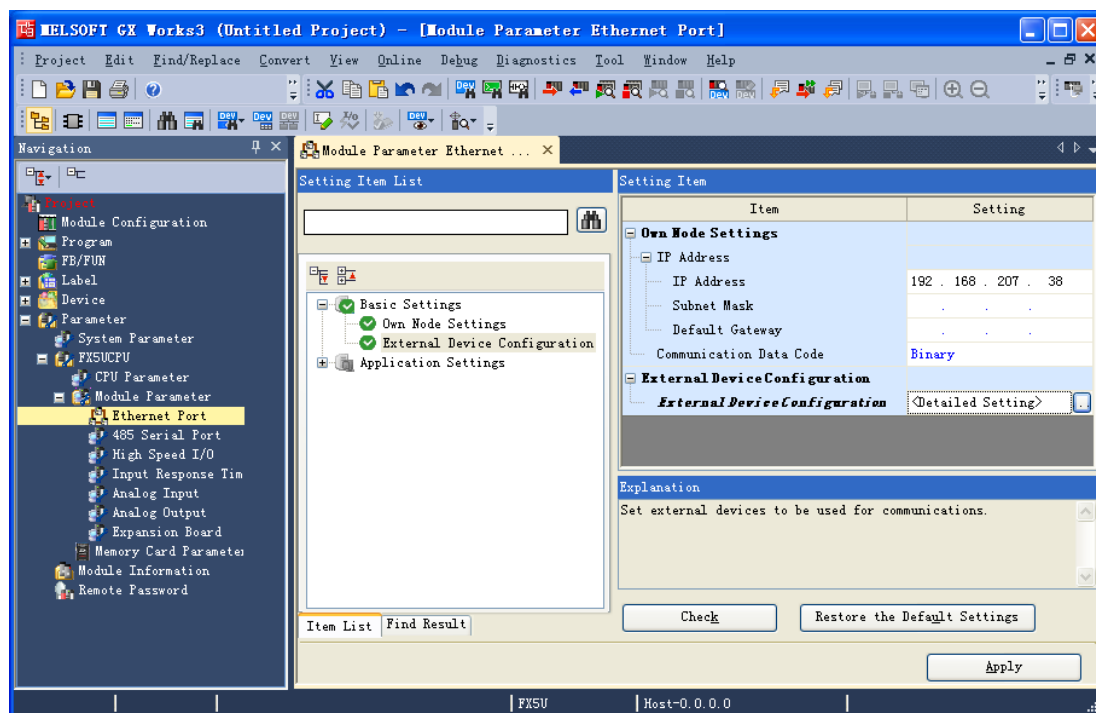

2. In the “Ethernet Port” Setting Item List---“External Device Configuration”,click “Detailed Setting”.
3. Popup the Ethernet Device(General) list, choose “SLMP Connection Module”,and set TCP Protocol, Port No. :1025, then Close with Reflecting the Setting.

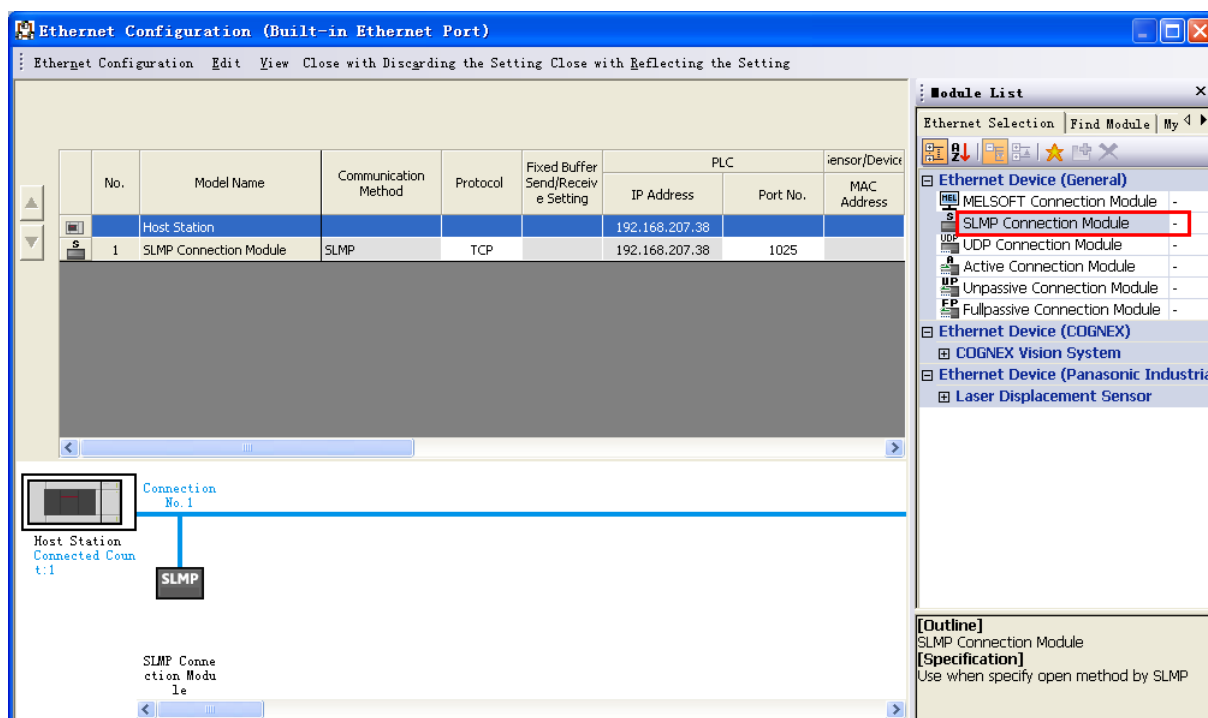


NOTE: 1.Data format of PORT number is decimalism

4. When connecting multiple HMI, the multiple HMIs cannot be set in the same project.


Example: Two HMIs connect to one plc.

HMI setting:

a. HMI1 setting in the project:

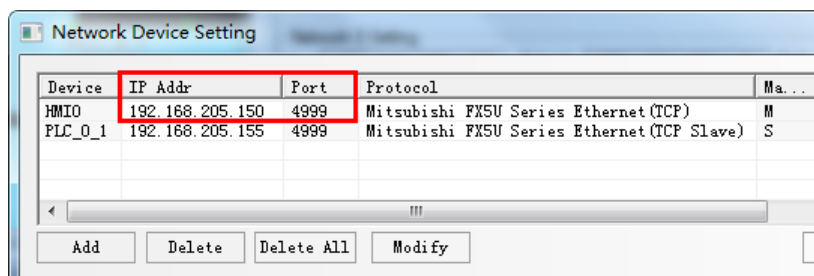


b.HMI2 setting in another project:

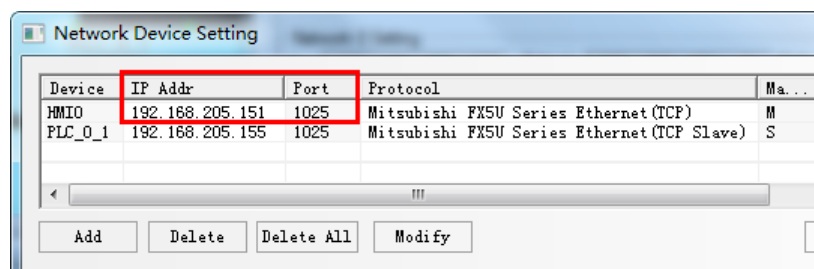

c. Download two projects to two HMIs respectively


PLC setting:

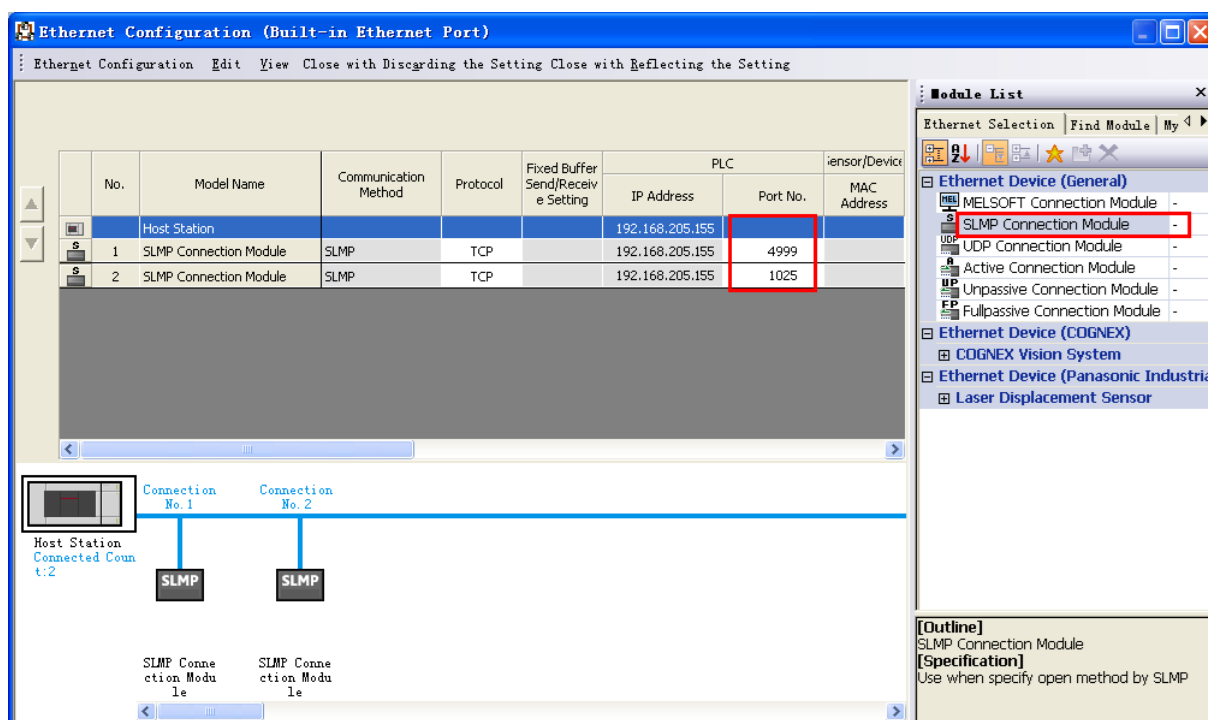


Note: there are requirements for port number on PLC. To connect one device, you need to open a port number. To connect N devices, you need to open N port numbers, and the port number cannot be repeated

Remote password settings:


set the remote password password,

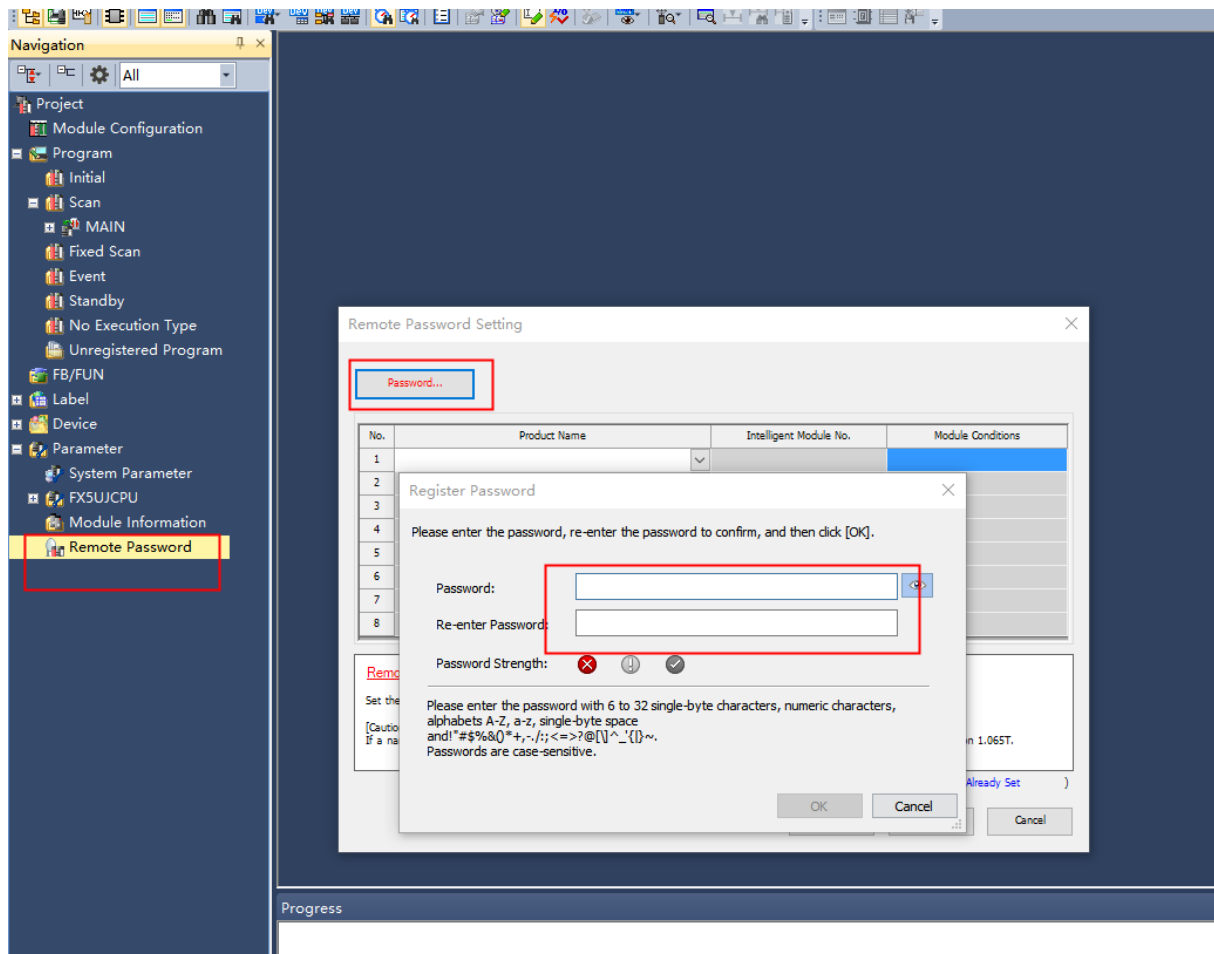

Confirm the details of the remote password settings, download to the plc.

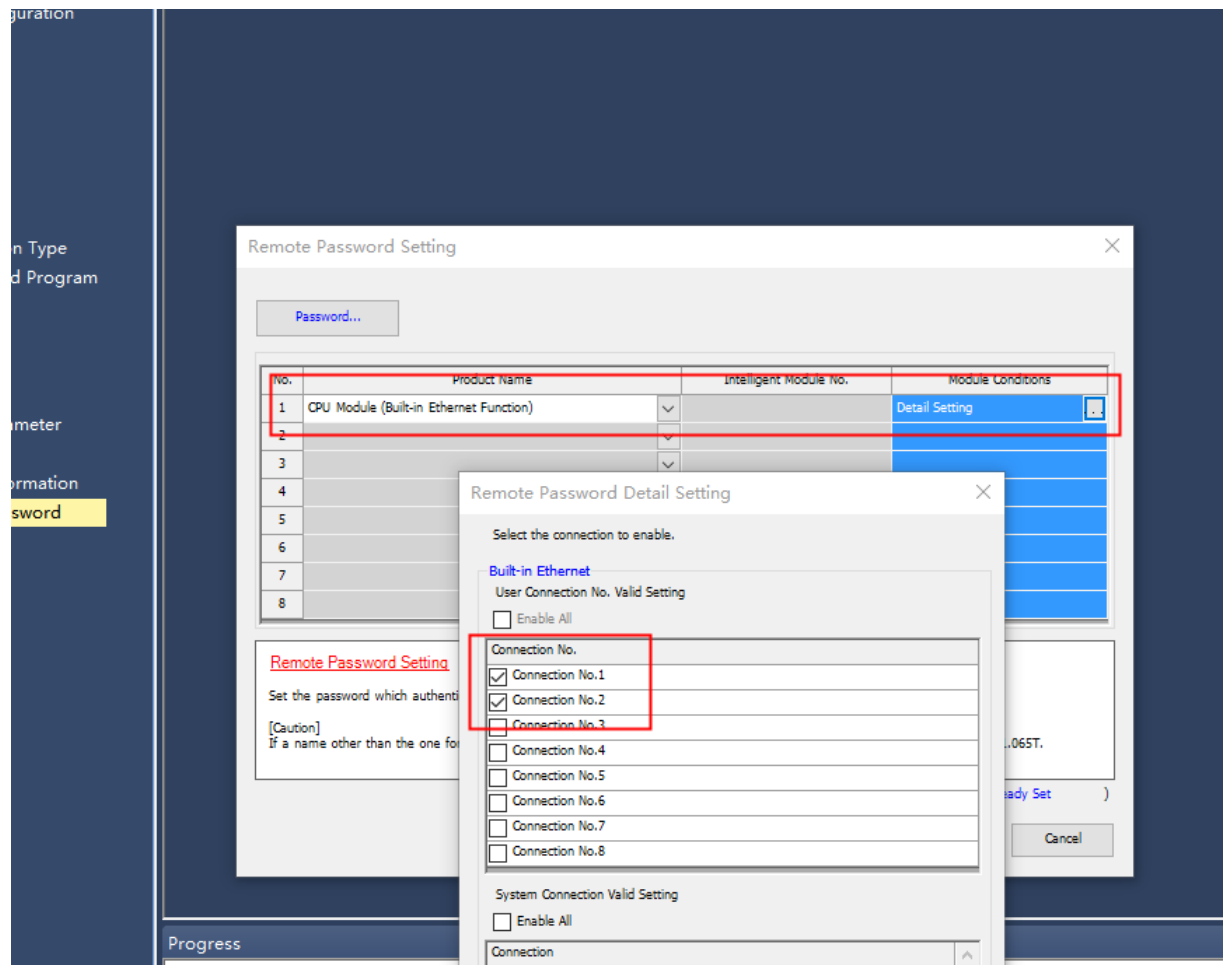


HMI project settings are as follows: enter the response remote password to download to the screen, you can press the PLC set up normal communication.

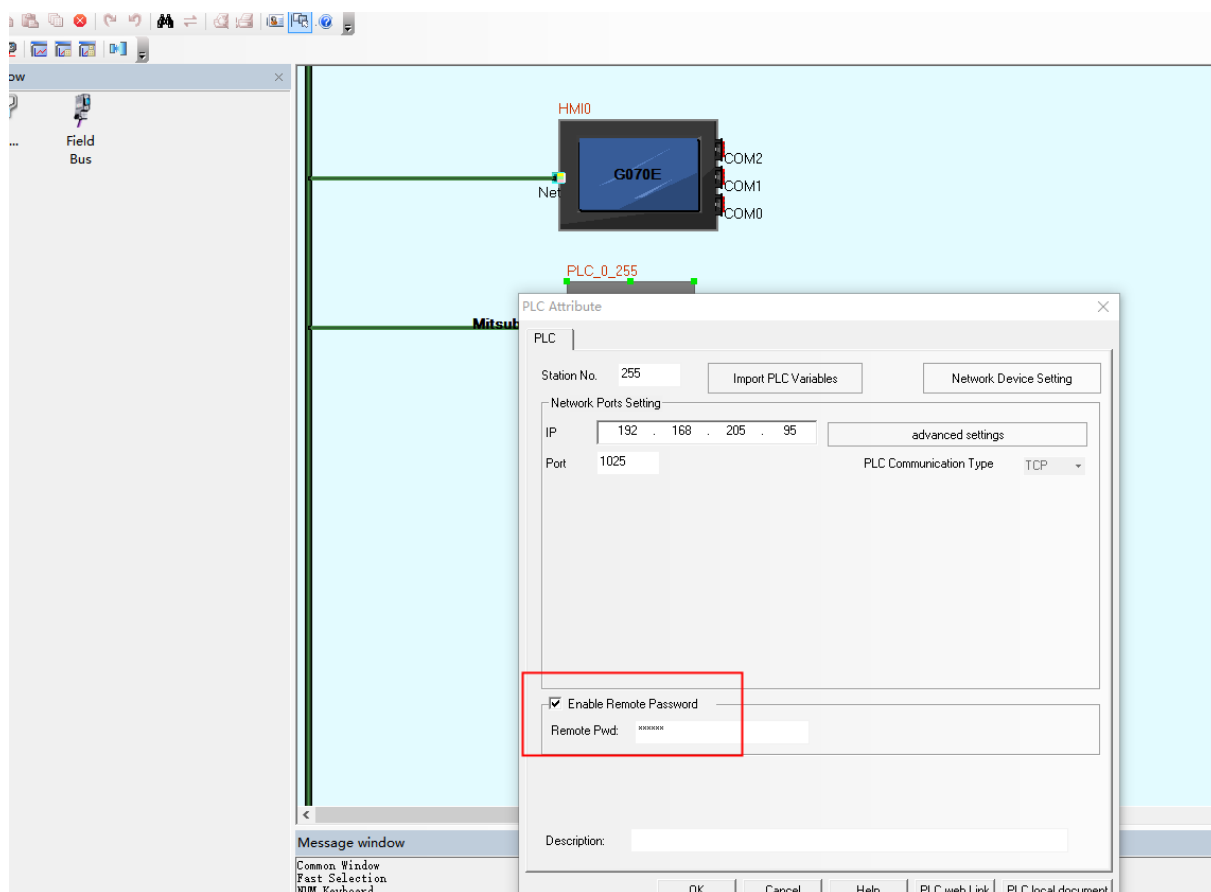


Mitsubishi FX5U-ASCII Ethernet(TCP Slave) protocol

HMI Setting

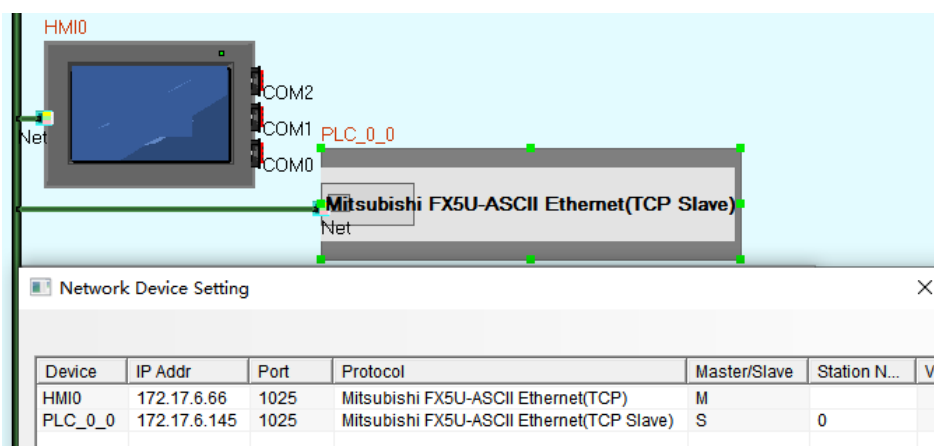

PLC Setting


1) Click "Parameters"—"FX5UCPU"—"Module parameters"—"Ethernet Port" for specific settings:

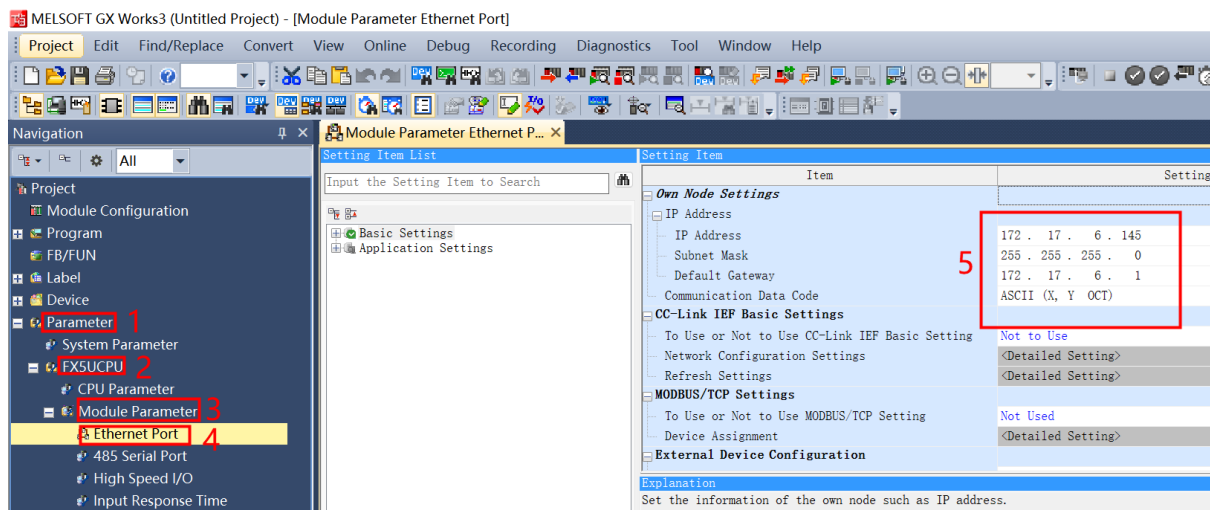

After configuration, click "Online" and select "Write to PLC" to write to PLC;

2) In the Ethernet Parameters settings attribute box, click "Object Device Connection Configuration Settings" and click "Detailed Settings"

3) When opened, the "Ethernet Configuration (Built-in Ethernet Port)" dialog box will display, select "SLMP Connection Device", and set the protocol as "TCP" and the port number "1025". See the following figure for detailed settings. After the setting is complete, click "Reflection Settings and Close"

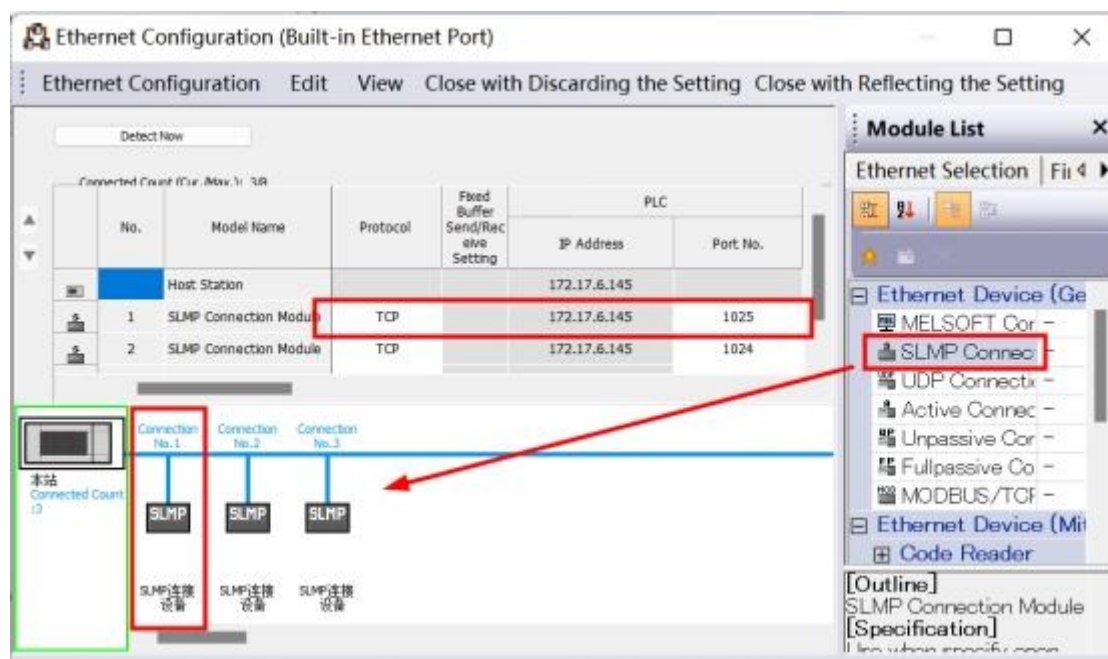

4) When connecting to multiple HMI projects, the HMI configuration software should do it with multiple projects, which cannot be set up in the same project

Example: Two HMI to one PLC

HMI settings:

a. Project 1 is set up as follows




Device	IP Addr	Port	Protocol	Master/Slave	Station NO...	Virtual PLC ...
HMI0	172.17.6.67	1023	Mitsubishi F...	M		
PLC_0_0	172.17.6.145	1023	Mitsubishi F...	S	0	

b. Project 2 is set up as follows



Device	IP Addr	Port	Protocol	Master/Slave	Station NO...	Virtual PLC ...
HMI0	172.17.6.66	1025	Mitsubishi F...	M		
PLC_0_0	172.17.6.145	1025	Mitsubishi F...	S	0	

c. Download the two projects to the two screens, respectively
PLC settings:

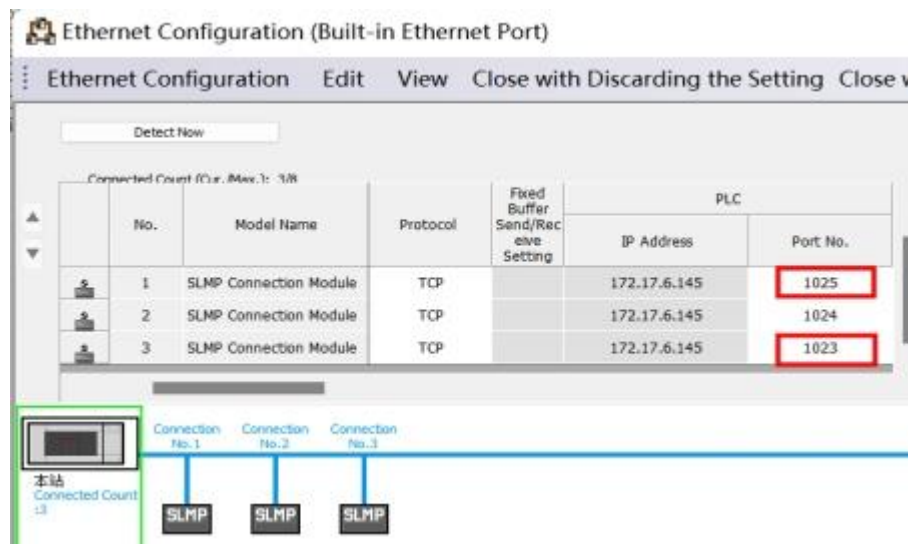

Ethernet Configuration (Built-in Ethernet Port)

Detect Now


Connected Count (Cur./Max.): 1/3

No.	Model Name	Protocol	Fixed Buffer Send/Receive Setting	PLC	
				IP Address	Port No.
1	SLMP Connection Module	TCP		172.17.6.145	1025
2	SLMP Connection Module	TCP		172.17.6.145	1024
3	SLMP Connection Module	TCP		172.17.6.145	1023


Connection diagram showing three SLMP modules connected to the HMI (本站) via Connection No. 1, 2, and 3.

Remote password settings:


set the remote password password,

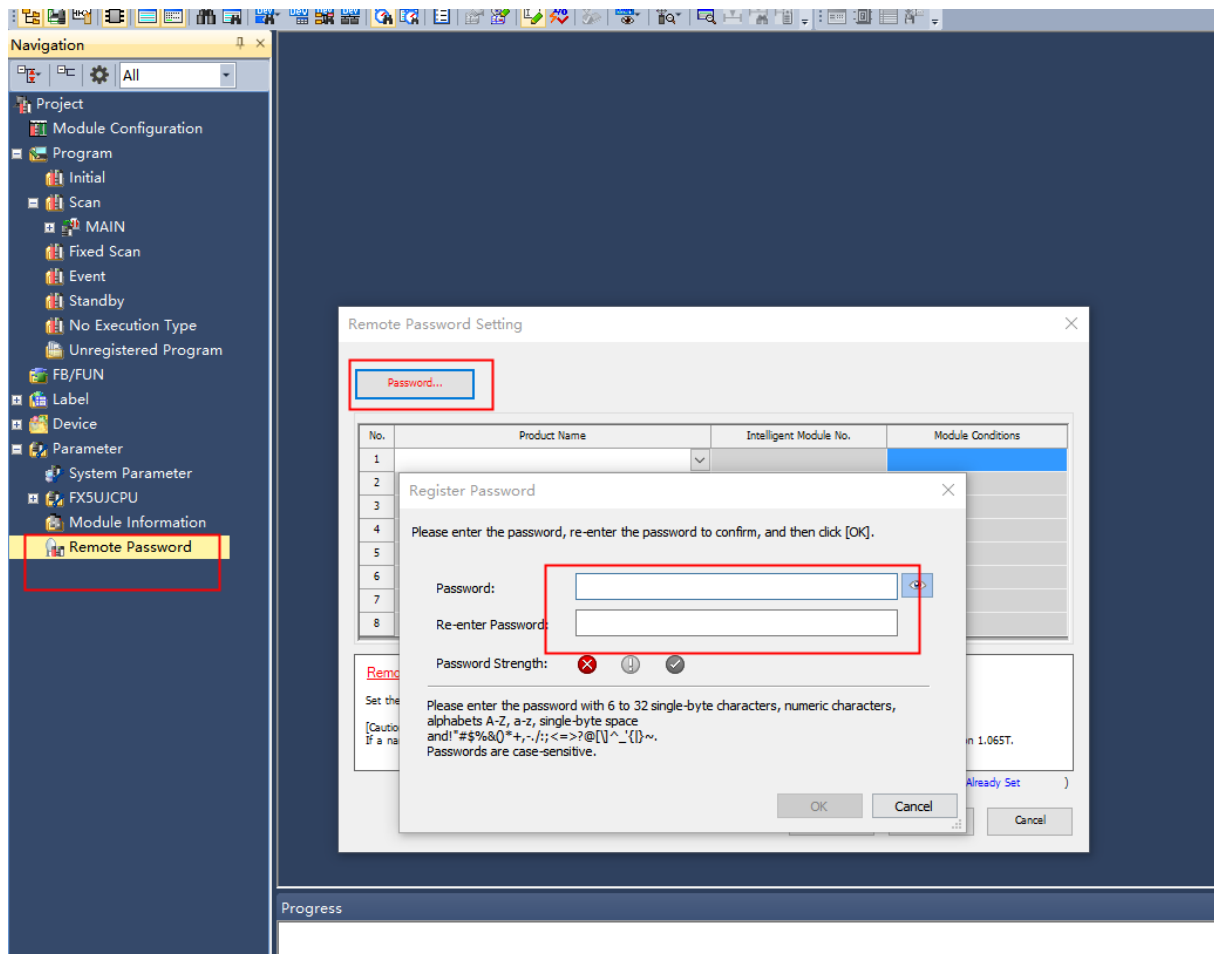

Confirm the details of the remote password settings, download to the plc.

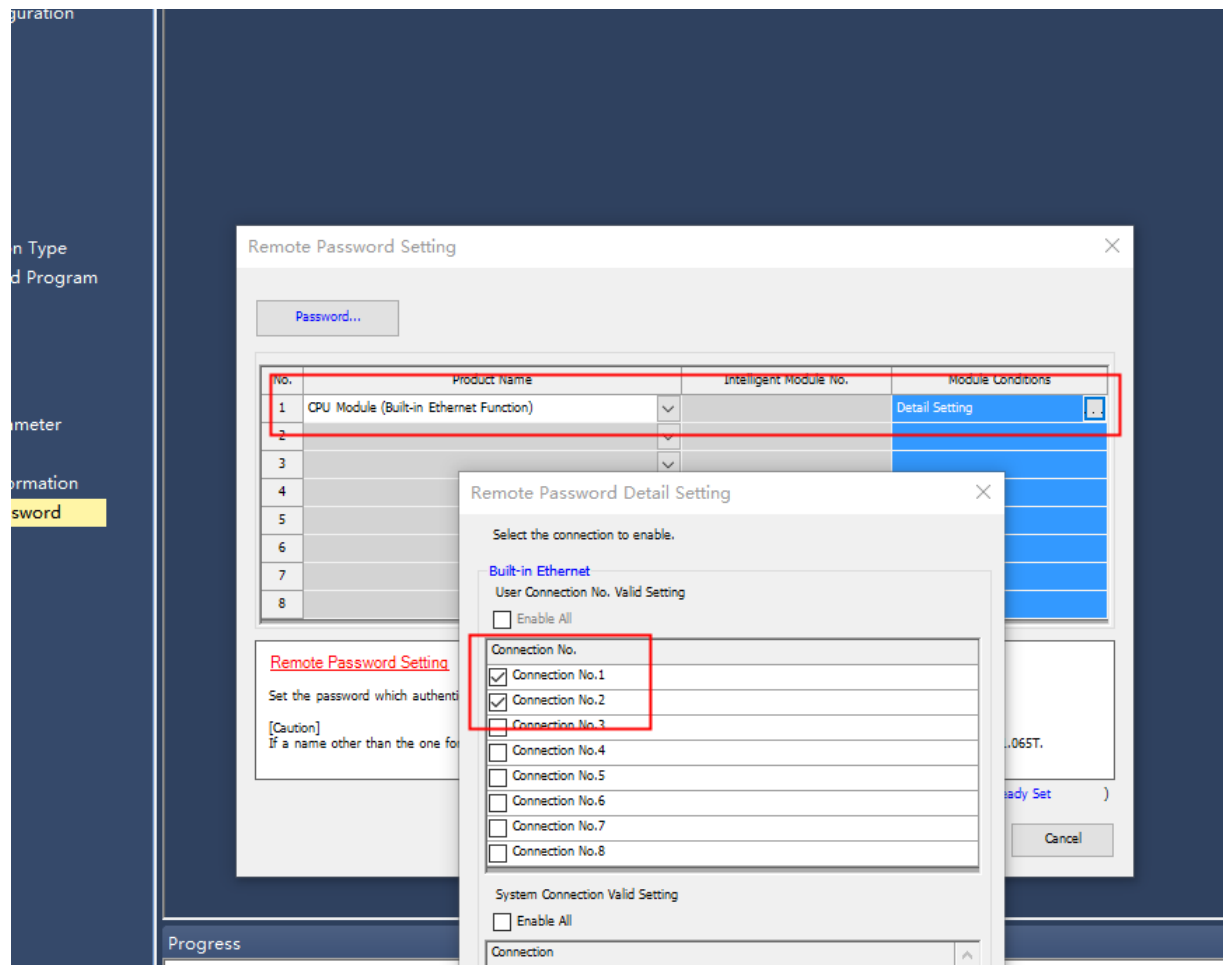


HMI project settings are as follows: enter the response remote password to download to the screen, you can press the PLC set up normal communication.

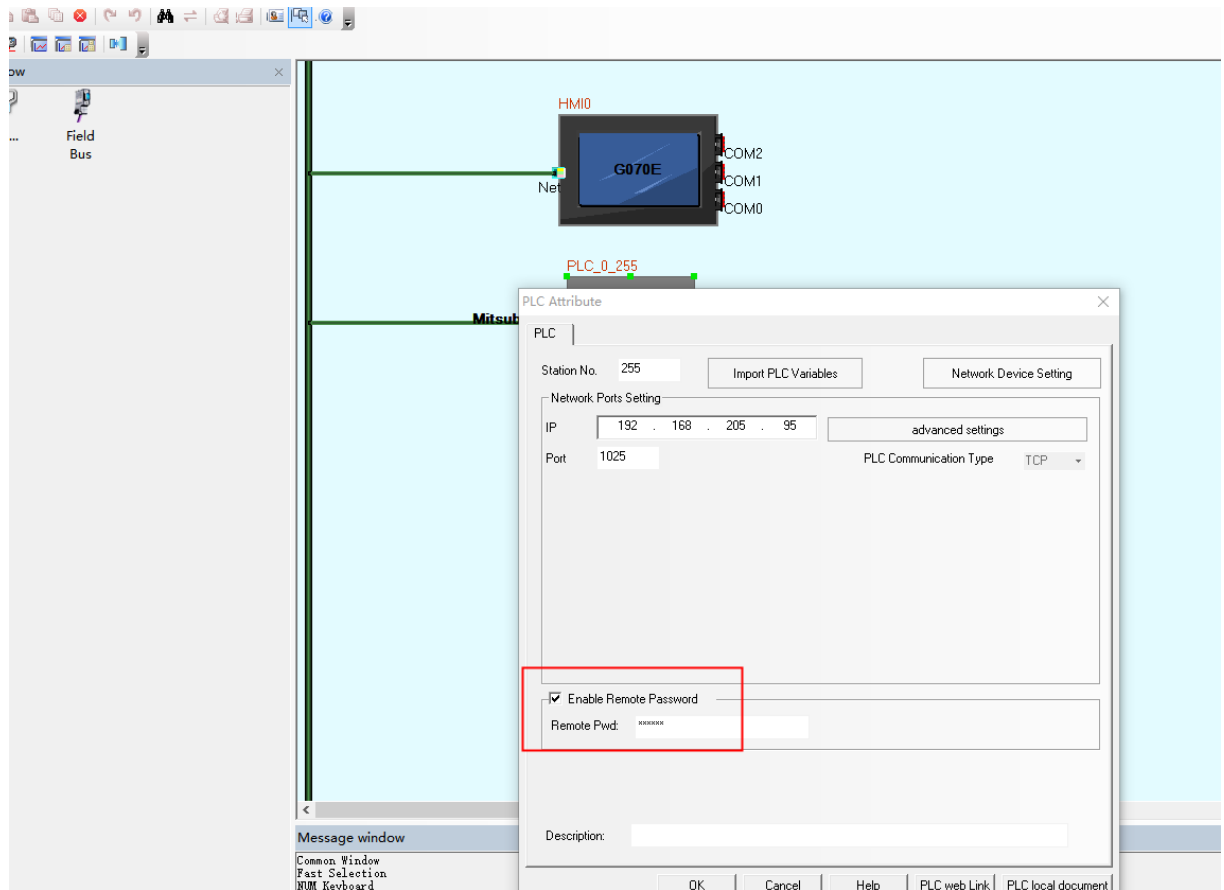


Mitsubishi QJ71E71 EtherNet protocol

HMI Setting

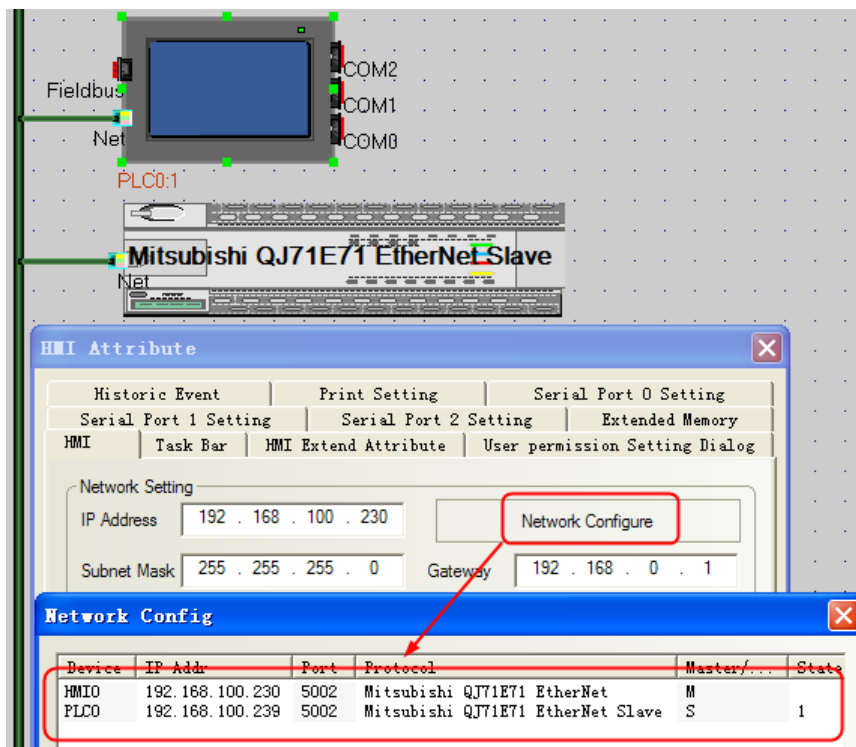


PLC Setting

1. Network parameters

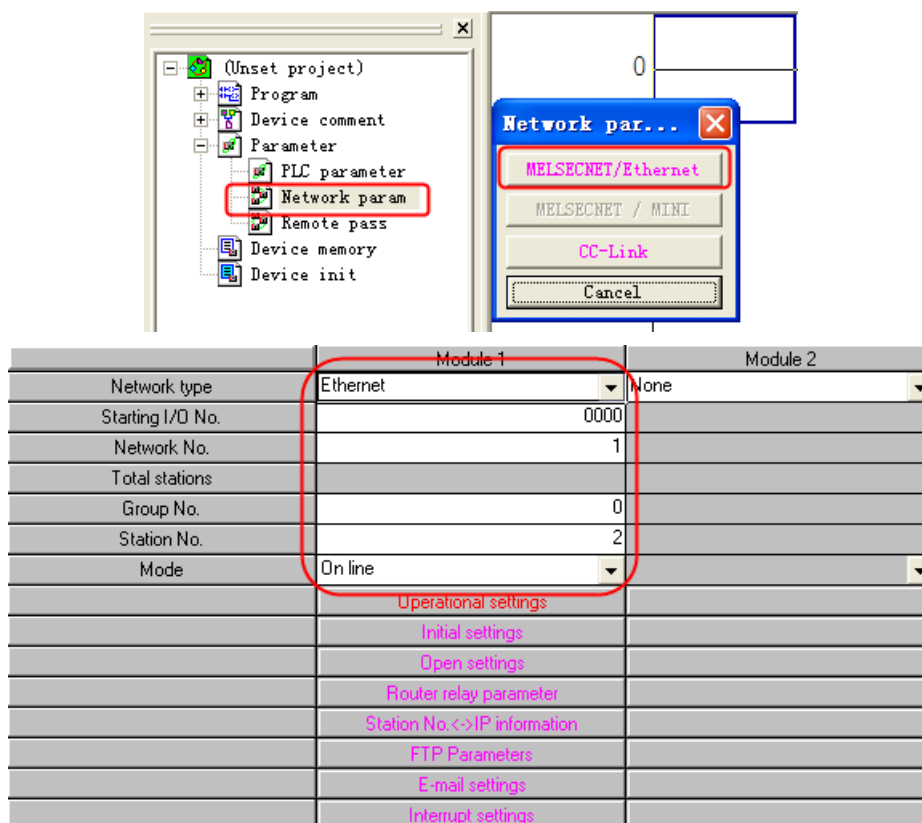

[network type] select "Ethernet"; [start I/O] is a hexadecimal number increments & H10, you can select "0"; [network number] range is 1-239, generally set at the network level, only a layer of the network, so set to "1"; [Group number] range is 0-32, select "0"; [station number] range 1-64, 1 occupied by the computer side, can be set to 2-64, the example is set to "2" ; [Model] Select "online". Next, click [operation], set the IP address of the dialog box pops up, in part by the network to determine the first three, the fourth part of the free use of the network number. One thing to note is that the figure of [the initial time setting] to choose "Always wait to open" (stop when communication), or Ethernet port is not open external device. Click [end set] button to save the settings.

2. Operational settings

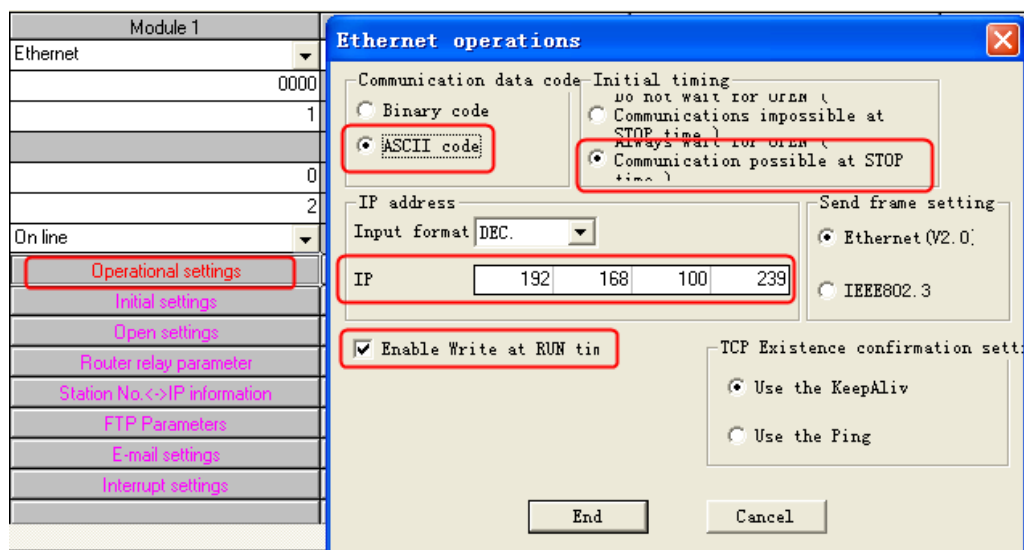

3. Open settings


Multiple HMIs are connected, set in "open Settings", select "TCP" -- "MELSOFT connection", connect N HMIs, and then set N TCP.

	Protocol	Open system	Fixed buffer	Fixed buffer communication procedure	Pairing open	Existence confirmation
1	TCP	MELSOFT connection				
2	TCP	MELSOFT connection				
3	TCP	MELSOFT connection				
4	TCP	MELSOFT connection				
5	TCP	MELSOFT connection				

4. The HMI IP is in the same network segment with PLC.

Note: the port number of the HMI can be ignored.



5. Just write to set the PLC in the main menu selection [online]->"PLC write", the "PLC/network parameters" in the content downloaded to the PLC, the correct execution, the writing on the work of the Ethernet parameters completed.

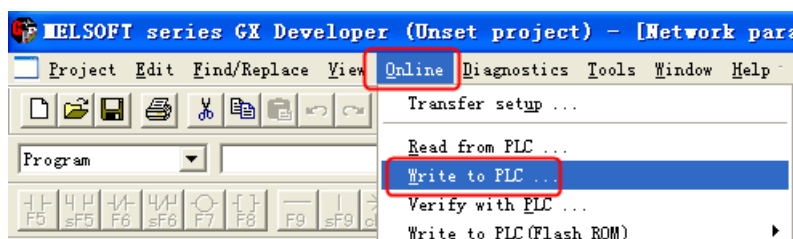

Mitsubishi QnA 3EBin Ethernet(TCP Slave) protocol

L02:


HMI Setting

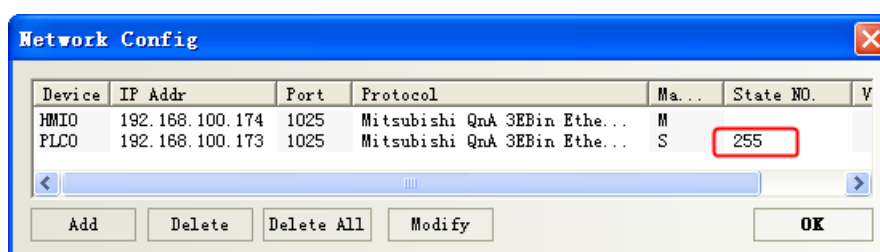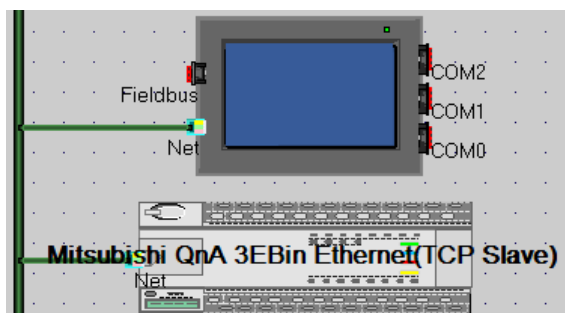**NOTE:**


1. PLC station number must be 255
2. Data format of Port number is decimalism

PLC Setting

Double click “PLC parameters”, select “Built-in Ethernet Port Settings”

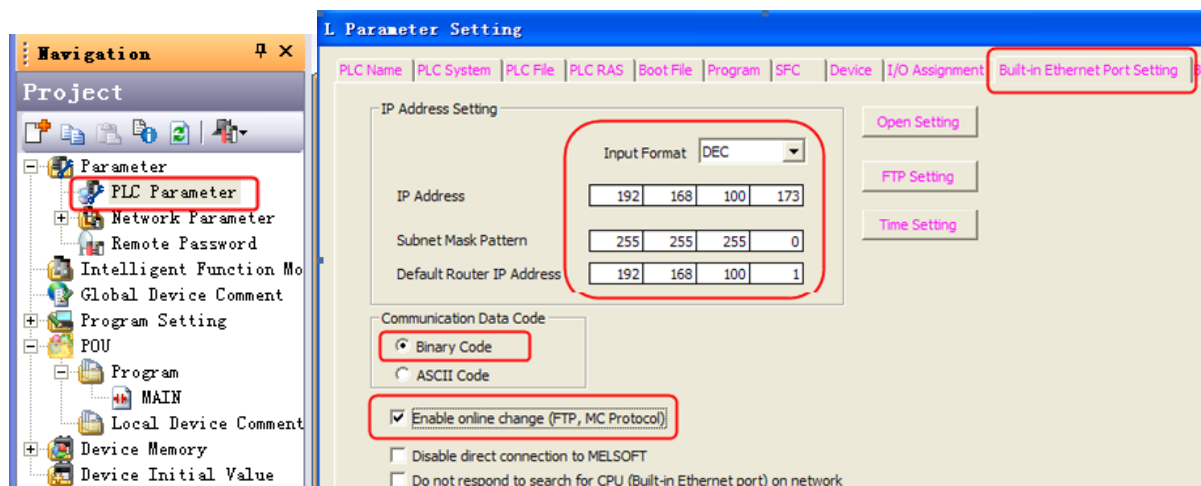


Click “Open Setting”, the parameters configuration as follow:

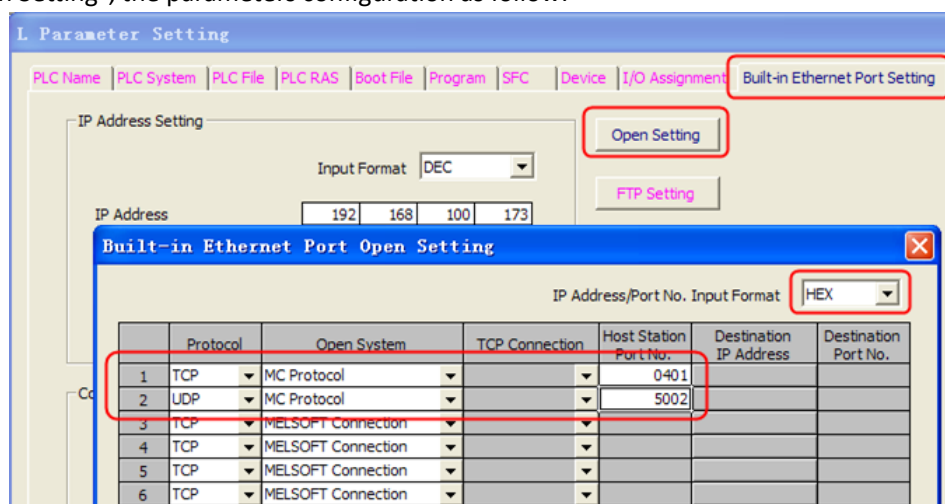


NOTE: Host Station Port No. will be set by the selected format.



Q03UDE CPU :

HMI Setting

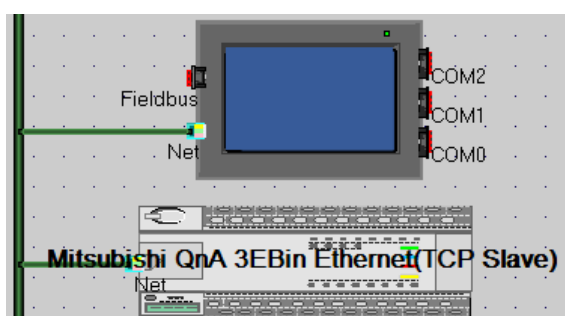


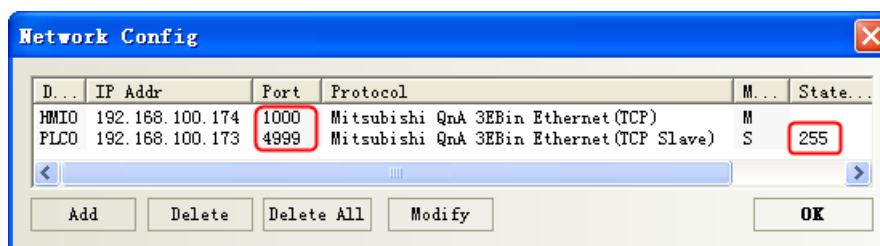**NOTE:**

1. PLC station number must be 255
2. Data format of Port number is decimalism

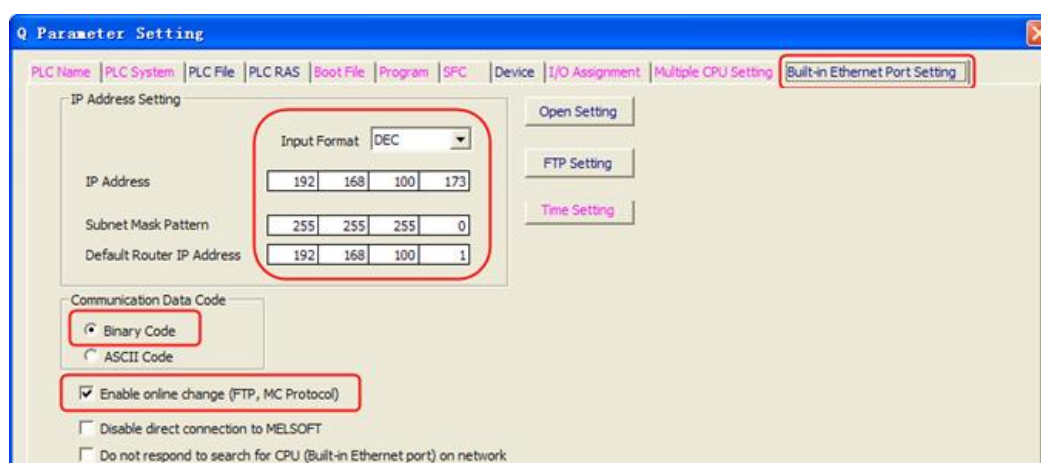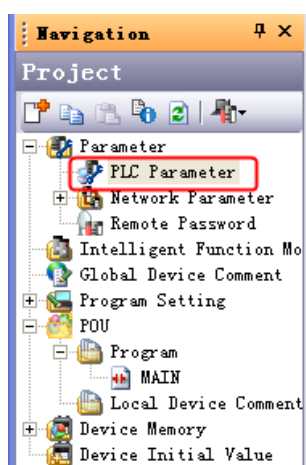PLC Setting


Click "Open Setting", the parameters configuration as follow:

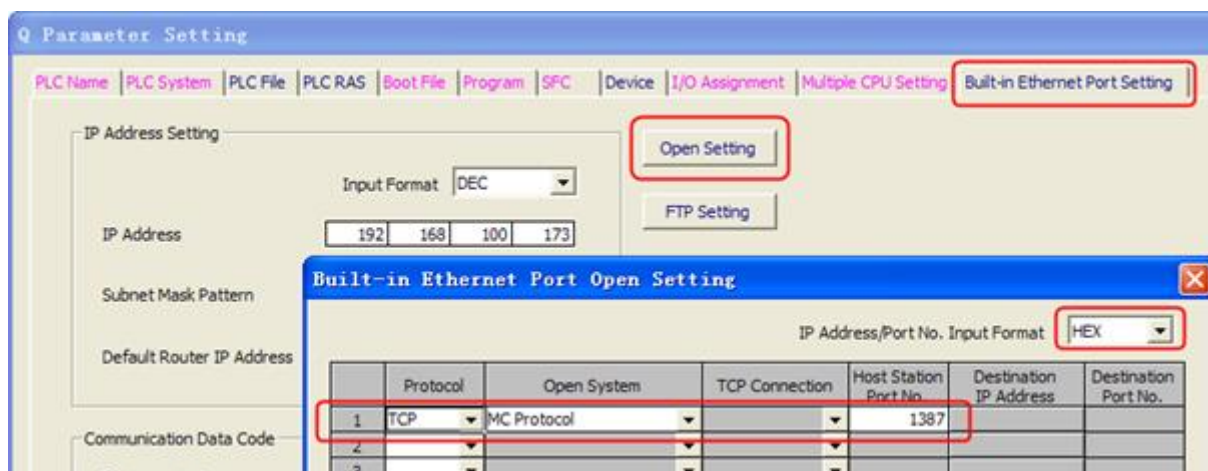

NOTE: Host Station Port No. will be set by the selected format.

R04ENCPU :

HMI Setting

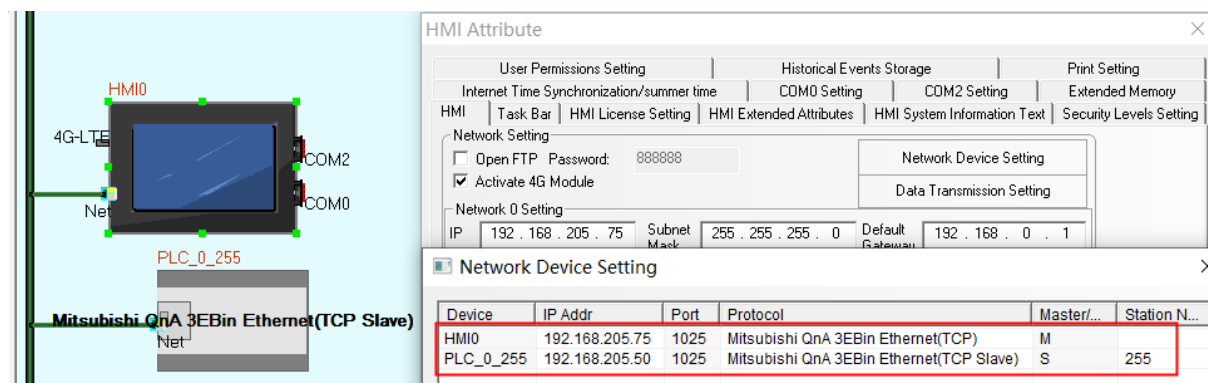


NOTE:


1. PLC station number must be 255
2. Data format of Port number is decimalism

PLC Setting

1. click “Module Parameter”, and set some parameter in “Basic Setting”

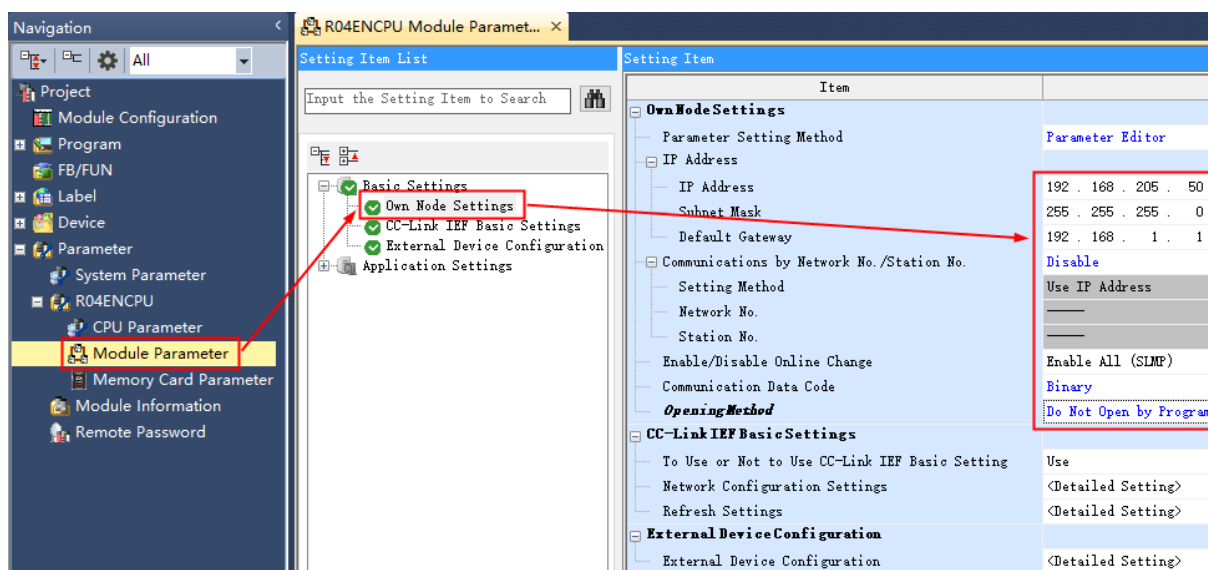

2. Double Click" External Device Configuration", and add SLMP Connection Module

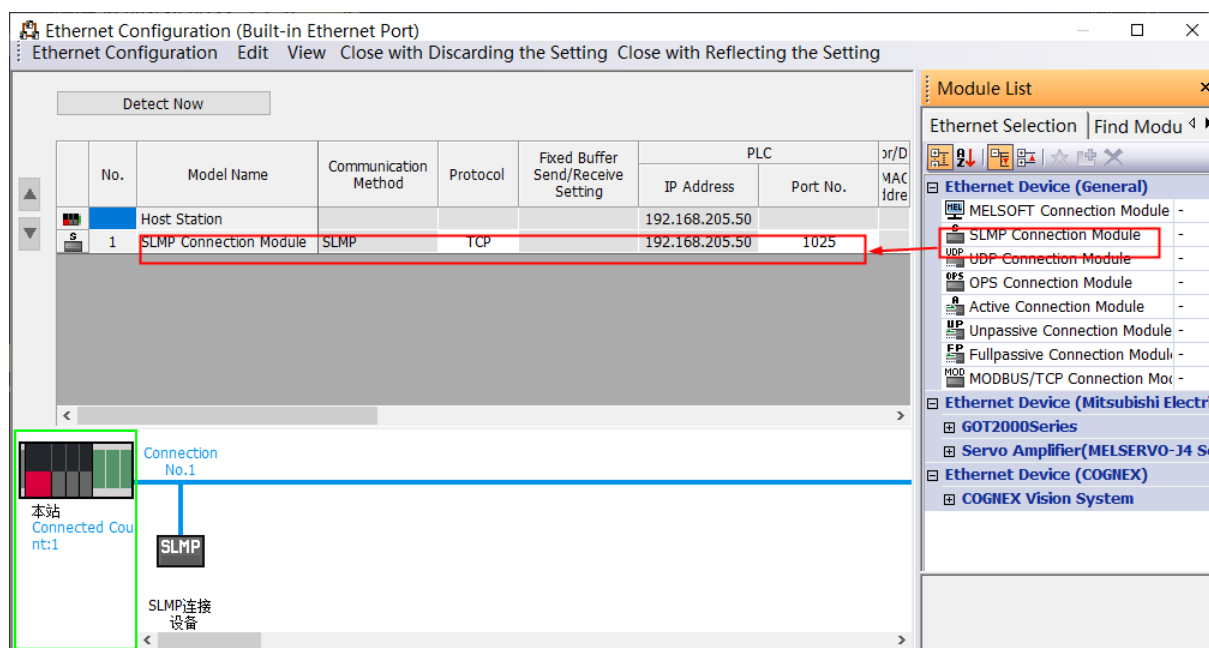

© Supported Device

FX1S

Device	Bit Address	Word Address	Format	Notes
Input Relay	X 00-764	-----	OOO	
Output Relay	Y 00-764	-----	OOO	
Internal Relay	M 000-7999	-----	DDDD	
Timer Contact	T 00-255	-----	DDD	
Counter Contact	C 00-255	-----	DDD	
Data Contact	D_bit 0.0-9999.F	-----	DDDD.H	
State	S 000-4095	-----	DDDD	
Timer Value	-----	T_word 00-511	DDD	
Counter Value	-----	C_word 00-199	DDD	
Data Register	-----	D_word 000-9999	DDDDD	
Special Data Register	-----	SD_word 8000-9999	DDDD	
Counter Value	-----	C_dword 200-255	DDD	32 bit device

FX0N/FX1N/2N/3G

Device	Bit Address	Word Address	Format	Notes
Input Relay	X 000-377	-----	OOO	
Output Relay	Y 000-377	-----	OOO	
Internal Relay	M 0000-3071	-----	DDDD	

Timer Contact	T_bit 000-255	-----	DDD	
Counter Contact	C_bit 000-199	-----	DDD	
Special Internal Relay	SM 8000-8255	-----	DDDD	
State	S 000-999	-----	DDD	
Timer Value	-----	T_word 000-255	DDD	
Counter Value	-----	C_word 000-199	DDD	
Data Register	-----	D 0000-7999	DDDD	
Special Data Register	-----	SD 8000-8255	DDDD	
Counter Value	-----	C_dword 200-255	DDD	32 bit device
R	-----	R 0-32767	DDDDD	

FX3G/3GA

Device	Bit Address	Word Address	Format	Notes
Input Relay	X 000-377	-----	OOO	
Output Relay	Y 000-377	-----	OOO	
Internal Relay	M 0000-7679	-----	DDDD	
Timer Contact	T_bit 000-319	-----	DDD	
Counter Contact	C_bit 000-199	-----	DDD	
Special Internal Relay	SM 8000-8255	-----	DDDD	
State	S 000-4095	-----	DDD	
Timer Value	-----	T_word 000-319	DDD	
Counter Value	-----	C_word 000-199	DDD	
Data Register	-----	D 0000-7999	DDDD	
Special Data Register	-----	SD 8000-8255	DDDD	
Counter Value	-----	C_dword 200-255	DDD	32 bit device
0	-----	R 0-32767	DDDDD	

FX2N-10GM/20GM

Device	Bit Address	Word Address	Format	Notes
Input Relay	X 00-571	-----	OO	*1
Output Relay	Y 00-571	-----	OO	*1
Internal Relay	M 000-9175	-----	DDD	*1
Special Internal Relay	SM9000-9999	-----	DDDD	*1
Data Register	-----	D 0-9313	DDDD	*2
Special Data Register	-----	SD 9000-9999	DDDD	*2

Special Data Register	-----	FD 4000-4550	DDDD	*2
Current Position(System)	-----	CP_unit 0-1	D	
Current Position(Pulse)	-----	CP_puls 0-1	D	

NOTE:

*1 Don't support batch

*2 Support batch

FX3UC

Device	Bit Address	Word Address	Format	Notes
Input Relay	X000-764	-----	OOO	
Output Relay	Y000-764	-----	OOO	
Timer Contact	T_bit 000-511	-----	DDD	
Counter Contact	C_bit 000-255	-----	DDD	
Data Contact	D_bit0.0-7999.F	-----	DDDD.H	
State	S0000-4095	-----	DDDD	
Internal Relay	M0000-7999	-----	DDDD	
Special Internal Relay	SM8000-9999	-----	DDDD	
Timer Value	-----	T_word 000-511	DDD	
Counter Value	-----	C_word 000-199	DDD	
Data Register	-----	D_word 0-7999	DDDDD	
Extension Register	-----	R0000-32767	DDDDD	
Special Data Register	-----	SD8000-9999	DDDD	
Counter Value	-----	C_dword200-255	DDD	32 bit device

FX Series Ethernet

Device	Bit Address	Word Address	Format	Notes
State	S 0-4095	-----	DDDD	
Data Contact	D_bit0.0-7999.F	-----	DDDD.H	
Special Internal Relay	SM8000-8511	-----	DDDD	
Counter Contact	C_bit0-255	-----	DDDD	
Timer Contact	T_bit0-511	-----	DDDD	
Internal Relay	M 0-7679	-----	DDDD	
Output Relay	Y 0-377	-----	DDDD	
Input Relay	X 0-377	-----	DDDD	
Extension Register	-----	R 0-32767	DDDDD	
Special Data Register	-----	SD 8000-8511	DDDD	
Data Register	-----	D_word0-7999	DDDD	
Timer Value	-----	T_word0-511	DDD	

Counter Value	-----	C_word0-199	DDD	
Counter Value	-----	C_dword200-255	DDD	

FX5U

Device	Bit Address	Word Address	Format	
Retentive TimerValve (contact)	SS 0-15	-----	DD	
Counter Valve (contact)	CS 0-255	-----	DDD	
Counter Valve (coil)	CC 0-255	-----	DDD	
Timer Valve (contact)	TS 0-511	-----	DDD	
Retentive TimerValve (coil)	SC 0-15	-----	DD	
Timer Valve (coil)	TC 0-511	-----	DDD	
	D_bit0.0-7999.0	-----	DDDD.H	
Specia Link Relay	SB 0-FF	-----	HH	
Link Relay	B 0-FF	-----	HH	
State Relay	S 0-4095	-----	DDDD	
Annunciator Relay	F 0-127	-----	DDD	
Latch relay	L 0-7679	-----	DDDD	
Specia Internal Relay	SM 0-9999	-----	DDDD	
Internal Relay	M 0-7679	-----	DDDD	
Output Relay	Y 0-1777	-----	OOOO	
Input Relay	X 0-1777	-----	OOOO	
Long Counter Valve (contact)	LCS 0-63	-----	DD	
Long Counter Valve (coil)	LCC 0-63	-----	DD	
16 Bit Index Register	-----	Z 0-19	DD	
Retentive TimerValve	-----	SN 0-15	DD	
Counter Valve	-----	CN 0--255	DDD	
Timer Valve	-----	TN 0-511	DDD	
Specia Link Register	-----	SW 0-1FF	HHH	
Link Register	-----	W 0-1FF	HHH	
File Register	-----	R 0-32767	DDDDD	
Specia Date Register	-----	SD 0-11999	DDDDD	
Date Register		D 0-7999	DDDD	
32 Bit Index Register		LZ 0-1	D	
Long Counter Valve		LCN 0-63	DD	Double

FX5u Series Ethernet

Device	Bit Address	Word Address	Format	Notes
State	S 0-4095	-----	DDDD	

Special Link Relay	SB0-FF	-----	HH	
Link Relay	B0-FF	-----	HH	
Annunciator	F0-127	-----	DDD	
Latch Relay	LO-7679	-----	DDDD	
Special Internal Relay	SM0-9999	-----	DDDD	
Internal Relay	M0-7679	-----	DDDD	
Output Relay	Y 0-1777	-----	OOOO	
Input Relay	X 0-1777	-----	OOOO	
	D_bit 0.0-7999.0	-----	DDDD.H	
File Register	-----	R 0-32767	DDDDD	
Counter Value	-----	CN0-255	DDD	
Retentive Timer Value	-----	SN0-15	DD	
Timer Value	-----	TN0-511	DDD	
Special Link Register	-----	SW0-1FF	HHH	
Link Register	-----	W0-1FFF	HHH	
Special Data Register	-----	SD0-11999	DDDDD	
Data Register	-----	D0-7999	DDDD	

Mitsubishi FX5U-ASCII Ethernet(TCP Slave)

<i>Device</i>	<i>Bit address</i>	<i>Word address</i>	<i>Format</i>	
Accumulated timer (contacts)	<i>SS 0-15</i>	<i>----</i>	<i>DD</i>	
Counter (contacts)	<i>CS 0-255</i>	<i>----</i>	<i>DDD</i>	
Counter (coil)	<i>CC 0-255</i>	<i>----</i>	<i>DDD</i>	
Timer (contacts)	<i>TS 0-511</i>	<i>----</i>	<i>DDD</i>	
Accumulated timer (coil)	<i>SC 0-15</i>	<i>----</i>	<i>DD</i>	
Timer (coil)	<i>TC 0-511</i>	<i>----</i>	<i>DDD</i>	
	<i>D_bit 0-7999.F</i>	<i>----</i>	<i>DDDD.H</i>	
Link to the special relays	<i>SB 0-1FF</i>	<i>----</i>	<i>HHH</i>	
Link relays	<i>B 0-FF</i>	<i>----</i>	<i>HH</i>	
State relay	<i>S 0-4095</i>	<i>----</i>	<i>DDDD</i>	
signal relay	<i>F 0-127</i>	<i>----</i>	<i>DDD</i>	
Lock memory relay	<i>L 0-7679</i>	<i>----</i>	<i>DDDD</i>	
Special relays	<i>SM 0-9999</i>	<i>----</i>	<i>DDDD</i>	
Internal relay	<i>M 0-7679</i>	<i>----</i>	<i>DDDD</i>	
Output relay	<i>Y 0-1777</i>	<i>----</i>	<i>OOOO</i>	
input relay	<i>X 0-1777</i>	<i>----</i>	<i>OOOO</i>	
Index register	<i>----</i>	<i>Z 0-19</i>	<i>DD</i>	
Cumulative register	<i>----</i>	<i>SN 0-15</i>	<i>DD</i>	
data register	<i>----</i>	<i>D 0-7999</i>	<i>DDDD</i>	
timer	<i>----</i>	<i>TN 0-511</i>	<i>DDD</i>	

counter	----	<i>CN 0-255</i>	<i>DDD</i>	
Link to the special registers	----	<i>SW 0-1FF</i>	<i>HHH</i>	
Link register	----	<i>W 0-1FF</i>	<i>HHH</i>	
File register	----	<i>R 0-32767</i>	<i>DDDDD</i>	
Special register	----	<i>SD 0-11999</i>	<i>DDDDD</i>	
Ultra-long variable address register	----	<i>LZ 0-1</i>	<i>D</i>	<i>Double</i>

Q00jCPU

Device	Bit Address	Word Address	Format	Notes
Counter Coil	CC0-1023	-----	DDDD	
Counter Contact	CS0-1023	-----	DDDD	
Timer Coil	TC0-2047	-----	DDDD	
Timer Contact	TS0-2047	-----	DDDD	
Special Link Relay	SB000-7FFF	-----	HHHH	
Link Relay	B0000-7FFF	-----	HHHH	
Step Relay	S0000-1FFF	-----	HHHH	
Edge Relay	V0000-32767	-----	DDDDD	
Annunciator	F0000-32767	-----	DDDDD	
Latch Relay	L0000-32767	-----	DDDDD	
Special Internal Relay	SM0000-2047	-----	DDDD	
Internal Relay	M0000-32767	-----	DDDDD	
Output Relay	Y0000-1FFF	-----	HHHH	
Input Relay	X0000-1FFF	-----	HHHH	
File Register	-----	R000-32767	DDDDD	
Special Link Register	-----	SW0-7FF	HHH	
Link Register	-----	W000-291F	HHHH	
Special Data Register	-----	SD0-2047	DDDD	
Data Register	-----	D0-25983	DDDDD	
Counter Value	-----	CN0-23087	DDDDD	
Retentive Timer Value	-----	SN0-2047	DDDD	
Timer Value	-----	TN0-23087	DDDDD	

Melsec Q

Device	Bit Address	Word Address	Format	Notes
Direct output	DY 0-7FF		HHHH	
Direct input	DX 0-7FF		HHHH	
Step Relay	S 0-2047	-----	DDDD	
Special Link Relay	SB 0-7FFF		HHHH	

Counter Coil	CC 0-511	-----	DDDD	
Counter Contact	CS 0-511	-----	DDDD	
Step Coil	SC 0-511	-----	DDDD	
Step Contact	SS 0-511	-----	DDDD	
Timer Coil	TC 0-511	-----	DDDD	
Timer Contact	TS 0-511	-----	DDDD	
Link Relay	B 0-7FF		HHHH	
Edge Relay	V 0-1023	-----	DDDD	
Annunciator	F 0-1023	-----	DDDD	
Latch Relay	L 0-2047	-----	DDDD	
Internal Relay	M 0-8191	-----	DDDD	
Output Relay	Y 0-7FF	-----	HHHH	
Input Relay	X 0-7FF	-----	HHHH	
File Register	-----	ZR 0-65535	DDDDDD	
File Register	-----	R 0-32767	DDDDDD	
Index Register	-----	Z 0-9	DD	
Counter Value	-----	CN 0-511	DDDD	
Retentive Timer Value		SN 0-511	DDDD	
Timer Value	-----	TN 0-511	DDDD	
Special Link Register	-----	SW 0-3FF	HHH	
Link Register	-----	W 0-1FFF	HHHH	
Special Data Register	-----	SD 0-2047	DDDD	
Data Register	-----	D 0-11135	DDDDDD	

Q Series CPU port

Device	Bit Address	Word Address	Format
Special Link Relay	SB 00000- 7FFF	-----	HHHH
Link Relay	B 00000- 7FFF	-----	HHHH
Step Relay	S 0000-8191	-----	DDDD
Edge relay	V 00000-32767	-----	DDDDDD
Annunciator	F 00000-32767	-----	DDDDDD
Latch relay	L 00000-32767	-----	DDDDDD
Special Internal Relay	SM 0000-2047	-----	DDDD
Internal Relay	M 00000-32767	-----	DDDDDD
Output Relay	Y 0000-1FFF	-----	HHHH
Input Relay	X 0000-1FFF	-----	HHHH
Index Register	-----	Z 00-19	DD
File Register	-----	ZR 0-16777215	DDDDDD

Link Register	-----	W 00000- 291F	HHHH
Timer Value	-----	TN 00000-23087	DDDDD
Counter Value	-----	CN 00000-23087	DDDDD
Retentive Timer Value	-----	SN 00000-23087	DDDDD
File Register	-----	R 00000-65535	DDDDD
Special Link Register	-----	SW 0000- 7FF	HHH
Data Register	-----	D 00000-25983	DDDDD
Special Data Register	-----	SD 0000-2047	DDDD

Q_QnA(link port)

Device	Bit Address	Word Address	Format
Special Link Relay	SB000-7FFF	-----	HHHH
Step Relay	S 000-8191	-----	DDDD
Link Relay	B0000-7FFF	-----	HHHH
Edge Relay	V0000-32767	-----	DDDDD
Annunciator	F0000-32767	-----	DDDDD
Latch Relay	L0000-32767	-----	DDDDD
Special Internal Relay	SM0000-2047	-----	DDDD
Internal Relay	M0000-32767	-----	DDDDD
Output Relay	Y0000-1FFF	-----	HHHH
Input Relay	X0000-1FFF	-----	HHHH
Index Register	-----	Z 0-19	DD
Link Register	-----	W0000-291F	HHHH
Timer Value	-----	TN0-23087	DDDDD
Retentive Timer Value	-----	SN0-23087	DDDDD
Counter Value	-----	CN0-23087	DDDDD
File Register(Block switching is not necessary)	-----	ZR00000-65535	DDDDD
File Register	-----	R00000-32767	DDDDD
Special Link Register	-----	SW000-7FF	HHH
Data Register	-----	D00000-25983	DDDDD
Special Data Register	-----	SD0000-2047	DDDD

Q06

Device	Bit Address	Word Address	Format
Special Link Relay	SB 0000- 7FFF	-----	HHHH
Link Relay	B 0000- 1FFF	-----	HHHH
Edge relay	V 00000-2047	-----	DDDDD
Annunciator	F 00000-2047	-----	DDDDD

Latch relay	L 00000-8191	-----	DDDDD
Special Internal Relay	SM 0000-2047	-----	DDDD
Internal Relay	M 00000-20480	-----	DDDDD
Output Relay	Y 0000-1FFF	-----	HHHH
Input Relay	X 0000-1FFF	-----	HHHH
S	S0-8191	-----	DDDD
Link Register	-----	W 00000- 27FF	HHHH
Timer Value	-----	TN 00000-8191	DDDDD
	-----	SN 0-4095	DDDD
Counter Value	-----	CN 00000-8191	DDDDD
File Register	-----	R 00000-32767	DDDDD
Special Link Register	-----	SW 0000- 7FF	HHH
Data Register	-----	D 00000-15359	DDDDD
Special Data Register	-----	SD 0000-2047	DDDD
	-----	TS 0-4095	DDDD
	-----	TC 0-4095	DDDD
	-----	SS 0-4095	DDDD
	-----	SC 0-4095	DDDD
	-----	CS 0-4095	DDDD
	-----	CC 0-4095	DDDD

Mitsubishi QJ71E71 EtherNet Slave

Device	Bit Address	Word Address	Format
Step Relay	S 000-8191	-----	DDDD
Special Link Relay	SB 000-7FFF	-----	HHHH
Counter Coil	CC 0-23087	-----	DDDDD
Counter Contact	CS 0-23087	-----	DDDDD
Step Coil	SC 0-23087	-----	DDDDD
Step Contact	SS 0-23087	-----	DDDDD
Timer Coil	TC 0-23087	-----	DDDDD
Timer Contact	TS 0-23087	-----	DDDDD
Link Relay	B 0000-7FFF	-----	HHHH
Edge Relay	V 0-32767	-----	DDDDD
Annunciator	F 0-32767	-----	DDDDD
Latch Relay	L 0-32767	-----	DDDDD
Special Internal Relay	SM 0-2047	-----	DDDD
Internal Relay	M 0-32767	-----	DDDD
Output Relay	Y 0-1FFF	-----	HHHH

Input Relay	X 0-1FFF	-----	HHHH
Link Register	-----	W 0-291F	HHHH
Timer Value	-----	TN 0-23087	DDDD
Counter Value	-----	CN 0-23087	DDDDD
Retentive Timer Value		SN 0-23087	DDDDD
File Register	-----	R 0-32767	DDDDD
File Register(Block switching is not necessary)	-----	ZR 0-1042431	DDDDDDD
Special Link Register	-----	SW 0-7FF	HHH
Data Register	-----	D 0-25983	DDDDD
Special Data Register	-----	SD 0-2047	DDDD

Mitsubishi QnA 3EBin Ethernet(TCP Slave)

Device	Bit Address	Word Address	Format	Notes
Direct output	DY 0-1FFF		HHHH	
Direct input	DX 0-1FFF		HHHH	
Step Relay	S 0-8191	-----	DDDD	
Special Link Relay	SB 0-7FF	SB 0-1FFF	HHHH	
Counter Coil	CC 0-1023	-----	DDDD	
Counter Contact	CS 0-1023	-----	DDDD	
Step Coil	SC 0-2047	-----	DDDD	
Step Contact	SS 0-2047	-----	DDDD	
Timer Coil	TC 0-2047	-----	DDDD	
Timer Contact	TS 0-2047	-----	DDDD	
Link Relay	B 0-1FFF	B 0-1FFF	HHHH	
Edge Relay	V 0-2047	-----	DDDD	
Annunciator	F 0-2047	-----	DDDD	
Latch Relay	L 0-8191	-----	DDDD	
Special Internal Relay	SM 0-2047	-----	DDDD	
Internal Relay	M 0-8191	-----	DDDD	
Output Relay	Y 0-1FFF	Y 0-1FFF	HHHH	
Input Relay	X 0-1FFF	X 0-1FFF	HHHH	
File Register	-----	ZR 0-16777215	DDDDDD	
File Register	-----	R 0-32767	DDDDD	
Index Register	-----	Z 0-19	DD	
Counter Value	-----	CN 0-1023	DDDD	
Retentive Timer Value		SN 0-2047	DDDD	
Timer Value	-----	TN 0-2047	DDDD	
Special Link Register	-----	SW 0-7FF	HHH	

Link Register		W 0-1FFF	HHHH	
Special Data Register	-----	SD 0-2047	DDDD	
Data Register	-----	D 0-45055	DDDDD	


Q03UDE

Device	Bit Address	Word Address	Format	Notes
Direct output	DY 0-1FFF		HHHH	
Direct input	DX 0-1FFF		HHHH	
Step Relay	S 0-8191	-----	DDDD	
Special Link Relay	SB 0-7FF	SB 0-7F0	HHHH	
Counter Coil	CC 0-1023	-----	DDDD	
Counter Contact	CS 0-1023	-----	DDDD	
Step Coil	SC 0-2047	-----	DDDD	
Step Contact	SS 0-2047	-----	DDDD	
Timer Coil	TC 0-2047	-----	DDDD	
Timer Contact	TS 0-2047	-----	DDDD	
Link Relay	B 0-1FFF	B 0-1FF0	HHHH	
Edge Relay	V 0-2047	-----	DDDD	
Annunciator	F 0-2047	-----	DDDD	
Latch Relay	L 0-8191	-----	DDDD	
Special Internal Relay	SM 0-2047	-----	DDDD	
Internal Relay	M 0-8191	-----	DDDD	
Output Relay	Y 0-1FFF	Y 0-1FF0	HHHH	
Input Relay	X 0-1FFF	X 0-1FF0	HHHH	
File Register	-----	ZR 0-32767	DDDDDD	
File Register	-----	R 0-32767	DDDDDD	
Index Register	-----	Z 0-19	DD	
Counter Value	-----	CN 0-1023	DDDD	
Retentive Timer Value	-----	SN 0-2047	DDDD	
Timer Value	-----	TN 0-2047	DDDD	
Special Link Register	-----	SW 0-7FF	HHH	
Link Register	-----	W 0-1FFF	HHHH	
Special Data Register	-----	SD 0-2047	DDDD	
Data Register	-----	D 0-12287	DDDDD	


© Cable Diagram**FX Series RS232 Cable****1. CPU port communication**

Please use the FX series SC - 09 serial programming cable communication, can also be made simple

programming cable

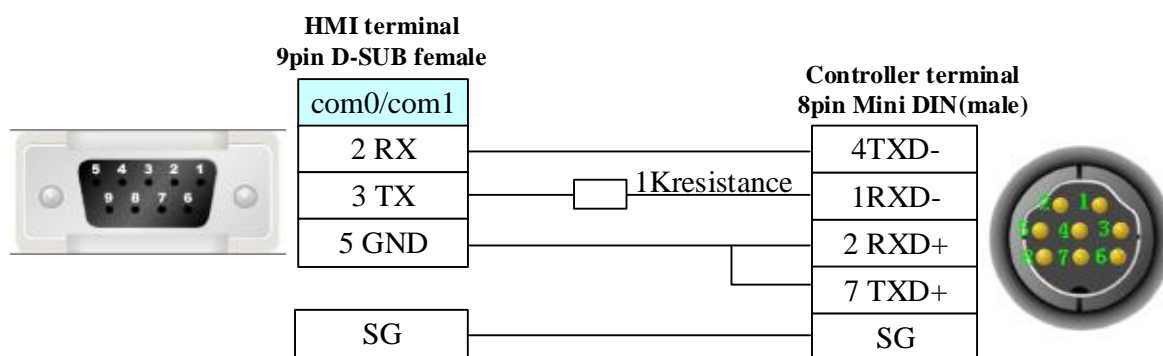


2. FX□□-232-BD/ADP communication

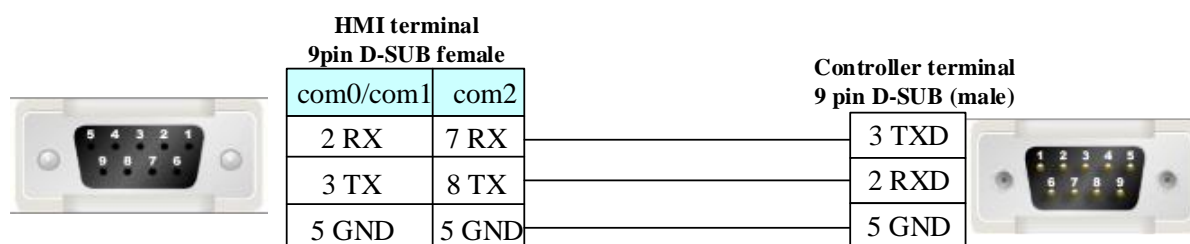


FX Series RS422 Cable

1. CPU port / FX□□-422-BD communication

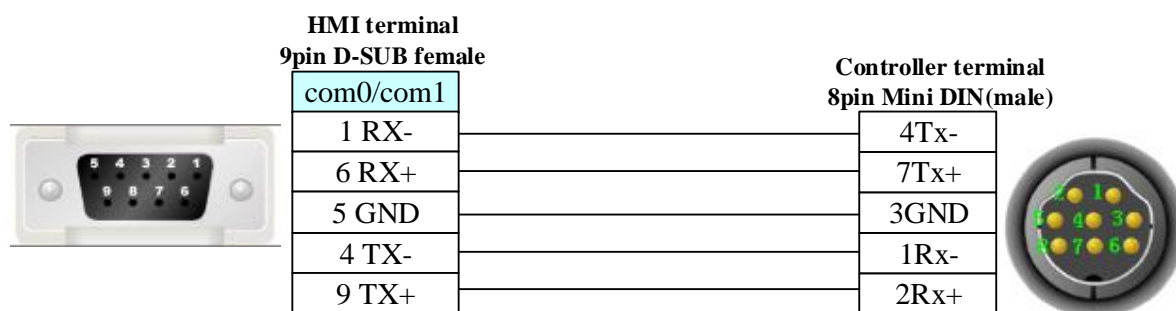


2. FX□□-485-BD communication

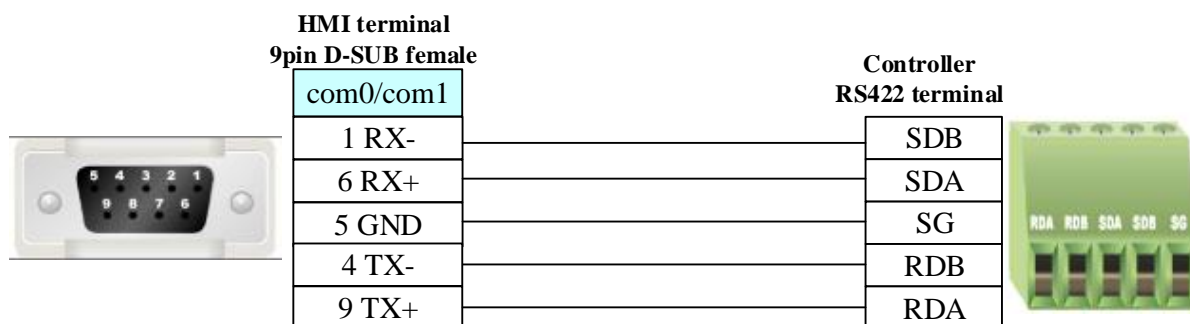


Q Series RS232 Cable

1. CPU port communication

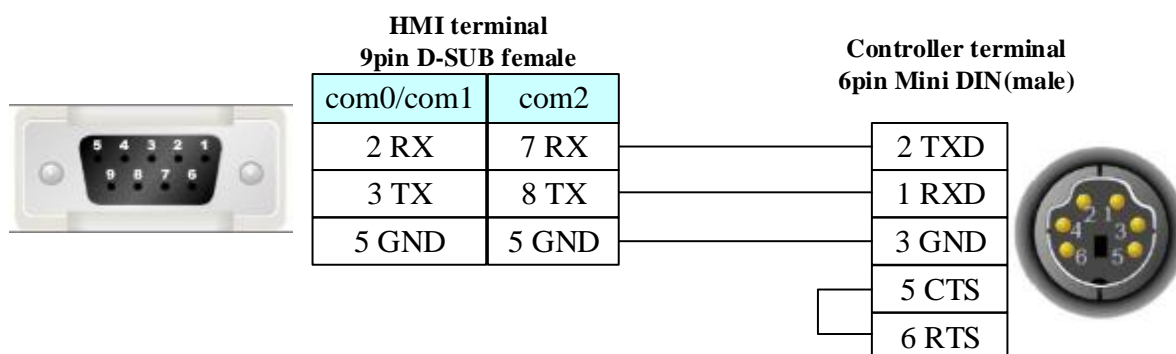


2. C24 module communication

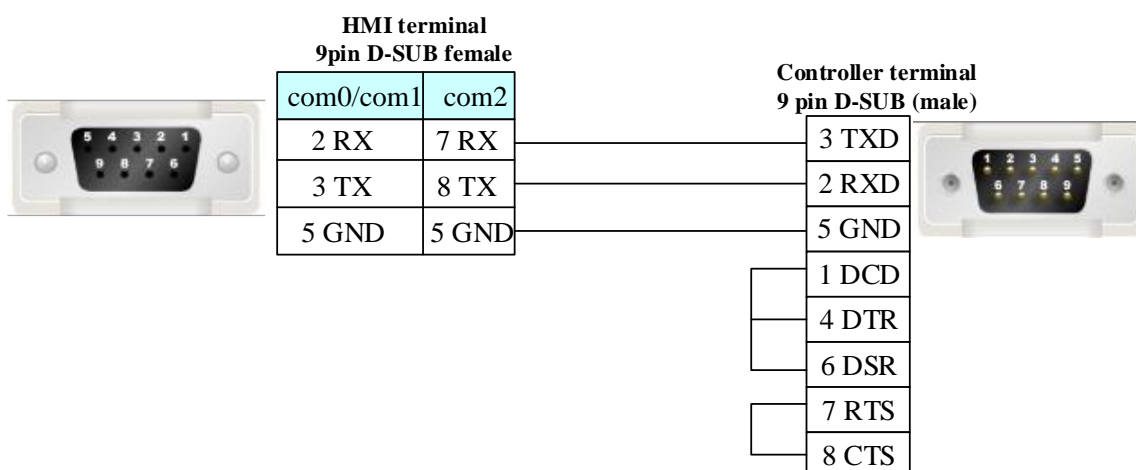

Q Series RS485/422 Cable

C24 module communication

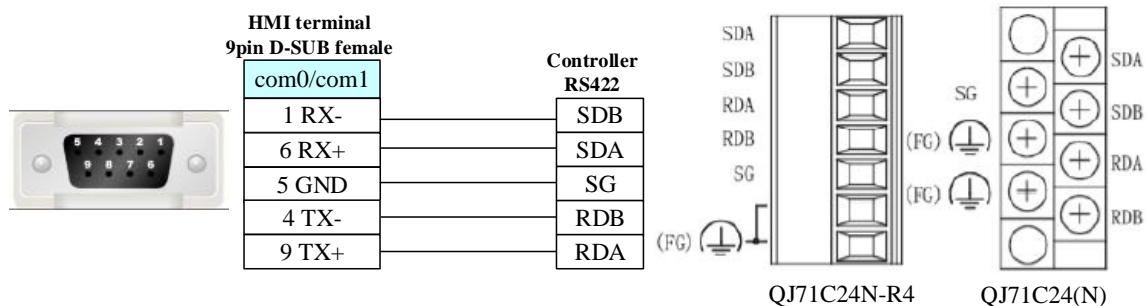

Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.62 Modbus

© Serial Communication

Series	CPU	Link Module	SIO type	Driver
Modbus RTU Extend		RS232/485 on the CPU unit		Modbus RTU Extend

Modbus RTU Extend (Zero-based Addressing)		RS232/485 on the CPU unit		Modbus RTU Extend (Zero-based Addressing)
Modbus RTU Slave		RS232/485 on the CPU unit		Modbus RTU Slave
Modbus RTU(Unsupport 06 function)		RS232/485 on the CPU unit		Modbus RTU(Unsupport 06 function)
Modbus ASCII		RS232/485 on the CPU unit		Modbus ASCII
Modbus TCP			Ethernet	Modbus TCP
Modbus TCP Slave			Ethernet	Modbus TCP Slave
Modbus UDP			Ethernet	Modbus UDP
Modbus UDP Slave			Ethernet	Modbus UDP Slave
Modbus Over TCP			Ethernet	Modbus Over TCP
Modbus TCP Slave(Zero-based Addressing)			Ethernet	Modbus TCP Slave(Zero-based Addressing)
Modbus RTU Slave Extend		RS232/485 on the CPU unit		Modbus RTU Slave Extend

© System configuration


Series	CPU	Link Module	COMM Type	Parameter	Cable
Modbus RTU Extend		RS232/485 on the CPU unit	RS232/RS485	Setting	Your owner cable
Modbus RTU Extend (Zero-based Addressing)		RS232 on the CPU unit	RS232/485	Setting	Your owner cable
Modbus RTU Slave		RS232/485 on the CPU unit	RS232/RS485	Setting	Your owner cable
Modbus RTU(Unsupport 06 function)		RS232/485 on the CPU unit	RS232/RS485	Setting	Your owner cable
Modbus ASCII		RS232/485 on the CPU unit	RS232/RS485	Setting	Your owner cable
Modbus RTU Slave Extend		RS232 on the CPU unit	RS232/485	Setting	Your owner cable
Modbus TCP			Ethernet	Connection Configuration	
Modbus TCP Slave			Ethernet		
Modbus UDP			Ethernet		
Modbus UDP Slave			Ethernet		
Modbus UDP Slave			Ethernet	Connection Configuration	
Modbus TCP Slave(Zero-based Addressing)			Ethernet	Connection Configuration	

© Communication Setting

Modbus RTU Extend protocol

RS232 communication


Default communication parameters: 9600, 8, even, 1; station: 1

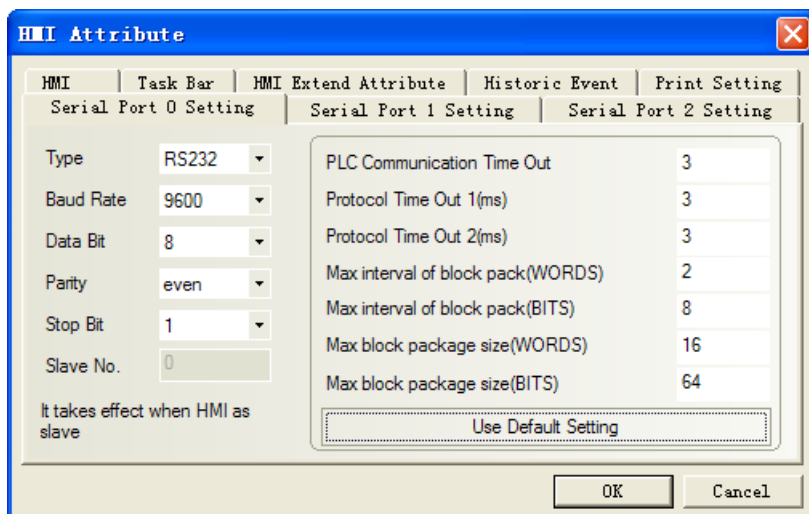

Modbus RTU Extend(Zero-based Addressing) protocol

RS232 communication

Default communication parameters: 9600, 8, even, 1; station: 1

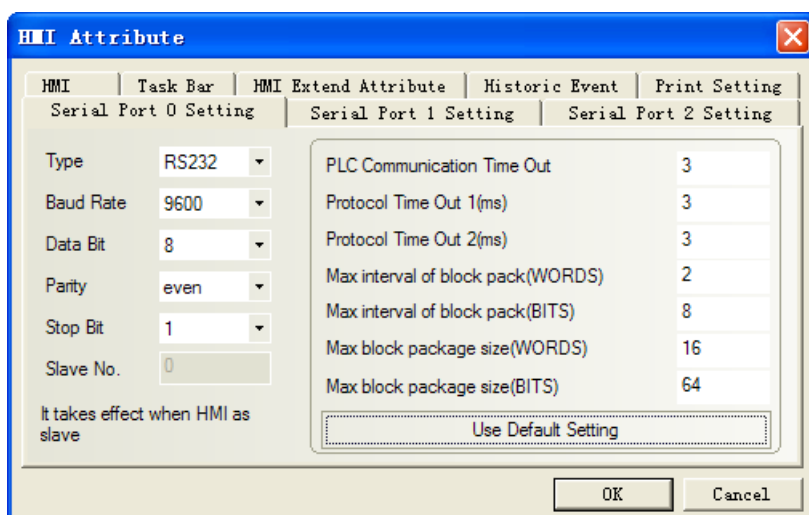


Note: The Modbus RTU Extend broadcast mode does not support direct online emulation.

Modbus RTU Slave/Modbus RTU Slave Extend protocol

RS232 communication


Default communication parameters: 9600, 8, even, 1; station: 1

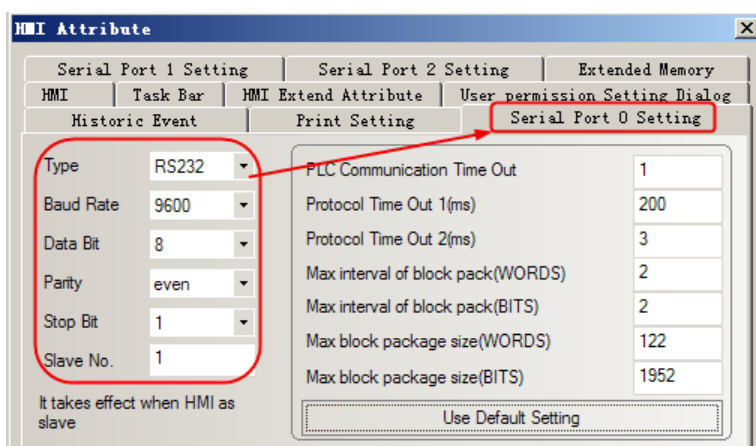

Modbus RTU(Unsupport 06 function)

RS232 communication


Default communication parameters: 9600, 8, even, 1; station: 1




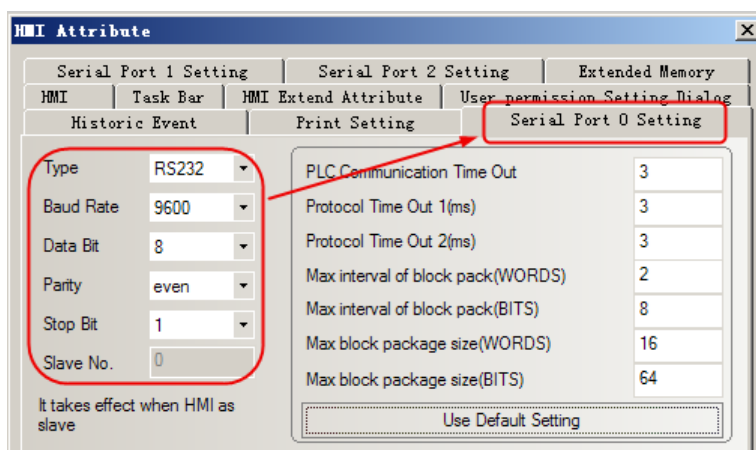


Modbus ASCII protocol


RS232 communication

Default communication parameters: 9600, 8, even, 1; station: 1

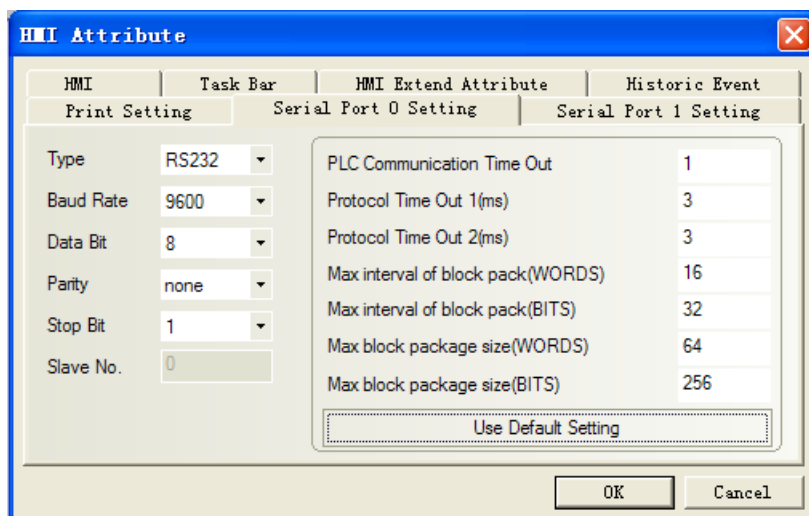

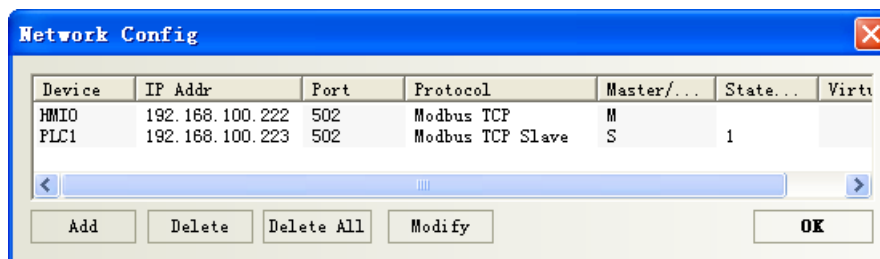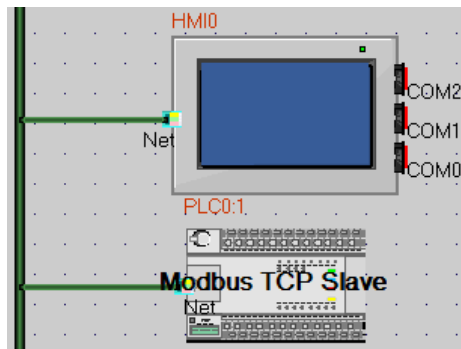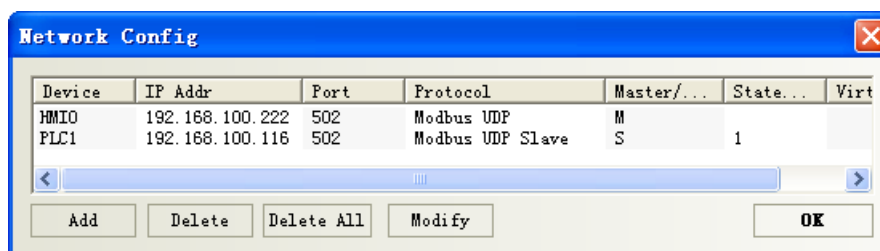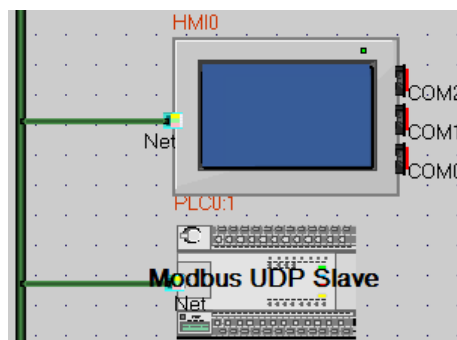Modbus TCP protocol**Network configuration****Modbus UDP protocol****Network configuration****Modbus Over TCP protocol****Network configuration**


The port number needs to be filled in according to the port number of the PLC controller device

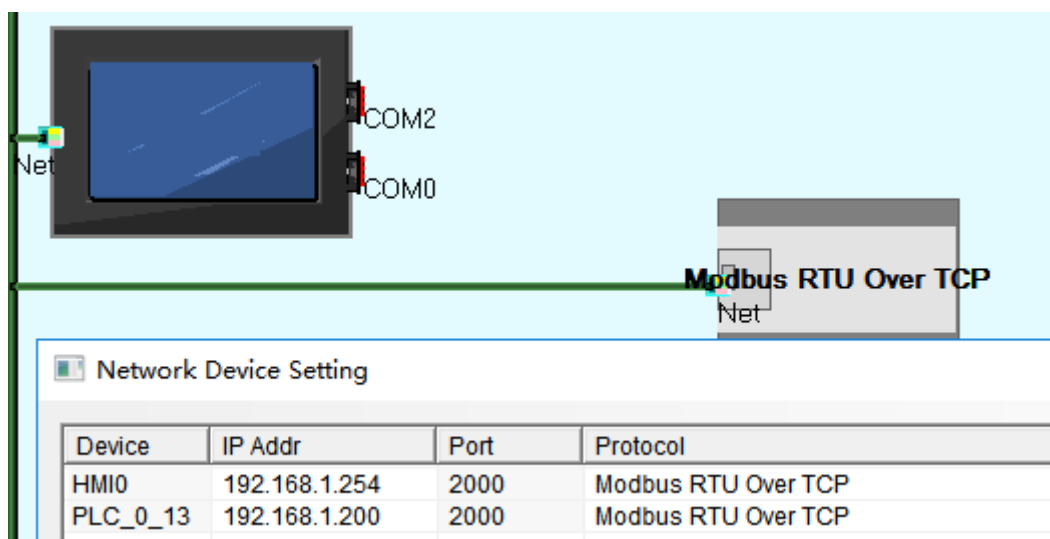

Note: If the register address of the controller does not support batch reading and writing, you need to use 6X registers for communication. If the communication is overtime, it may be caused by the incompatible timeout time of some devices. You can change the communication timeout time to 3.

Modbus TCP Slave (Zero-based Addressing) protocol

HMI setting

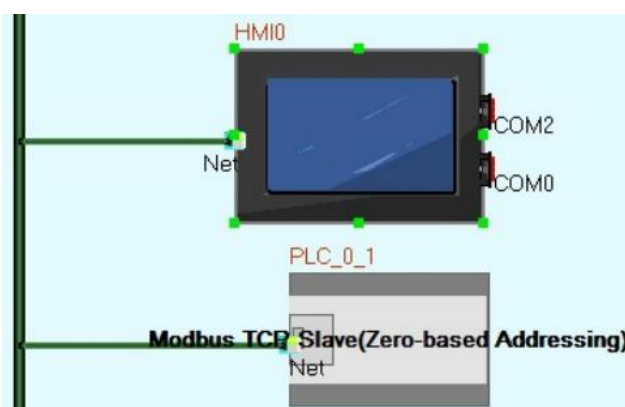

PLC configuration

Please refer to the communication instructions for parameter parameters.

©Supported Device




Modbus RTU Extend

Device	Bit Address	Word Address	Format	Notes
Output Relay	0X1-65535	-----	DDDDD	
Input Relay	1X1-65535	-----	DDDDD	read only
Input Relay	3X_bit 1.00-65535.15	-----	DDDDD	read only
Output Relay	4X_bit 1.00-65535.15	-----	DDDDD	

4X Single Write Relay	6X_bit 1.00-65535.15	-----	DDDDD.DD	
Input Register	-----	3X1-65535	DDDDD	read only
Output Register	-----	4X1-65535	DDDDD	
Data Register	-----	5X1-65535	DDDDD	
4X single word write	-----	6X1-65535	DDDDD	
4X double word swap		4X-DINV 1-65535	DDDDD	
3X double word swap		3X-DINV 1-65535	DDDDD	

NOTE:

1. 5X is the byte register; 4X-DINV, 3X-DINV is the word high and low-bit register. The relation of them as follow:

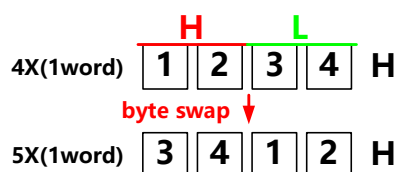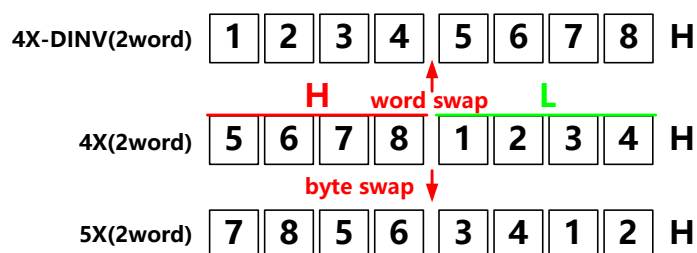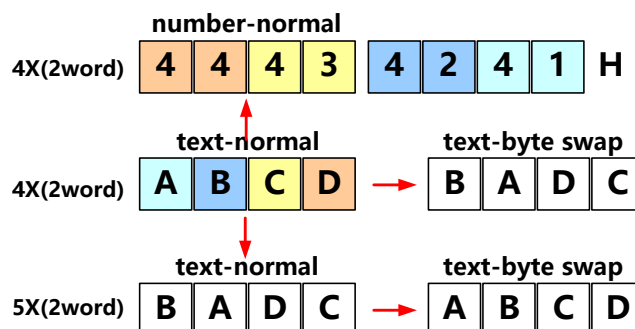Word:**Dword:****Text:**

3. Not use the odd and even address in the same window by 4X-DINV, only odd address or even address in the same window.




Modbus RTU Extend(Zero-based Addressing)

Device	Bit Address	Word Address	Format	Notes
Output Relay	0X0-65535	-----	DDDDD	
Input Relay	1X0-65535	-----	DDDDD	read only
Input Relay	3X_bit 0.00-65535.15	-----	DDDDD	read only
Output Relay	4X_bit 0.00-65535.15	-----	DDDDD	

4X Single Write Relay	6X_bit 0.00-65535.15	-----	DDDDD.DD	
Input Register	-----	3X0-65535	DDDDD	read only
Output Register	-----	4X0-65535	DDDDD	
Data Register	-----	5X0-65535	DDDDD	
4X single word write	-----	6X0-65535	DDDDD	
4X double word swap		4X-DINV 0-65535	DDDDD	
3X double word swap		3X-DINV 0-65535	DDDDD	

NOTE:

1. 5X is the byte register; 4X-DINV, 3X-DINV is the word high and low-bit register. The relation of them as follow:

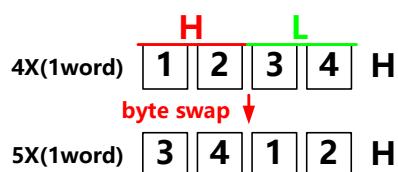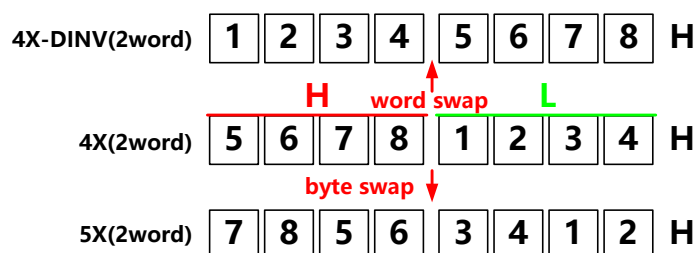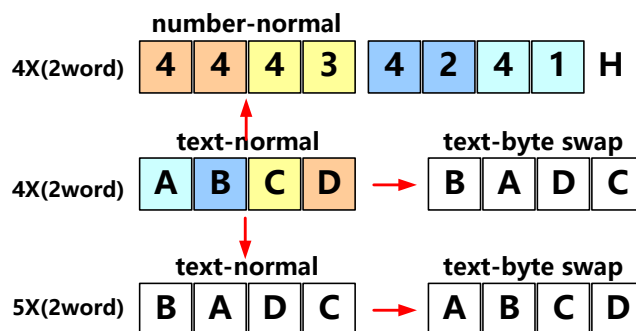Word:**Dword:****Text:**

2. Not use the odd and even address in the same window by 4X-DINV, only odd address or even address in the same window.

Modbus RTU Slave

Device	Bit Address	Word Address	Format	Notes
Output Relay	LB 0-9999	-----	DDDDD	Mapping to 0X 1~9999
Data Register	-----	LW 0-65535	DDDDD	Mapping to 4X 1~9999

Modbus RTU MT500 compatible

Device	Bit Address	Word Address	Format	Notes
Output Relay	0X 1-65535	-----	DDDDD	

Input Relay	1X 1-65535	-----	DDDDDD	read only
Input Relay	3X_bit 1.00-65535.15	-----	DDDDDD.DD	read only
Output Relay	4X_bit 1.00-65535.15	-----	DDDDDD.DD	
Input Register	-----	3X 1-65535	DDDDDD	read only
Output Register	-----	4X 1-65535	DDDDDD	

Modbus ASCII

Device	Bit Address	Word Address	Format	Notes
Output Relay	0X1-65535	-----	DDDDDD	
Input Relay (read only)	1X1-65535	-----	DDDDDD	
Input Relay	3X_bit 1.00-65535.15	-----	DDDDDD.DD	read only
Output Relay	4X_bit 1.00-65535.15	-----	DDDDDD.DD	
Input Register (read only)	-----	3X1-65535	DDDDDD	
Output Register	-----	4X1-65535	DDDDDD	

Modbus TCP Slave

Device	Bit Address	Word Address	Format	Notes
Output Relay	0X 1-65535	-----	DDDDDD	
Input Relay	1X 1-65535	-----	DDDDDD	read only
Input Relay	3X_bit 1.00-65535.15	-----	DDDDDD.DD	read only
Data relay	4X_bit 1.00-65535.15	-----	DDDDDD.DD	
4X Single Write Relay	6X_bit 1.00-65535.15	-----	DDDDDD.DD	
Input Register	-----	3X 1-65535	DDDDDD	read only
Output Register	-----	4X 1-65535	DDDDDD	
4X single word write	-----	6X1-65535	DDDDDD	
Data Register	-----	4X-DINV 1-65535	DDDDDD	
Data Register	-----	3X-DINV 1-65535	DDDDDD	

NOTE: 4X-DINV, 3X-DINV is the word high and low-bit counter.

Modbus TCP Slave(Zero-based Addressing)

Device	Bit Address	Word Address	Format	Notes
Output Relay	0X 0-65535	-----	DDDDDD	
Input Relay	1X 0-65535	-----	DDDDDD	read only
Input Relay	3X_bit 0.00-65535.15	-----	DDDDDD.DD	read only
Data relay	4X_bit 0.00-65535.15	-----	DDDDDD.DD	
Data Relay	5X_bit 1.00-65535.15	--	DDDDDD	--
4X Single Write Relay	6X_bit 0.00-65535.15	-----	DDDDDD.DD	
Input Register	-----	3X 0-65535	DDDDDD	read only
Output Register	-----	4X 0-65535	DDDDDD	
Data Register	--	5X 1-65535	DDDDDD	--
4X single word write	-----	6X 0-65535	DDDDDD	
Data Register	-----	4X-DINV 0-65535	DDDDDD	
Data Register	-----	3X-DINV 0-65535	DDDDDD	

NOTE: 4X-DINV, 3X-DINV is the word high and low-bit counter.

Modbus UDP Slave

Device	Bit Address	Word Address	Format	Notes
Output Relay	0X1-65535	-----	DDDDD	
Input Relay	1X1-65535	-----	DDDDD	read only
Input Relay	3X_bit 1.00-65535.15	-----	DDDDD.DD	read only
Data relay	4X_bit 1.00-65535.15	-----	DDDDD.DD	
4X Single Write Relay	6X_bit 1.00-65535.15	-----	DDDDD.DD	
Input Register	-----	3X1-65535	DDDDD	read only
Output Register	-----	4X1-65535	DDDDD	
Data Register	-----	5X1-65535		
4X single word write	-----	6X1-65535	DDDDD	
Data Register	-----	4X-DINV 1-65535	DDDDD	
Data Register	-----	3X-DINV 1-65535	DDDDD	


Modbus RTU Slave Extend

Device	Bit Address	Word Address	Format	Notes
System internal/external output node	LB 5000-8999	-----	DDDDD	Mapping to 0X 0~3999
Data register	-----	LW 5000-8999	DDDDD	Mapping to 4X 0~3999
System internal/external input node	LB 0-4999	-----	DDDDD	Mapping to 1X 0~4999
Analog input data register	-----	LW 0-4999	DDDDD	Mapping to 3X 0~4999


NOTE:1X、3X Read only

© Cable Diagram

RS232 communication cable

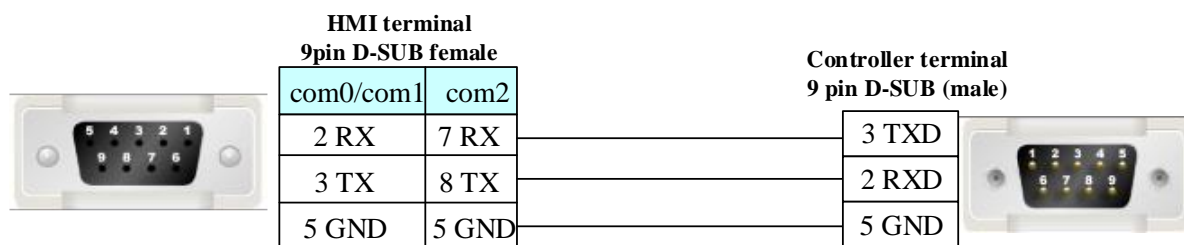

RS485 communication cable

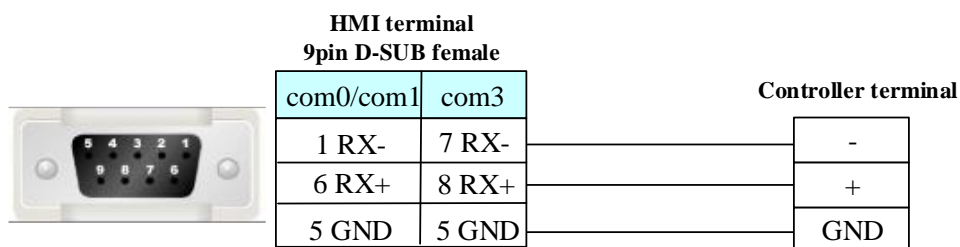

Ethernet communication cable

Cross-connection or crossover network cable can be used as communication cable via the hub
Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.63 MODROL

Serial Communication

Series	CPU	Link Module	Driver
MODROL	IMS-GF3-4011E	RS485 on the CPU unit	MODROL


System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
MODROL	IMS-GF3-4011E	RS485 on the CPU unit	RS485	Setting	Your owner cable

Communication Setting

HMI Setting

Default communication: 9600, 8, none, 1; station: 1

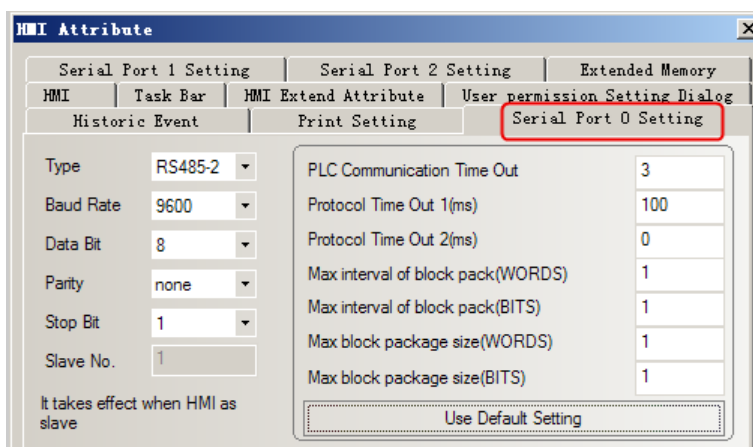


Supported Device

Device	Bit Address	Word Address	Format	Notes
	-----	D_1 0-9999	DDDD	One byte
	-----	D_2 0-9999	DDDD	Two byte

	-----	D_3 0-9999	DDDD	Three byte
--	-------	------------	------	------------

Cable Diagram

MODROL RS485

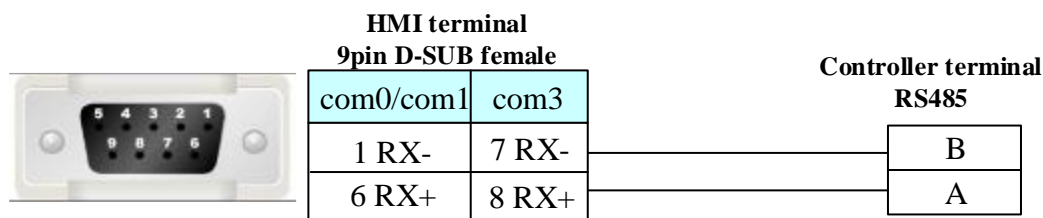

4.64 MoringStar CX-KZX81

◎ Serial Communication

Series	CPU	Link Module	Driver
MoringStar CX-KZX81		RS485 on the CPU port	MoringStar CX-KZX81

◎ Serial System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
MoringStar CX-KZX81		RS485 on the CPU port	RS485	Setting	Your owner cable

◎ Serial Communication Setting

HMI setting

HMI default communication parameters: 2400bps, 8, even check, 1; PLC station no. : 255

RS485 communication

HMI Attribute

User Permissions Setting	Historical Events Storage
HMI Task Bar HMI License Setting HMI Extended Attributes HMI System Inf	
Internet Time Synchronization/summer time	COM0 Setting COM2

Type: **RS485** ☐ Use Serial Parameters

Baud Rate: 2400

Data Bit: 8

Parity Check: even

Stop Bit: 1

☐ Broadcast 65535

Advanced Settings


◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
Slave_no	Slave_no 0-0	-----	D	

Switch_State.bit	-----	Switch_State.bit 0-15	DD	
------------------	-------	-----------------------	----	--

◎ Cable Diagram

RS485 communication cable

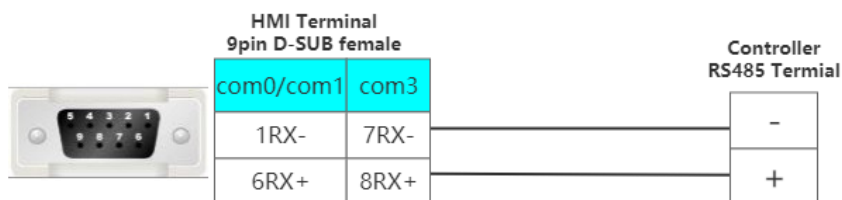

4.65 Motrona controller

◎ Serial Communication

Series	CPU	Link Module	Driver
BY125	BY125	RS232 on the CPU unit	motrona MC700
CT150	CT150	RS232 on the CPU unit	motrona CT-150


◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
BY125	BY125	RS232 on the CPU unit	RS232	Setting	Your owner cable
CT150	CT150	RS232 on the CPU unit	RS232	Setting	Your owner cable

◎ Communication Setting


Use motrona MC700 protocol

Default communication: 9600, 7, even, 1; station: 11

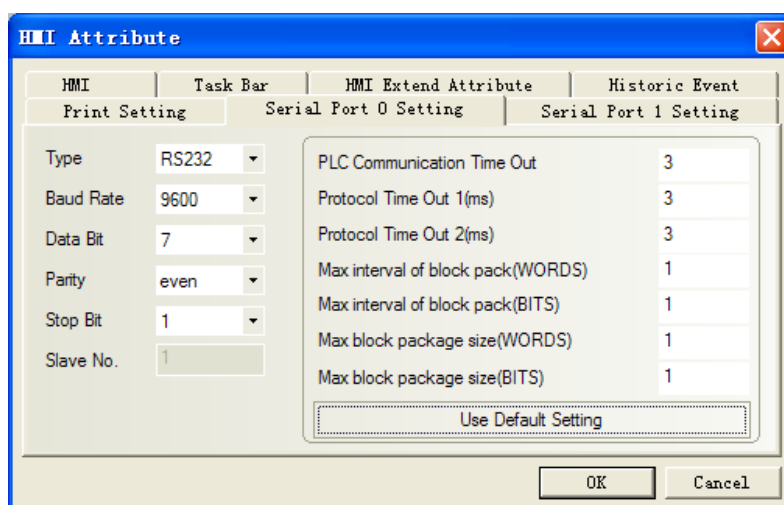

Use motrona CT-150 protocol

Default communication: 9600, 7, even, 1; station: 11

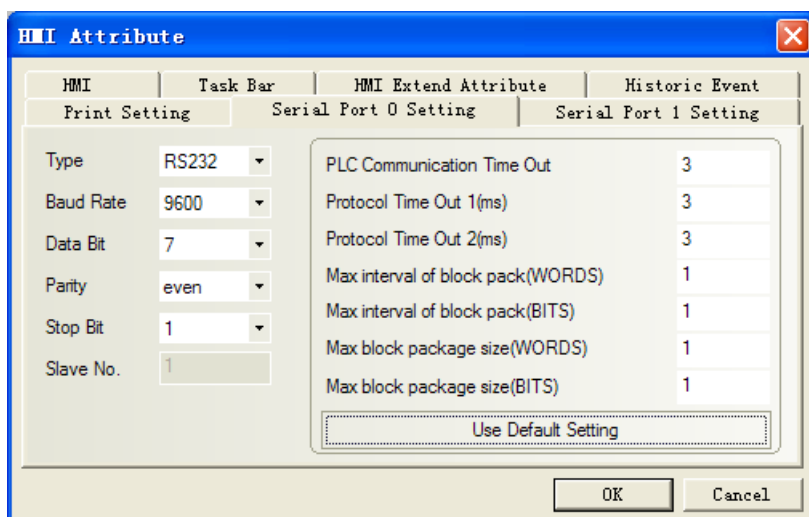

© Supported Device

motrona MC700 protocol

Device	Bit Address	Word Address	Format	Notes
Relay	CB 00-270F	-----	HHHH	
ERCD	ERCD 0.00-9896.7F	-----	HHHH.HH	
Register	-----	CD00-FF	HH	
External Register	-----	ERCD 0000.00-9896.7F	HHHH.HH	
Internal data processing control address bit	-----	M1 0~270F	HHHH	Read only
Internal data processing control address bit	-----	M2 0~270F	HHHH	Read only
Internal data processing control address bit	-----	M3 0~270F	HHHH	Read only

NOTE:

- 1) ERCD is Extended register, the four position before radix point are C1,C2,C3,C4.The two positions after radix point are S1, S2.
- 2) Parameter code corresponding with CD are C1,C2;
- 3) Parameter code corresponding with CB set to "1";Eg:"Bit State Setting" part, addr type CB67, set the state to "1".
- 4) M1 correspond to parameter ":"; M2 correspond to parameter";"; M3 correspond to parameter"<";


motrona CT-150 protocol

Device	Bit Address	Word Address	Format	Notes
Relay		Cn_32Bit 0-99	DD	
Relay		Bn_32Bit 0-9	D	
Relay		An_32Bit 0-8	D	
Relay		ACT_CUT_ERR_L 0	D	
Relay		ACT_CUT_ERR_M 0	D	

Relay		ACT_CUT_LEN 0	D	
Relay		LINE_SPD 0	D	
Relay		WASTE_CNT 0	D	
Relay		BAT_CNT 0	D	
Relay		PRTMARK_ERR 0	D	
Relay		LV_VAL 0	D	
Relay		ERR_CNT 0	D	
Relay		Cn 0-99	DD	
Relay		Bn 0-9	D	
Relay		An 0-8	D	

◎ Cable Diagram

MKS controller RS232 communication cable

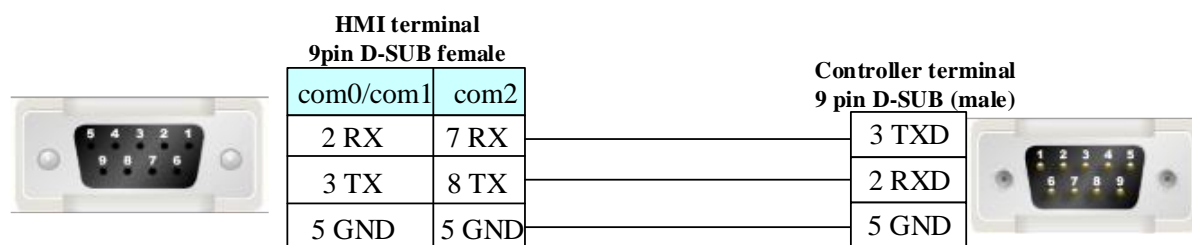

4.66 MyAntenna

◎ Serial Communication

Series	CPU	Link Module	Driver
MyAntenna	MyAntenna L2S	RS485 on the CPU unit	MyAntenna L2/L2S


◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
MyAntenna	MyAntenna L2S	RS485 on the CPU unit	RS485	Setting	Your owner cable

◎ Communication Setting

HMI Setting

Default communication: 9600bps, 8, None, 1; station: 0

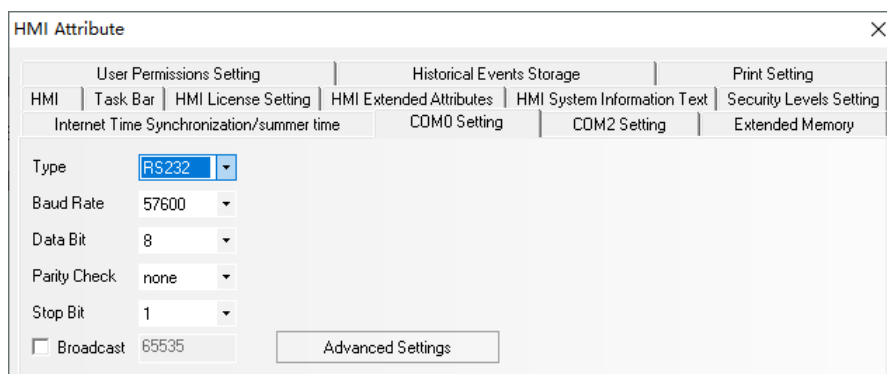


◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
Laser_Switch_Off	Laser_Switch_Off 0	-----	D	
Laser_Switch_On	Laser_Switch_On 0	-----	D	
Range	-----	Range 0	D	
Distance	-----	Distance 0	D	
Offset	-----	Offset 0	D	

◎ Cable Diagram

RS485

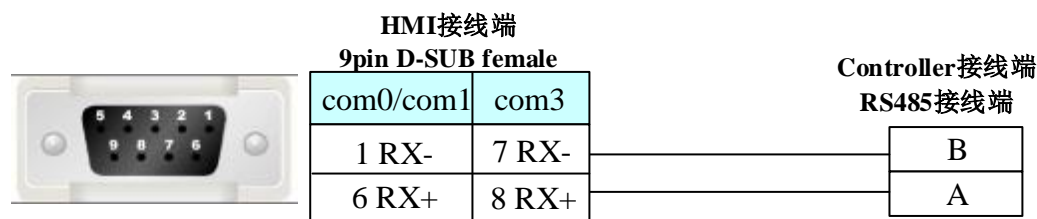

4.67 OE MAX

◎ Serial Communication


Series	CPU	Link Module	Driver
NX7	NX7	RS232 on the CPU unit	OE MAX NX7

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
NX7	NX7	RS232 on the CPU unit	RS232	Setting_	Your owner cable

◎ Communication Setting

Default communication: 19200, 8, none, 1; station: 1

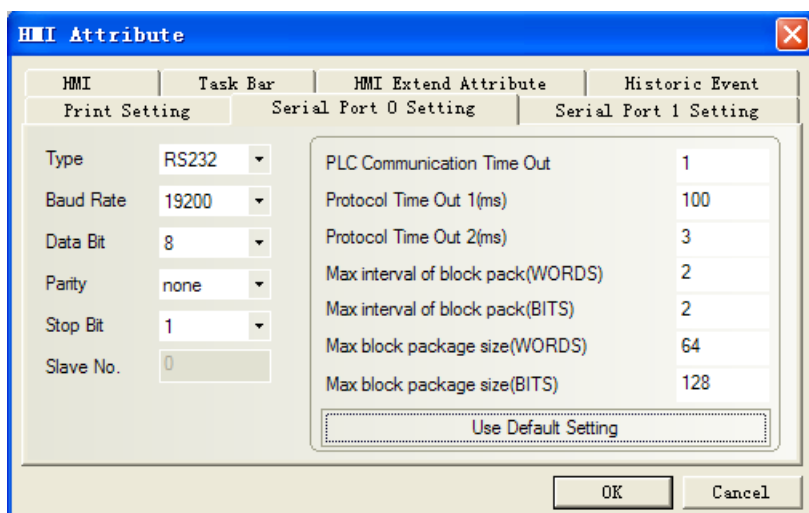


© Supported Device

Device	Bit Address	Word Address	Format	Notes
Input/Output Relay	R 0.0–127.15	-----	DDD.DD	
General Relay	L 0.0–63.15	-----	DD.DD	
General Relay	M 0.0–127.15	-----	DDD.DD	
Keep Relay	K 0.0–127.15	-----	DDD.DD	
Timer Relay	TC 0–255	-----	DDD	
Special Relay	F 0.0–15.15	-----	DD.DD	
Internal HSC	-----	R_word 0-127	DDD	
General Register	-----	L_word 0-63	DD	
General Register	-----	M_word 0-127	DDD	
Keep Register	-----	K_word 0-127	DDD	
General Register	-----	F_word 0-15	DD	
Timer/Counter Register	-----	SV_word 0-255	DDD	
Timer/Counter Register	-----	PV_word 0-255	DDD	
General Register	-----	W_word 0-2047	DDDD	
Special Register	-----	SR_word 0-511	DDD	

© Cable Diagram

Oemax RS232 communication cable

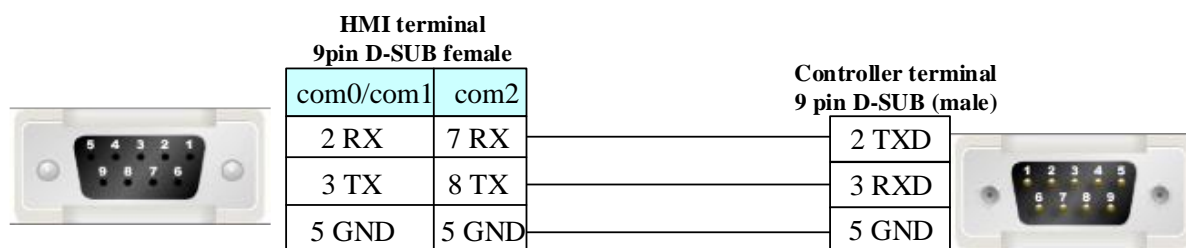

4.68 Omron Corporation

◎ Serial Communication

Series	CPU	Link Module	Driver
SYSMAC C	CP1H	RS232 on the CPU unit	OMRON C Series Host Link OMRON CP Series Host Link
	CP1L	CP1W-CIF01	
	CP1E	CP1W-CIF11/CIF12	
	C200H	C200H-LK202 C120-LK201-V1	OMRON C Series Host Link
	C200HS	C200H-LK201 C200H-LK202 C120-LK201-V1	
		Link I/F on the CPU unit	
		Peripheral port on the CPU unit	
		C500 C500F C1000H C2000 C2000H	
	C1000HF	C500-LK201-V1 C500-LK203	
	C20H/28H/40H	Link I/F on the CPU unit	
	C20PF/28PF C40PF/60PF	C120-LK201-V1 C120-LK202-V1	
	C120 C120F	C120-LK201-V1 C120-LK202-V1	
	CQM1-CPU11	Peripheral port on the CPU unit	
	CQM1-CPU21	RS232C port on the CPU unit	
	CQM1-CPU41 CQM1-CPU42 CQM1-CPU43 CQM1-CPU44 CQM1-CPU41-V1 CQM1-CPU42-V1 CQM1-CPU43-V1 CQM1-CPU44-V1	Peripheral port on the CPU unit	
	CPM2C	Peripheral port on the CPU unit	
		Peripheral port on the CPM2C-CIF01	
		RS232C port on the CPM2C-CIF01	
		RS232C port on the CPM2C-CIF11	
		Terminal block on	

		the CPM2C-CIF11	
	CQM1H-CPU11	Peripheral port on the CPU unit	
	CQM1H-CPU21	RS232 on the CPU unit	
	CQM1H-CPU51	Peripheral port on the CPU unit	
	CQM1H-CPU61	RS232 on the CPU unit	
		RS232C port on the CQM1H-SCB41	
		RS422A/485 port on the CQM1H-SCB41	
		CPM1 CPM1A CPM1A-V1 CPM2AH	
SYSMAC CJ2	CJ2M-CPU13	RS232 on the CPU unit	OMRON CJ/CS Series Host Link
SYSMAC CJ	CJ1G-CPU45	RS232 on the CPU unit	
	CJ1G-CPU44		
	CJ1G-CPU45H		
	CJ1G-CPU44H	Peripheral port on the CPU unit	
	CJ1G-CPU43H		
	CJ1G-CPU42H		
	CJ1M-CPU23		
	CJ1M-CPU22	CJ1W-SCU41	
CJ1M-CPU21			
CJ1M-CPU13			
CJ1M-CPU12			
CJ1M-CPU11			
CJ1H-CPU66H			
CJ1H-CPU65H			
SYSMAC CS	CS1G-CPU45 CS1G-CPU44 CS1G-CPU43 CS1G-CPU42 CS1G-CPU45H CS1G-CPU44H CS1G-CPU43H CS1G-CPU42H	RS232 on the CPU unit	OMRON CJ/CS Series Host Link

	CS1G-CPU45-V1 CS1G-CPU44-V1 CS1G-CPU43-V1 CS1G-CPU42-V1 CS1H-CPU67 CS1H-CPU66 CS1H-CPU65 CS1H-CPU64 CS1H-CPU63 CS1H-CPU67H CS1H-CPU66H CS1H-CPU65H CS1H-CPU64H CS1H-CPU63H CS1H-CPU67-V1 CS1H-CPU66-V1 CS1H-CPU65-V1 CS1H-CPU64-V1 CS1H-CPU63-V1	Peripheral port on the CPU unit	
		CS1W-SCU21 CS1W-SCB21 CS1W-SCB41	

◎ Network Communication

Series	CPU	Link Module	Driver
SYSMAC CJ/CS	CJ2M-CPU35	EtherNet/IP port on CPU Unit	OMRON CJ Series Ethernet(TCP Slave)
		CJ1W-ETN21	
	CJ2M-CPU3* CS1H CS1G	EtherNet/IP port on CPU Unit	Omron CJ/CS/NJ/NX Series Ethernet (UDP Slave)
		CS1W-ETN21/EIP21	
		CJ1W-ETN21/EIP21	
		CJ2H-***-EIP	
SYSMAC NJ	NJ*01	EtherNet/IP port on CPU Unit	
SYSMAC CP1	CP1L-EM	EtherNet/IP port on CPU Unit	OMRON CP Series Ethernet (UDP Slave)
	CP1L-EL		
	CP1H CP1L	CP1W-CIF41	
SYSMAC CP2	CP2E	EtherNet/IP port on CPU Unit	
NJ/NX	NJ501	port1 EtherNet/IP	OMRON NJ_NX Series EtherNet_IP(Free tag Names)

◎ Serial System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
SYSMAC C	CP1H CP1L CP1E	RS232 on the CPU unit	RS232	Setting	Your owner cable
		CP1W-CIF01			
		CP1W-CIF11/CIF12	RS422	Setting	Your owner cable

	CPM2AH	RS232 on the CPU unit	RS232	Setting	Your owner cable
				Setting	
SYSMAC CJ2	CJ2M-CPU13	RS232 on the CPU unit	RS232	Setting	Your owner cable
SYSMAC CJ	CJ1G-CPU45 CJ1G-CPU44 CJ1G-CPU45H CJ1G-CPU44H CJ1G-CPU43H CJ1G-CPU42H	RS232 on the CPU unit	RS232	Setting	Your owner cable
	CJ1M-CPU23 CJ1M-CPU22 CJ1M-CPU21 CJ1M-CPU13 CJ1M-CPU12 CJ1M-CPU11	Peripheral port on the CPU unit*1	RS232	Setting	Your owner cable
	CJ1H-CPU66H CJ1H-CPU65H	CJ1W-SCU41	RS232	Setting	Your owner cable
			RS422	Setting	Your owner cable
SYSMAC CS	CS1G-CPU45 CS1G-CPU44 CS1G-CPU43 CS1G-CPU42 CS1G-CPU45H CS1G-CPU44H CS1G-CPU43H CS1G-CPU42H CS1G-CPU45-V1 CS1G-CPU44-V1 CS1G-CPU43-V1 CS1G-CPU42-V1 CS1H-CPU67 CS1H-CPU66 CS1H-CPU65 CS1H-CPU64 CS1H-CPU63 CS1H-CPU67H CS1H-CPU66H CS1H-CPU65H CS1H-CPU64H CS1H-CPU63H CS1H-CPU67-V1 CS1H-CPU66-V1	RS232 on the CPU unit	RS232	Setting	Your owner cable
		Peripheral port on the CPU unit*1	RS232	Setting	Your owner cable
		CS1W-SCU21	RS232	Setting	Your owner cable
		CS1W-SCB21	RS232	Setting	
			RS232	Setting	
		CS1W-SCB41	RS422	Setting	Your owner cable

	CS1H-CPU65-V1 CS1H-CPU64-V1 CS1H-CPU63-V1				
--	-------------------------------------------------	--	--	--	--

*1 Must set the switch DIP 4 to be on

◎ Network System configuration

Series	CPU	Link Module	Connect Type	Parameter	Cable
SYSMAC CJ/CS	CJ2M-CPU35	EtherNet/IP port on CPU Unit	Ethernet(TCP Slave)	Setting	Your own cable
		CJ1W-ETN21			
	CJ2M-CPU3* CS1H CS1G	EtherNet/IP port on CPU Unit	Ethernet (UDP Slave)	Setting	Your own cable
		CS1W-ETN21/EIP21			
		CJ1W-ETN21/EIP21			
		CJ2H-***-EIP			
SYSMAC NJ	NJ*01	EtherNet/IP port on CPU Unit			
SYSMAC CP1	CP1L-EM	EtherNet/IP port on CPU Unit	Ethernet (UDP Slave)	Setting	Your own cable
	CP1L-EL				
	CP1H CP1L	EtherNet/IP port on CPU Unit			
		CP1W-CIF41			
SYSMAC CP2	CP2E	EtherNet/IP port on CPU Unit	Ethernet (UDP Slave)	Setting	Your own cable
NJ/NX	NJ501	PORT1 EtherNet/IP	Ethernet	Setting	Your own cable


◎ Serial Communication Setting

OMRON CP Series Host Link protocol


HMI Setting

Default communication: 9600, 7, even, 2; station: 0

RS232 communication

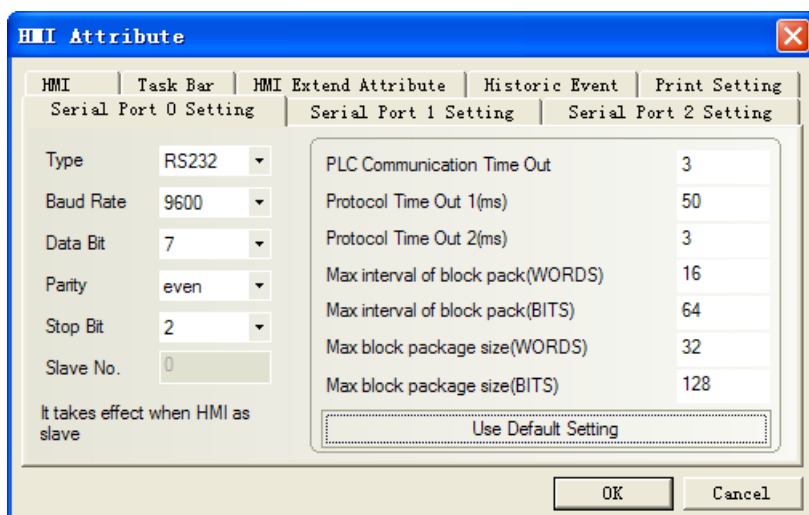

RS422 communication

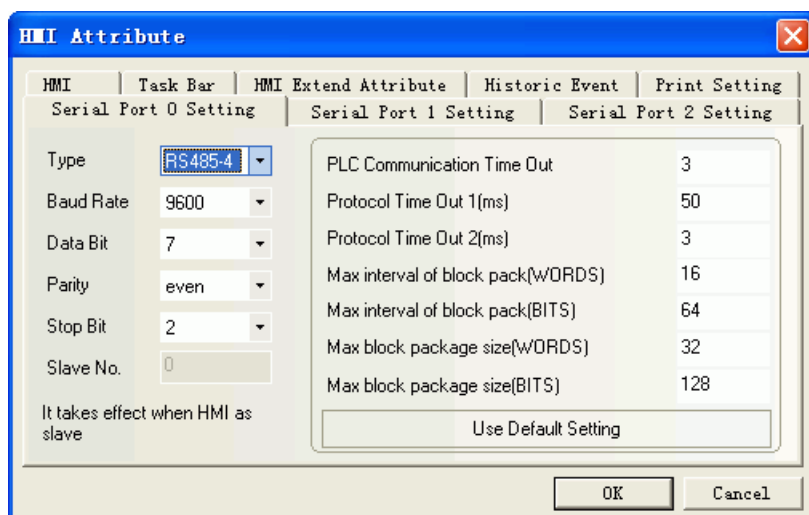


NOTE: Make sure that the switch DIP1~6 of PLC must be OFF when using OMRON CP Series Host Link protocol.

NO.	Setup contents	default status
1	ON: write enable OFF: write disable	OFF
2	ON: program automatically transmit from card to PLC when power up OFF: program can't automatically transmit from card to PLC when power up	OFF
3	OFF: OFF(default)	OFF
4	ON: communication port1, Toolbus(default) OFF: Port 1 communications settings according to the PLC system CPU setting	OFF
5	ON: communication port2, Toolbus(default) OFF: Port 2 communications settings according to the PLC system CPU setting	OFF
6	ON: customer use (A395.12 = ON) OFF: customer use (A395.12 = OFF)	OFF

OMRON C Series Host Link protocol

Default communication: 19200, 7, even, 2; station: 0

RS232 communication

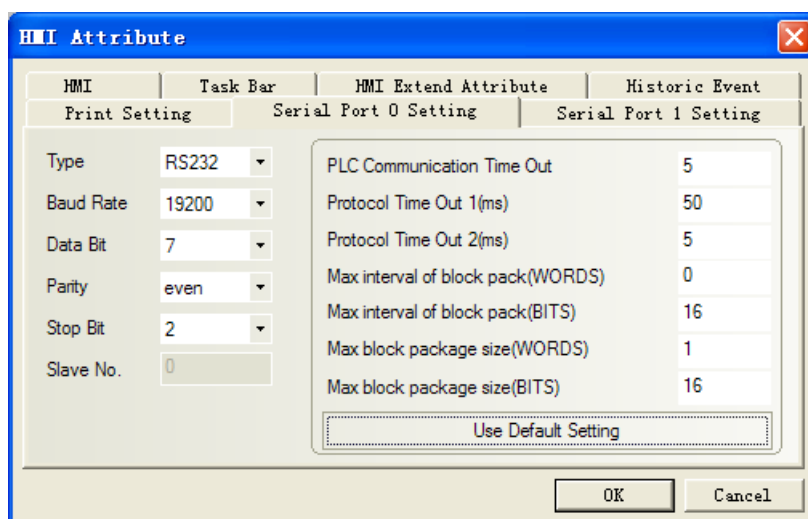


The HMI Attribute dialog box is shown with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to RS232. The 'Baud Rate' is 19200, 'Data Bit' is 7, 'Parity' is even, 'Stop Bit' is 2, and 'Slave No.' is 0. The communication parameters for the PLC are as follows:

Parameter	Value
PLC Communication Time Out	5
Protocol Time Out 1(ms)	50
Protocol Time Out 2(ms)	5
Max interval of block pack(WORDS)	0
Max interval of block pack(BITS)	16
Max block package size(WORDS)	1
Max block package size(BITS)	16

Buttons: OK, Cancel

RS422 communication

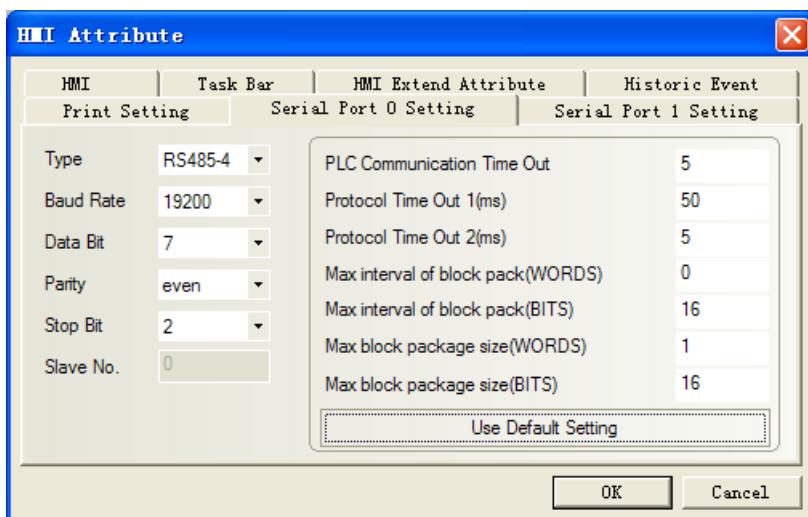


The HMI Attribute dialog box is shown with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to RS485-4. The 'Baud Rate' is 19200, 'Data Bit' is 7, 'Parity' is even, 'Stop Bit' is 2, and 'Slave No.' is 0. The communication parameters for the PLC are as follows:

Parameter	Value
PLC Communication Time Out	5
Protocol Time Out 1(ms)	50
Protocol Time Out 2(ms)	5
Max interval of block pack(WORDS)	0
Max interval of block pack(BITS)	16
Max block package size(WORDS)	1
Max block package size(BITS)	16

Buttons: OK, Cancel

OMRON CPM Series Host Link protocol

Default communication: 9600, 7, even, 2; station: 0

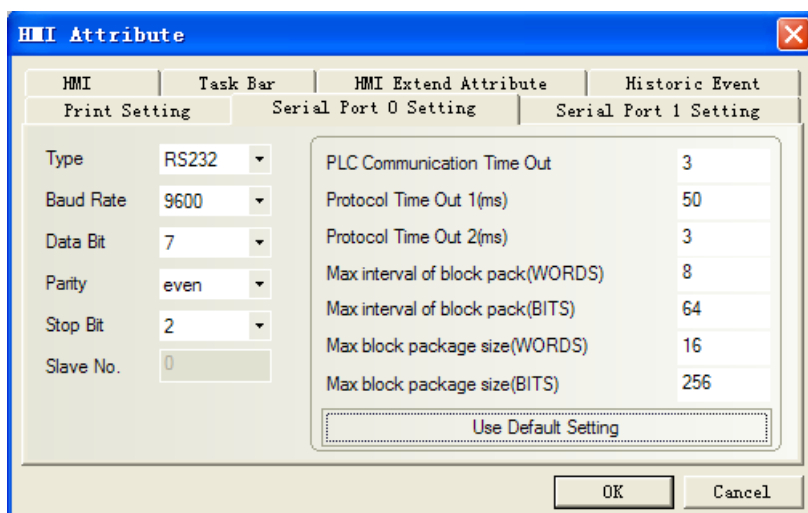

The HMI Attribute dialog box is shown with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to RS232. The 'Baud Rate' is 9600, 'Data Bit' is 7, 'Parity' is even, 'Stop Bit' is 2, and 'Slave No.' is 0. The communication parameters for the PLC are as follows:

Parameter	Value
PLC Communication Time Out	3
Protocol Time Out 1(ms)	50
Protocol Time Out 2(ms)	3
Max interval of block pack(WORDS)	8
Max interval of block pack(BITS)	64
Max block package size(WORDS)	16
Max block package size(BITS)	256

Buttons: OK, Cancel

NOTE: Select custom communication parameters (non-standard communication parameters), the switch of PLC must be OFF.

OMRON CJ/CS Series Host Link protocol

RS232 Default communication: 9600, 7, even, 2; station: 0

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS232'. The 'Baud Rate' is '9600', 'Data Bit' is '7', 'Parity' is 'even', 'Stop Bit' is '2', and 'Slave No.' is '0'. On the right, communication parameters are listed: 'PLC Communication Time Out' (1), 'Protocol Time Out 1(ms)' (1), 'Protocol Time Out 2(ms)' (1), 'Max interval of block pack(WORDS)' (0), 'Max interval of block pack(BITS)' (16), 'Max block package size(WORDS)' (1), and 'Max block package size(BITS)' (16). A 'Use Default Setting' button is at the bottom of the parameter list. 'OK' and 'Cancel' buttons are at the bottom right.

NOTE: 1. CJ1M switch DIP: SW1, SW2, SW3, SW5, SW8 must be off, but SW4, SW6, SW7 are optional.
2. CJ1M switches DIP 1~8 are OFF (default).



RS422 Default communication: 9600, 7, even, 2; station: 0

The screenshot shows the 'HMI Attribute' dialog box with the 'COM1 Setting' tab selected. The 'Type' is set to 'RS485-4'. The 'Baud Rate' is '9600', 'Data Bit' is '7', 'Parity Check' is 'even', 'Stop Bit' is '2', and the 'Broadcast' checkbox is unchecked with the value '65535'. On the right, communication parameters are listed: 'PLC Communication Time Out' (1), 'Protocol Time Out 1(ms)' (1), 'Protocol Time Out 2(ms)' (1), 'Max interval of word block pack' (0), 'Max interval of bit block pack' (16), 'Max word block package size' (1), and 'Max bit block package size' (16). A 'Use Default Setting' button is at the bottom of the parameter list. 'OK' and 'Cancel' buttons are at the bottom right.

© Network Communication Setting


OMRON CJ Series Ethernet(TCP Slave)

HMI Setting

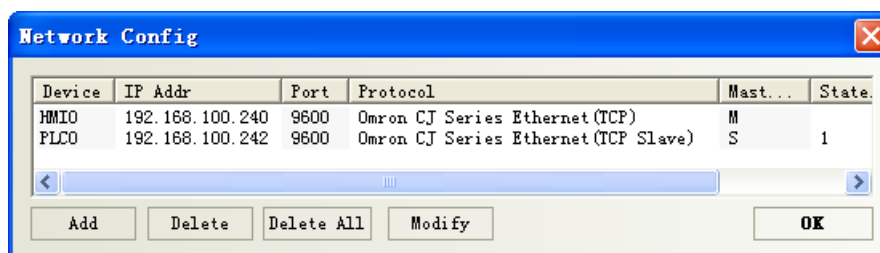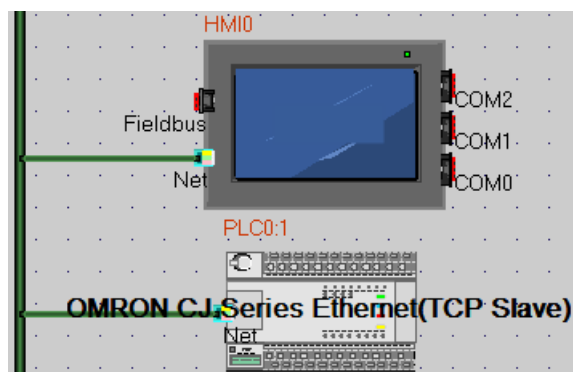


PLC Setting

1. Double-click the IO table and the unit set, find the Ethernet communication module

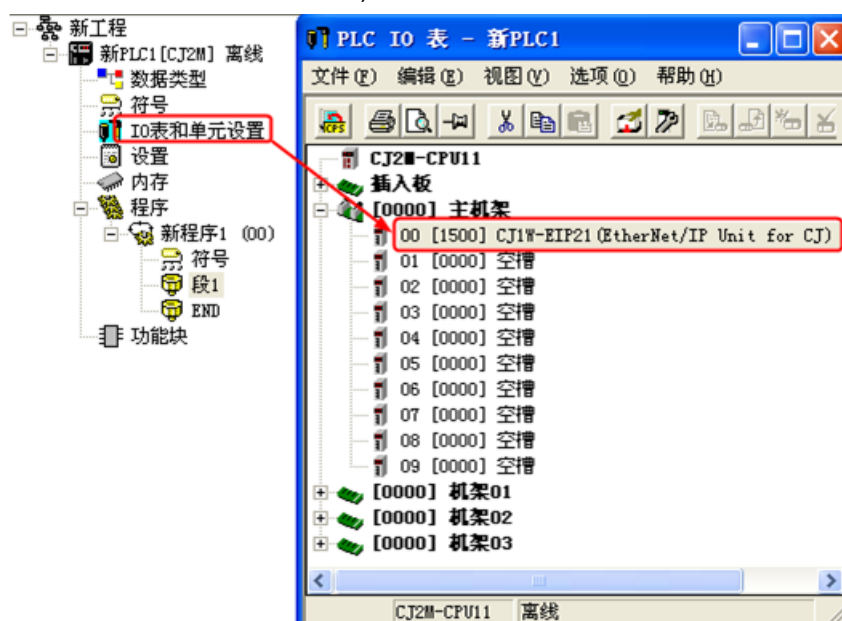


2. Double-click the Ethernet communication module, set the parameters

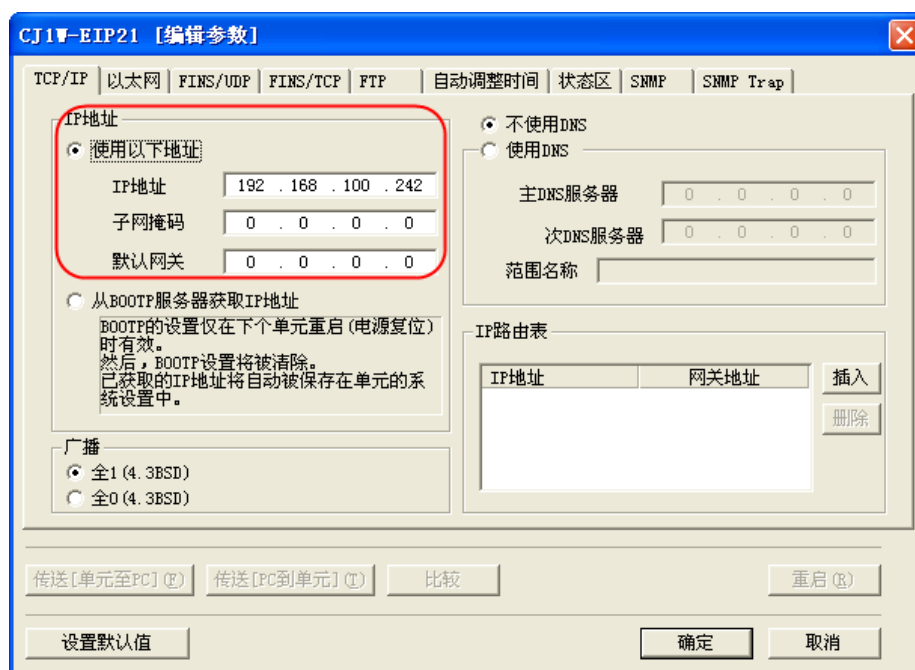


OMRON CJ/CS/NJ/NX Series Ethernet(UDP Slave)

HMI Setting

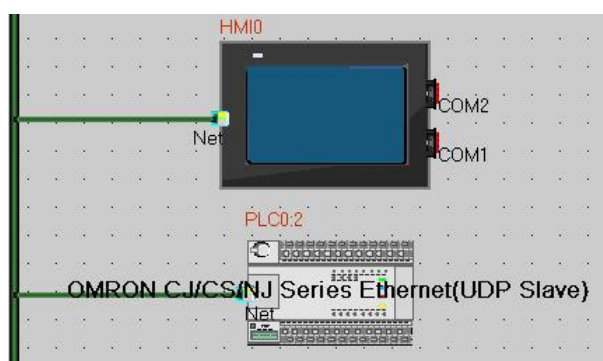


Attention: HMI and PLC must be set in the same network, while the node ID should be different.

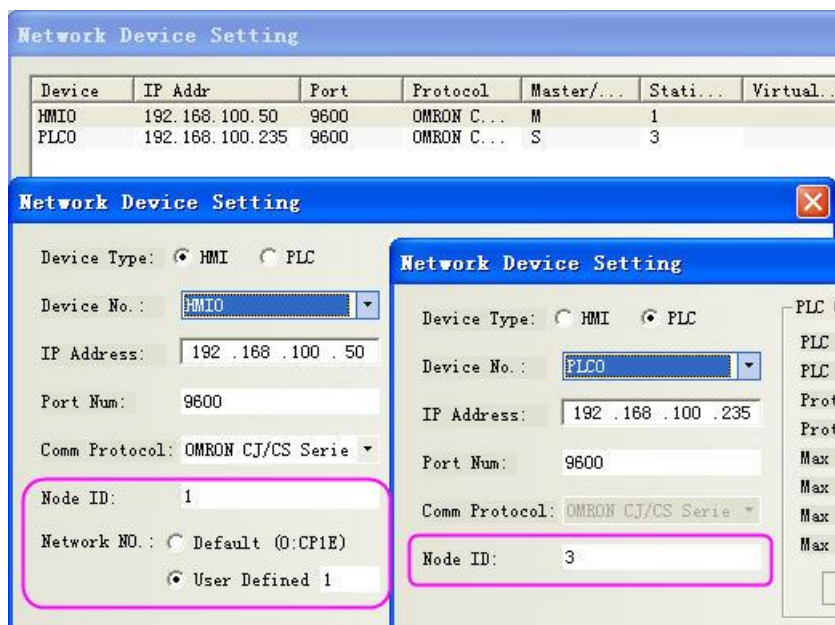

PLC Setting

Please use CX-Integrator to modify

1. Choose the right type to get the PLC and its software connected
2. Set the PLC into programming mode
3. Read the data and show the connected device

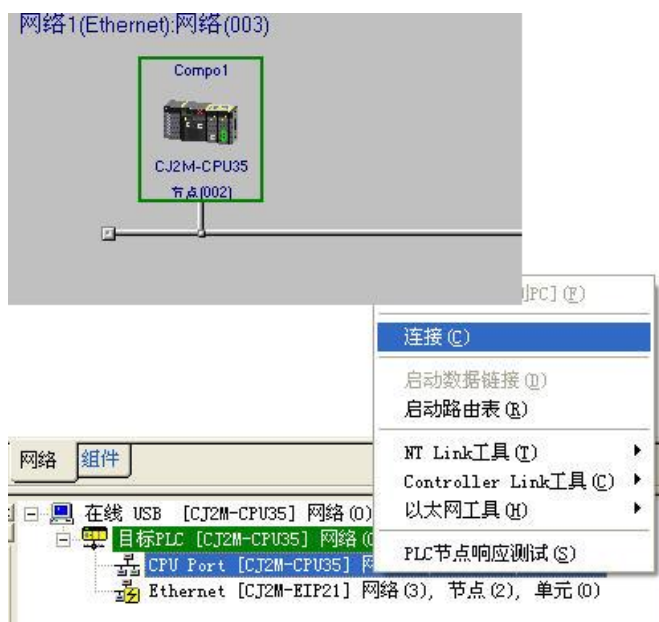


4. Double click the device to modify the related parameter, for example IP Address




5. Set the Network number and Node ID

(1) Network number

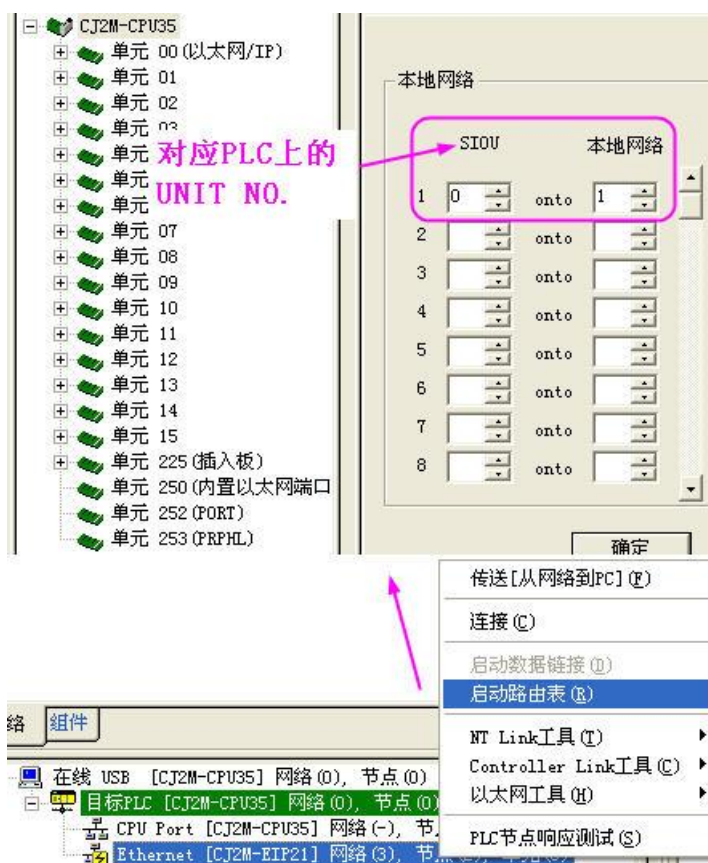

(2) You can change the Node ID by the switch on the device (NODE No.)



Notice: NX1P2 needs to set "sysmac studio", to check the register used, as shown in the figure below

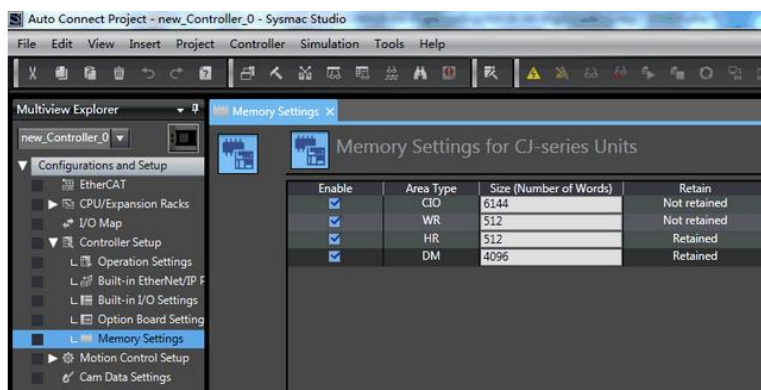

OMRON CP Series Ethernet(UDP Slave)


CP1 Series:

HMI Setting

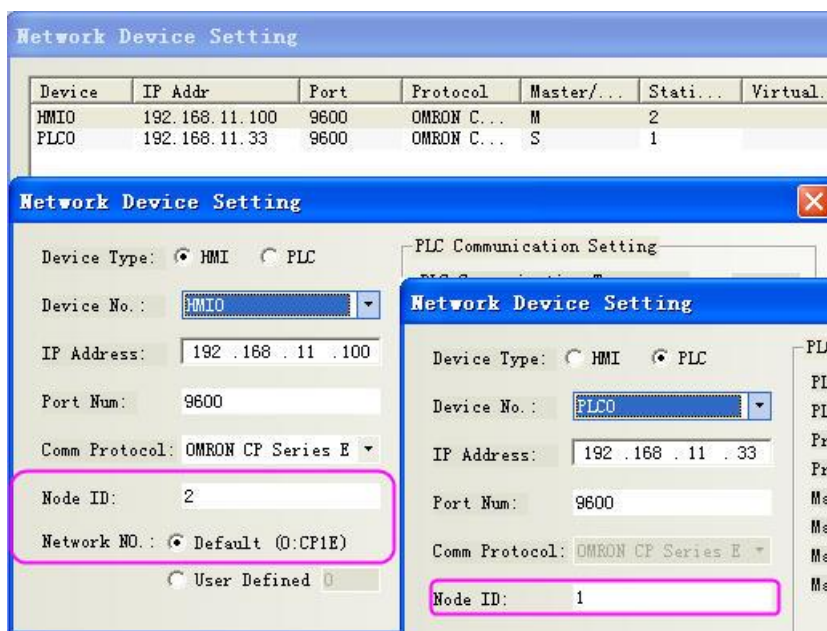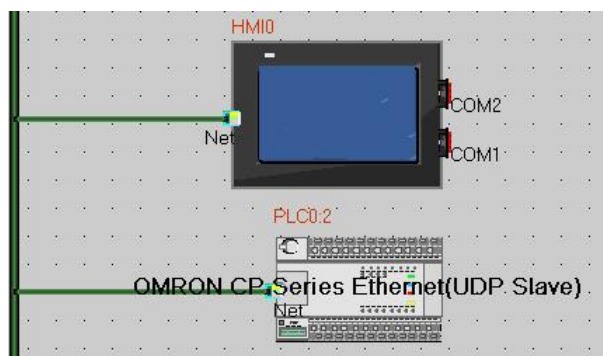


PLC Setting

Type in IE the IP address (ex: <http://192.168.11.33/C00.HTM>) and the password (ex:ETHERNET), then you entry this interface.Later,you can modify the parameter.

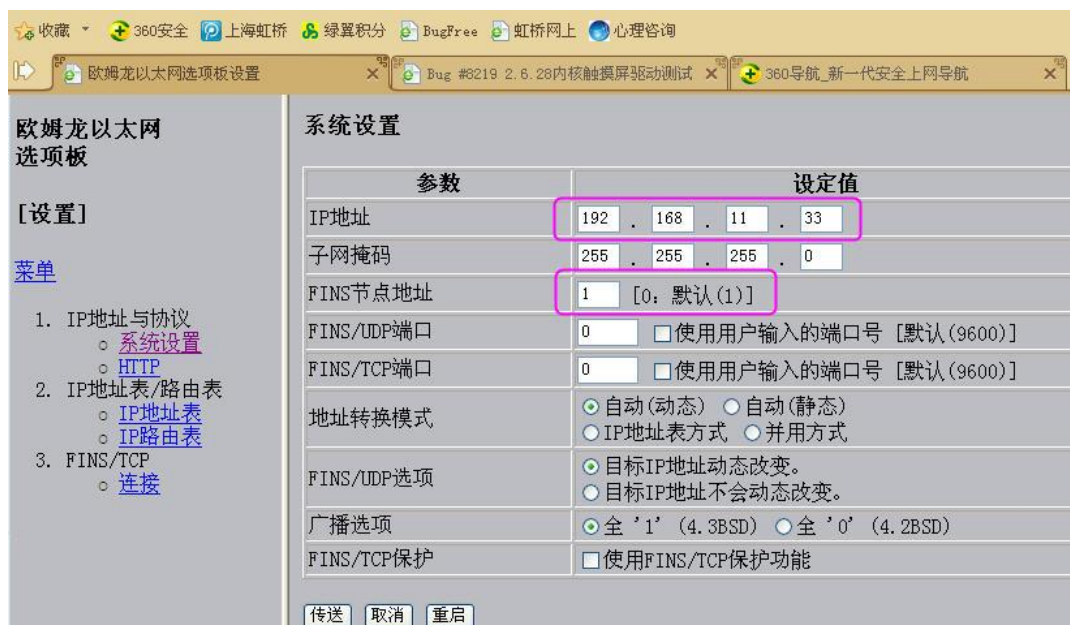

CP2 Series: HMI Setting

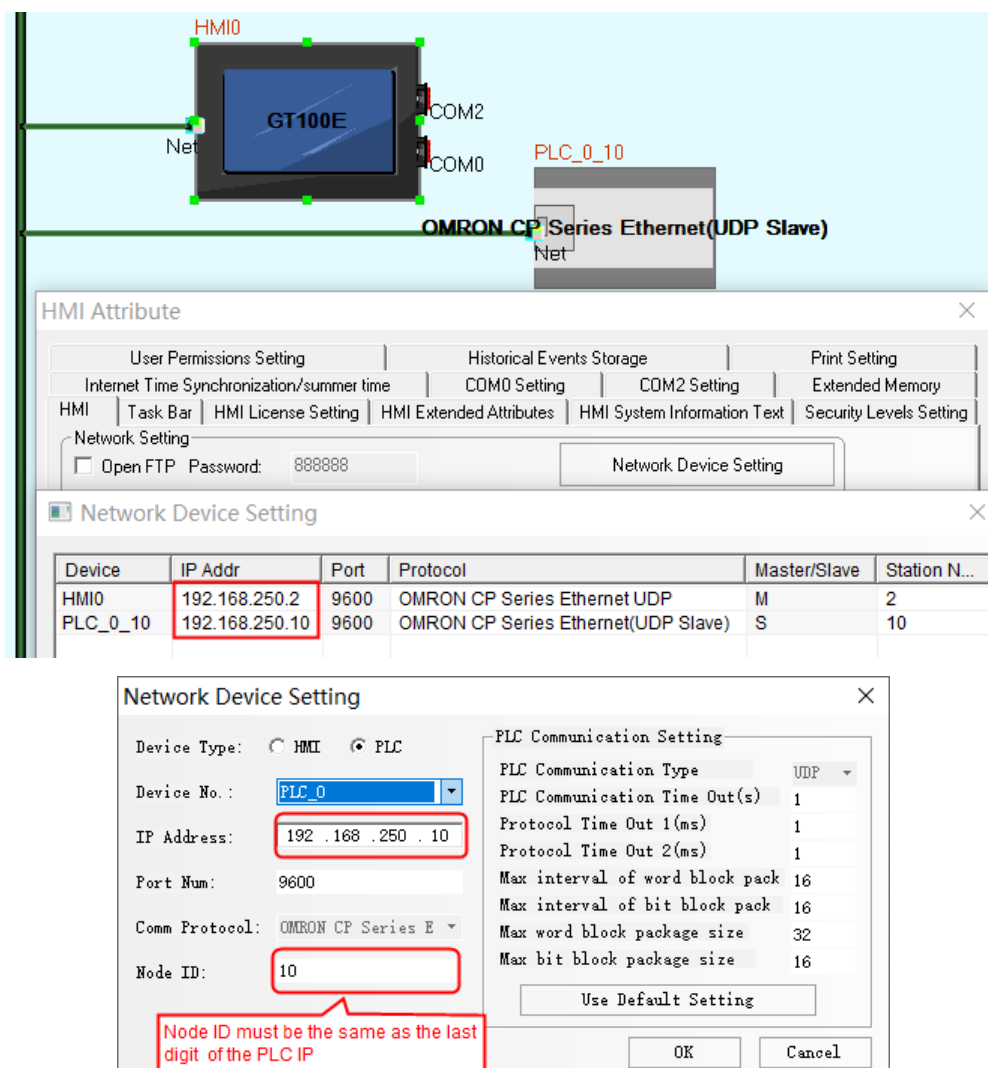

Note: HMI node ID can't be the same as the PLC node ID


PLC Setting

1. IP address: 192.168.250.10
2. FINS Node ID:10

Note: The Node ID must be the same as the last digit of the PLC IP

OMRON NJ_NX Series EtherNet_IP(Free tag Names)


HMI Setting

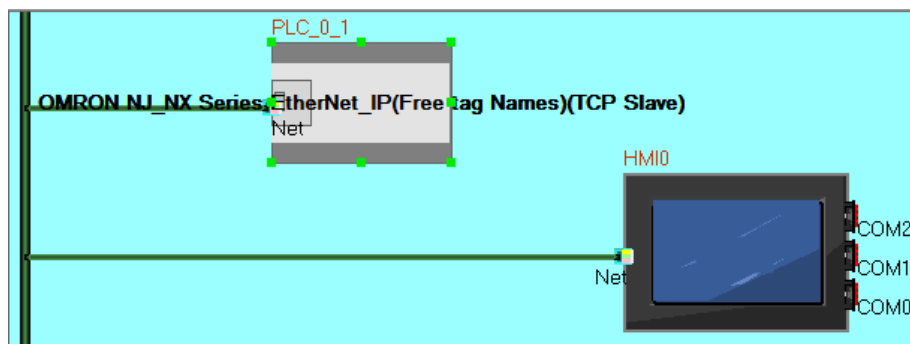


Device	IP Addr	Port	Protocol	Master/S...	Station...	Virtual ...
HMI0	192.168.250.137	48898	OMRON NJ...	M		
PLC_0_1	192.168.250.1	48898	OMRON NJ...	S	1	

PLC Setting


① Communication settings

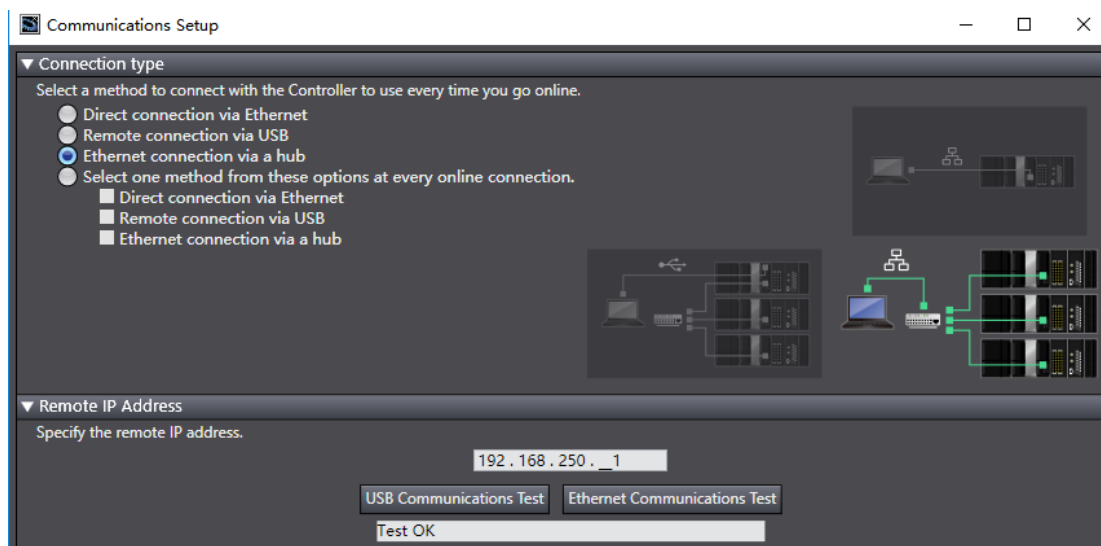

② IP address setting

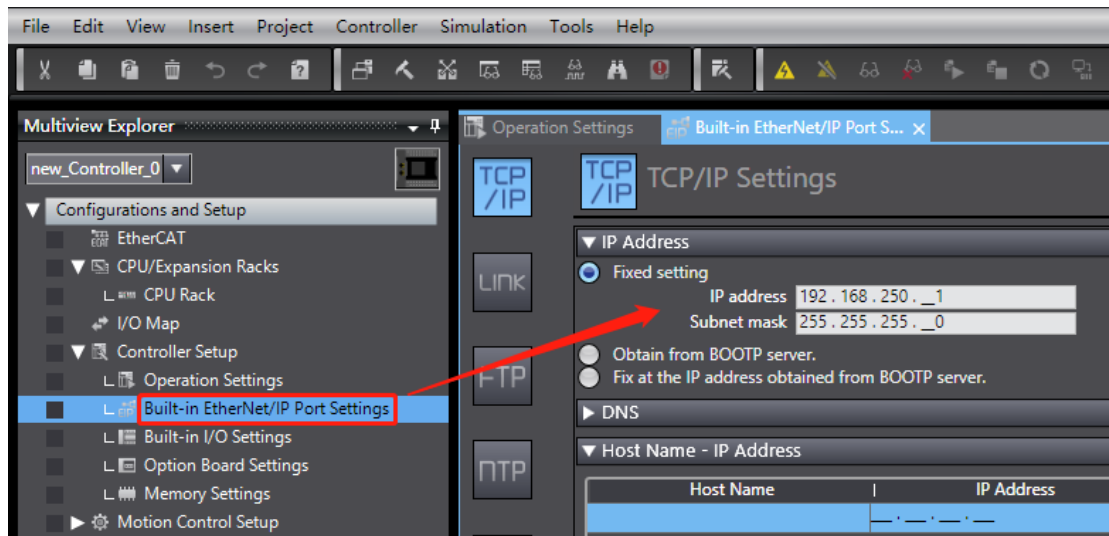


③ Enable memory settings

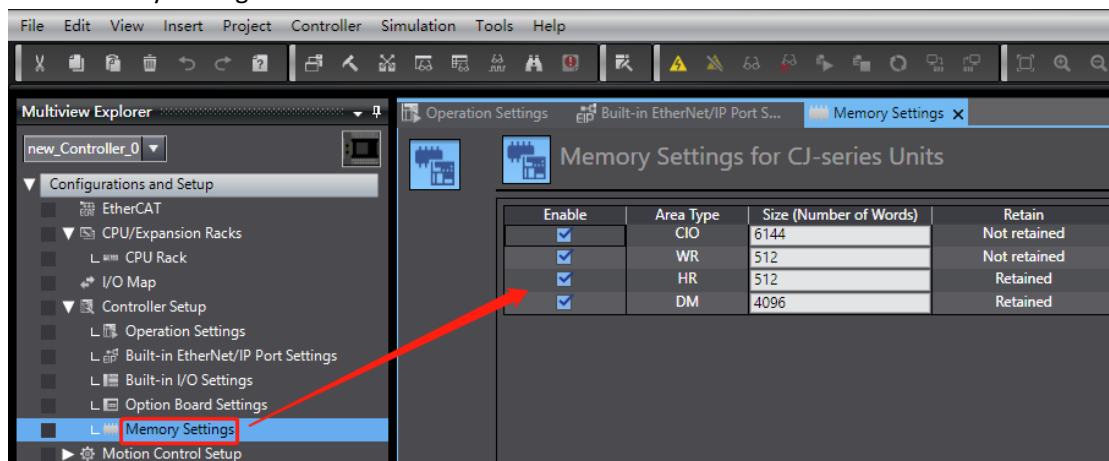

Note: NX series controllers, to enable memory settings; NJ series has no memory settings, do not need to be enabled.

④ Create variable tags

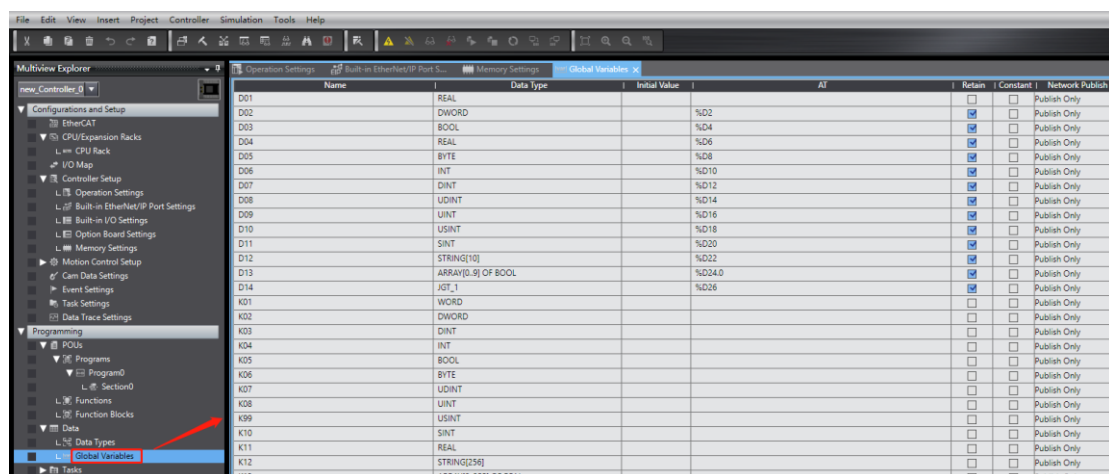


Note: The network public must be selected to public only.

Import Label


After the global variables of the sysmac Studio programming software are created, you can copy the


global variables to the pasteboard by exporting the global variables and paste them directly into Kinco Dtools.

① Export global variables from plc software, copy global variables to clipboard

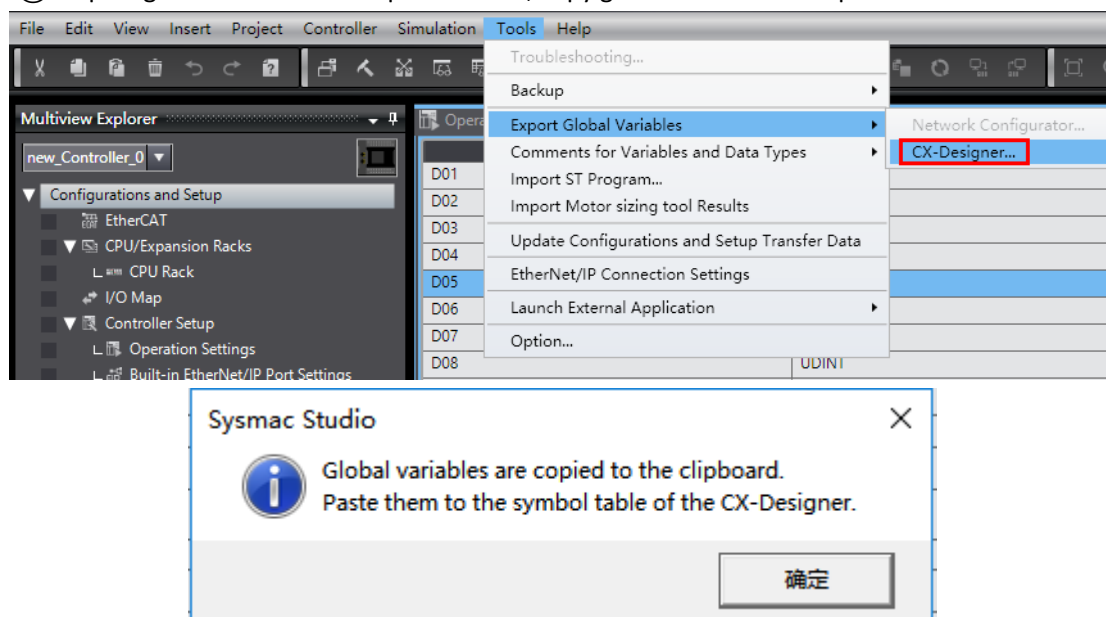

② Open the tag editor of the PLC property, paste the variable exported in ① and click OK. The tag is successfully created.

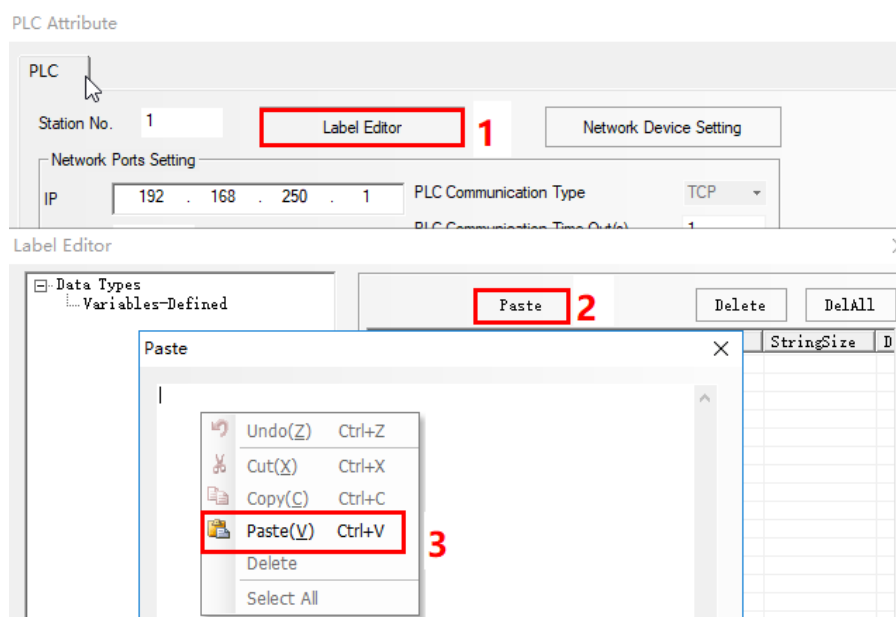

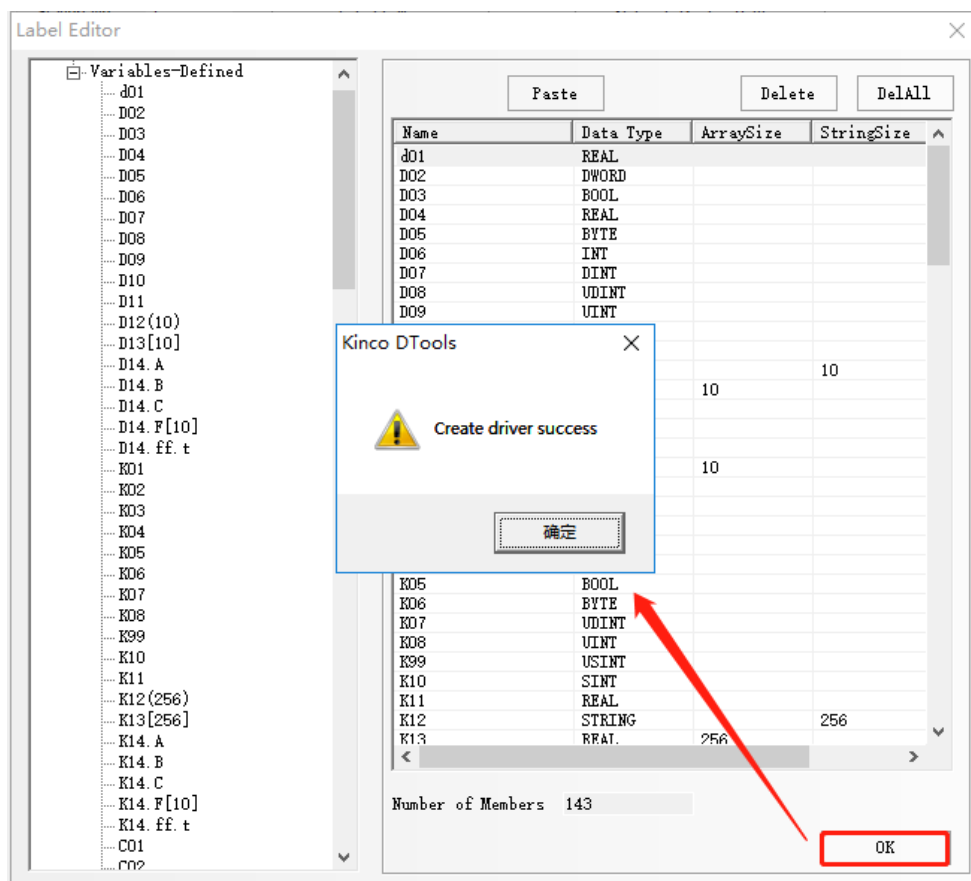

© Supported Device

Omron C Series Host Link

Device	Bit Address	Word Address	Format
Hold Relay	H_bit 00.00-99.15	-----	DD.DD
Data Relay	D_bit 0000.00-6655.15	-----	DDDD.DD
Link Relay	LR_bit 00.00-63.15	-----	DD.DD
Auxiliary Relay	A_bit 00.00-27.15	-----	DD.DD
Channel I/O	CIO_IR_bit 000.00-511.15	-----	DDD.DD
	C_FLAG 0-511	----	DDD
	T_FLAG 0-511	----	DDD
Counter Relay	-----	C 000-511	DDD
Timer Relay	-----	T 000-511	DDD
Hold Register	-----	H 00-99	DD
Data Register	-----	D 0000-6655	DDDD
Link Register	-----	LR 00-63	DD
Auxiliary Register	-----	A 0-27	DDD
Channel I/O Register	-----	CIO_IR_word 000-511	DDD

OMRON CP Series Host Link

Device	Bit Address	Word Address	Format	Notes
Work Relay	W_bit 0.00-511.15	-----	DDD.DD	

Hold Relay	H_bit 0.00-1535.15	-----	DDDD.DD	
Data Relay	D_bit 0.00-32767.15	-----	DDDDD.DD	
Counter Relay	C flag 0-4095	-----	DDDD.DD	
Timer Relay	T flag 0-4095	-----	DDDD.DD	
Auxiliary Relay	A_bit 0.00-959.15	-----	DDD.DD	
Channel I/O	CIO_bit 0.00-6143.15	-----	DDDD.DD	
	T_bit 0.00-4095.15	-----	DDDD.DD	
	C_bit 0.00-4095.15	-----	DDDD.DD	
Work Register	-----	W_word 0-511	DDD	
Hold Register	-----	H_word 0-1535	DDDD	
Data Register	-----	D_word 0-32767	DDDDD	
Counter Register	-----	C_word 0-4095	DDDD	
Timer Register	-----	T_word 0-4095	DDDD	
Auxiliary Register	-----	A_word 0-959	DDD	
Channel I/O Register	-----	CIO_word 0-6143	DDDD	
Byte Register		TK 0-31	DD	
		DR 0-15	DD	

OMRON CPM Series Host Link

Device	Bit Address	Word Address	Format	Notes
Hold Relay	HR 0.00-4095.15	-----	DDDD.DD	
Link Relay	LR 0.00-4095.15	-----	DDDD.DD	
Auxiliary Relay	AR 0.00-4095.15	-----	DDDD.DD	
Internal Relay	IR 0.00-4095.15	-----	DDDD.DD	
Timer/Counter Register	-----	TC 0-255	DDD	
Data Register	-----	DM 0-9999	DDDD	

OMRON CJ/CS Series Host Link

Device	Bit Address	Word Address	Format
Channel I/O	CIO 0.00-6143.15	-----	DDDD.DD
Internal Auxiliary Relay	W_bit 0.00-511.15	-----	DDD.DD
Special Auxiliary Relay	A_bit 0.00-11535.15	-----	DDD.DD
Latch Relay	H_bit 0.00-1535.15	-----	DDD.DD
Timer (Timer Up Flag)	T_FLAG 0-4095	-----	DDDD
Counter (Counter Up Flag)	C_FLAG 0-4095	-----	DDDD
Data Memory	D_bit 0.00-32767.15	-----	DDDDD.DD
Extension Data Memory Relay(E0-EF)	E0 0.00-E18 32767.15	-----	DDDDD.DD
Extension Data Memory(E0-EF)	-----	E0 0-E18 32767	DDDDD
Channel I/O	-----	CIO 0000-6143	DDDD
Internal Auxiliary Relay	-----	W 0-511	DDD
Special Auxiliary Relay	-----	A 0-11535	DDD
Latch Relay	-----	H 0-1535	DDD
Timer (current Value)	-----	T 0-4095	DDDD

Counter (Current Value)	-----	C 0-4095	DDDD
Data Memory	-----	D 0-4095	DDDDD
Index Register	-----	IR 00-15	DD
Data Register	-----	DR 00-15	DD

OMRON CJ Series Ethernet (TCP Slave)

Device	Bit Address	Word Address	Format
Channel IO	CIO 0.00-6143.15	-----	DDDD.DD
Internal Auxiliary Relay	W 0.00-511.15	-----	DDD.DD
Special Auxiliary Relay	A 0.0-959.15	-----	DDD.DD
Latch Relay	H 0.0-511.15	-----	DDD.DD
Timer Up Flag	T 0-4095	-----	DDDD
Count Up Flag	C 0-4095	-----	DDDD
TKB	TKB 0-127	-----	DD
	D0.00-32767.15		DDDDD.DD
	E0 0.00 - E18 32767.15		DDDDD.DD
Channel IO	-----	CIO 0-6143	DDDD
Byte Register	-----	DR 0-15	DD
Byte Register	-----	TK 0-127	DDD
Internal Auxiliary Relay	-----	W 0-511	DDD
Special Auxiliary Relay	-----	A 0-11535	DDD
Latch Relay	-----	H 0-1535	DDD
Timer Current Value	-----	T 0-4095	DDDD
Counter Current Value	-----	C 0-4095	DDDD
Extension Data Memory(E0-E18)	-----	E0-E18 0-32767	DDDDD
EM	-----	EM 0-32767	DDDDD
Index Register	-----	IR 0-15	DD
Data Register	-----	D 0-32767	DDDDD

OMRON CJ/CS/NJ Series Ethernet (UDP Slave)

Device	Bit Address	Word Address	Format
Channel IO 0.00-6143.15	CIO_bit	-----	DDDD.DD
	CIO_FORCE	-----	
	CIO_FORCE_RELEASE	-----	
	CIO_RELEASE_STATUS	-----	
Internal Auxiliary Relay 0.00-511.15	W_bit	-----	DDD.DD
	W_FORCE	-----	
	W_FORCE_RELEASE	-----	
	W_RELEASE_STATUS	-----	
Latch Relay 0.0-1535.15	H_bit	-----	DDDD.DD
	H_FORCE	-----	
	H_FORCE_RELEASE	-----	
	H_RELEASE_STATUS	-----	
Timer Up Flag	T_FLAG	-----	DDDD

0-4095	T_FORCE	-----	
	T_FORCE_RELEASE	-----	
	T_RELEASE_STATUS	-----	
Count Up Flag 0-4095	C_FLAG	-----	DDDD
	C_FORCE	-----	
	C_FORCE_RELEASE	-----	
	C_RELEASE_STATUS	-----	
Special Auxiliary Relay	A 0.0-11535.15	-----	DDDDD.DD
Extension Data Memory 0.00-32767.15	E (0-9) _bit	-----	DDDDD.DD
	E (A-F) _bit	-----	DDDDD.DD
	E (10-18) _bit	-----	DDDDD.DD
Data Memory	D_bit 0.00-32767.15	-----	DDDDD.DD
TKB	TK_FLAG 0-127	-----	DDD
Channel IO	-----	CIO 0-6143	DDDD
Internal Auxiliary Relay	-----	W 0-511	DDD
Latch Relay	-----	H 0-1535	DDDD
Timer Current Value	-----	T 0-4095	DDDD
Counter Current Value	-----	C 0-4095	DDDD
Special Auxiliary Relay	-----	A 0-11535	DDDDD
Extension Data Memory	-----	E0-E9 0-32767 EA-EF 0-32767 E10-E18 0-32767 EM 0-32767	DDDDD
Data Memory	-----	D 0-32767	DDDDD
TK	-----	TK0-127	DDD
Index Register	-----	IR 0-15	DD
Data Register	-----	DR 0-15	DD

OMRON CP Series Ethernet (UDP Slave)

Device	Bit Address	Word Address	Format
Channel IO 0.00-6143.15	CIO_bit	-----	DDDD.DD
	CIO_FORCE	-----	
	CIO_FORCE_RELEASE	-----	
	CIO_RELEASE_STATUS	-----	
Internal Auxiliary Relay 0.00-511.15	W_bit	-----	DDD.DD
	W_FORCE	-----	
	W_FORCE_RELEASE	-----	
	W_RELEASE_STATUS	-----	
Latch Relay 0.0-1535.15	H_bit	-----	DDDD.DD
	H_FORCE	-----	
	H_FORCE_RELEASE	-----	
	H_RELEASE_STATUS	-----	

Timer Up Flag 0-4095	T_FLAG	-----	DDDD
	T_FORCE	-----	
	T_FORCE_RELEASE	-----	
	T_RELEASE_STATUS	-----	
Count Up Flag 0-4095	C_FLAG	-----	DDDD
	C_FORCE	-----	
	C_FORCE_RELEASE	-----	
	C_RELEASE_STATUS	-----	
Special Auxiliary Relay	A 0.0-959.15	-----	DDDDD.DD
Data Memory	D_bit 0.00-32767.15	-----	DDDDD.DD
TKB	TK_FLAG 0-31	-----	DDD
Channel IO	-----	CIO 0-6143	DDDD
Internal Auxiliary Relay	-----	W 0-511	DDD
Latch Relay	-----	H 0-1535	DDDD
Timer Current Value	-----	T 0-4095	DDDD
Counter Current Value	-----	C 0-4095	DDDD
Special Auxiliary Relay	-----	A 0-959	DDDDD
Data Memory	-----	D 00000-32767	DDDDD
TK	-----	TK0-31	DDD
Index Register	-----	IR 0-15	DD
Data Register	-----	DR 0-15	DD


OMRON NJ_NX Series EtherNet_IP (Free tag Names)

Date Type	data format	Notes
Bool	bit	
Byte	16-bit Decimal, Hex, Binary	8-bit
SInt	16-bit Decimal, Hex, Binary	8-bit
USInt	16-bit Decimal, Hex, Binary	8-bit
Word	16-bit Decimal, Hex, Binary	16-bit
Int	16-bit Decimal, Hex, Binary	16-bit
UInt	16-bit Decimal, Hex, Binary	16-bit
DWord	32-bit Float,Decimal, Hex, Binary	32-bit
DInt	32-bit Float,Decimal, Hex, Binary	32-bit
Real	32-bit Float,Decimal, Hex, Binary	32-bit
UDInt	32-bit Float,Decimal, Hex, Binary	32-bit
Array		

© Cable Diagram

RS232 Communication Cable

1. RS232 on the CPU unit or CP1W-CIF01\CS1W-SCU21\CS1W-SCB21 etc. module

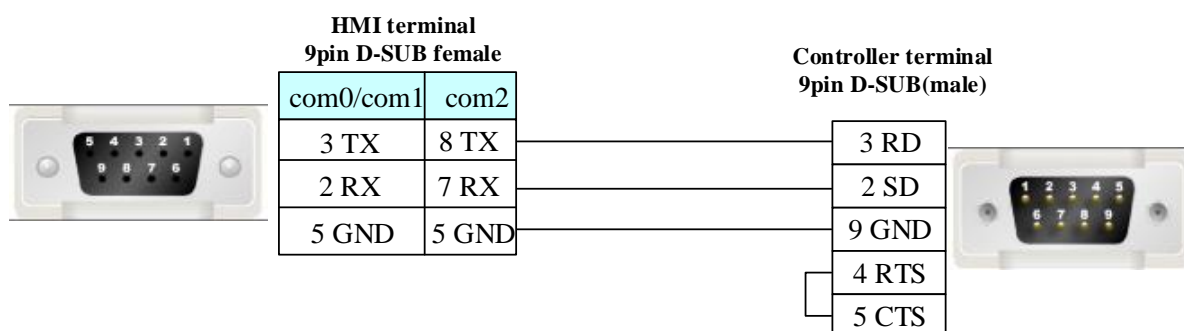


2. Peripheral port on the CPU unit (OMRON CJ\CS series)

When connecting the peripheral port on the CPU by the conversion adapter, set DIP4 to on.

RS422 Communication Cable


1. CJ1W-SCU41\ CJ1W-SCB41 module

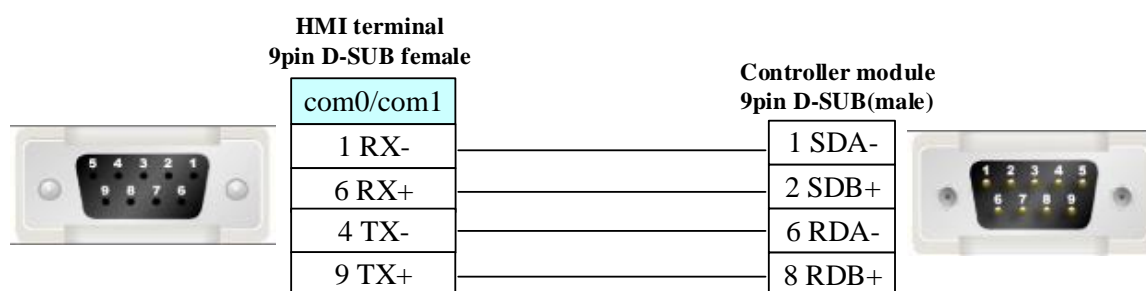

2. CP1W-CIF11/CP1W-CIF12 module

NOTE: CP1W-CIF11 is without photoelectricity isolation, the maximum communication distance is 50 m. CP1W-CIF12 is with photoelectricity isolation, the maximum communication distance is 500 m. Other parameters specification and DIP switch settings are the same.


DIP	CONTENT		
1	ON	Yes (Both sides)	Terminal resistance selection
	OFF	No	
2	ON	2-wires (RS485)	2、3 must be the same.
	OFF	4-wires (RS422A)	
3	ON	2-wires (RS485)	
	OFF	4-wires (RS422A)	
4	----	----	N/A
5	ON	With RS control	Set ON when loop back is forbidden.
	OFF	Without RS control (Receive)	
6	ON	With RS control	If connecting to multiple devices, set ON when using RS422A, it must set as ON.
	OFF	Without RS control (Send)	

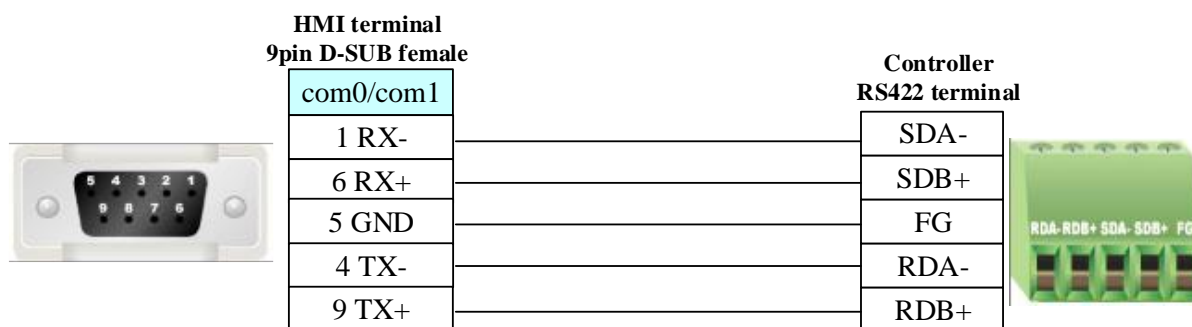

NOTE: When PLC uses CP1W-CIF11 or CP1W-CIF12 module for communication, if it uses 1:1 and RS422 communication, it need to set all the DIP Switch SW1~6 as OFF. If it uses 1:N and RS422 communication, it need to set DIP Switch SW1~5 as OFF and SW6 as ON.

RS485 communication cable

CP1W-CIF11/CIF12 module

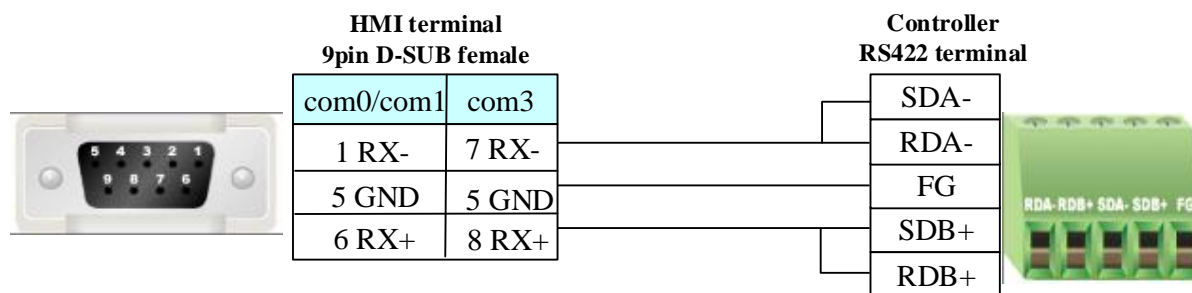

NOTE: When PLC uses CP1W-CIF11 or CP1W-CIF12 module and RS485 communication, please make sure the DIP Switch SW1 of CP1W-CIF11 or CP1W-CIF12 as OFF, and set SW2,SW3,SW5,SW6 as ON. SW4 can be set as ON or OFF.

Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub
Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.69 OMRON E5CN/E5EZ/E5ZN (Temperature Controller)

◎ Serial Communication

Series	CPU	Link Module	Driver
OMRON E5	E5CN E5EZ E5ZN	RS485 on the CPU unit	OMRON E5CN/E5EZ/E5ZN


◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
--------	-----	-------------	-----------	-----------	-------

OMRON E5EZ-R3	OMRON E5EZ-R3	RS485 on the CPU unit	RS485	Setting	Your owner cable
------------------	------------------	--------------------------	-------	-------------------------	----------------------------------

◎ Communication Setting

Default communication: 9600, 7, even, 2; station: 0

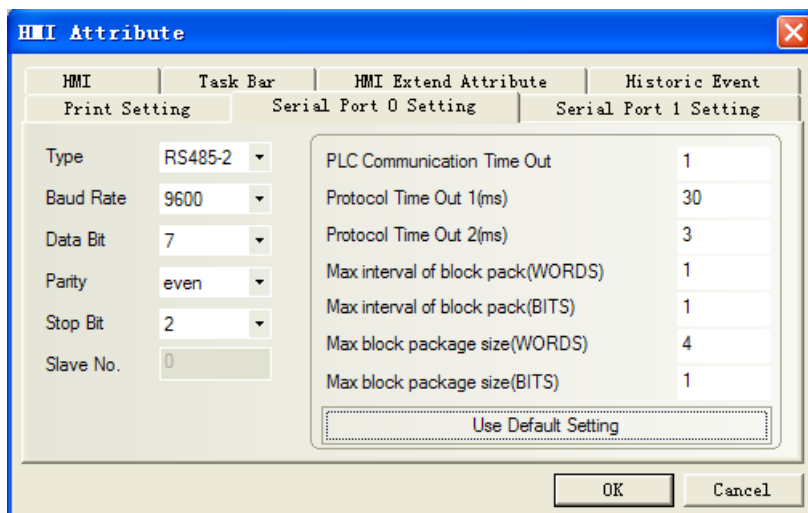

Temperature Controller setting

Protocol: CompoWay/F (Sysway)

◎ Supported Device

OMRON E5EZ-R3

Device	Bit Address	Word Address	Format	Notes
Variable	-----	0.0 — 0.A (C0 read only)	DDD.HH	Main addr indicates variable type 0(C0),1(C1),2(C3) subaddress indicates address of variable type
		1.0 — 1.2D (C1)		
		2.0 — 2.5B (C3)		
Action Command	-----	0-8	H	
State	0-31	-----	DD	Show the bit value of 0001 (state) in C0
Abnormal Input	0	-----	D	The 6th value of C0 0001(state) Abnormal Input

NOTE: H indicates hexadecimal

Action Command address and other informations

Addr	command	content	Notes
0	Communication write	00:OFF (disable)	Before writing data, "Communication write" command is "01" ON (enable)", otherwise it writes disable
		01:ON (enable)	
1	Run/Stop	00: Run	
		01: Stop	
2	Multi-segment SP	00: Setting value 0	Must set the value of variable(addr:3.1A)to

		01: Setting value 1	1(ON) for writing correctly, otherwise it can't write-in.
		02: Setting value 2	
		03: Setting value 3	
3	AT execute/stop	00: stop	
		01: AT execute	
4	write-in mode	00: save	
		01: RAM	
5	RAM storage	00	
6	Soft reset	00	
7	Setting area1 shift	00	
8	Protection value shift	00	


Please refer to the communication protocol for details.

NOTE:


- Make sure the setting value be the same as the plc's station No.
- Must be the same as the station No. of HMI
- Before writing data, "Communication write" command must is "01" ON (enable)", otherwise it writes disable

◎ Cable Diagram

RS485 communication cable

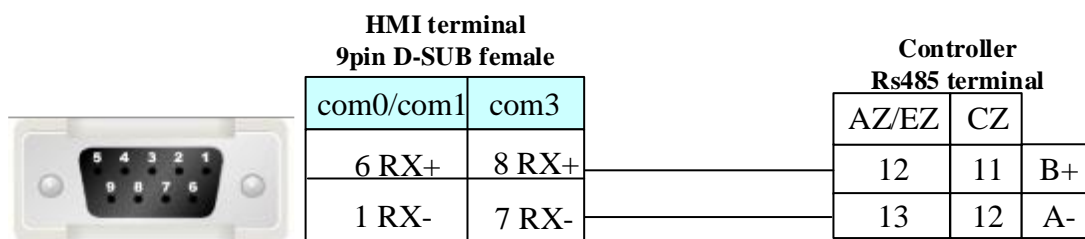

RS232 communication, need to use RS-232 to RS-422/485 converter

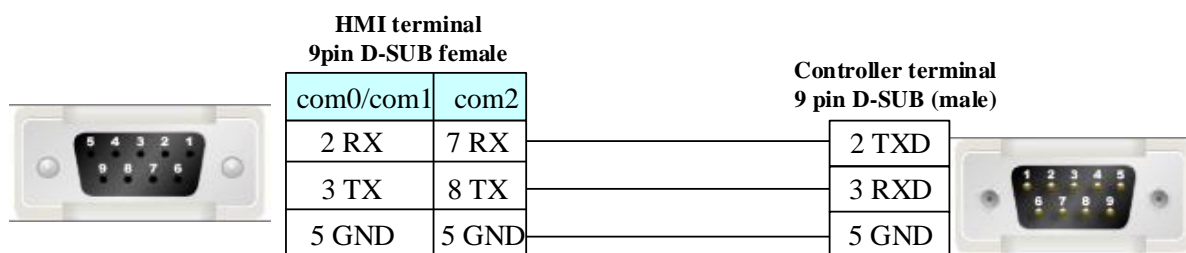

4.70 OPTO 22


◎ Ethernet Communication (nonsupport Direct Online Simulation)

Series	CPU	Link Module	Driver
OPTO 22	SNAP-UP1-ADS SNAP-PAC-R2	Ethernet	OPTO 22 SNAP Ethernet(TCP)

◎ System configuration



Series	CPU	Link Module	Connect Type	Parameter	Cable
OPTO 22	SNAP-UP1-ADS SNAP-PAC-R2	Ethernet	Ethernet	Setting	Your owner cable

◎ Communication Setting

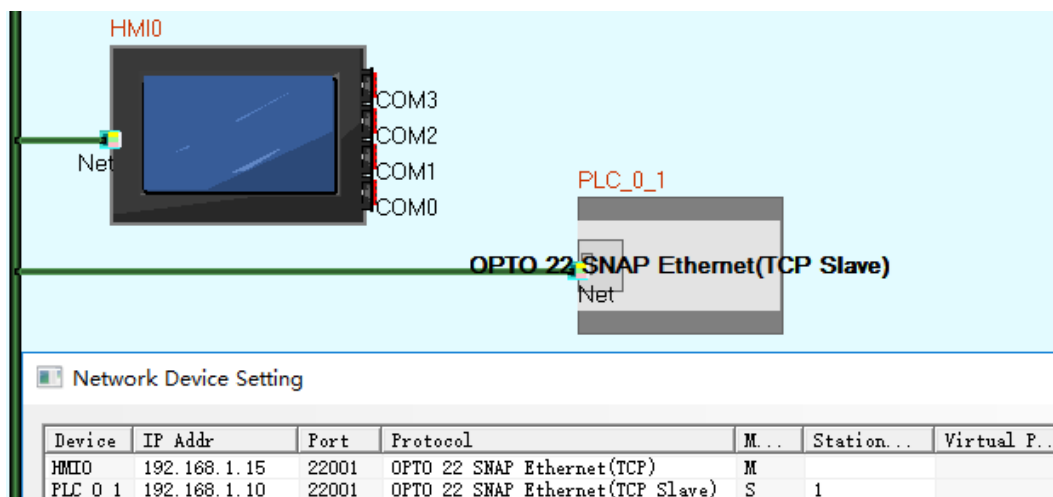

PLC Settings

Use Manager tool to read/write IP of OPT controller

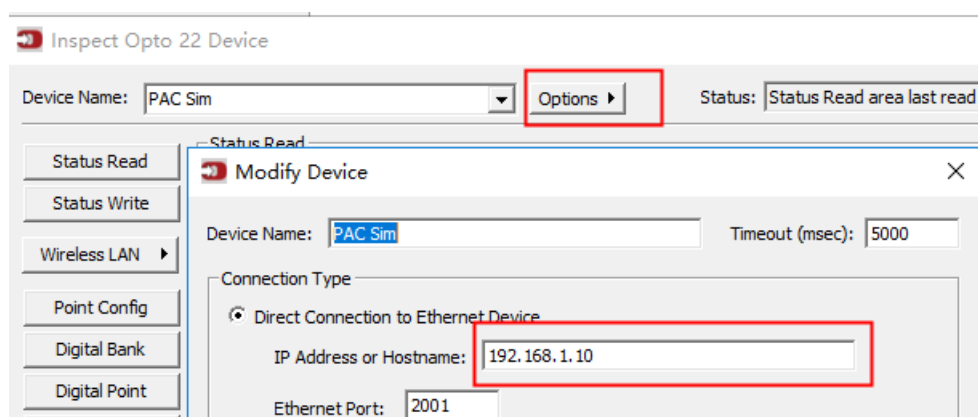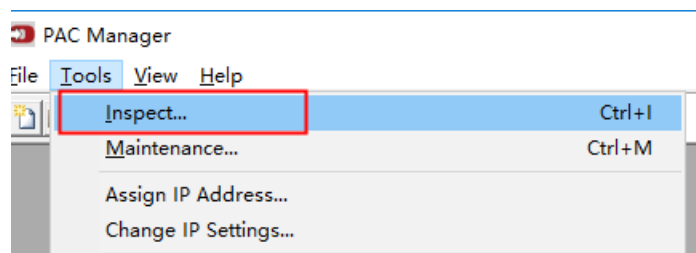

Inspect Opto 22 Device

Device Name: PAC Sim Options Status: Status Read area last read at 12/31/19 10:46

Status Read

0xFFFF F030 00A0	Firmware Version Date	08/12/2016
0xFFFF F030 00B0	Firmware Version Time	11:27:01
0xFFFF F030 0020	Unit Type	0x00000078
0xFFFF F030 0080	Unit Description	SNAP-PAC-R2
0xFFFF F030 0024	I/O Unit Hardware Revision (Month)	4
0xFFFF F030 0025	I/O Unit Hardware Revision (Day)	21
0xFFFF F030 0026	I/O Unit Hardware Revision (Year)	2008
0xFFFF F030 024C	I/O Coprocessor Firmware Version	R1.1b
0xFFFF F030 0028	Installed Ram	33554432
ETHERNET 1 Interface		
0xFFFF F030 002E	MAC Address	00-A0-3D-03-79-91
0xFFFF F030 0034	IP Address	10.0.0.10
0xFFFF F030 0038	Subnet Mask	255.255.255.0
0xFFFF F030 003C	Gateway	0.0.0.0
0xFFFF F030 0040	DNS	0.0.0.0
ETHERNET 2 Interface		
0xFFFF FFFF F060	MAC Address	00-A0-3D-03-79-92
0xFFFF FFFF F050	IP Address	192.168.1.10
0xFFFF FFFF F058	Subnet Mask	255.255.255.0
0xFFFF FFFF F068	Gateway	0.0.0.0
0xFFFF FFFF F070	DNS	0.0.0.0

Inspect Opto 22 Device

Device Name: PAC Sim Options Status: Status Write area last read at 12/31/19 10:46:43


Status Write

Address	Description	Value
0xFFFF F038 02B0	Out Of Range Value (32-Bit)	-2147483648.000
0xFFFF F038 0054	Scanner Flags	0x 00000000
0xFFFF F038 0154	Host Name	
0xFFFF F038 0194	Domain Name	
0xFFFF F408 0004	Strategy Download Method	Normal
0xFFFF F700 2000	Turn-Around Delay for Port 0 (msec)	0
ETHERNET 2 Interface		
0xFFFF FFFF F050	IP Address	192.168.1.10
0xFFFF FFFF F058	Subnet Mask	255.255.255.0
0xFFFF FFFF F068	Gateway	0.0.0.0
0xFFFF FFFF F070	DNS	0.0.0.0

Refresh Apply


PLC Software Setting

Set the IP of OPT to connect with Software

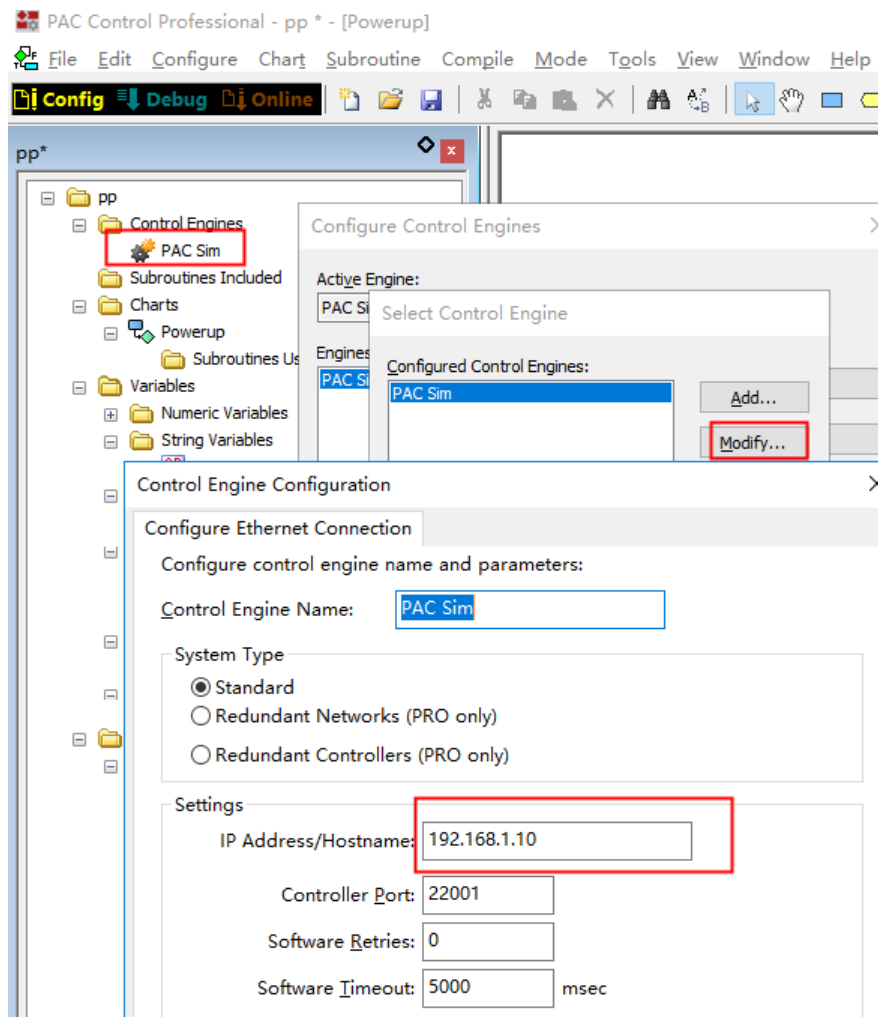


Register add setting

Click "Config" to edit mode

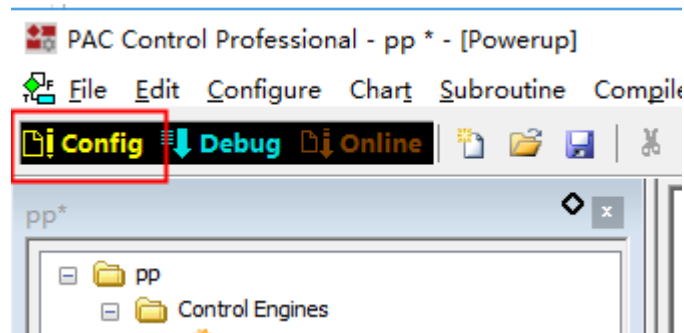


Non-array type addition:


1."B "or "N" bit register adding:chose Integer 32 Type

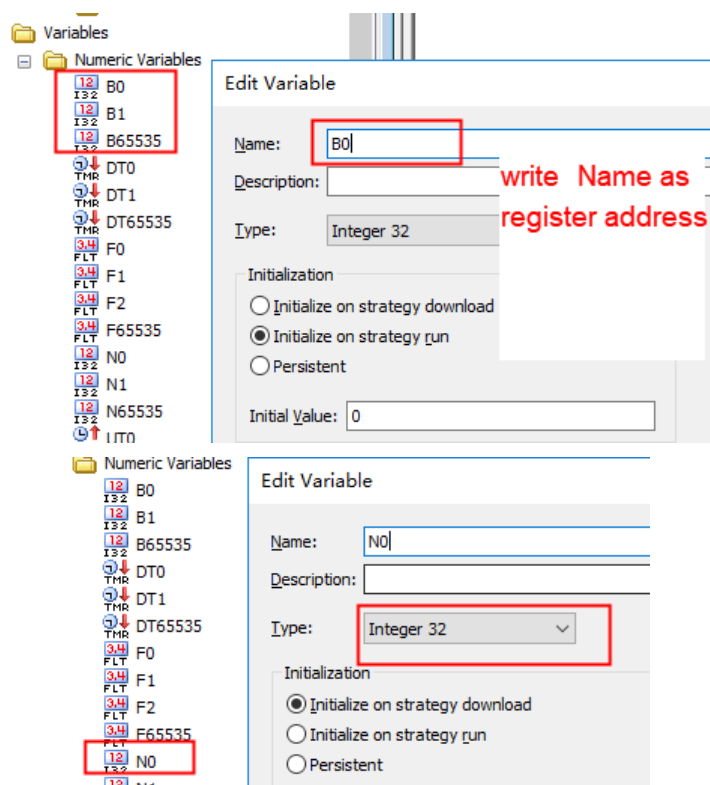


2."DT" register:chose Down Timer Type

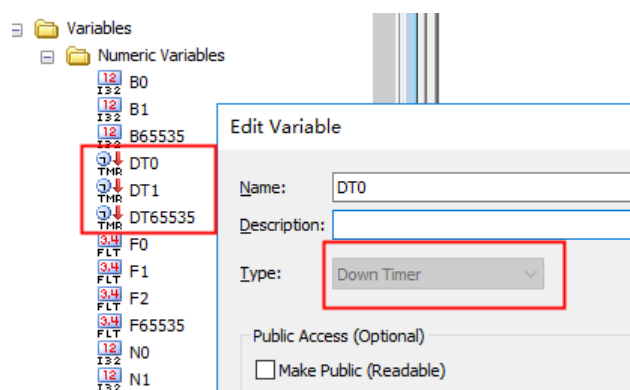

3."UT" register:chose UP Timer Type

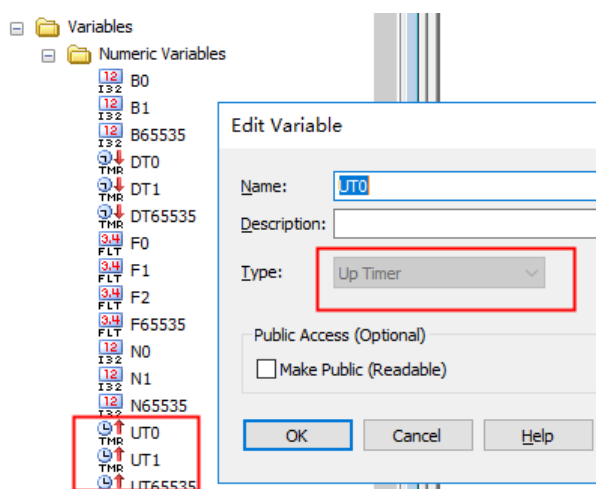


4."F" register:chose Float Type

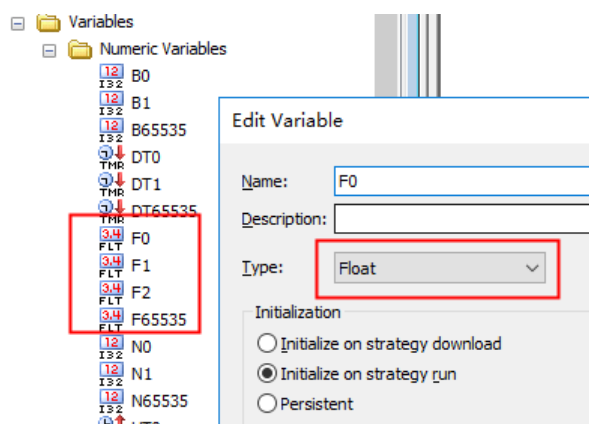


Array table adding:

BT/FT/NT (register name) +array number, set array length; for example: BT0 length 50, BT1 length 50


1. BT bit array adding:

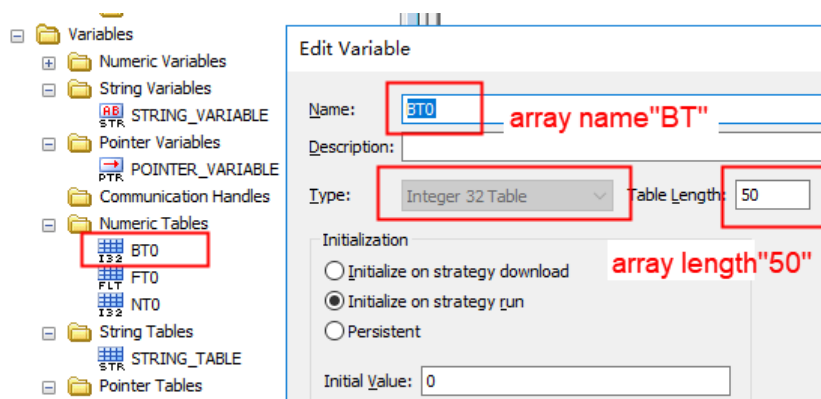


2. Float array adding:

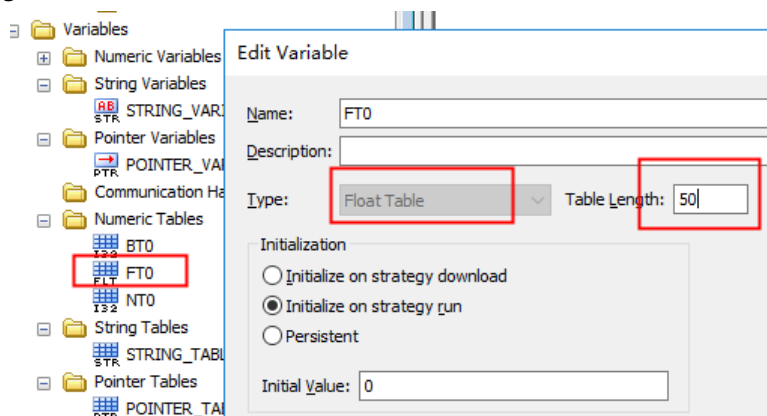


3. INT array adding:

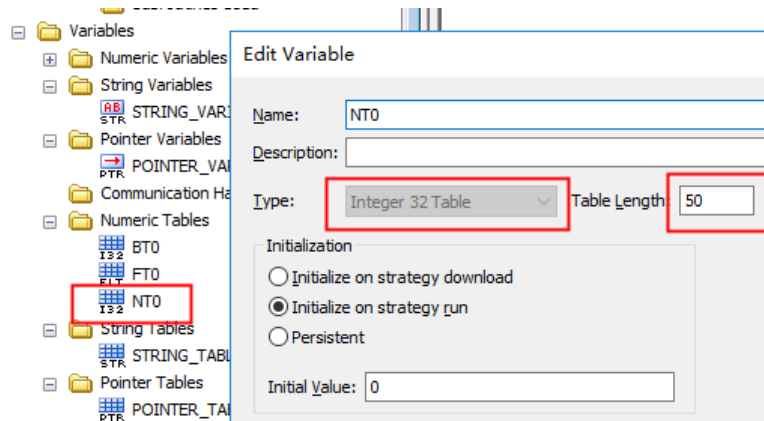

4.I/O bit register adding:

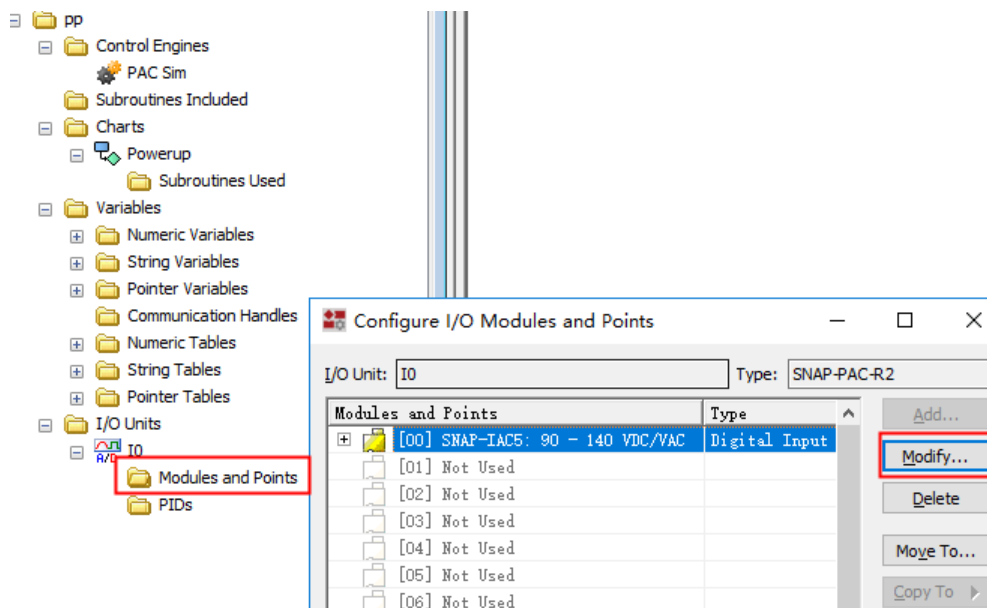


After adding register, click “Debug” to download project.

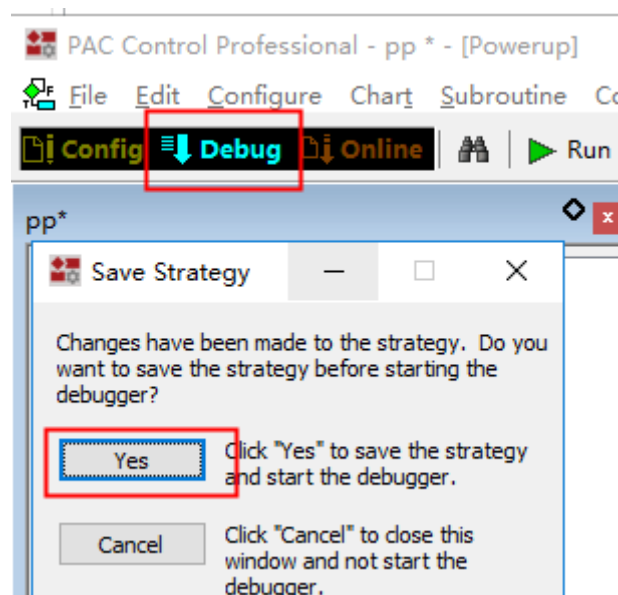


Watch variables's value online


Write click “Watch”

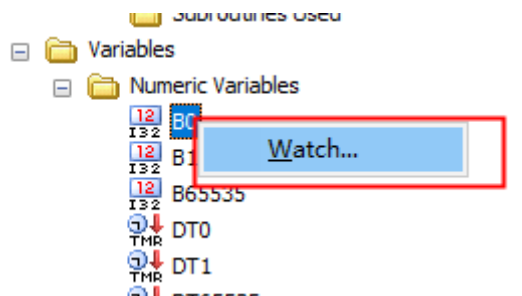

Click “New” to creat a table as “5”

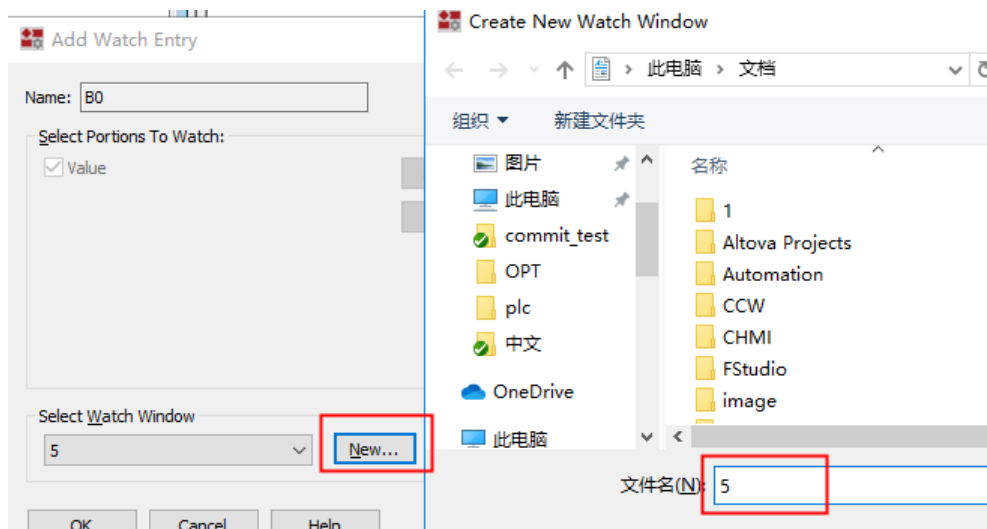

Then double click variables to change values,and click “Apply”

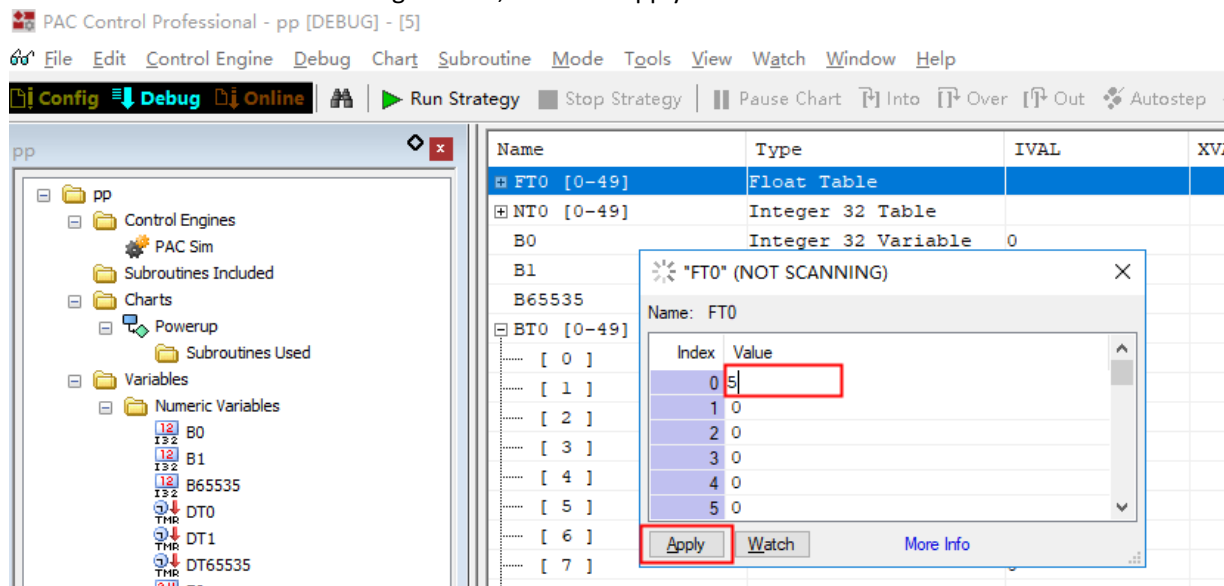

Notice

1. The address set in OPTO 22 software and HMI configuration should be correspond :

Correct: Define Float type like “F1” in OPTO 22 software

Then it can communicate normally.

Select the “FN” register in the HMI configuration, the address is: 1

Error: Float type defined in OPTO 22 software such as “F0001”

Select the FN register in the HMI configuration, the address is: 1

Then it cannot communicate normally.

2. Correspondence between array registers and HMI configuration

For example, configure “FTn 0.000” : The 0 before the decimal point represents the array number, which corresponds to the FT0 array in the PLC, the decimal point represents the address of each register in the array, and FTn0.049 corresponds to the address 49 in the FT0 array in the PLC.

Configuration FTn 1.000 corresponds to FT1 array, address 0; FTn1.049 corresponds to array FT1, address 49

Same for NTn and BTn

◎Supported Device

Device	Bit Address	Word Address	Format
Bit Table	B0-65535	----	DDDDD
Input Coil	In0-65535	---	DDDDD
Output Coil	Qn0-65535	---	DDDDD
Bit Table	BT0.000-65535.255	----	DDDDD.DDD
Integer 32	----	N32 0-65535	DDDDD
Float	----	FN0-65535	DDDDD
UP Timer	----	UTN0-65535	DDDDD
Down Timer	----	DTN0-65535	DDDDD
Integer 32 Table	----	NT0.000-65535.255	DDDDD.DDD
Float Table	----	FT0.000-65535.255	DDDDD.DDD

Editing Macro, please refer to the type table:

Register	Type
N32	Double
FN	Float
DTN	Float
UTN	Float
IN	BIT
QN	BIT
NT	Double
FT	Float
B	BIT(the attribute of B is the same as N32 in the PLC software)
BT	BIT(the attribute of BT is the same as NT in the PLC software)

◎Cable Diagram

Ethernet communication cable

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.71 Panasonic Electric Corporation

◎Serial Communication

Series	CPU	Link Module	Driver
FP	FP Σ	Tool port on the Control unit	Panasonic FP Panasonic FP_Extend
		AFPG801	
		AFPG802	
		AFPG803	
		AFPG806	
	FP0 FP1 FP-M	Tool port on the Control unit	
		RS232C port on the Control unit	
	FP2 FP2SH	Tool port on the Control unit	
		RS232C port on the Control unit	
		AFP2462	
		AFP2465+(AFP2803,AFP2804, FP2805)	
	FP3	Tool port on the Control unit	
		AFP3462	
	FP-e	Tool port on the Control unit	
		AFPE224300	
		AFPE224302	
		AFPE224305	
		AFPE214322	
		AFPE214325	
	FP10SH FP10S	Tool port on the Control unit	
		RS232C port on the Control unit	
		AFP3462	
	FP-X	RS232C port on the Control unit	
FP7	CPS3E	RS232 on the CPU unit	Panasonic FP7

◎Network Communication

Series	CPU	Link Module	Driver
FP	FP-X	Ethernet interface on CPU	Panasonic FP Ethernet (TCP Slave)
FP7	CPS3E	Ethernet interface on CPU	Panasonic FP7 Ethernet (TCP slave)

◎Serial System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
FP	FP	Tool port on the Control unit	RS232C	Setting	Your owner cable
		AFPG801			Your owner cable
		AFPG802			
		AFPG806			

		AFPG803		RS485(2 wire)	Setting	Your owner cable
		AFPG806				
	FP0	Tool port on the Control unit		RS232C	Setting	Your owner cable
		RS232C port on the Control unit				Your owner cable
	FP1 FP-M	Tool port on the Control unit		RS232C	Setting	Your owner cable
		RS232C port on the Control unit				Your owner cable
	FP2 FP2SH	Tool port on the Control unit		RS232C	Setting	Your owner cable
		RS232C port on the Control unit				Your owner cable
		AFP2462				
		AFP2465	AFP2803	RS422(4 wire)	Setting	
			AFP2804			
			AFP2805			RS485(2 wire)
	FP3	Tool port on the Control unit		RS232C	Setting	Your owner cable
		AFP3462				Your owner cable
		AFP3463		RS422(4 wire)	Setting	Your owner cable
	FP-e	Tool port on the Control unit		RS232C	Setting	Your owner cable
		AFPE224300		RS232C		Your owner cable
		AFPE214325				
		AFPE224305				
		AFPE224302		RS485(2 wire)	Setting	Your owner cable
		AFPE214322				
	FP10SH FP10S	Tool port on the Control unit		RS232C	Setting	Your owner cable
		RS232C port on the Control unit				Your owner cable
		AFP3462				
	FP-X	RS232C port on the Control unit		RS232C	Setting	Your owner cable
FP7	CPS3E	RS232 on the CPU unit		RS232	Setting	Your owner cable

NOTE:

1. Only FP0 (C10CRM/C10CRS/C14CRM/C14CRS/C16T/C16CP/C32CT/C32CP) has RS232C port.
2. Only FP1 (C24/C40/C56/C72) has RS232C port.
3. Only FP1(C20R/C20T/C32T)has RS232C port.
4. AFP245 is the communication Package of FP2/FP2SH. AFP2803, AFP2084 and AFP2085 are the communications module of AFP2465.


◎ Network System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
FP	FP-X	Ethernet interface on CPU	Ethernet	Setting	Your owner cable
FP7	CPS3E	Ethernet interface on CPU	Ethernet	Setting	Your owner cable

◎ Serial Communication Setting

Panasonic FP、Panasonic FP _Extend protocol:


RS232 communication

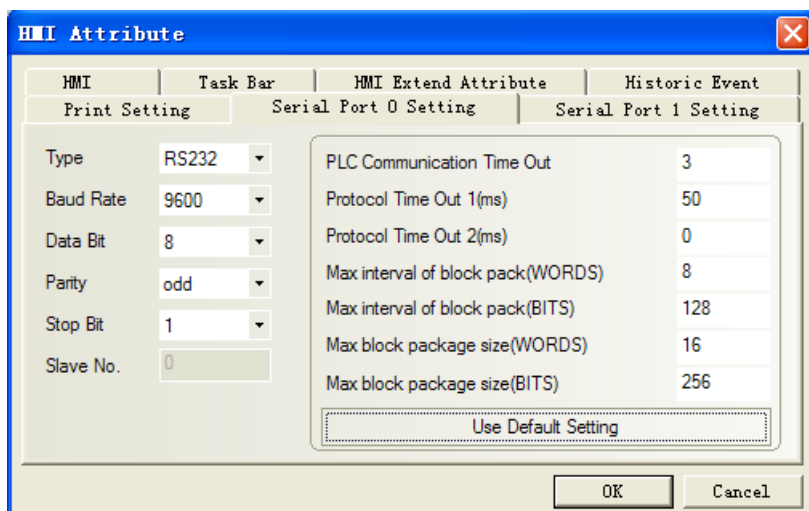

Panasonic FP7 protocol:

HMI Setting

Default communication parameters: 19200, 8, odd, 1; station: 1

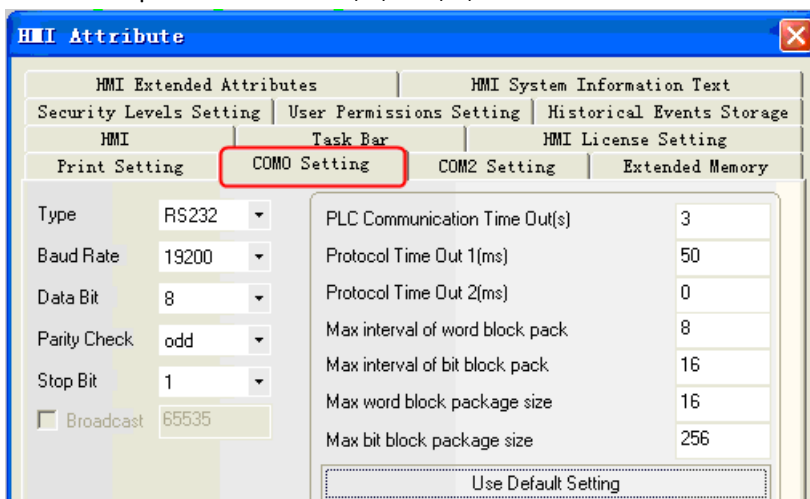

PLC Setting


communication parameters setting:

No	Item name	Data	Di...	Range	Additional information
768	Communication mode	MEWTOCOL-COM master...		MEWTOCOL...	The PLC can be a MEWTOCOL-COM mas
769	Station number	1		1 to 99	Station number (available in 'MEW
770	Baud rate	19200	baud	230400	Specifies the baud rate of the po
771	Sending data length	8 bits		8 bits	Selects the sending data length.
772	Sending parity check	Odd		None	Selects the parity check.
773	Sending stop bit	1 bit		1 bit	Specifies the number of stop bits
774	RS/CS control	Disable		Disable	
775	Sending delay time	0	ms	0 to 100	
776	Sending start code	No-STX		No-STX	Selects the start code (available
777	Sending end code/...	CR		CR	Selects the end code (available i
778	Reception done...	0	ms	0.0 to 1...	
779	Modem connection	Disable		Disable	Specifies if a modem is connected

◎ Network Communication Setting


Panasonic FP Ethernet (TCP Slave) protocol

HMI Setting

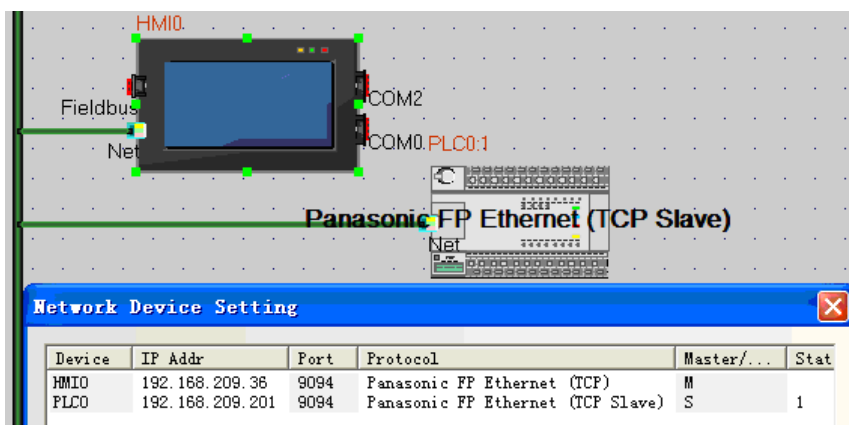

PLC Setting


1. Open the Configurator WD and search the online PLC.

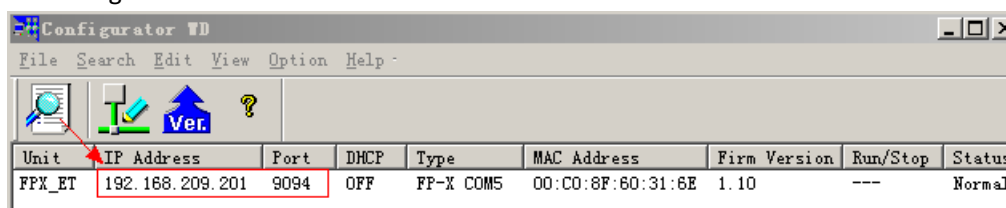


NOTE: Configurator WD can configure PLC parameters (IP Address, Port).

2. Software Setting


1) Open the Control FPCWIN Pro 7, build new project and select PLC type (FP-X C40T) ;

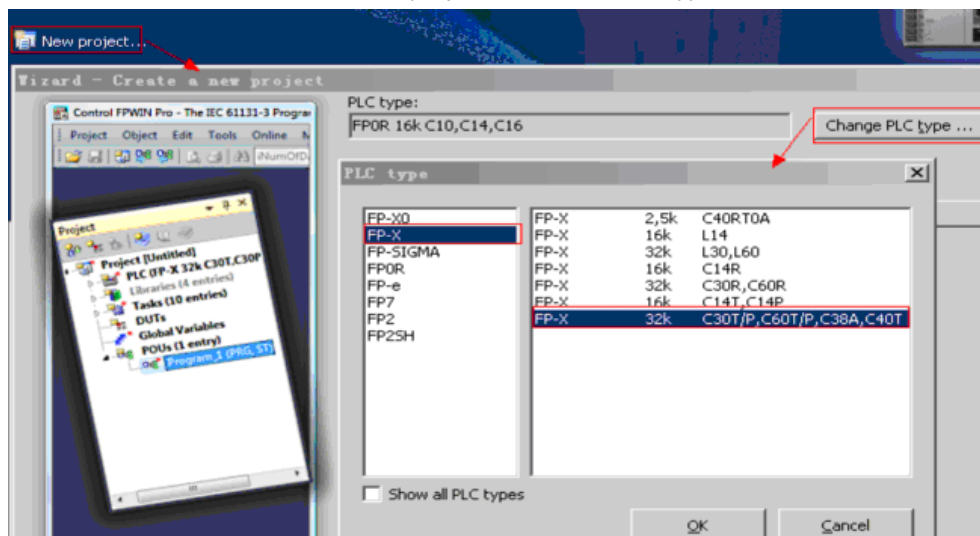

2) Communication setting: [Online] → [Communication parameters...] → Communications settings (Destination Parameters must be the same as the testing PLC Parameters)

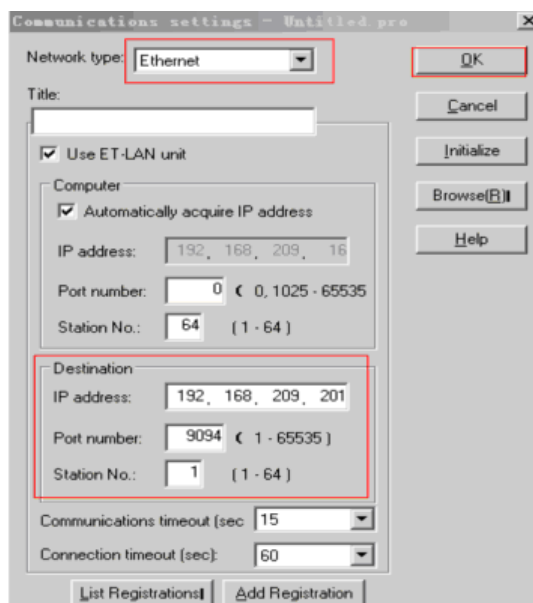

3) VAR_EXTERNAL declaration

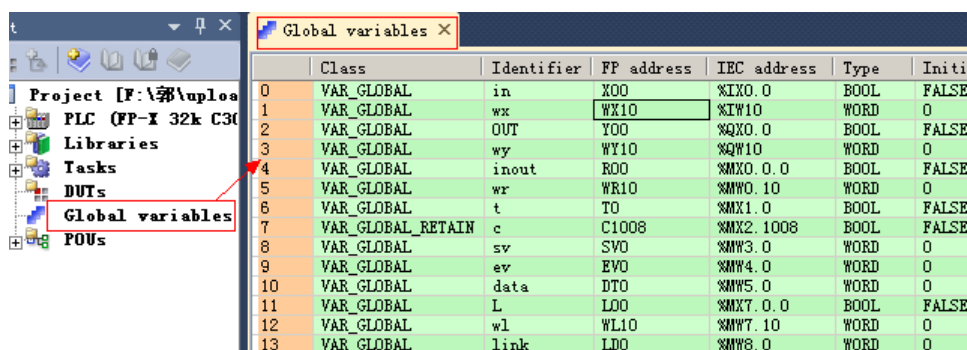


NOTE: VAR_EXTERNAL must be declared; otherwise you will get some compile errors.

4) Download to the PLC

Panasonic FP7 Ethernet (TCP Slave) protocol


HMI Settings

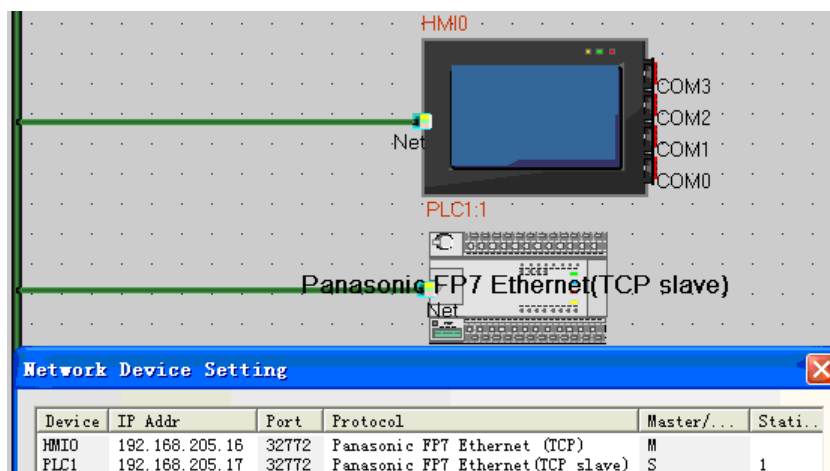**NOTE:**

This protocol supports one HMI to one PLC communication.

PLC Settings


1、communications settings

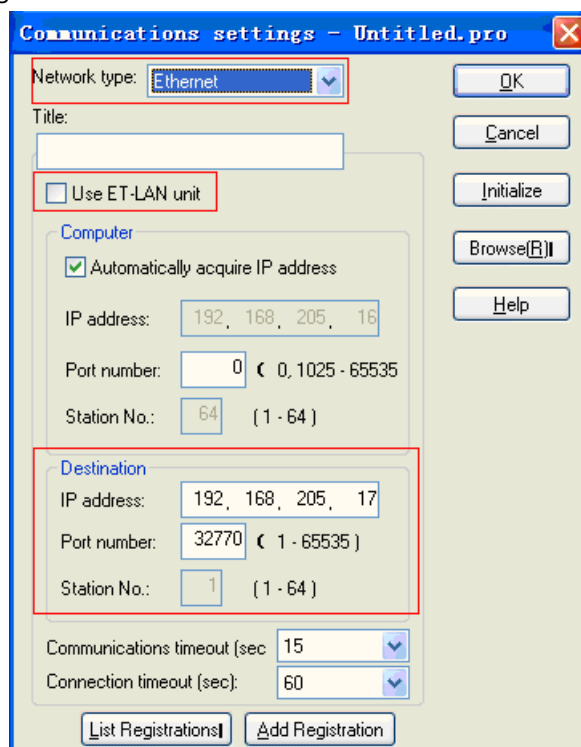

NOTE:

- The range of the destination's port number is 32769~32772.
- The destination's port number cannot be the same as the network device setting's port of HMI setting.

2、changed the IP address

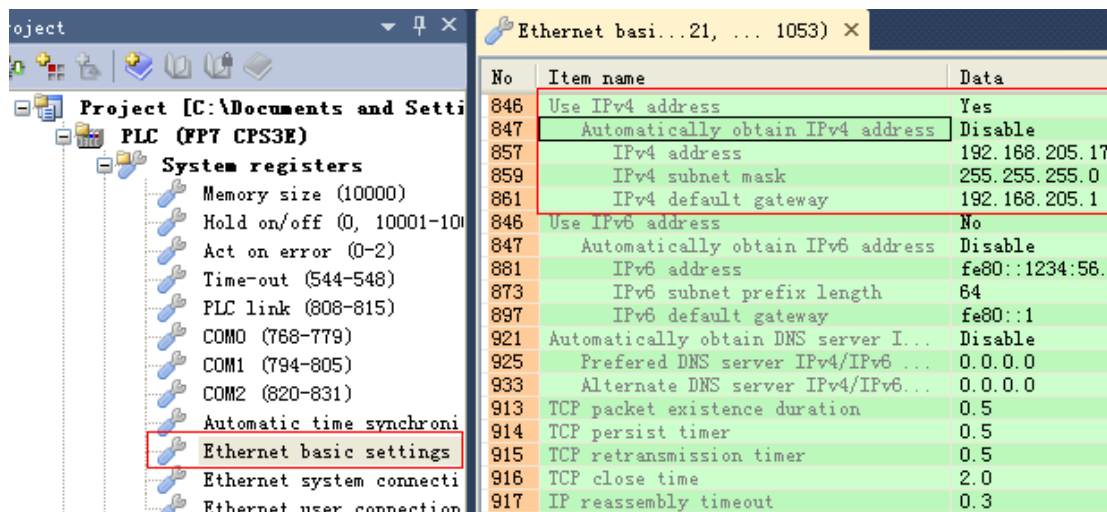

©Supported Device

Panasonic FP Series

Device	Bit Address	Word Address	Format	Notes
Output Relay	X0.0~32767.F	-----	DDDDD.H	
Input Relay	Y0.0~32767.F	-----	DDDDD.H	

Timer	T0~9999	-----	DDDD	
Counter	C0~9999	-----	DDDD	
Link Relay	L0.0~32767.F	-----	DDDDD.H	
Internal Auxiliary/Relay	R0.0~32767.F	-----	DDD.H	
T/C Elapsed Value	-----	EV0~32767	DDDDD	
T/C Setting Value	-----	SV0~9999	DDDD	
Data Register	-----	DT0~99999	DDDDD	
Input Word	-----	WX0~32767	DDDD	
Output Word	-----	WY0~32767	DDDD	
Internal Auxiliary/Relay	-----	WR0~32767	DDDDD	
Link Data Register	-----	LD0~99999	DDDDD	
Link Relay	-----	WL0~32767	DDDDD	
File Register	-----	FL0~99999	DDDDD	

NOTE:

1. Example: X address: 01 in the PLC corresponds to 0.1 in the EV5000; X address: 1F in the PLC corresponds to 1.F in the EV5000.Y\R register address, and so on.
2. EV registers in the range of addresses on the touch screen can be set to 32767, but only supports the 9999 agreement.

Panasonic FP_Extend

Device	Bit Address	Word Address	Format	Notes
Output Relay	X0.0~9999.F	-----	DDDDD.H	
Input Relay	Y0.0~9999.F	-----	DDDDD.H	
Timer	T0~9999	-----	DDDD	
Counter	C0~9999	-----	DDDD	
Link Relay	L_Bit 0.0~9999.F	-----	DDDDD.H	
Link Relay	L 0~9999F	-----	DDDDD.H	
Internal Auxiliary/Relay	R0.0~9999.F	-----	DDD.H	
T/C Elapsed Value	-----	EV0~65535	DDDDD	
T/C Setting Value	-----	SV0~9999	DDDD	
Data Register	-----	DT0~262143	DDDDD	
Input Word	-----	WX0~9999	DDDD	
Output Word	-----	WY0~9999	DDDD	
Internal Auxiliary/Relay	-----	WR0~9999	DDDDD	
Link Data Register	-----	LD0~99999	DDDDD	
Link Relay	-----	WL0~9999	DDDDD	
File Register	-----	FL0~99999	DDDDD	

Panasonic FP(Ethernet)

Device	Bit Address	Word Address	Format
Output Relay	X0.0-10000.0	-----	DDDDD.H
Input Relay	Y0.0-10000.0	-----	DDDDD.H
Internal Auxiliary/Relay	R0.0-10000.0	-----	DDDDD.H
Link Relay	L0.0-10000.0	-----	DDDDD.H
Timer	T0-160000	-----	DDDDDD

Counter	C0-160000	-----	DDDDDD
Input Word	-----	WX0-9999	DDDD
Output Word	-----	WY0-9999	DDDD
Internal Auxiliary/Relay	-----	WR0-9999	DDDD
Link Relay	-----	WL0-9999	DDDD
File Register	-----	FL0-99999	DDDDD
Link Data Register	-----	LD0-8447	DDDD
Data Register	-----	DT0-99999	DDDDD
T/C Setting Value	-----	SV0-9999	DDDD
T/C Elapsed Value	-----	EV0-65535	DDDDD

FP7 Series

Device	Bit Address	Word Address	Format
Input Relay	X 0.0-32767.f	-----	DDDDD.H
Output Relay	Y0.0-32767.f	-----	DDDDD.H
Internal Auxiliary/Relay	R0.0-32767.f	-----	DDDDD.H
Link Relay	L0.0-32767.f	-----	DDDDD.H
Timer	T0-4095	-----	DDDD
Counter	C0-1023	-----	DDDD
Input word	-----	WX0-511	DDD
Output word	-----	WY0-511	DDD
Internal Auxiliary/Relay	-----	WR0-32767	DDDDD
Link Relay	-----	WL0-32767	DDDDD
File register	-----	FL0-99999	DDDDD
Link Data register	-----	LD0-99999	DDDDD
Data register	-----	DT0-9829	DDDD
T Setting Value	-----	TS0-4095	DDDD
T Elapsed Value	-----	TE0-4095	DDDD
C Setting Value	-----	CS0-1023	DDDD
C Elapsed Value	-----	CE0-1023	DDDD
Index register	-----	I 0-E	H

NOTE:

Example: X address:01 in the PLC corresponds to 0.1 in the HMI;X address;1F in the PLC corresponds to 1.F in the HMI.R\Y\L register address,and so on.

FP7 Ethernet(TCP Slave)

Device	Bit Address	Word Address	Format
Input Relay	X 0.0-511.f	-----	DDD.H
Output Relay	Y0.0-511.f	-----	DDD.H
Internal Auxiliary/Relay	R0.0-2047.f	-----	DDDD.H

Link Relay	L0.0-1023.f	-----	DDDD.H
Timer	T0-4095	-----	DDDD
Counter	C0-1023	-----	DDDD
Error alarm relay	E0-4095	-----	DDDD
Input word	-----	WX0-511	DDD
Output word	-----	WY0-511	DDD
Internal Auxiliary/Relay	-----	WR0-2047	DDDD
Link Relay	-----	WL0-1023	DDDD
File register	-----	FL0-99999	DDDDD
Link Data register	-----	LD0-16383	DDDDD
Data register	-----	DT0-999423	DDDDDD
T Setting Value	-----	TS0-4095	DDDD
T Elapsed Value	-----	TE0-4095	DDDD
C Setting Value	-----	CS0-1023	DDDD
C Elapsed Value	-----	CE0-1023	DDDD
Index register	-----	I 0-E	H


NOTE:

Example: X address:01 in the PLC corresponds to 0.1 in the HMI;X address;1F in the PLC corresponds to 1.F in the HMI.R\Y\L register address,and so on.


◎ Cable Diagram

RS232 communication


Tool port:

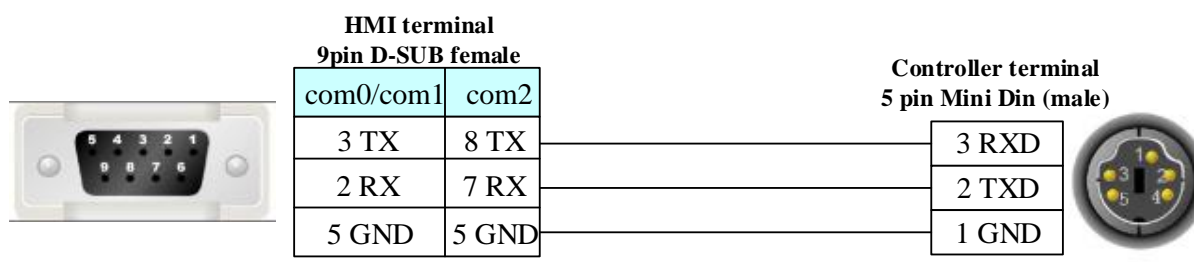


CPU port:

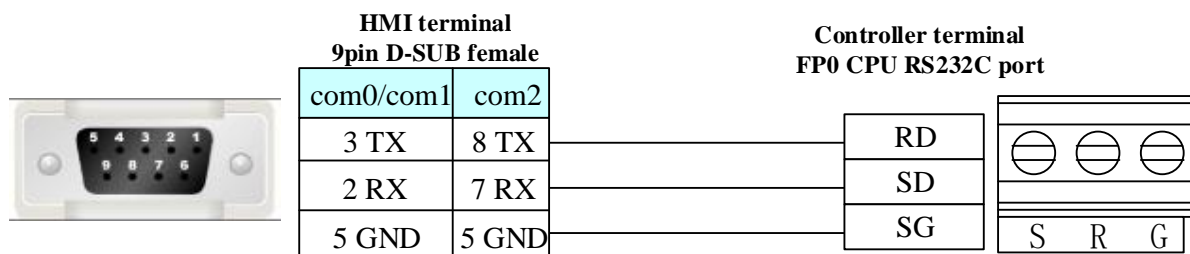


COM port:

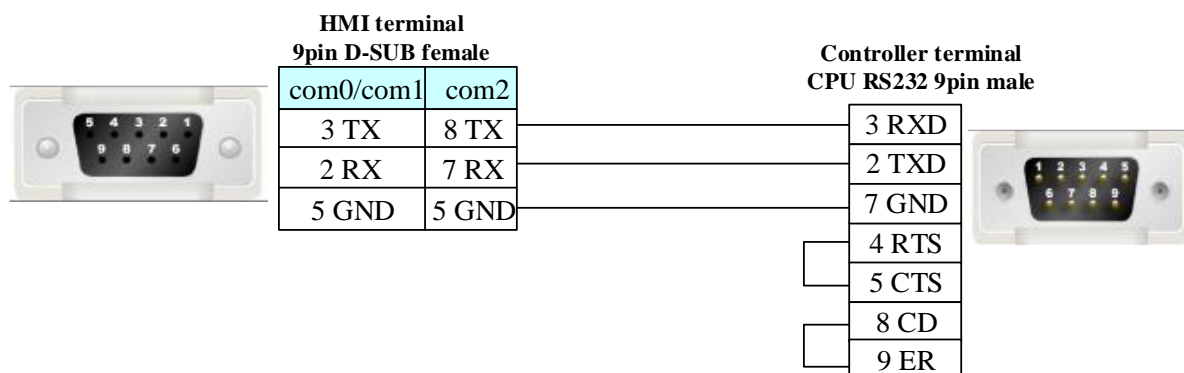

Communication module:

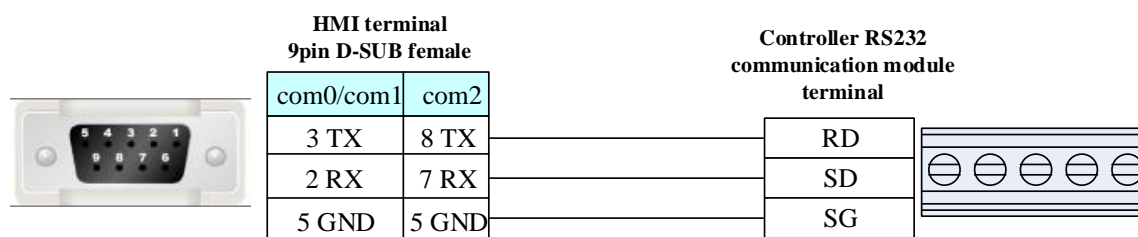


RS485 communication

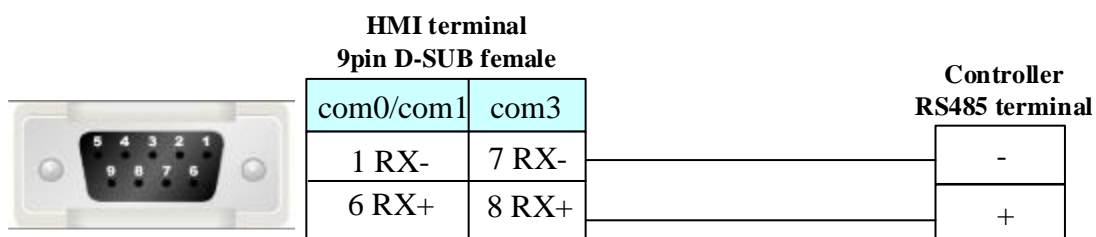

RS422 communication

FP3 RS422 programming port:

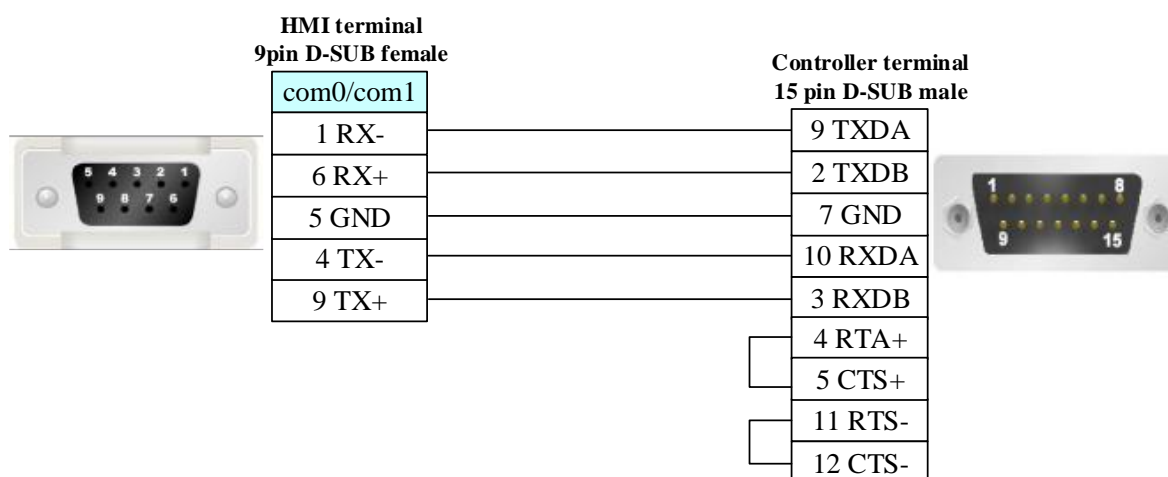

Another module RS422 communication:



Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.72 Parker Automation (Servo Controller)

◎ Serial Communication

Series	CPU	Link Module	Driver
Parker Compax3	Compax3	RS232 on CPU unit	Parker Compax3
		RS485 on CPU unit	
Parker SLVD Series	SLVD 15NS	RS485 on the CPU unit	Parker SLVD Series
Parker 6k	6K4	RS232 on the CPU unit	Parker 6k
ACR9040	ACR9040-P3-B	RS232 on the CPU unit	Parker ACR9000

◎ Ethernet Communication

Series	CPU	Link Module	Driver
ACR9040	ACR9040-P3-B	Ethernet interface on CPU	Parker ACR9000 Series Ethernet (TCP Slave)

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
Parker Compax3	Compax3	RS232 on CPU unit	RS232	Setting	Your owner cable
		RS485 on CPU unit	RS485	Setting	Your owner cable
		RS422 on CPU unit	RS422	Setting	Your owner cable
Parker SLVD Series	SLVD Series	RS485 on the CPU unit	RS485	Setting	Your owner cable
Parker 6k	6K4	RS232 on the CPU unit	RS232	Setting	Your owner cable
ACR9040	ACR9040-P3-B	RS232 on the CPU unit	RS232	Setting	Your owner cable

◎ Ethernet System configuration

Series	CPU	Link Module	Connect Type	Parameter	Cable
--------	-----	-------------	--------------	-----------	-------

ACR9040	ACR9040-P3-B	Ethernet interface on CPU	Ethernet	Setting	Your owner cable
---------	--------------	---------------------------	----------	-------------------------	----------------------------------

◎ Communication Setting

Parker Compax3 protocol

HMI Setting

Default communication parameters: 115200, 8, none, 1; station: 1

RS232 Communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS232'. The 'Baud Rate' is '115200', 'Data Bit' is '8', 'Parity' is 'none', 'Stop Bit' is '1', and 'Slave No.' is '1'. The 'PLC Communication Time Out' is '10', 'Protocol Time Out 1(ms)' is '50', 'Protocol Time Out 2(ms)' is '3', 'Max interval of block pack(WORDS)' is '1', 'Max interval of block pack(BITS)' is '1', 'Max block package size(WORDS)' is '1', and 'Max block package size(BITS)' is '1'. There is a 'Use Default Setting' button and 'OK' and 'Cancel' buttons at the bottom.

RS485 Communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 1 Setting' tab selected. The 'Type' is set to 'RS485-2'. The 'Baud Rate' is '9600', 'Data Bit' is '8', 'Parity' is 'none', 'Stop Bit' is '1', and 'Slave No.' is '1'. The 'PLC Communication Time Out' is '10', 'Protocol Time Out 1(ms)' is '50', 'Protocol Time Out 2(ms)' is '3', 'Max interval of block pack(WORDS)' is '1', 'Max interval of block pack(BITS)' is '1', 'Max block package size(WORDS)' is '1', and 'Max block package size(BITS)' is '1'. There is a 'Use Default Setting' button and 'OK' and 'Cancel' buttons at the bottom.

PLC Setting

NOTE: RS-485 Settings can be made in the C3 Servo Manager under "RS485 settings"

RS485 setting:

RS-485 Settings	
Master	General
Multicast Address	98
Device Address	1
Baud rate	9600
Connection Type	Two wire
Parity	No
Stop bits	1
Data bits	8

RS422 setting:

RS-485 Settings	
Master	General
Multicast Address	98
Device Address	1
Baud rate	9600
Connection Type	Four wire
Parity	No
Stop bits	1
Data bits	8

Parker SLVD Series protocol


Default communication parameters: 9600, 8, 1, even; station: 0

RS422 communication

HMI Attribute	
Security Levels Setting User Permissions Setting Historical Events Storage HMI Task Bar HMI Extended Attributes HMI System Information Text Print Setting COM0 Setting COM2 Setting Extended Memory	
Type	RS485-4
Baud Rate	9600
Data Bit	8
Parity Check	even
Stop Bit	1
<input type="checkbox"/> Broadcast	65535
PLC Communication Time Out	3
Protocol Time Out 1(ms)	5
Protocol Time Out 2(ms)	3
Max interval of word block pack	1
Max interval of bit block pack	2
Max word block package size	1
Max bit block package size	8
Use Default Setting	
<div>OK Cancel</div>	

Parker 6K protocol


Default communication parameters: 9600, 8, 1, none; station: 0

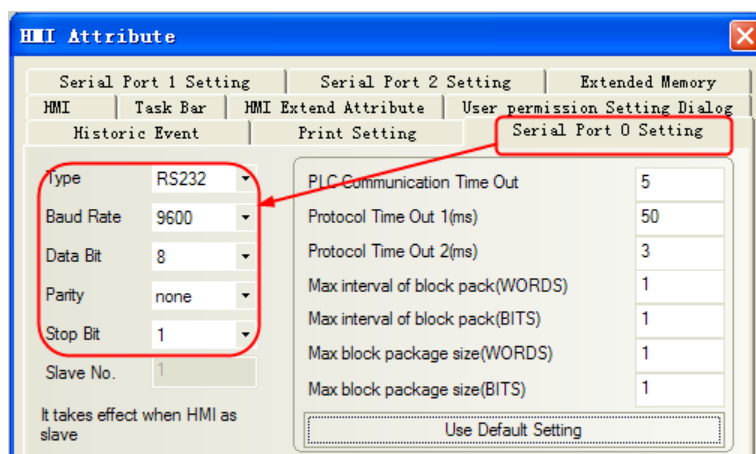

NOTE: Don't support RS485 communication mode



Parker ACR9000 protocol

Default communication parameters: 38400bps, 8, none, 1; station NO.: 0

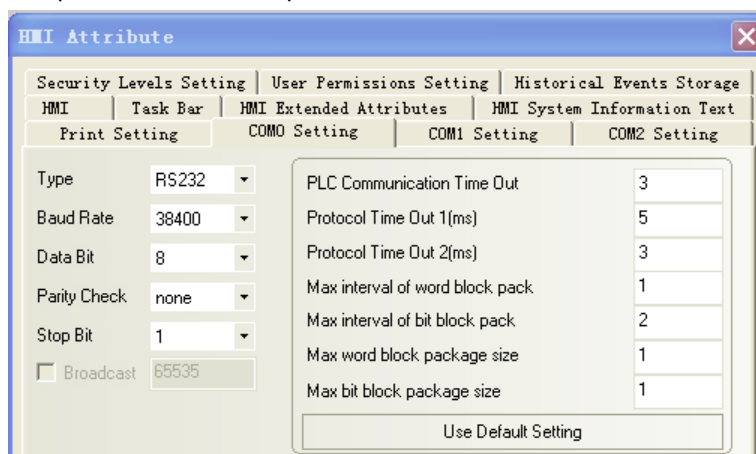

Parker ACR9000 Series Ethernet (TCP Slave)

HMI Setting

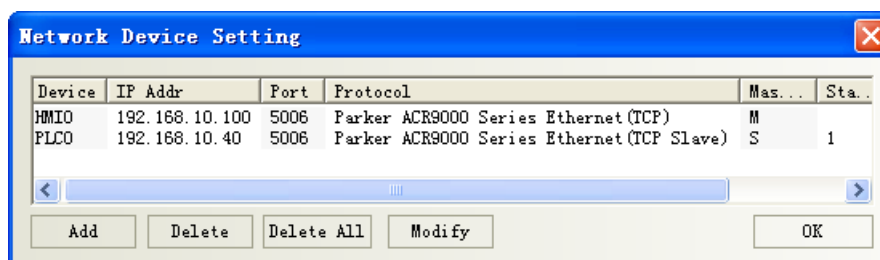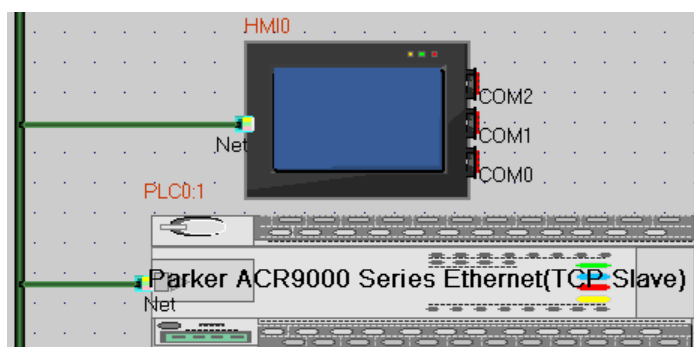

◎ Supported Device

Parker Compax3

Device	Bit Address	Word Address	Format
	R_Bit 0.0-9999999.31	-----	DDDDDDDD.DD
	-----	R_Float 0.0-9999.511	DDDD.DDD
	-----	R_Int 0.0-9999.511	DDDD.DDD

NOTE: R_Bit device is the bit format of R_Int device. The address of R_Bit device is DDDDDDD.DD, the first seven position indicate the address of R_Int, the last two position indicate 32-bit

SLVD Series

Device	Bit Address	Word Address	Format	Note
Pr_Bit	0-9999.15	-----	DDDD.DD	
Pr_Byte	-----	0-9999	DDDD	
Pr_Word	-----	0-9999	DDDD	
Pr_DWord	-----	0-9999	DDDD	

6k Series

Device	Bit Address	Word Address	Format	Notes
Bit in register	VARB_bit 1.00~125.31	-----	DDD	Read only
	KILL 0	-----		
	S 0	-----		
	C 0	-----		
	PS 0	-----		
	HALT 0	-----		
	RUN 0	-----		
	TAS_Bit 1.01-2.32	-----		
	TSS_Bit 1-32	-----		
	TIN_Bit 1.01-3.32	-----		
	TOUT_Bit 1.01-3.32	-----		
The 32-bit hexadecimal value in register	-----	VARB 1~125	DDD	Read only
The integer number value in register	-----	VAR_Int 1~225	DDDD	
The real number value in register	-----	VAR_Float 1~225	DDD	
	-----	VAR 1~255	DDD	
	-----	VARS 1~255	DDD	
	-----	A 1~255	DDD	
	-----	AD 1~255	DDD	
	-----	V 1~255	DDD	

	-----	DRIVE 1~255	DDD	
	-----	TAS 1~2	D	
	-----	TPC 1~255	DDD	
	-----	TPE 1~255	DDD	
	-----	TER 0	D	
	-----	TSS 0	D	
	-----	TIN 1~3	D	
	-----	TOUT 1~3	D	

NOTE: VARB configuration software need to use hexadecimal data type, integer-bit to 8 bits.


ACR9000、Parker ACR9000 Series Ethernet (TCP Slave)

Device	Bit Address	Word Address	Format	Notes
P_low16bit	0.0~99999.f	-----	DDDDD.FF	
P_high16bit	0.0~99999.f	-----	DDDDD.FF	
P_int32	-----	0~99999	DDDDD	
P_float	-----	0~99999	DDDDD	


◎ Cable Diagram

Parker Compax3 Series


RS232 Communication Cable

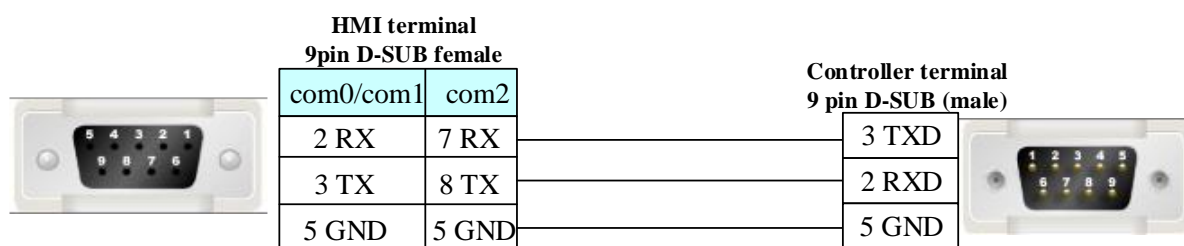

RS485 Communication Cable

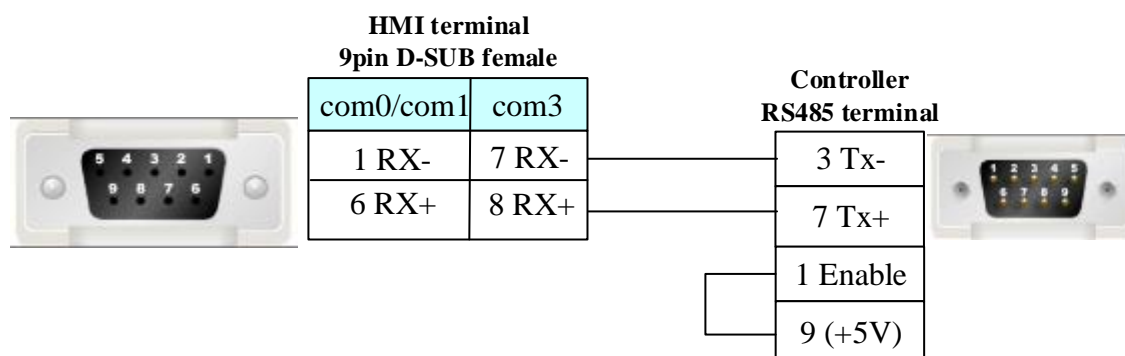


RS422 Communication Cable

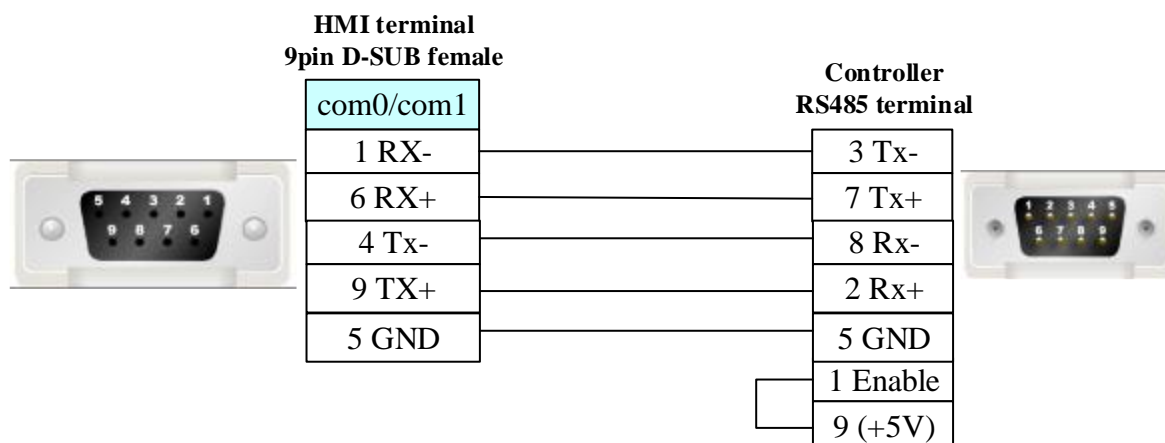


SLVD Series

RS485 Communication Cable

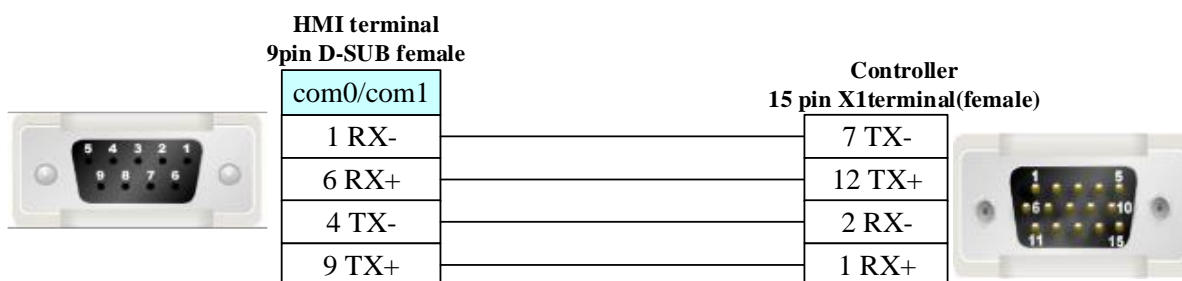

6k/9000 Series

RS232 Communication Cable

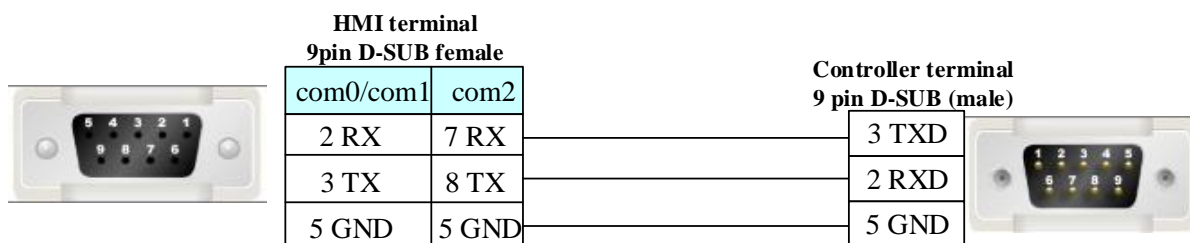

Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.73 PANKONG Corporation

© Serial Communication

Series	CPU	Link Module	Driver
MX Series	MX310-32	RS232 on the CPU unit	PANKONG MX Series RTU

◎ Ethernet Communication

Series	CPU	Link Module	Driver
MX Series	MX310-32	Ethernet interface on CPU	PANKONG MX Series(TCP Slave)

◎ Serial System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
MX Series	MX310-32	RS232 on the CPU unit	RS232	Setting	Your owner cable

◎ Ethernet System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
MX Series	MX310-32	Ethernet interface on CPU	Ethernet	Setting	Your owner cable

◎ Serial Communication Setting

HMI Setting

Default communication parameters 57600, 8, even, 1; station: 1

RS232 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'COM0 Setting' tab selected. The settings are as follows:

Setting	Value
Type	RS232
Baud Rate	57600
Data Bit	8
Parity Check	even
Stop Bit	1
Broadcast	<input type="checkbox"/> 65535


There is an 'Advanced Settings' button at the bottom right of the dialog box.

PLC 设置

1. Open the MX Builder programming tool, create a new project, select the CPU series MX310-32
2. Click on the menu bar (the button next to Offline), select the serial port, click Detect, the connected serial port setting parameters will be automatically detected, and click OK to connect to the device

◎ Network Communication Setting

HMI Setting

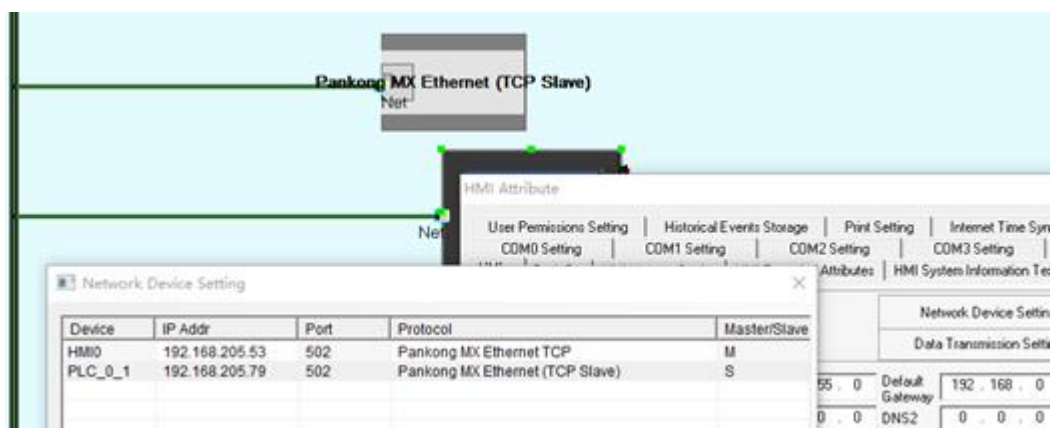

PLC Setting


1. Open the MX Builder programming tool, create a new project, and select the CPU series MX310-32
2. Click the button next to Offline in the menu bar, select the network port, search for the device, click the PLC device in the gray box, wait until the lower left corner shows connected, and then click OK

© Supported Device

Device	Bit Address	Word Address	Format	Notes
Output register	X 0~377	-----	OOO	
Input register	Y 0~377	-----	OOO	
Counter Value	C 0~255	-----	DDD	
Timer Value	T 0~511	-----	DDD	
Status register	S 0~4095	-----	DDDD	
	M8xxx 0~511	-----	DDD	
Auxiliary relay	M 0~7679	-----	DDDD	
Counter Value (32 bits)	-----	C2xx 0~55	DD	
Counter Value	-----	CW 0~199	DDD	
Timer Value	-----	TW 0~511	DDD	
Auxiliary relay	-----	R 0~7999	DDDD	
	-----	D8xxx 0~511	DDD	
Data register	-----	D 0~7999	DDDD	

© Cable Diagram

RS232 cable

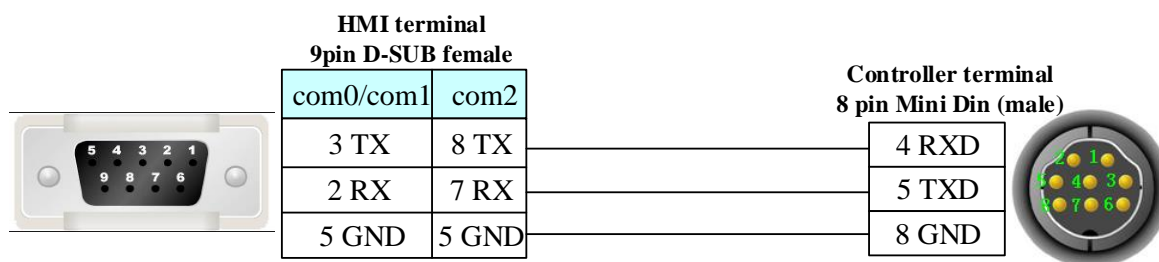

Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.74 PMAC Motion Controller

Serial Communication

Series	CPU	Link Module	Driver
PC/104	PC/104	RS232 on the CPU unit	PMAC series


System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
PC/104	PC/104	RS232 on the CPU unit	RS232	Setting	Your owner cable

Communication Setting

HMI Setting

Default communication parameters: 38400bps, 8, none, 1; station: 0

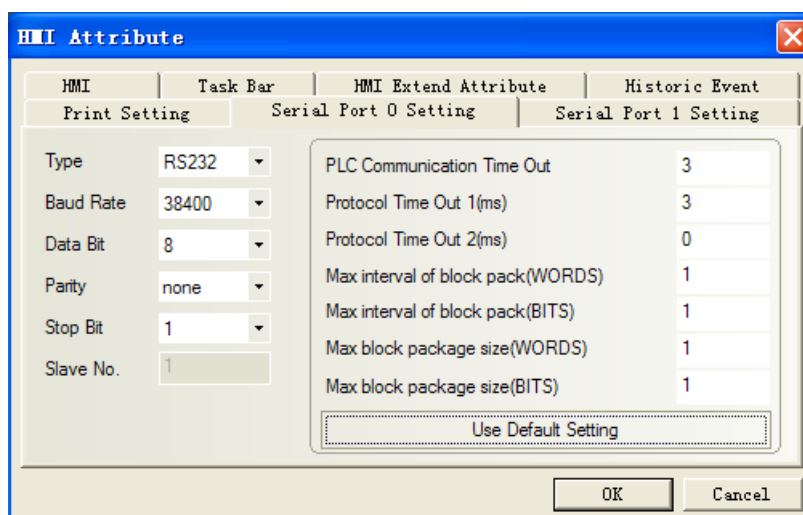

Supported Device

Device	Bit Address	Word Address	Format	Notes
I variable	-----	I 0-9999	DDDD	R/W

M variable	-----	M 0-9999	DDDD	R/W
P variable	-----	P 0-9999	DDDD	R/W
Q variable	-----	Q 0-9999	DDDD	R/W
I variable Float	-----	I_float 0-9999	DDDD	R/W
P variable Float	-----	P_float 0-9999	DDDD	R/W
Q variable Float	-----	Q_float 0-9999	DDDD	R/W
report position of motor	-----	POS 0	D	R
report velocity of motor	-----	VEL 0	D	R
report following error of motor	-----	FER 0	D	R
common manual and programming command	-----	ORD/JOG* 0-9999	DDDD	W
Run current program	-----	RUN 0-9999	DDDD	W
Halt program	-----	HLT 0-9999	DDDD	W

NOTE: Some addresses in I variable devices are on with hex number, when single float number on, all bits which can't be transformed into hex numbers will be "0"

PMAC common manual commands


- (0) ORD/JOG 0000: j+: continual positive rotation command
- (1) ORD/JOG 0010: j- : continual reverse rotation command
- (2) ORD/JOG 0020: j/ : stop command
- (3) ORD/JOG 0030: j=constant
- (4) ORD/JOG 0040: j: constant
- (5) ORD/JOG 0050: j ^
- (6) ORD/JOG 0060: # n
- (7) ORD/JOG 0070: home (hm) : manual reset zero commands
- (8) ORD/JOG 0080: homez (hmz) : manual reset zero position commands

PMAC common programming commands

- (0) ORD/JOG 0100: & n
- (1) ORD/JOG 0110: B m R
- (2) ORD/JOG 0120: B m S
- (3) ORD/JOG 0130: A (ctrl A) : Stop movement program
- (4) ORD/JOG 0140: K (ctrl K) : Stop movement program and close enable signal
- (5) ORD/JOG 0150: Enable PLC n: Enable PLC, n indicates prog no. of PLC, range 0-31
- (6) ORD/JOG 0160: Disable PLC n: Disable PLC, n indicates prog no. of PLC, range 0-31

© Cable Diagram

RS232 Communication Cable

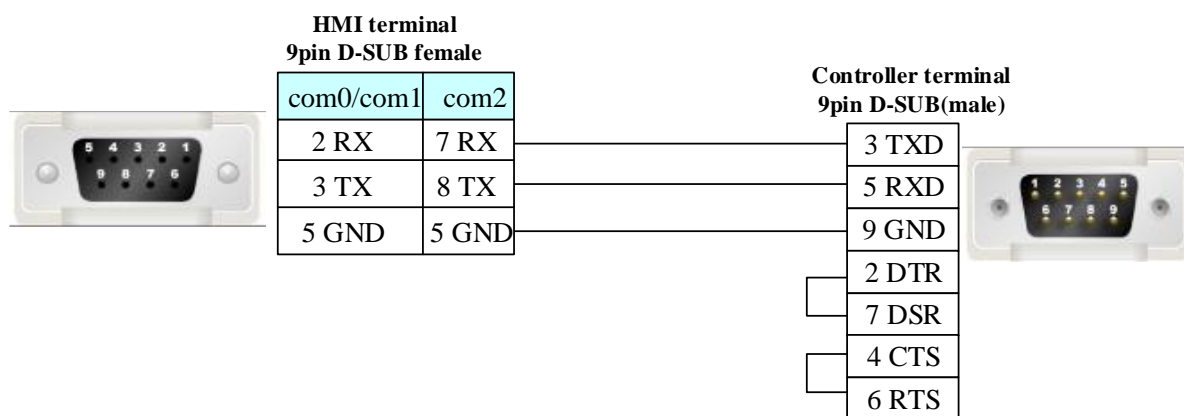

4.75 Power-one AURORA Wind Inverter

◎ Serial Communication

Series	CPU	Link Module	Driver
AURORA	PVI-6000-OUTD-US-W	RS485 on the port	Aurora PV


◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
AURORA	PVI-6000-OUTD-US-W	RS485 on the port	RS485	Setting	Your owner cable

◎ Communication Setting

HMI Setting

Default communication parameters: 19200, 8, none, 1; station: 2

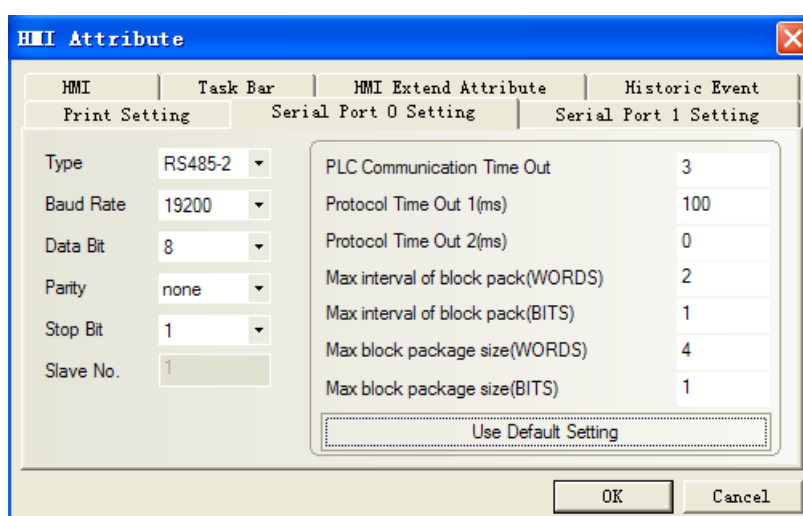

◎ Supported Device


Device	Bit Address	Word Address	Format
--------	-------------	--------------	--------

Time Register (double word)	-----	Time 0-9999.7	DDDDD.0
Energy Register (double word)	-----	Energy 0-9999.7	DDDDD.0
Status variable Register (double word)	-----	Measure 0-9999.7	DDDDD.0
Hardware version (double word)	-----	Fireware 0-9999.7	DDDDD.0
Software version (double word)	-----	Version 0-9999	DDDD
Device sequence No. (double word)	-----	SN 0-9999	DDDD
Device ID (double word)	-----	PN 0-9999	DDDD
Device work status	-----	State 0-9999	DDDD


◎ Cable Diagram

NOTE: AURORA Wind Inverter supports two connection modes, please refer to the manual of power-one Corporation for details.

1. Connect with RS485 port

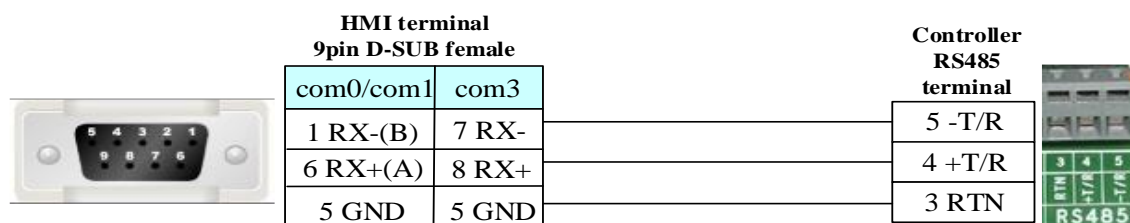

2. Connect with RJ12

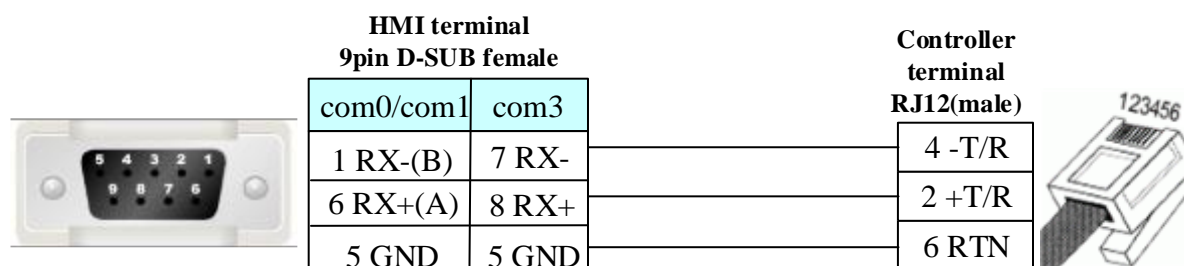

4.76 Profibus DP Slave

◎ Serial Communication

Series	CPU	Link Module	Driver
SIMATIC S7-300/400	ALL CPUs that have the DP port	PROFIBUS DP port on the External Device	Profibus DP Slave
Other company devices which support PROFIBUS DP Master		PROFIBUS DP port	



◎ System configuration

Series	CPU	Link Module	Parameter	SIP Type
SIMATIC S7-300/400	ALL CPUs that have the DP port	PROFIBUS DP port on the External Device	Setting	Profibus

Other company devices which support PROFIBUS DP Master	PROFIBUS DP port	Setting	
--------------------------------------------------------	------------------	-------------------------	--

◎ Communication Setting

HMI Setting

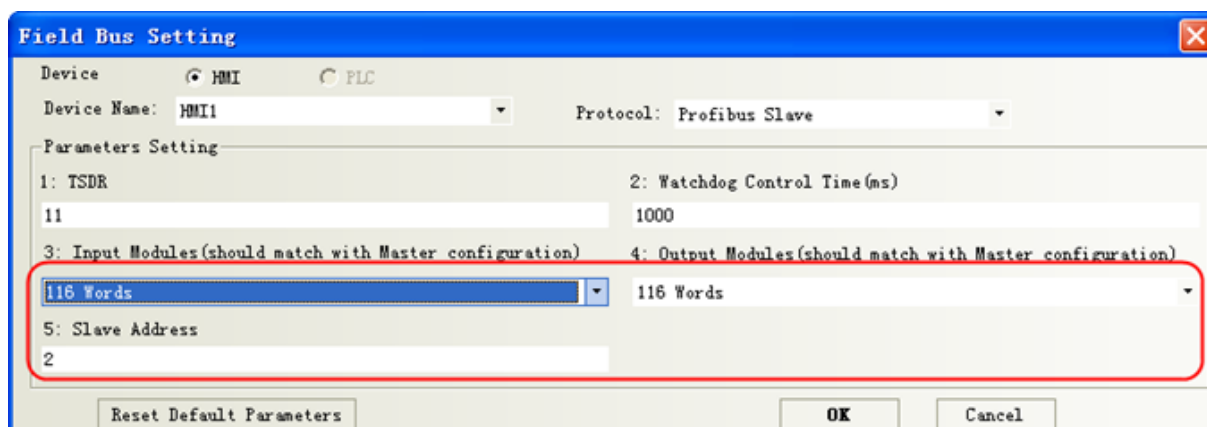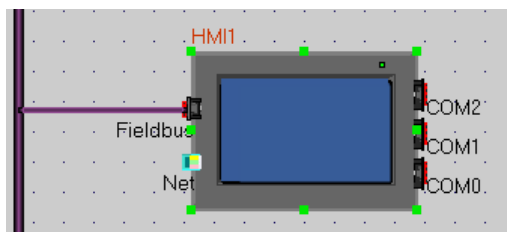

NOTE: Input and Output Modules should match with Master Configuration.

PLC Setting

NOTE: you can find kinco.gsd in the fieldbus file of EV5000 Installation Directory, or you can download from www.kinco.cn.

1.Setup kinco.gsd file

Setup GSD file in the s7-300 software.

Process:

- (1) . Closed all the station in HW Config
- (2) .choose "option" > "install GSD file".
- (3) .Find out the folder of eviiew.gsd.
- (4) .Choose eviiew.gsd, and then click the install button.

You can find the ico in PROFIBUS DP\MMI, after installing





2.configuration setting

- (1) Make a new project in s7-300 through the guide

(2) We must use OB82, OB86, OB100, OB121 and OB122 in BLOCK, or system will go wrong when PLC is power-up.


(3) Double click HW Config, choose “DP” and right click “add master station”.

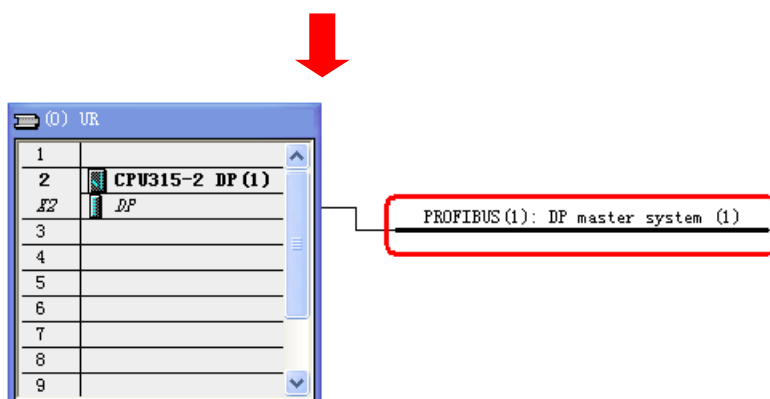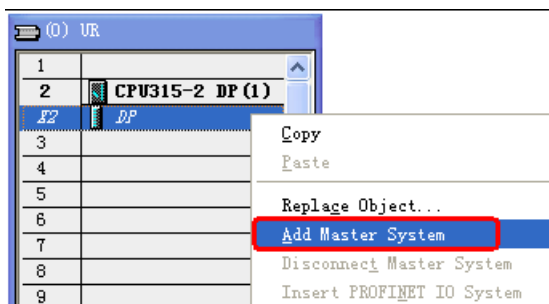

(4) Right click, choose “Insert Object”



Click “Kinco_MT5K_ProfibusDP_V1.0”, set address.

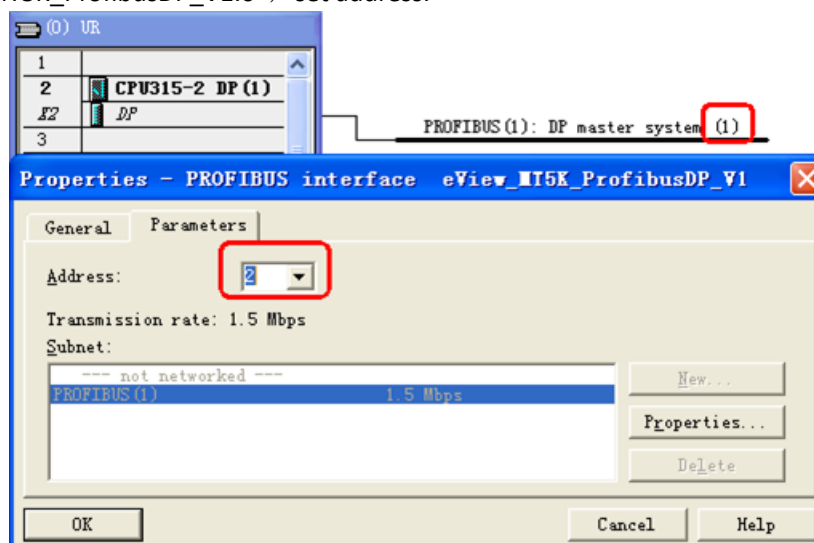


NOTE: the address No. of DP master station and slave can not be same.

(5) Input and output setting

插...	DP ID	订货号/标识	I 地址	Q 地址
1	16AI	PLC Direct I/O 16 Words Input	256...287	
2	16AO	PLC Direct I/O 16 Words Output		256...287
3				
4				

(6) Profibus DP Slave has adaption function, you can change the transmission rate of DP master station, maximum is 12Mbps.

(7) Double click slave ico, then set User_Prm_Data (0) =01

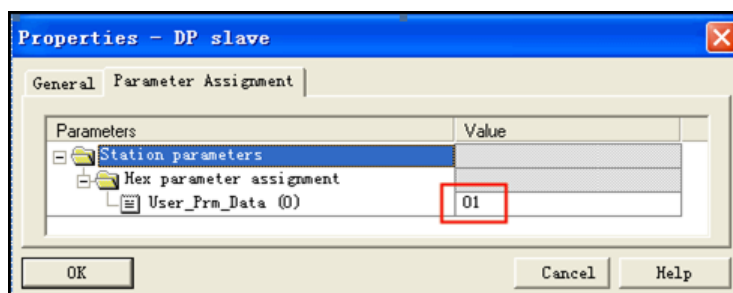


◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
Direct I/O Input	LW.B8500.0~8615.F	-----	DDDD.H	
Direct I/O Output	LW.B8000.0~8115.F	-----	DDDD.H	
Direct I/O Input	-----	LW8500~8615	DDDD	correspond PIW
Direct I/O Output	-----	LW8000~8115	DDDD	correspond PQW
Direct I/O Input	-----	LW8500~8615(Data width is dword)	DDDD	correspond PID
Direct I/O Output	-----	LW8000~8115(Data width is dword)	DDDD	correspond PQD

NOTE: When use either PID or PQD, you must set User_Prm_Data (0) =1 if HMI communication with the DP port of Siemens; Other company devices which support PROFIBUS DP Master, default User_Prm_Data (0) =0.

◎ Cable Diagram

A-type violet cable

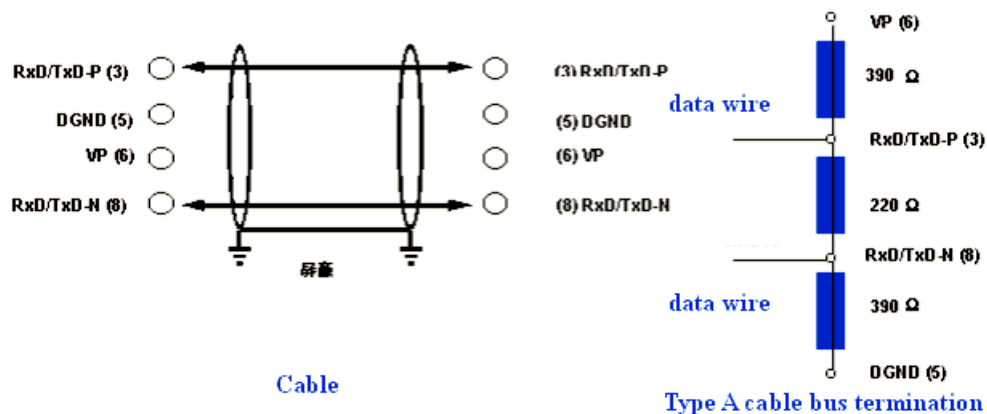

4.77 RF-IC (Card Reader)


◎ Serial Communication

Series	CPU	Link Module	Driver
RF-IC	RF-IC	RS232 on the CPU unit	RF-IC

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
RF-IC	RF-IC	RS232 on the CPU unit	RS232	Setting	Your owner cable

◎ Communication Setting

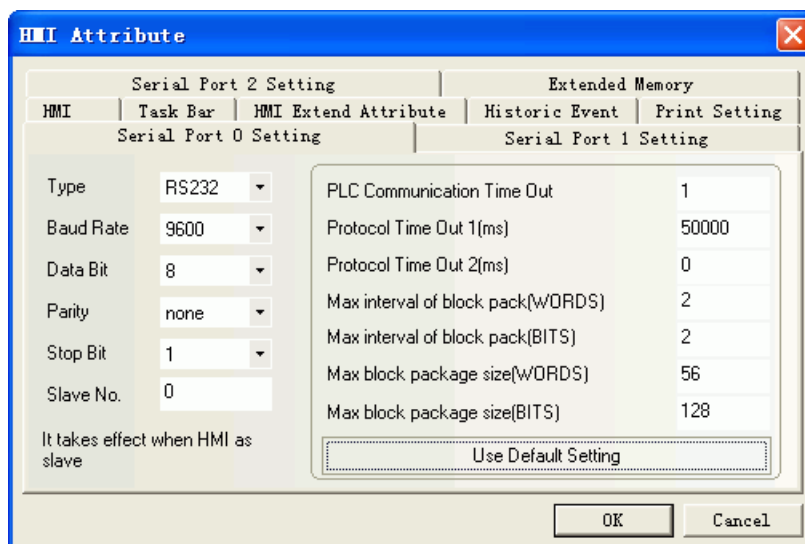


◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
Bit	LB 8999	-----	DDDD	
	-----	LW 8900	DDDD	

NOTE: LB8999 means bar code has received or not. LB8999=1 means data has received.

◎ Cable Diagram

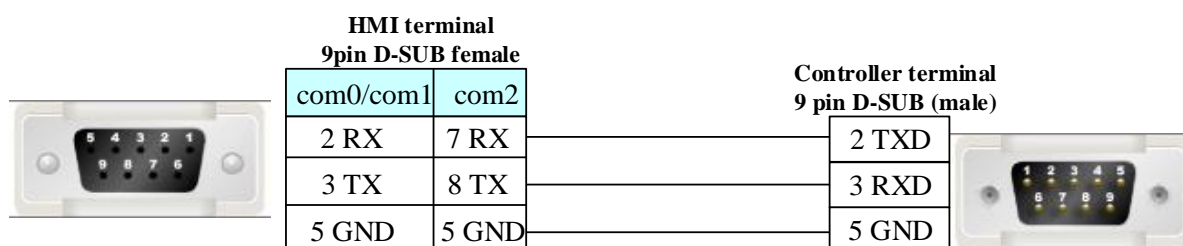

4.78 RKC Instrument INC.

◎ Serial Communication

Series	CPU	Link Module	Driver
RKC CH	CH402WK02-VV*AN-5N	CPU direct	RKC CH402

◎ System configuration


Series	CPU	Link Module	COMM Type	Parameter	Cable
RKC CH	CH402WK02-VV *AN-5N	RS485 the CPU unit	RS485	Setting	Your owner cable

◎ Communication Setting

HMI Setting

Default communication: 9600, 8, none, 1; station: 1

[RS485 communication](#)

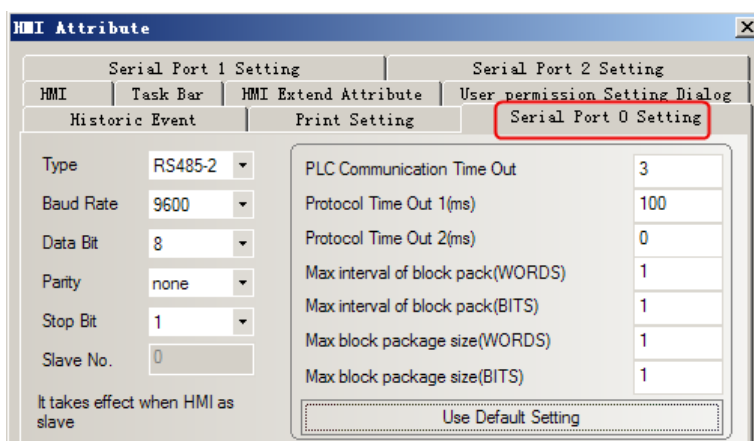

PLC Setting

Press “SET” key and “ < R/S ” key at one time, then press the SET key and select parameters:

Add	Address *1
bPS	Baudrate *2
bit	data instruction *3
InT	transmission delay *4

*1: Two bits ASCII code. Example 23, instrument number must 23(32H 33H)

*2: Baudrate controlled by code as below; default value: 2

0:	2400 bps
1:	4800 bps
2:	9600 bps
3:	19200 bps

*3: data instruction controlled by code as below; default value: 0

ID	Data bit	parity	stop bit
0	8	none	1
1	8	none	2
2	7	odd	1
3	7	odd	2
4	7	even	1
5	7	even	2


◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
Alarm 1 status	AA: 0	-----	D	Read only

Burnout	B1: 0	-----	D	Read only
PID control/Autotuning	G1: 0	-----	D	R/W
Alarm 2 status	AB: 0	-----	D	Read only
RUN/STOP transfer	SR: 0	-----	D	R/W
Self-tuning	G2:0	-----	D	R/W
Measured value	-----	M1: 0	D	Read only
Current transformer input1	-----	M2: 0	D	Read only
Current transformer input2	-----	M3: 0	D	Read only
Error code	-----	ER: 0	D	Read only
Set value(SV1)	-----	S1: 0	D	R/W
Alarm 1 setting	-----	A1: 0	D	R/W
Alarm 2 setting	-----	A2: 0	D	R/W
Heater break alarm 1 setting	-----	A3: 0	D	R/W
Heater break alarm 2 setting	-----	A4: 0	D	R/W
Control loop break alarm	-----	A5: 0	D	R/W
Heat-side proportional band	-----	P1: 0	D	R/W
Integral time	-----	I1: 0	D	R/W
Derivative time	-----	D1: 0	D	R/W
Anti-reset windup	-----	W1: 0	D	R/W
Cool-side proportional band	-----	P2: 0	D	R/W
Overlap/deadband	-----	V1: 0	D	R/W
Heat-side proportioning cycle	-----	T0: 0	D	R/W
Cool-side proportioning cycle	-----	T1: 0	D	R/W
PV bias	-----	PB: 0	D	R/W
Set data lock function	-----	LK: 0	D	R/W

◎ Cable Diagram

RS485 Communication Cable

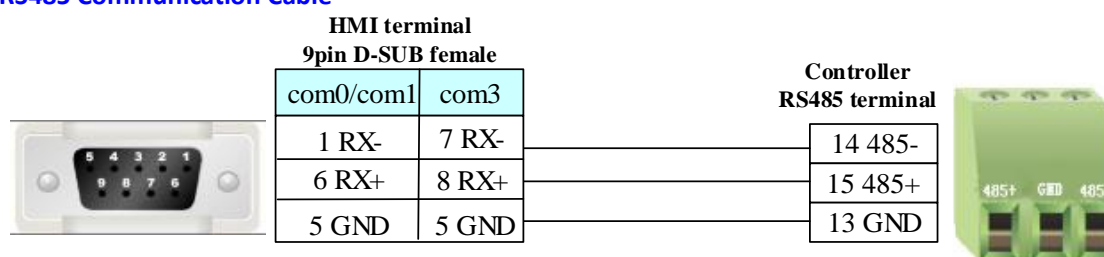

4.79 Saia-Burgess

◎ Serial Communication

Series	CPU	Link Module	Driver
PCS	PCS1.C8	RS232 on the CPU unit	Saia SBus

PCD	PCD2.M110 PCD2.M120 PCD2.M150 PCD2.M170 PCD2.M480	RS232 on the CPU unit	
-----	---------------------------------------------------------------	-----------------------	--

◎ Systems Configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
PCS	PCS1.C8	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485 on the CPU unit	RS422	Setting	Your owner cable
PCD	PCD2.M110	RS232 on the CPU unit	RS232	Setting	Your owner cable

◎ Communication Setting

HMI Setting

Default communication: 9600, 8, none, 1; station: 80

RS232 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS232'. The 'Baud Rate' is 9600, 'Data Bit' is 8, 'Parity' is none, 'Stop Bit' is 1, and 'Slave No.' is 1. The right pane shows communication parameters: PLC Communication Time Out (3), Protocol Time Out 1(ms) (50), Protocol Time Out 2(ms) (3), Max interval of block pack(WORDS) (2), Max interval of block pack(BITS) (8), Max block package size(WORDS) (64), and Max block package size(BITS) (128). A 'Use Default Setting' button is at the bottom of the right pane. 'OK' and 'Cancel' buttons are at the bottom of the dialog.

RS485 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS485-2'. The 'Baud Rate' is 9600, 'Data Bit' is 8, 'Parity' is none, 'Stop Bit' is 1, and 'Slave No.' is 1. The right pane shows communication parameters: PLC Communication Time Out (3), Protocol Time Out 1(ms) (50), Protocol Time Out 2(ms) (3), Max interval of block pack(WORDS) (2), Max interval of block pack(BITS) (8), Max block package size(WORDS) (64), and Max block package size(BITS) (128). A 'Use Default Setting' button is at the bottom of the right pane. 'OK' and 'Cancel' buttons are at the bottom of the dialog.


◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
Input	I0-8091	-----	DDDDD	
Output	O0-8091	-----	DDDDD	
Flag	F0-8091	-----	DDDD	
Timer	-----	T0-1599	DDDD	
Counter	-----	C0-1599	DDDD	
Register	-----	R0-4095	DDDD	
Register (support single float point)	-----	R_Float0-4095	DDDD	


◎ Cable Diagram

PCS1.C8

RS232 communication cable

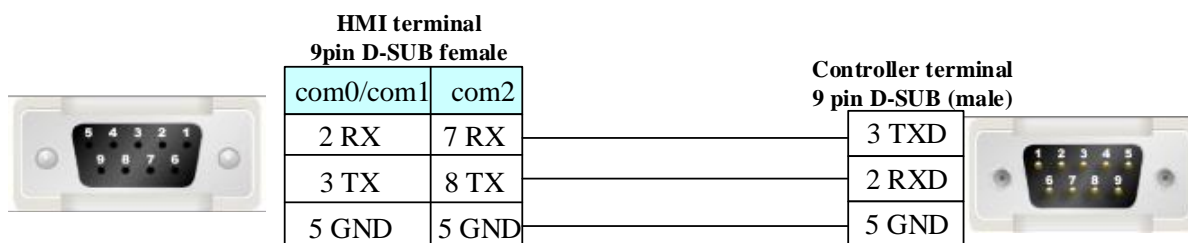


RS485 communication cable

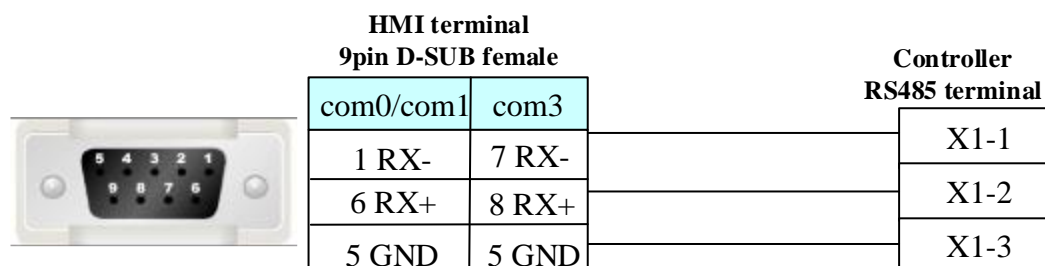

PCD2.M110

RS232 communication cable

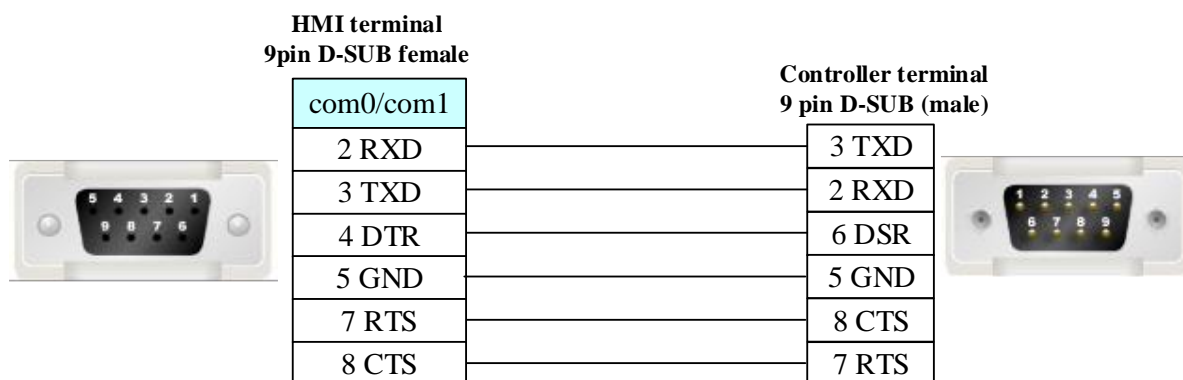

4.80 Sailors D9 (Temperature Controller)

Serial Communication

Series	CPU	Link Module	Driver
Sailors D9	Swp-T16-80-08-N	RS232 on the CPU unit	Sailors D9

System configuration


Series	CPU	Link Module	COM Type	Parameter	Cable
Sailors D9	Swp-T16-80-08-N	RS485 on the CPU unit	RS485	Setting	Your owner cable

Communication Setting

HMI Setting

Default communication parameters: 9600, 8, none, 1; station: 80

RS485 communication

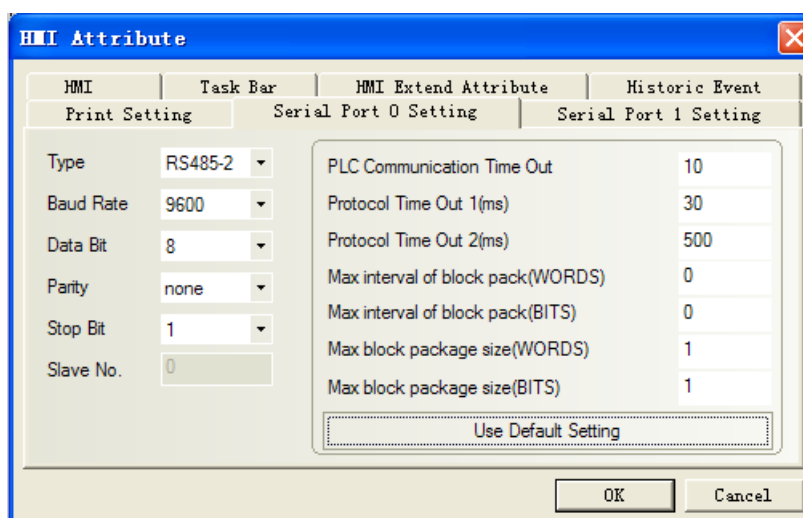


Supported Device

Device	Bit Address	Word Address	Format	Notes
--------	-------------	--------------	--------	-------

Channel Sample Value	-----	CH 0~16	DD	
Channel Indexing	-----	SN 1~16	DD	

◎ Cable Diagram

RS485 communication cable

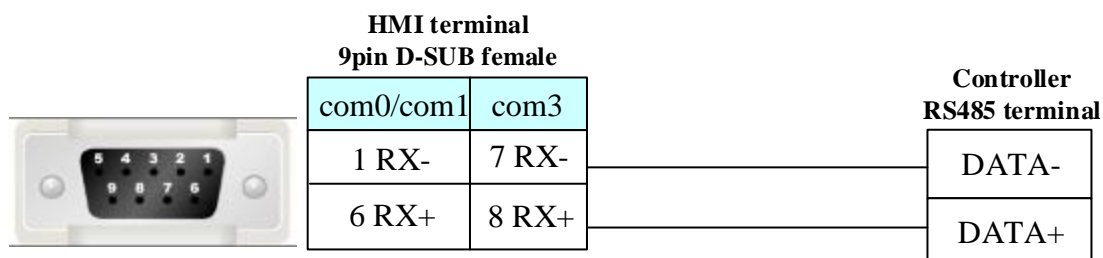

4.81 Schneider Electric, Ltd.

◎ Serial Communication

Series	CPU	Link Module	Driver
Micro	TSX3705001 TSX 37 05 028DR1 TSX 37 08 056DR1 TSX 37 10 128DT1 TSX 37 10 128DR1 TSX 37 10 128DTK1 TSX 37 10 164DTK1 TSX 37 10 028AR1 TSX 37 10 028DR1 TSX 37 21 101 TSX 37 22 101 TSX 37 21 001 TSX 37 22 001	TER port on the CPU	Schneider Modicon Uni-TelWay Modbus RTU
Premium	TSX P57 103M TSX P57 153M TSX P57 203M TSX P57 253M TSX P57 303M TSX P57 353M TSX P57 453M	TER port on the CPU	
Nano	TSX 07 3L □□□□28 TSX 07 30 10□□□□ TSX 07 31 16□□□□ TSX 07 31 24□□□□	Programming port on CPU	

	TSX 07 32 □□□□28 TSX 07 33 □□□□28		
Twido	TWD LCAA 10DRF TWD LCAA 16DRF TWD LCAA 24DRF TWD LMDA 20DTK TWD LMDA 20DUK TWD LMDA 20DRT TWD LMDA 40DTK TWD LMDA 40DUK	RS485 on the CPU unit	Schneider Twido Modbus RTU
M 258 Series	TM258LD42DT TM258LF42DT	RS232 on the CPU unit RS485 on the CPU unit	Schneider M Series
M241 Series	TM241CEC24R	RS232 on the CPU unit RS485 on the CPU unit	Schneider M Series
TM100/200 Series	TM100/ TM200CE32R	RS485 on the CPU unit	Schneider M100_M200 Modbus RTU Series

◎ Network communication

Series	CPU	Link Module	Driver
M 258 Series	TM258LD42DT TM258LF42DT	ETH on the CPU unit	Schneider Ethernet(TCP Slave)
M241 Series	TM241CEC24R	ETH on the CPU unit	Schneider Ethernet(TCP Slave)
TM100/200 Series	TM200CE32R	ETH on the CPU unit	Schneider M200 Ethernet(TCP Slave)

◎ Serial System configuration

Series	CPU	Link Module	Driver	COMM Type	Parameter	Cable
Modicon TSX	TSX3705001	RS485 on the CPU unit	Schneider Modicon Uni-TelWay	RS232	Setting	Your owner cable
	TSX3705001			RS485	Setting	Your owner cable
	TSX 37 05 028DR1					
	TSX 37 08 056DR1					
	TSX 37 10 128DT1					
	TSX 37 10 128DR1					
	TSX 37 10 128DTK1					
	TSX 37 10 164DTK1					
	TSX 37 10 028AR1					
	TSX 37 10 028DR1					
	TSX 37 21 101					
	TSX 37 22 101					
	TSX 37 21 001					
	TSX 37 22 001					
	TSX3705001	RS485 on	Modbus	RS232	Setting	Your owner cable

	TSX3705001 TSX 37 05 028DR1 TSX 37 08 056DR1 TSX 37 10 128DT1 TSX 37 10 128DR1 TSX 37 10 128DTK1 TSX 37 10 164DTK1 TSX 37 10 028AR1 TSX 37 10 028DR1 TSX 37 21 101 TSX 37 22 101 TSX 37 21 001 TSX 37 22 001	the CPU unit	RTU			
				RS485	Setting	Your owner cable
Twido	TWD LCAA 10DRF TWD LCAA 16DRF TWD LCAA 24DRF TWD LMDA 20DTK TWD LMDA 20DUK TWD LMDA 20DRT TWD LMDA 40DTK TWD LMDA 40DUK	RS485 on the CPU unit		RS232	Setting	Your owner cable
				RS485	Setting	Your owner cable
M258 Series	TM258LD42DT TM258LF42DT	RS232 on the CPU unit		RS232	Setting	Your owner cable
		RS485 on the CPU unit		RS485	Setting	Your owner cable
M241 Series	TM241CEC24R	RS232 on the CPU unit		RS232	Setting	Your owner cable
		RS485 on the CPU unit		RS485	Setting	Your owner cable
TM100/200 Series	TM200CE32R	RS485 on the CPU unit		RS485	Setting	Your owner cable

◎ Network System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
M258 Series	TM258LD42DT TM258LF42DT	ETH on the CPU unit	Ethernet	HMI Setting	Your owner cable
M241 Series	M241 Series	ETH on the CPU unit	Ethernet	HMI Setting	Your owner cable
TM200 Series	TM200CE32R	ETH on the CPU unit	Ethernet	HMI Setting	Your owner cable

◎ Serial Communication Setting

HMI Setting

Schneider Modicon Uni-TelWay protocol

Default communication: 9600, 8, odd, 1; station:1

RS232 communication

NOTE: Cable by Schneider Electric Industries, Rotary switch setting: 2(TER Direct)

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS232'. The 'Baud Rate' is '9600', 'Data Bit' is '8', 'Parity' is 'odd', 'Stop Bit' is '1', and 'Slave No.' is '0'. On the right, the 'PLC Communication Time Out' is '3', 'Protocol Time Out 1(ms)' is '50', 'Protocol Time Out 2(ms)' is '300', 'Max interval of block pack(WORDS)' is '8', 'Max interval of block pack(BITS)' is '8', 'Max block package size(WORDS)' is '32', and 'Max block package size(BITS)' is '16'. A 'Use Default Setting' button is at the bottom of the right panel. 'OK' and 'Cancel' buttons are at the bottom of the dialog.

RS485 communication


The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS485-2'. The 'Baud Rate' is '9600', 'Data Bit' is '8', 'Parity' is 'odd', 'Stop Bit' is '1', and 'Slave No.' is '0'. On the right, the 'PLC Communication Time Out' is '3', 'Protocol Time Out 1(ms)' is '50', 'Protocol Time Out 2(ms)' is '300', 'Max interval of block pack(WORDS)' is '8', 'Max interval of block pack(BITS)' is '8', 'Max block package size(WORDS)' is '32', and 'Max block package size(BITS)' is '16'. A 'Use Default Setting' button is at the bottom of the right panel. 'OK' and 'Cancel' buttons are at the bottom of the dialog.

Modbus RTU protocol


Default communication: 9600, 8, even, 1; station: 1

RS232 communication

NOTE: Cable by Schneider Electric Industries, Rotary switch setting: 3(OTHER Direct)

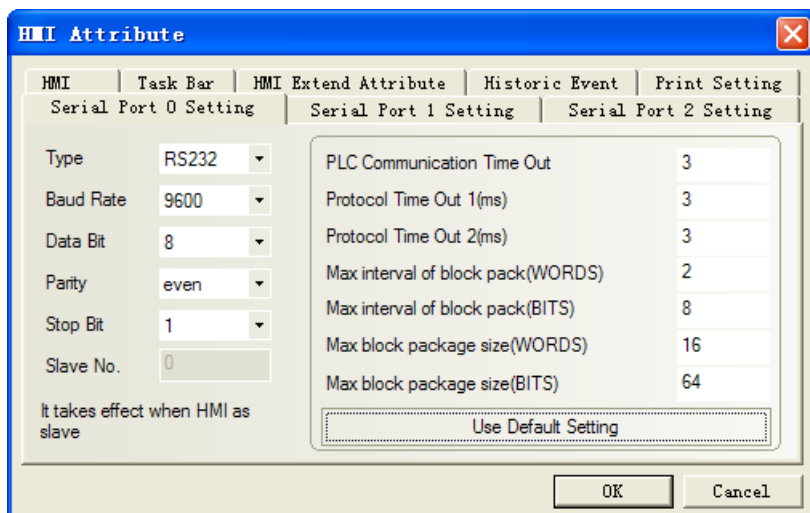


RS485 communication

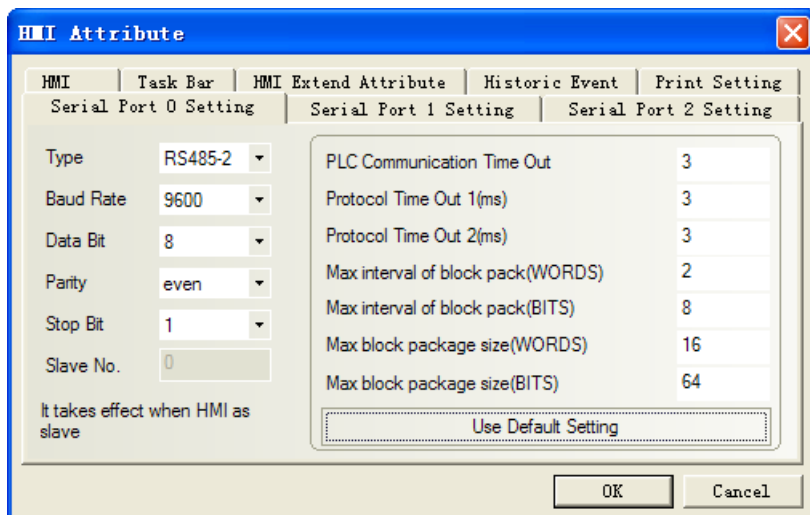


PLC Setting

PL7 software setting


1. Start menu → "modicum telemecanique" → "XWAY Driver Manager" to set communication parameter

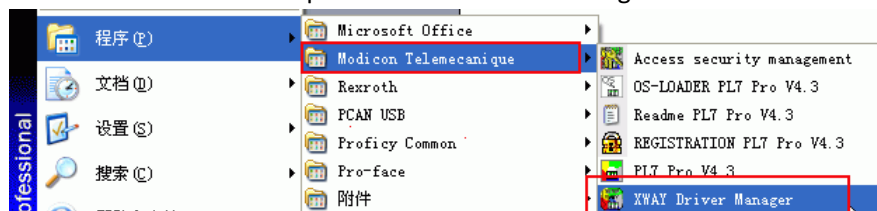


2. Pop-up to select "UNITELWAY Driver" → "Configuration" → "Edit" to modify communication parameter

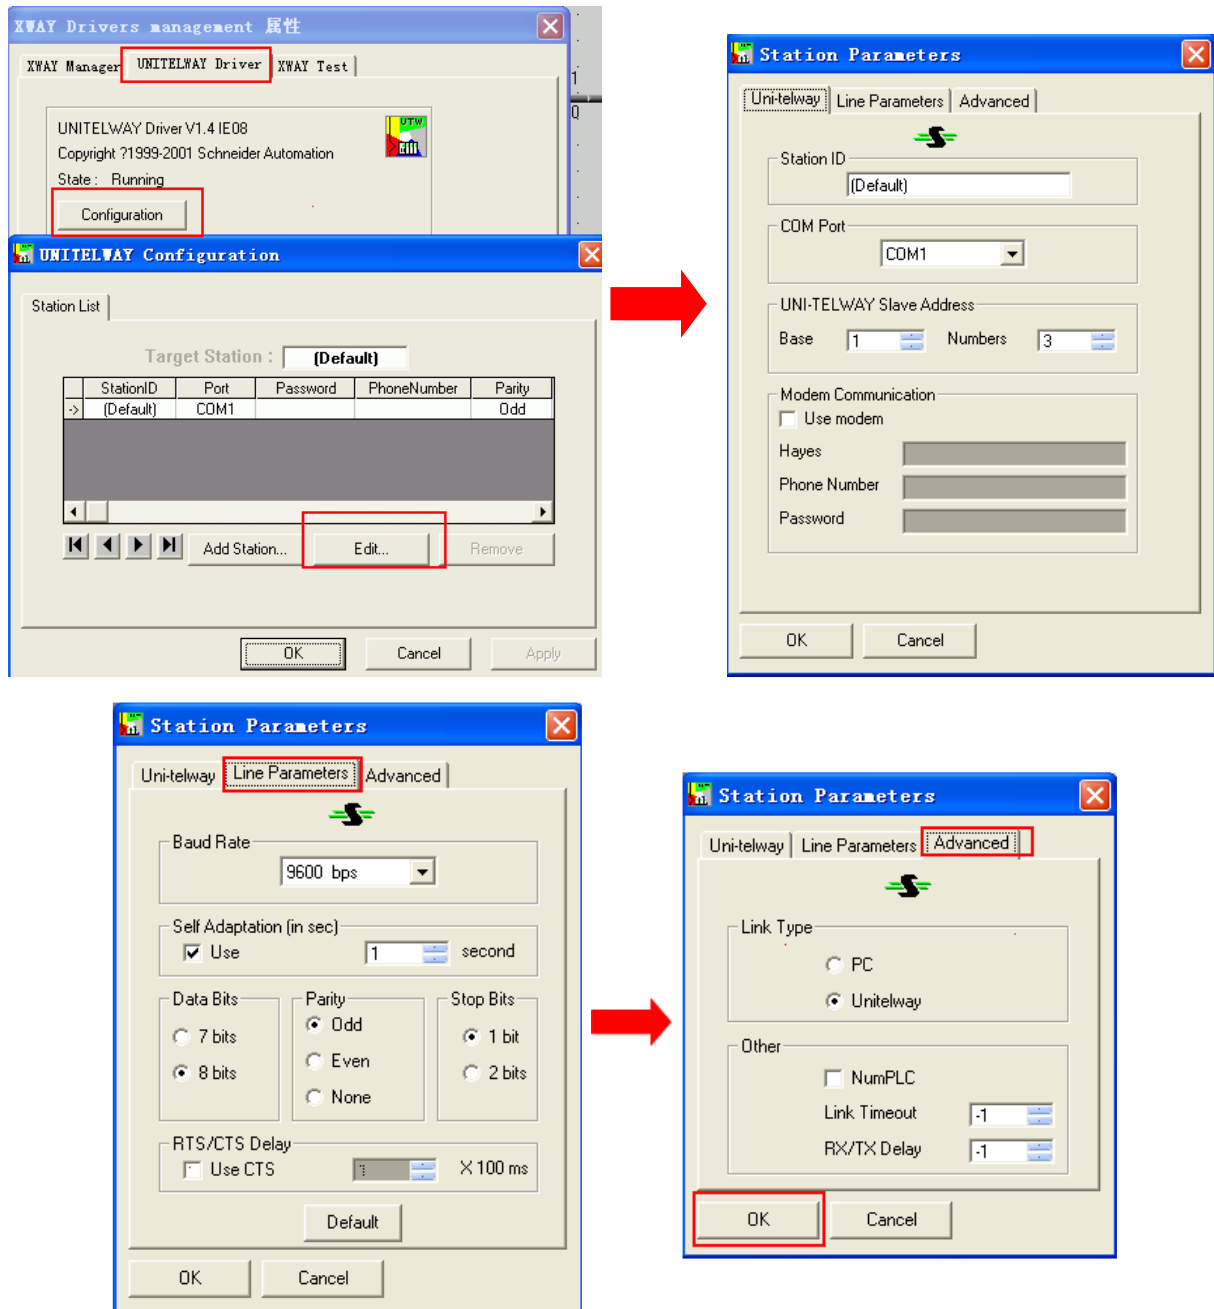


3. Press "OK" and pop up the following tips

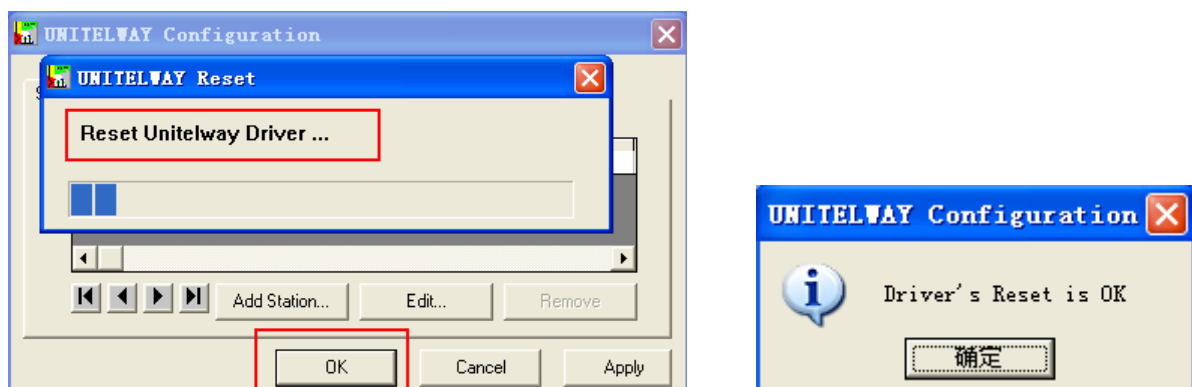


4. And then click "XWAY Test" → "Connect", if the connection is successful, it will clue "Connected"

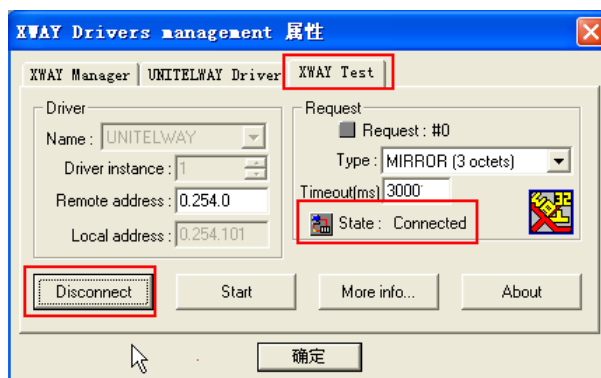


5. Open the PL7 software → "Create new project" → click "Hardware configuration" → double-click pop-up window "Comm"

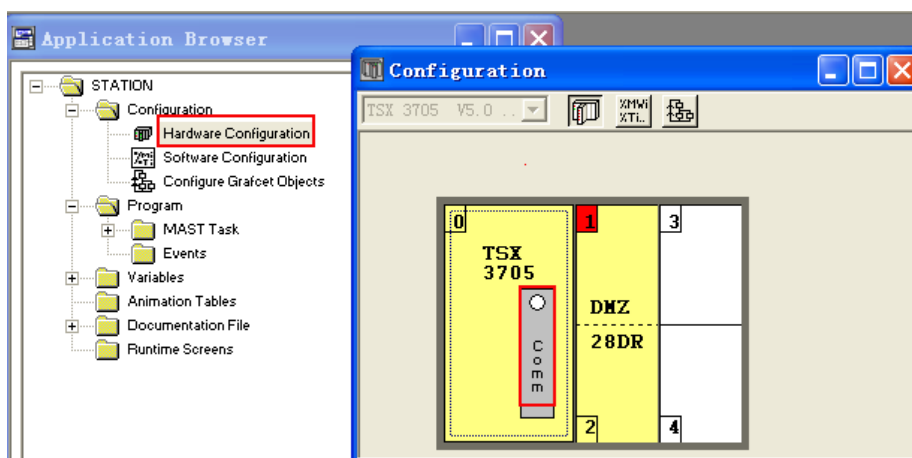

Unitel-way protocol setting as follow:

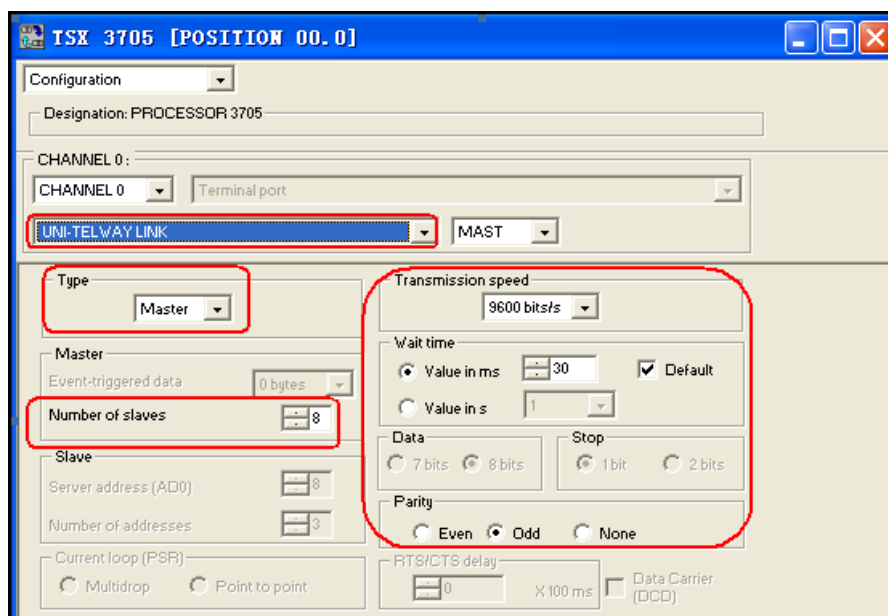

Modbus RTU protocol setting as follow:

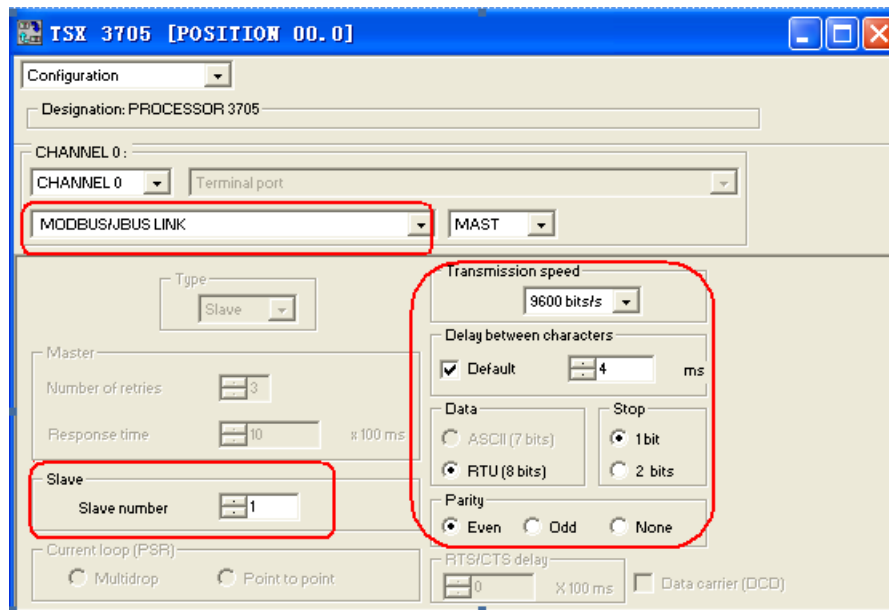


6. Setting up the configuration and download the project to the PLC

Schneider Twido Modbus RTU protocol


Default communication: 19200, 8, none, 1; station: 1

NOTE: Cable by Schneider Electric Industries, Rotary switch setting: 2(TER Direct).

[RS232 communication](#)

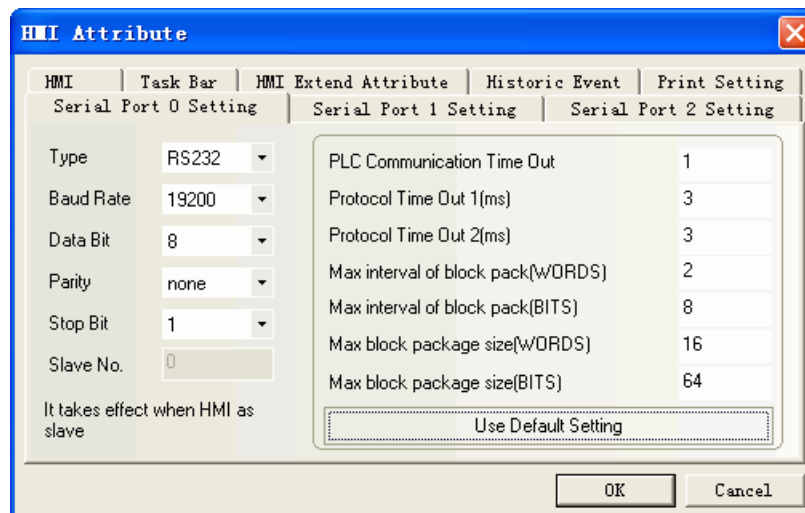


[RS485 communication](#)

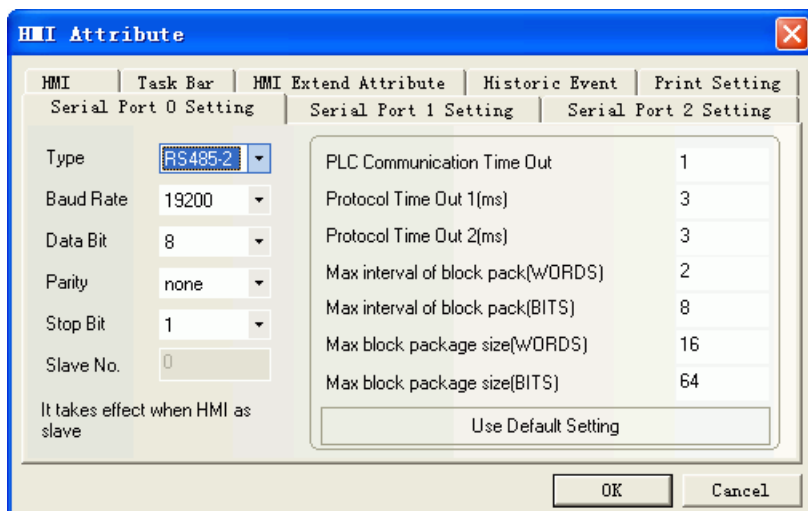


PLC Setting

1. Specify a large number for the internal word in the “Controller → Memory Use → Edit” and load the configuration into the PLC to open the memory area for the words. If set the internal word 3000, you can use address of MW before 3000.

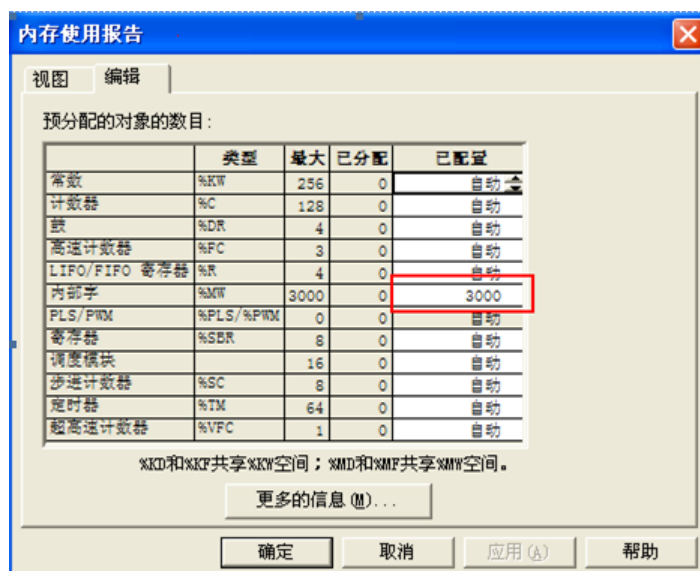


2. You must program a coil with maximum address to open the memory area for the Bits. If you program a coil with 127 addresses, then the address before 127 can be used.




Schneider M Series protocol

Default communication: 9600, 8, odd, 1; station:1

[RS232 communication](#)

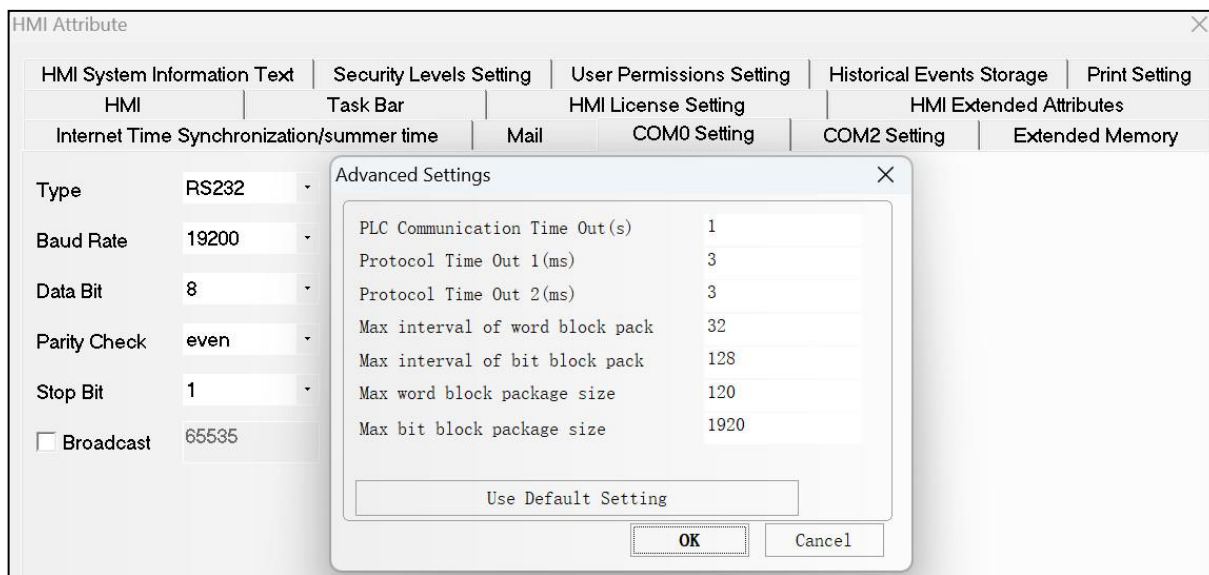


RS485 communication

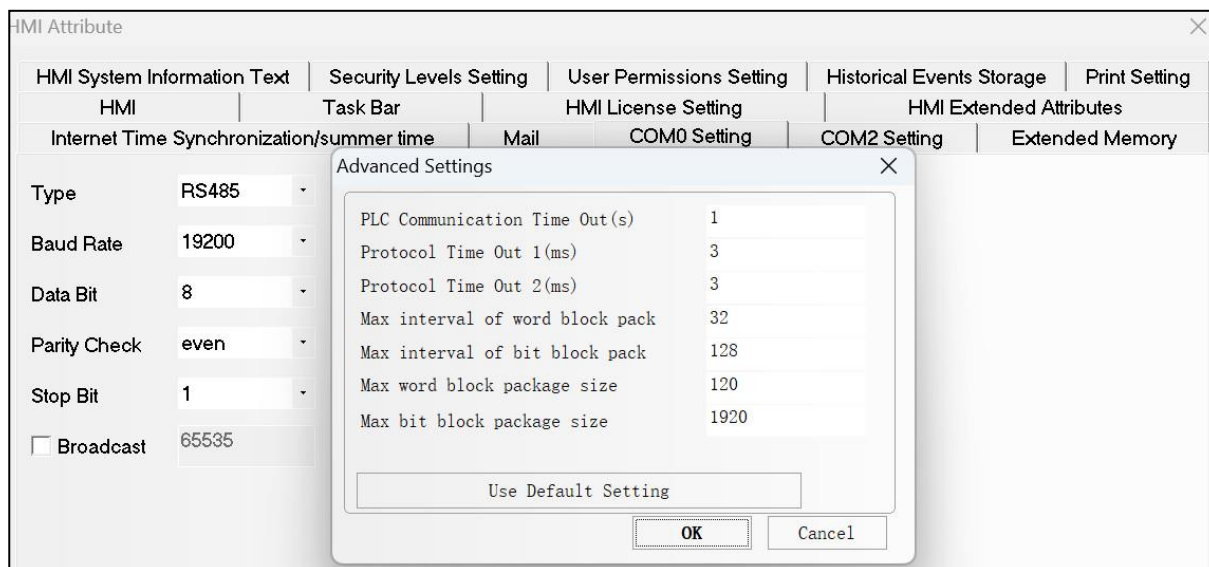


PLC Setting

Somachine software setting


1. In Somachine software, choose and link to the same type PLC, then create a new program.

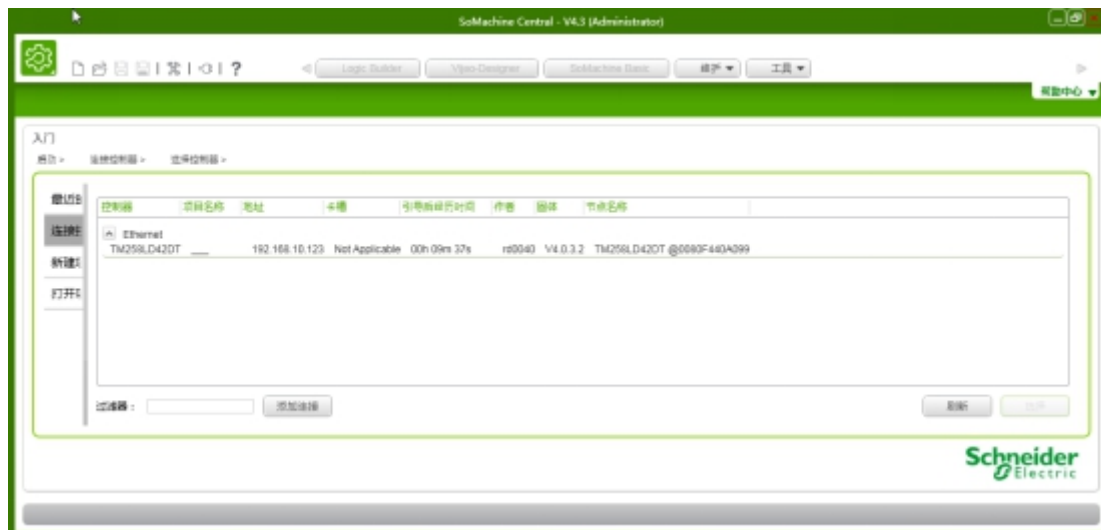


2. After creating a new program, right click [Serial Line] and choose add device

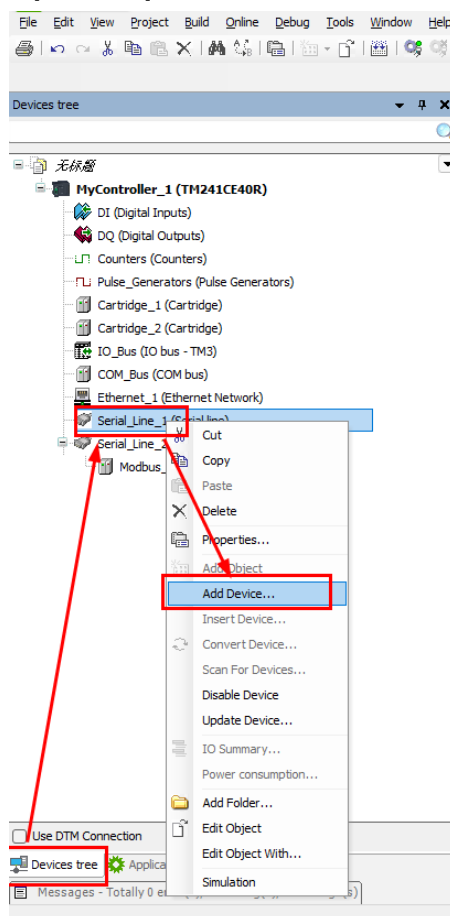


In the add device window, choose Modbus Manager and click [add device]

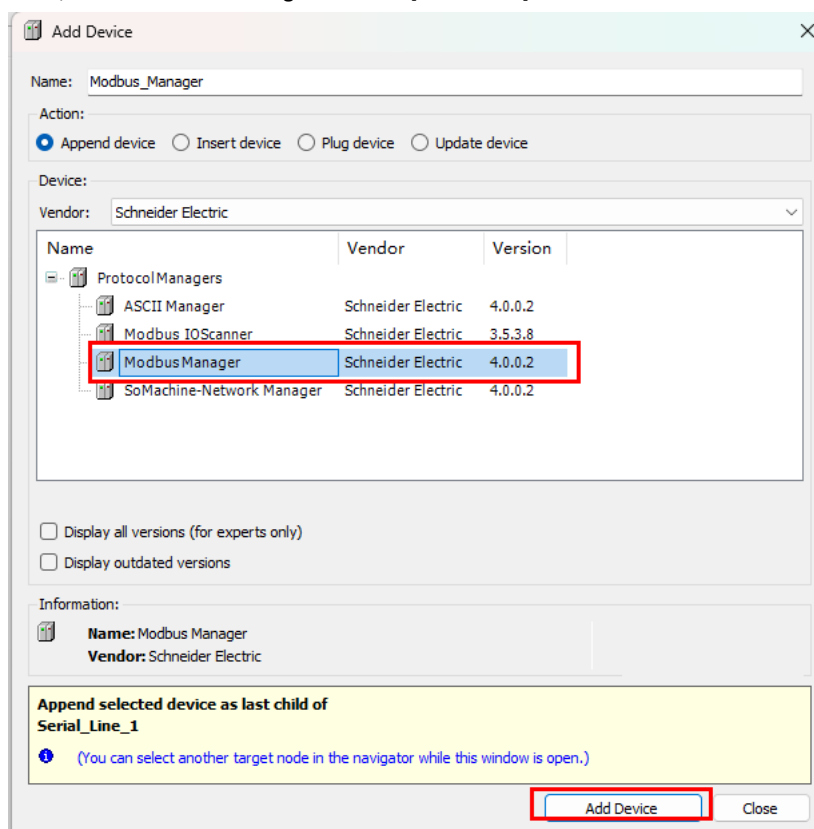


3. Double click [Serial Line]>[Modbus Manager], complete the parameter setting, click [online] and [log on].

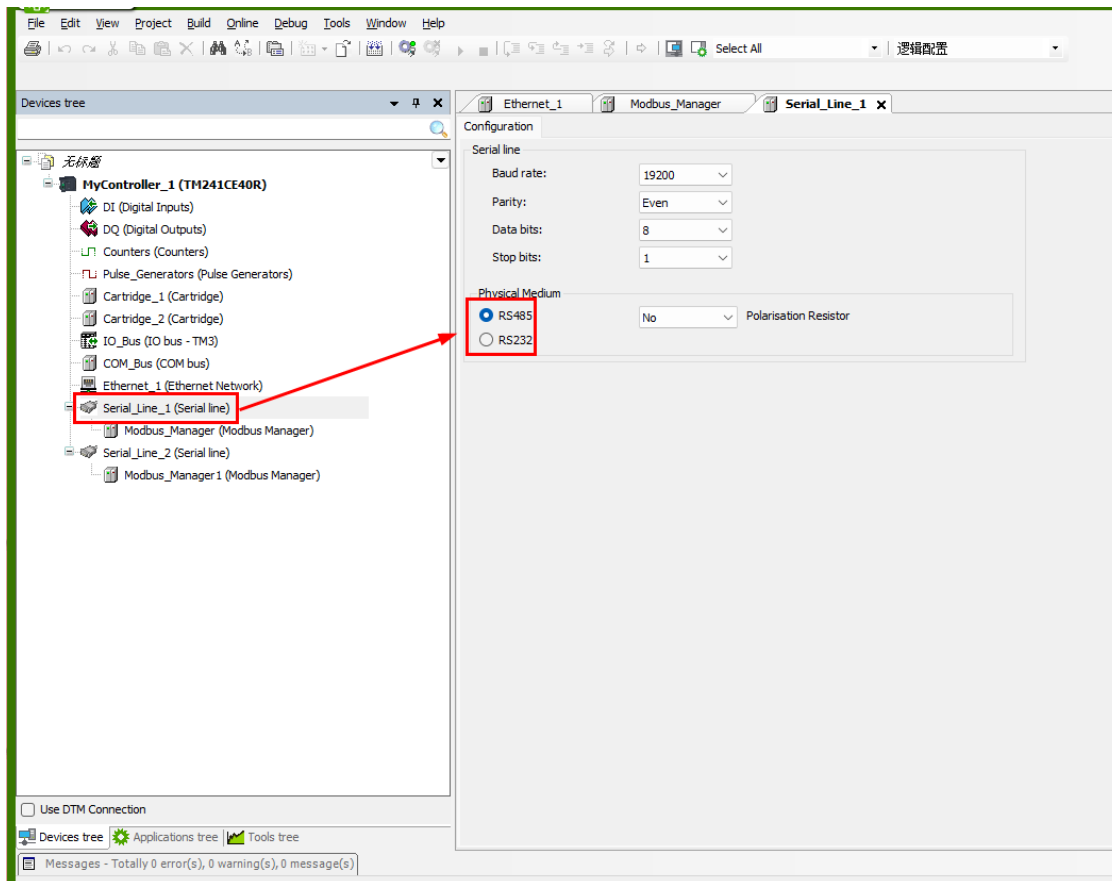

4. when need to change the type of communication, double click [Serial Line] and choose in the right region.

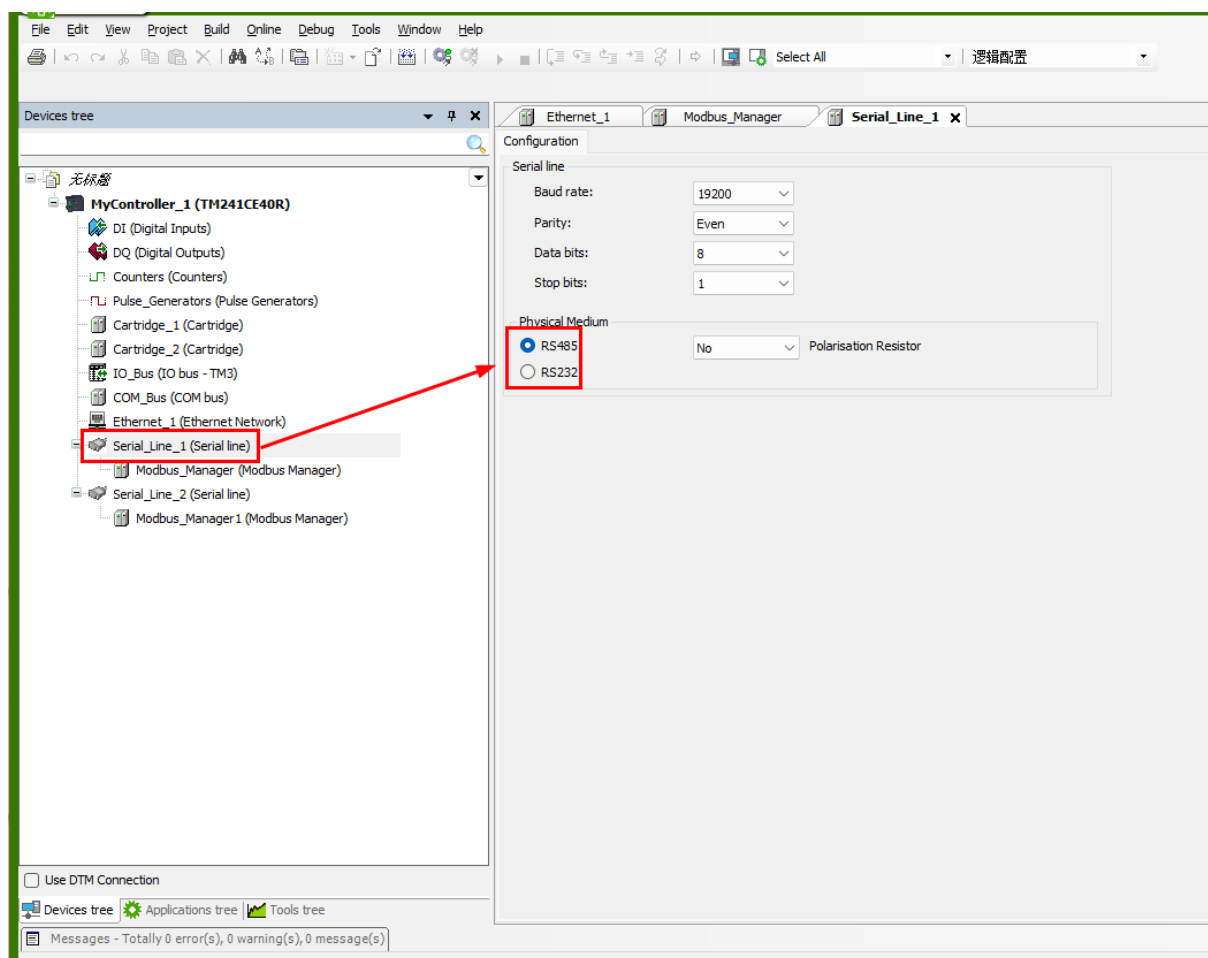


5.If you want to monitor the internal data of the controller,click [View]>[Monitor] and choose a monitor sheet.

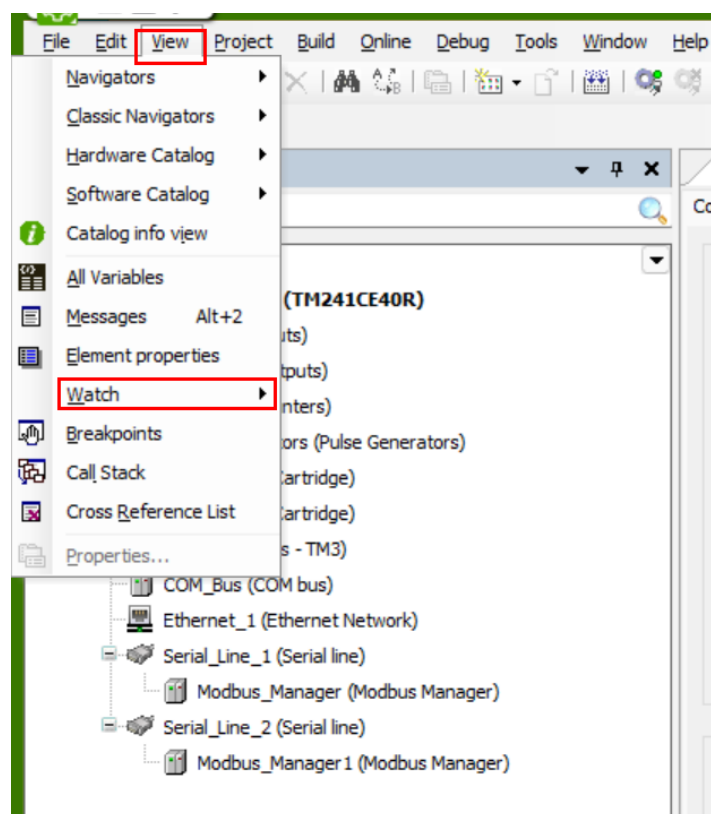


Schneider M100_M200 Modbus RTU Series protocol

Default communication: 9600, 8, odd, 1; station:1

RS485 communication

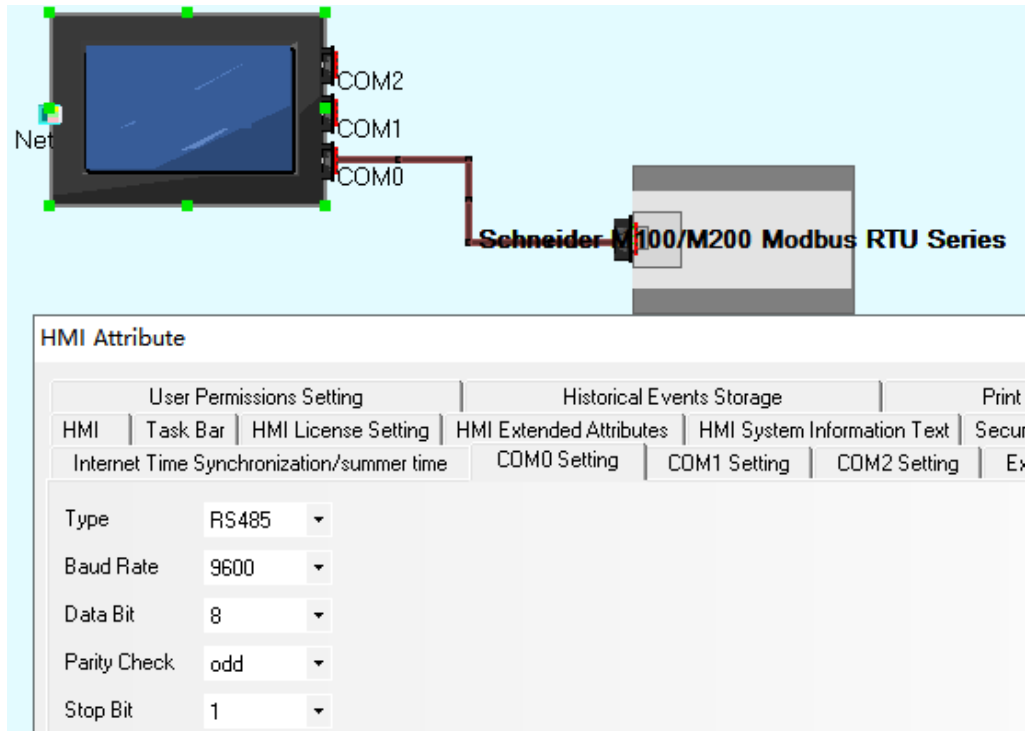



PLC Setting

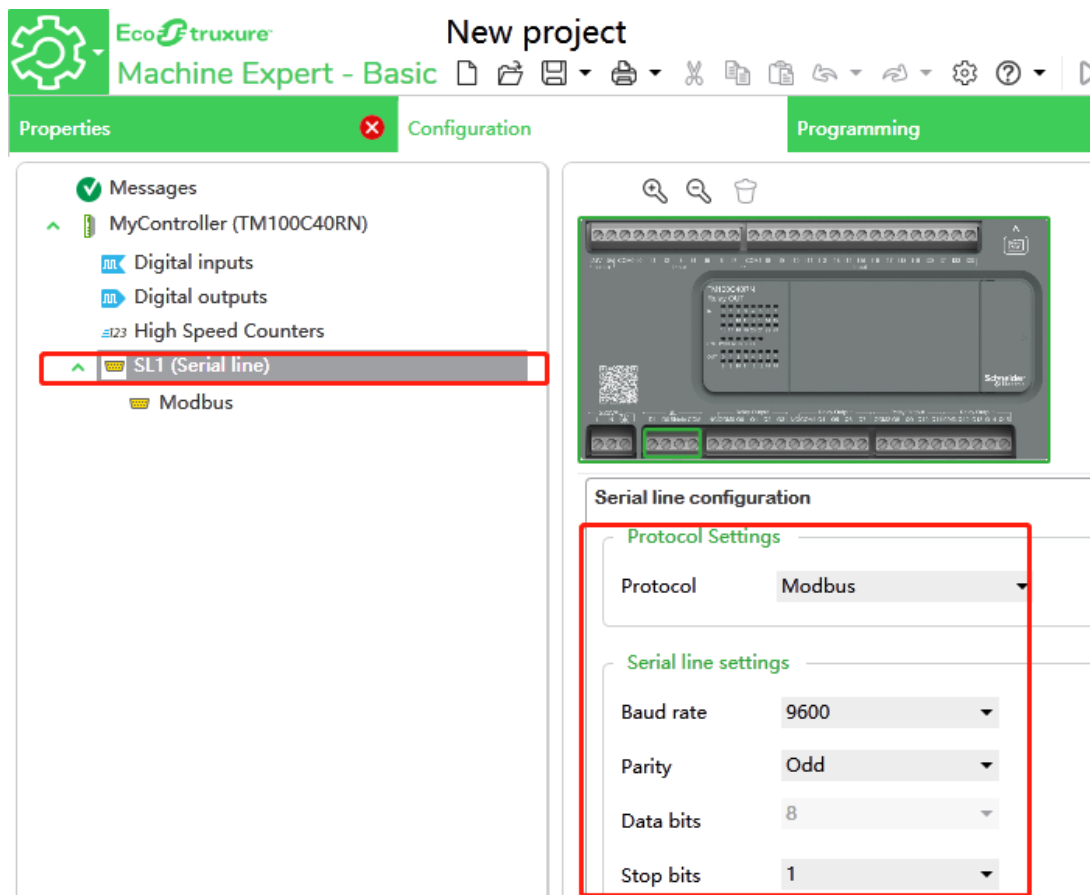

◎ Network Communication Setting


Schneider Ethernet TCP Slave protocol

HMI Setting

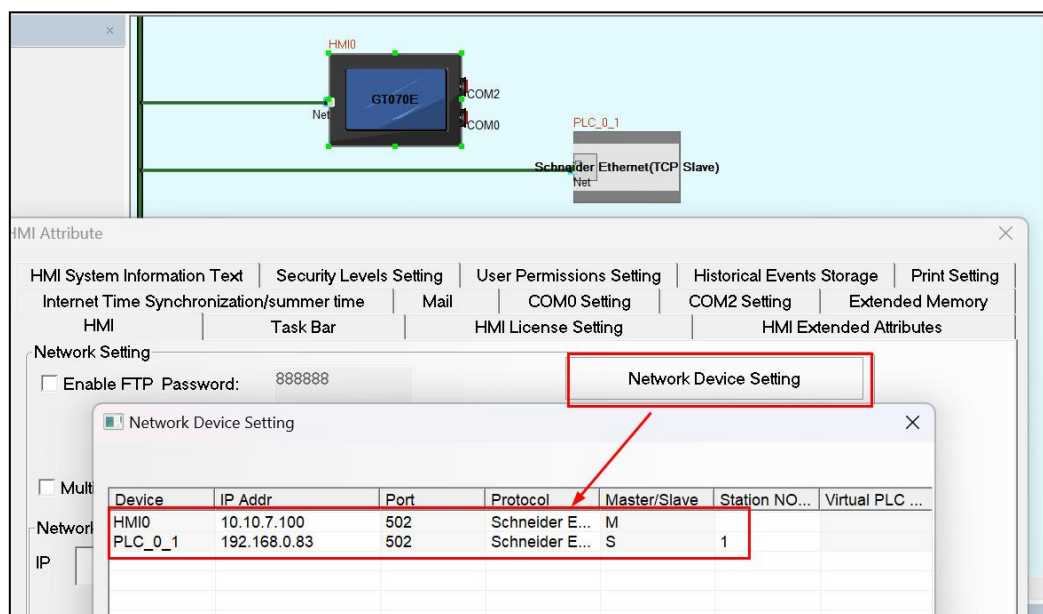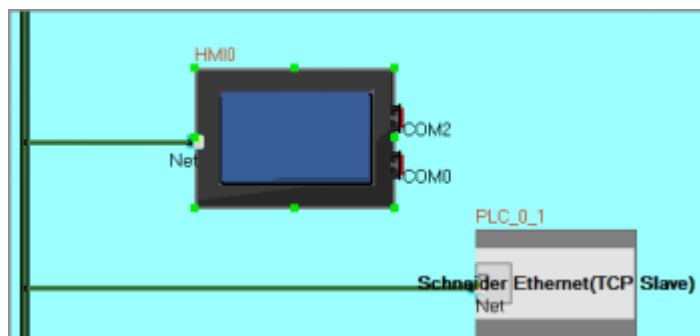


PLC Setting


1. In Somachine software, choose and link to the same type PLC, then create a new program.

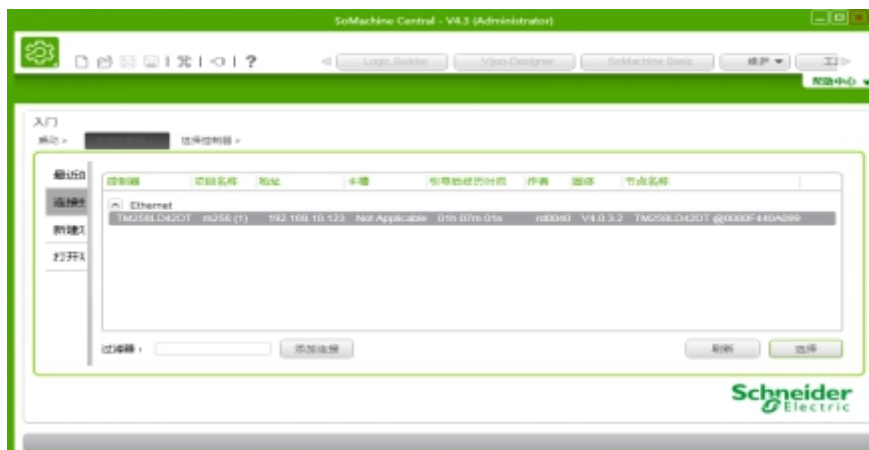


2.If you need to change the IP Address of the PLC, double click [Ethernet]then complete the IP Address configuration,The following safety parameters ensure that the modbus protocol is active.(Attention: Subnet mask and Gateway address should be set up correctly, and choose Ethernet II protocol.)

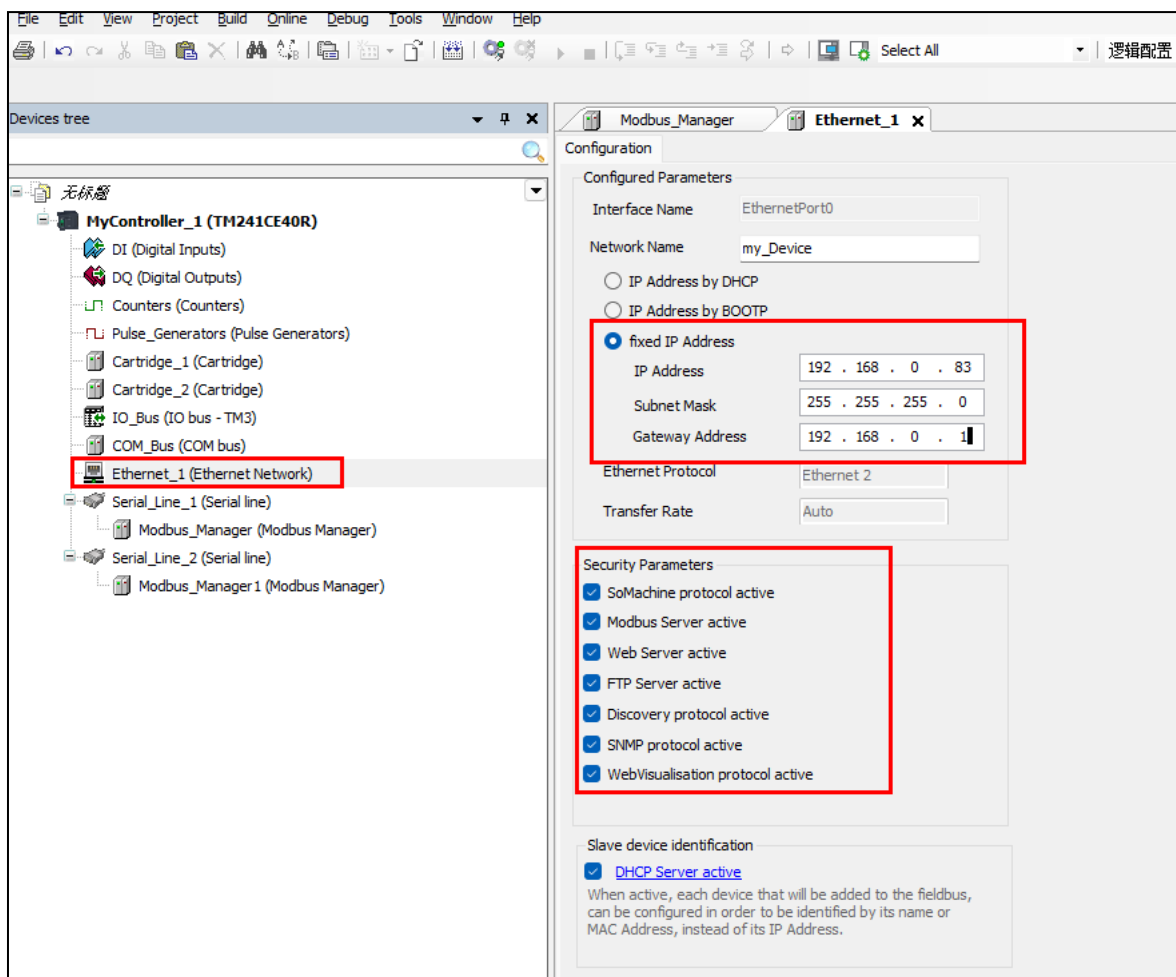


3.Configure modbus; select the device tree on the left, right-click Serial Line and select Add Device

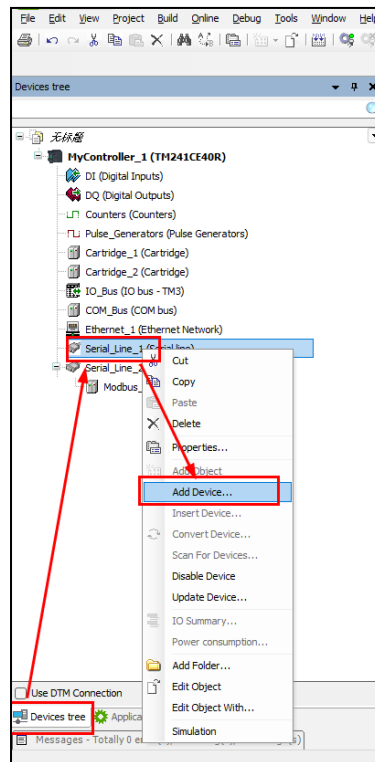


4. In the Add Device window check Modbus Manager and click Add Device.

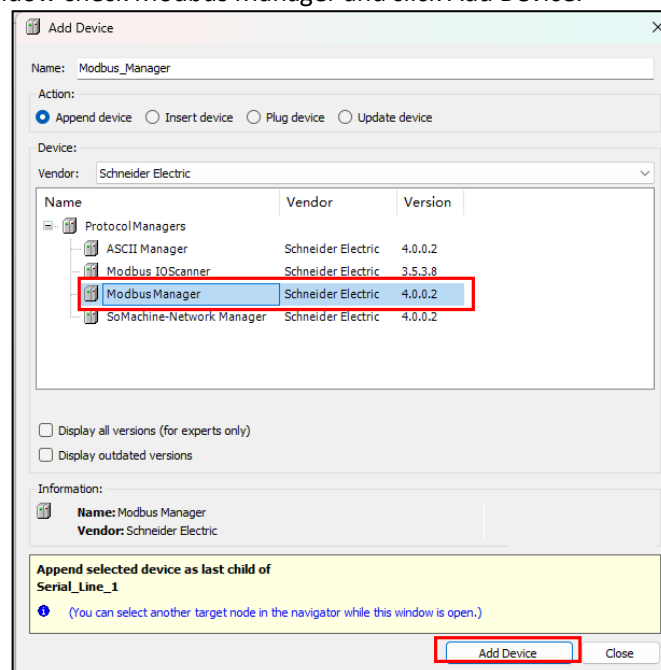


5. Double click Modbus Manager under Serial Line and click Login under Online Options after setting parameters.

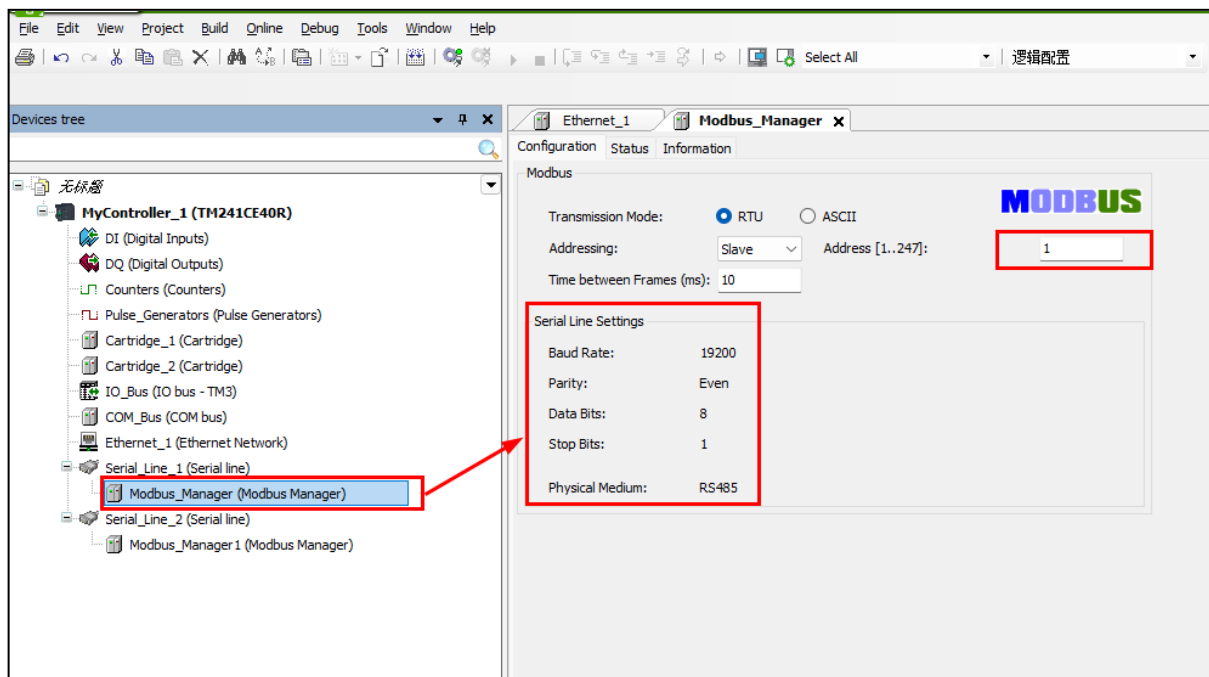


6.To switch the communication type, double click Serial Line and select RS232/RS485 communication on the right side.

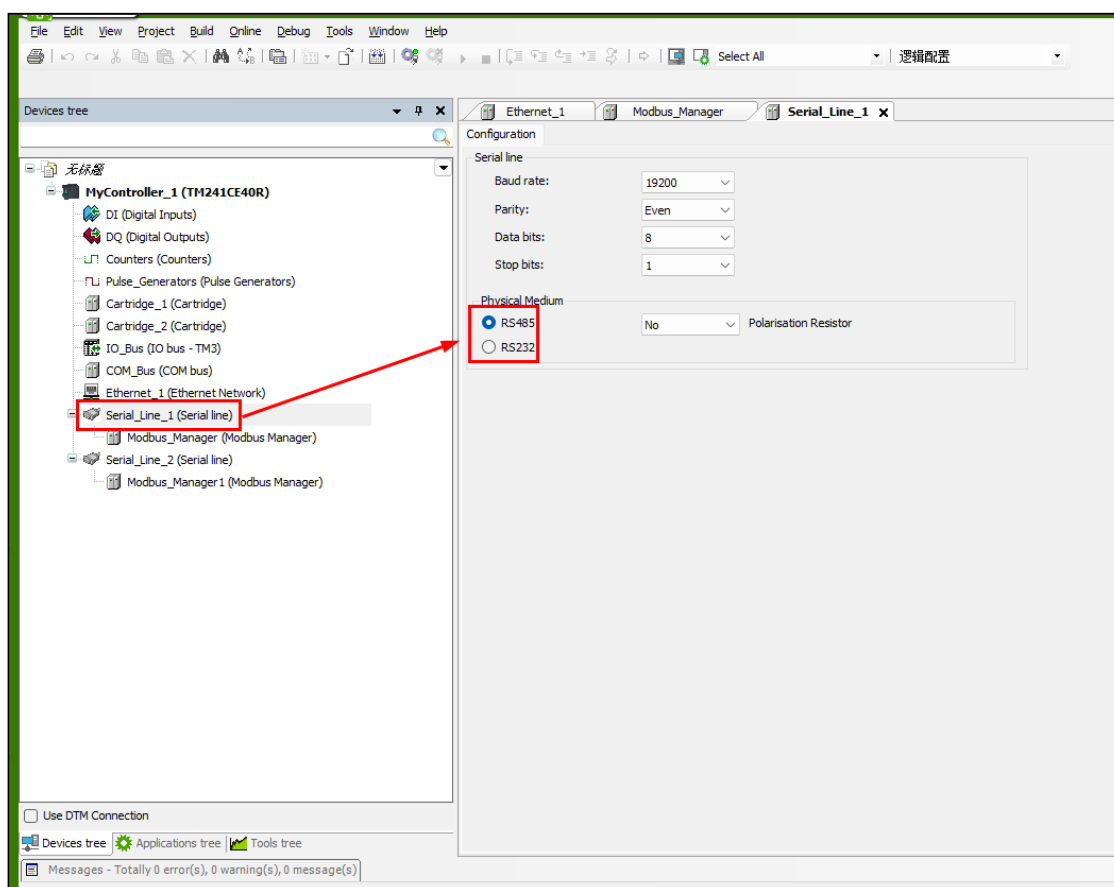

7.If you don't need to change the IP Address of the PLC, double click [Mycontroller]then choose the right model PLC, click [online]and [log on].

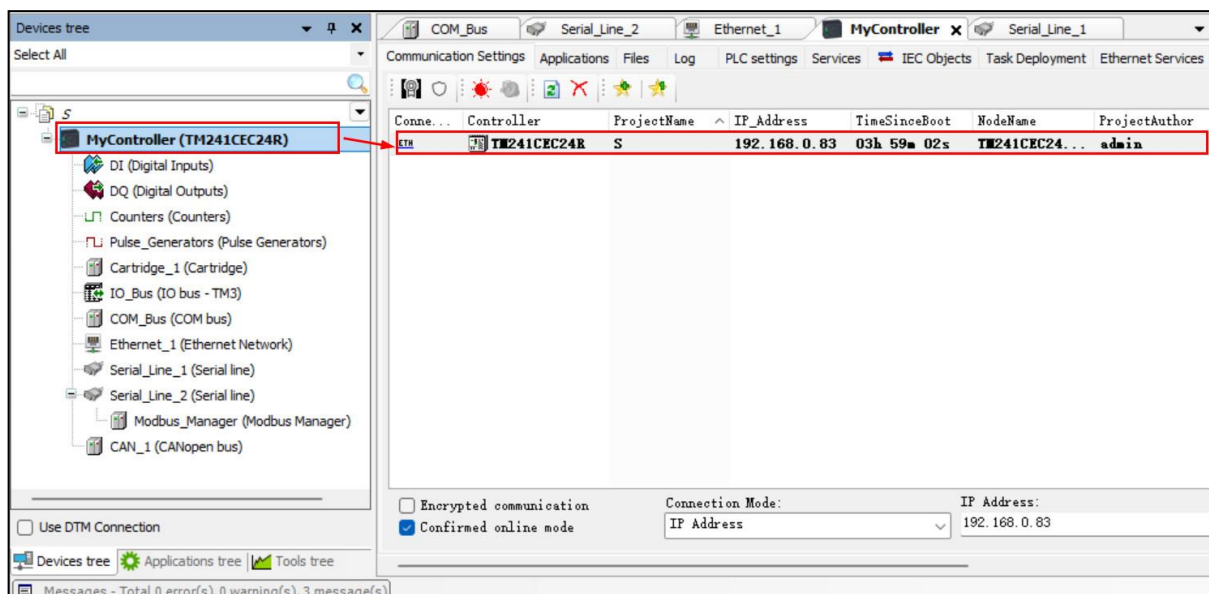


4.If you want to monitor the internal data of the controller,click [View]>[Monitor] and choose a monitor sheet.

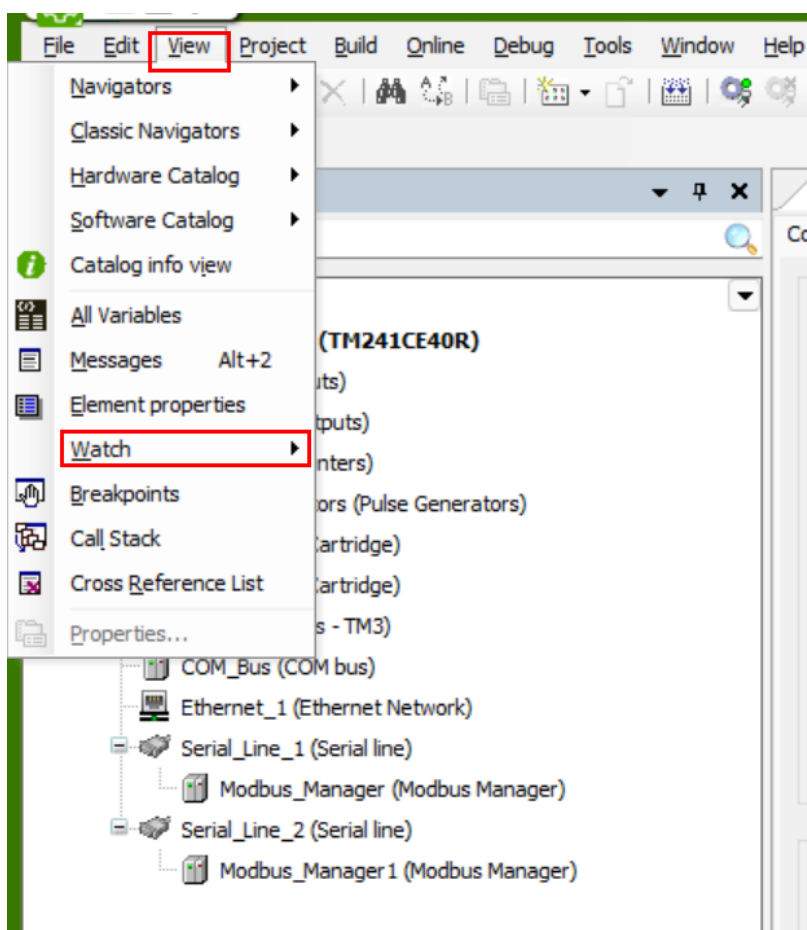

Schneider TM200 Ethernet (TCP Slave) protocol

HMI Setting

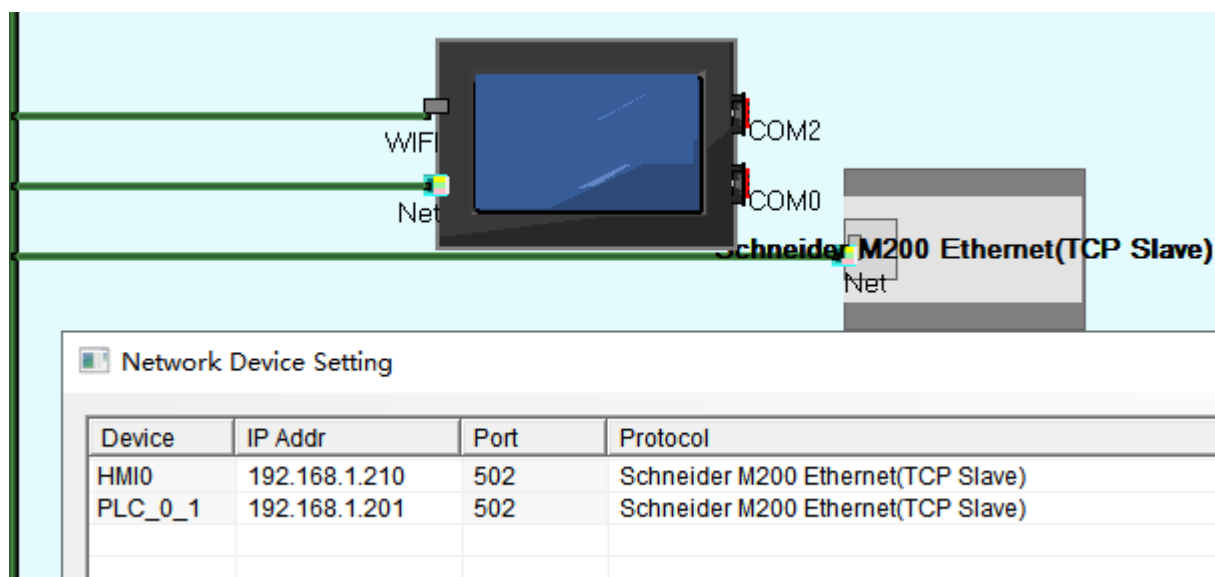

PLC Setting

TM200 Machine Expert - Basic

Program error(s) detected

COM3

Properties Configuration Programming Commissioning

Messages

- MyController (TM200CE32R)
 - Digital inputs
 - Digital outputs
 - High Speed Counters
 - IO Bus
 - ETH1**
 - Modbus TCP
 - SL1 (Serial line)
 - Modbus

Ethernet

Device name: M200

☐ IP address by DHCP
☐ IP address by BOOTP
☒ Fixed IP address

IP address: 192 . 168 . 1 . 201
 Subnet mask: 255 . 255 . 255 . 0
 Gateway address: 192 . 168 . 1 . 1

© Supported Device

Modicon TSX

Device	Bit Address	Word Address	Format	Notes
Internal Relay	S00000-32767	-----	DDDDD	
Auxiliary Relay	M00000-32767	-----	DDDDD	

Data Register Relay	MW.B0000-9999.F	-----	DDDD.H	
Data register	-----	MW0000-7999	DDDD	
Data register double word	-----	MD0000-7999	DDDD	

Twido

Device	Bit Address	Word Address	Format	Notes
Output Relay	0X 1-9999	-----	DDDD	
Input Relay (read only)	1X 1-9999	-----	DDDD	
Input Register (read only)	-----	3X 1-9999	DDDD	
Output Register	-----	4X 1-9999	DDDD	

NOTE:

The M register in the software of TWIDO corresponds to 0X in the ev5000 software; MW corresponds to 4X. The HMI's address must plus 1 to correspond with the address of PLC.

e.g.: M0 corresponds to 0X1.

Don't use 1X, 3X device, because there is no correspondence with the PLC.

M Series

Device	Bit Address	Word Address	Format	Notes
Input	IX0.0-4095.7	-----	DDDD.O	Read only
Output	QX0.0-4095.7	-----	DDDD.O	
Data Register Relay	MX0.0-11999.7	-----	DDDDDD.O	
Data register	-----	MW00000- 59999	DDDDD	
Data register double word	-----	MD00000-29999	DDDDD	


© Cable Diagram

Uni-TelWay protocol

RS232 communication cable

Cable recommended by Schneider Electric Industries, Rotary switch setting: 2(TER Direct) (Add a direct line)

RS485 communication cable

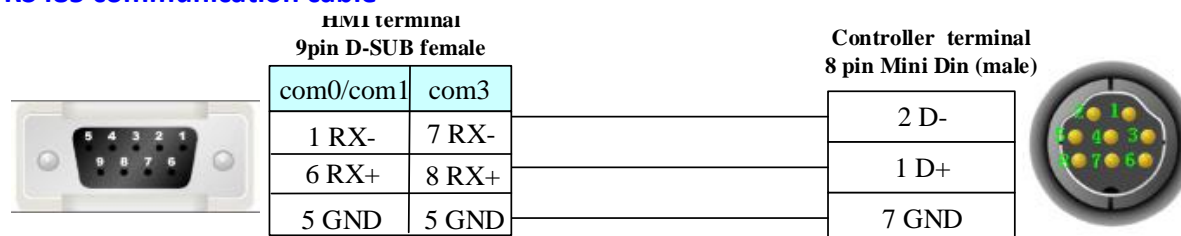

Modicon modbus protocol


RS232 communication cable

PLC software setting: "Hardware Configuration" → double click "Ccom" to select "MODBUS/BUS LINK"; others are default parameters.

Cable recommended by Schneider Electric Industries, Rotary switch setting: 3 (OTHER Direct)

RS485 communication cable

PLC software setting: "Hardware Configuration" → double click "Ccom" to select " MODBUS/BUS LINK"; Others are default parameters.

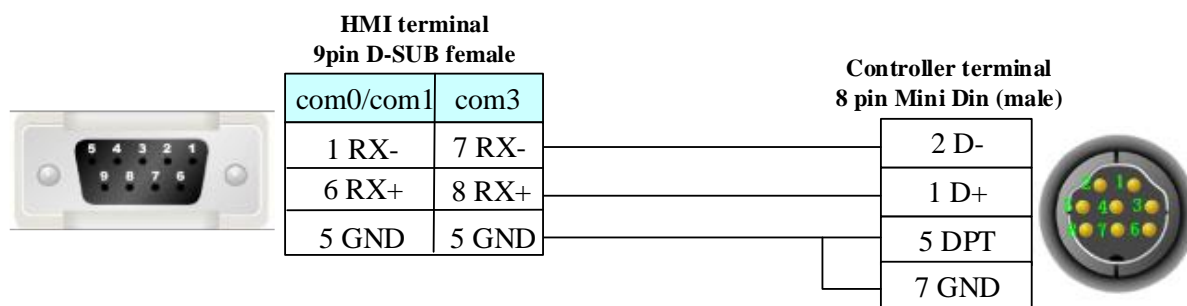


Schneider Twido Modbus RTU protocol

RS232 communication cable


Cable recommended by Schneider Electric Industries

RS485 communication cable

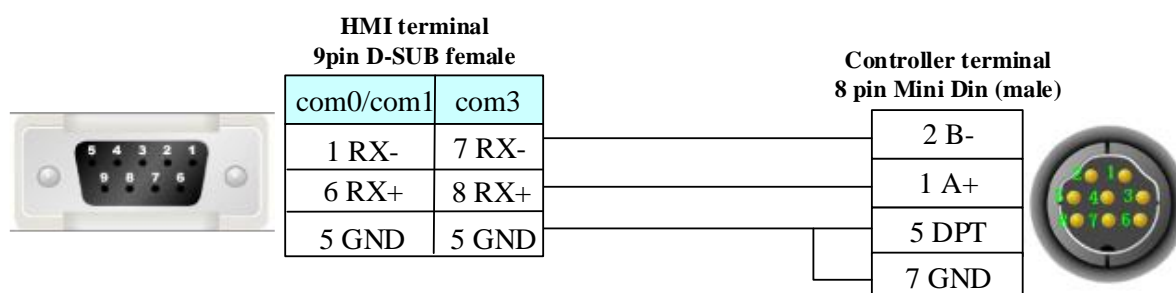


Schneider M Series protocol

RS232 communication cable

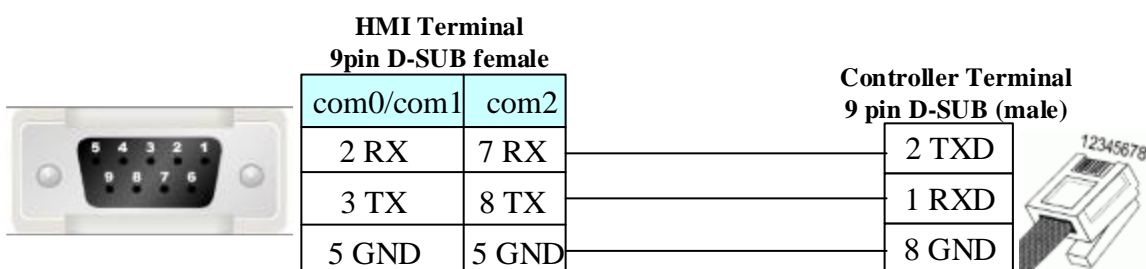


RS485 communication cable

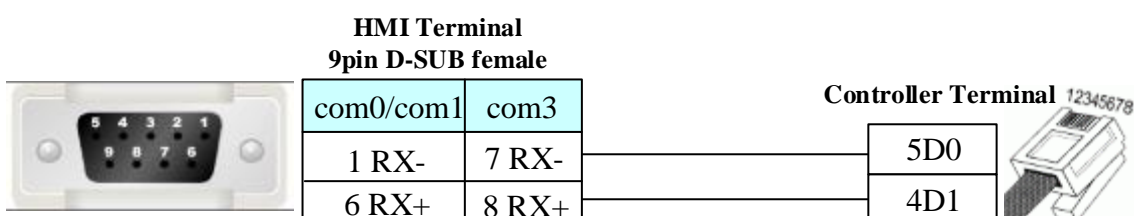

Schneider TM100/200 Modbus RTU Series protocol

RS485 communication cable

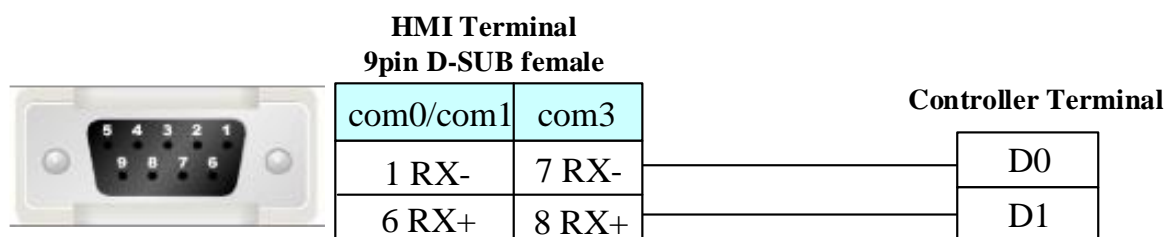

Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.82 SHIMADEN

◎ Serial Communication

Series	CPU	Link Module	Driver
FP23	FP23	RS485 on the CPU unit	SHIMADEN FP23
MR13	FP23	RS485 on the CPU unit	SHIMADEN MR13


◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
FP23	FP23	RS485 on the CPU unit	RS485	Setting	Your owner cable
MR13	MR13	RS485 on the CPU unit	RS485	Setting	Your owner cable

◎ Communication Setting

SHIMADEN FP23


Default communication parameters: 9600, 8, even, 1; station: 1

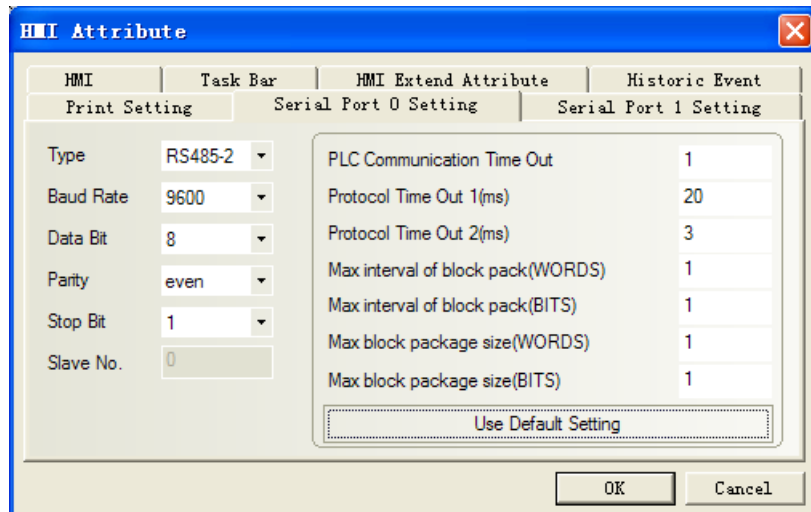

SHIMADEN MR13

HMI Settings


Default communication parameters of HMI

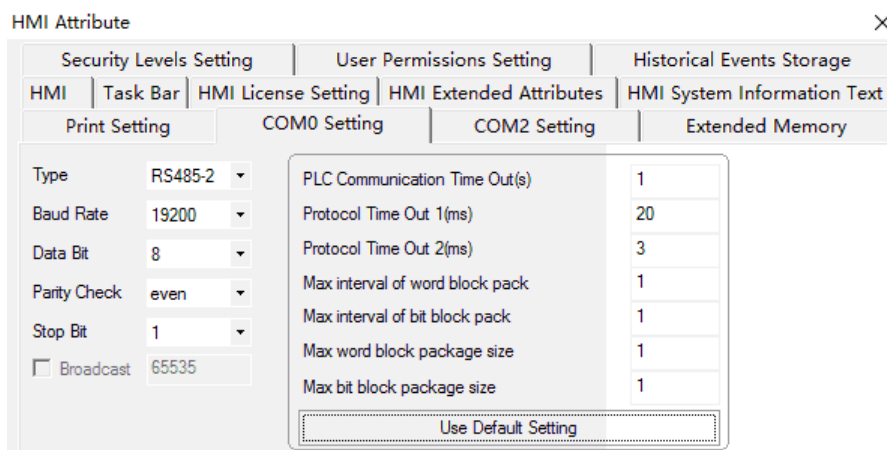

NOTE:

1. When communicating with COM mode, you should first put the 18C address 1, and then open the COM communication mode to communicate successfully. The bool element address is set to 1.18C, as shown in the following figure:

Multi-State Setting Component Attribute

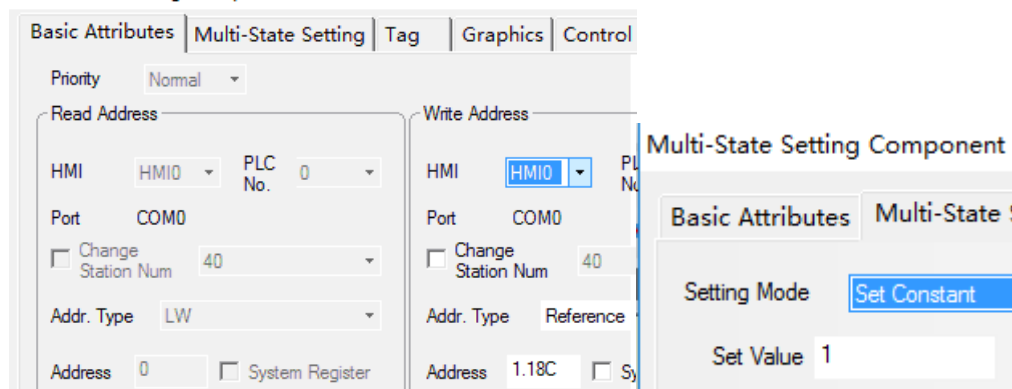

PLC Settings

Please refer to relevant instructions of communication equipment for related parameter settings.

【1-14B】 PLC Station No.;

【1-15B】 Baud Rate;

【1-16B】 Data Bits、Parity、Stop Bits;

【1-18B】 Start Character Mode, Select 2: STX_ETX_CRLF;

【1-19B】 BCC Operation Method, Select 1: ADD;

◎ Supported Device

FP23

Device	Bit Address	Word Address	Format
State instructions(Write Only)	Ctrl_Write 184-252	-----	HHH
Sequence code(Read Only)	-----	Array Code 0-3	H
Basic parameter value (Read Only)	-----	Basic_Read 00-42	HH
OUT1_W,OUT2_W(Write Only)	-----	Out_Write 0-1	H
PV1, PV2 (Read Only)	-----	PV_Read 0-1	H
Reference (Read & Write)	-----	Reference 300-952	HHH

Basic_Read operatable address

PLC addr (HEX)	Parameter	R/W	Parameters mean
00H	PV_W	Read	Measurements
01H	SV_W	Read	Setting value
02H	OUT1_W	Read	Output1 value
03H	OUT2_W	Read	Output2 value
04H	EXE_FLG	Read	Execute_flag (no execute=0)
05H	EV_FLG	Read	Event_flag (no event output 0000)
06H	Reserve	Read	value:0000H
07H	EXE_PID	Read	Execute_PID No.
09H	HB_W	Read	Heater break alarm
0AH	HL_W	Read	Heater loop alarm
0BH	DI_FLG	Read	DI status flag
10H	UNIT	Read	Measurement unit
11H	RANGE	Read	Measuring range
12H	CJ	Read	Cold junction compensation 0=Internal 1=External
13H	DP	Read	Decimal position, 0=none 1=0.1 2=0.01 3=0.001 4=0.0001
14H	SC_L	Read	PV lower limit side scaling
15H	SC_H	Read	PV higher limit side scaling
16H	DPFLG	Read	0=show 1=cancel
20H	E_PRG	Read	Execute flag of program
21H	E_PTN	Read	Execution step No. of step loop
22H	Reserve	Read	Reserve

23H	E_RPT	Read	Curve repeat time
24H	E_STP	Read	Execution count of step loop
25H	E_TIM	Read	Step time
26H	E_PID	Read	PID No. execution
29H	E_STPRPT	Read	Number of steps
42H	POSI	Read	Seven switches (feedback 0-100)

Ctrl_Write operatable address example

PLC addr (HEX)	Parameter	R/W	Parameters mean
184H	AT	write	Execution automatically adjustment 0: OFF1: ON
18CH	COM	write	Communication Protocol: 0: LOC 1: COM

Reference operatable address example

PLC Addr (HEX)	Parameter	R/W	Parameters mean
300H	FIX_SV	R/W	FIX mode SV: in the limit range of SV
460H	PB21	R/W	ratio coefficient: 0.0 to 999.9% (0.0=OFF)

About device address details, please refer to the FP23 communication protocol.

Show: H indicates HEX

Note: 1、Setting the parameters of ADDR address, the settings must be the same as the corresponding PLC station.

2、When Connecting multiple instruments, for distinguishing instruments, each instrument must be set different ADDR value.

MR13

Device	Bit Address	Word Address	Format	Notes
State instructions(Write Only)	Ctrl_Write 1.184-3.252	-----	HHH	
Sequence code(Read Only)	-----	Array Code1.000-3.003	D.HHH	
Basic parameter value (Read Only)	-----	Basic_Read 1.000-3.042	D.HHH	settings
OUT1_W,OUT2_W(Write Only)	-----	Out_Write 1.000-3.001	D.HHH	
PV1, PV2 (Read Only)	-----	PV_Read 1.000-3.002	D.HHH	PV1(1.0;2.0;3.0) PV2(1.1;2.1;3.1) PV3(1.2;2.2;3.2)
Reference (Read & Write)	-----	Reference 1.100-3.952	D.HHH	settings

(Example: In address 1.184, "1" is the channel address, "2" is the control address, and the communication mode is chosen as the public address, regardless of the channel. The address is set to 1.184(AT mode)and1.18C(COM mode) by default.)

Basic_Read 可操作地址

Examples: Address "1.2", "1" is the channel address, and "2" is the control address

PLC Address	Parameter	Read/Write	Meanings of Parameter	Remark /Example for 3 channel address
-------------	-----------	------------	-----------------------	---------------------------------------

(HEX)				
01H	SV_W	Read	Setting values	1.1; 2.1; 3.1(setting values of three channels)
02H	OUT_W	Read	Limits of output control	1.2; 2.2; 3.2
04H	EXE_FLG	Read	Execution flag	Non execution =0
05H	EV_FLG	Read	Event output flag bit	Non event output=0000
06H	Retain	Read	The value is fixed to 0000H	
07H	EXE_PID	Read	The current executed PID number	
09H	HB_W	Read	Heater disconnection alarm value	
0AH	HL_W	Read	Undercurrent alarm value	
0BH	DI_FLG	Read	DI switch status flag bit	
10H	UNIT	Read		0=°C;1=°F;2=% 3=K; 4=NONE
11H	RANGE	Read	Measuring range	
12H	CJ	Read	Cold junction compensation	0=Internal; 1=External
13H	DP	Read	Position of decimal point	0=None; 1=0.1; 2=0.01.....
14H	SC_L	Read	Lower limit of measuring range	
15H	SC_H	Read	Higher limit of measuring range	
16H	DPFLG	Read	Digital decimal place	0=Display ; 1=Cancel
20H	E_PRG	Read	Program execution tagging	
21H	E_PTN	Read	The currently executed curve number	
22H	Retain	Read	Retain	
23H	E_RPT	Read	Curve repeat number	
24H	E_STP	Read	Current executed step of the curve	
25H	E_TIM	Read	The remaining time of the current executed step	
26H	E_PID	Read	The current executed PID number	
29H	E_STPRPT	Read	Program execution steps	
42H	POSI	Read	Seven switching quantities	

Ctrl_Write: Operable address examples

PLC Address (HEX)	Parameter	Read/Write	Remark /Example for 3 channel address
184H	AT	Write	Self-tuning function, 0=OFF;1=ON
18CH	COM	Write	COM function: 0=Local; 1=COM

(Example: In address 1.184, "1" is the channel address, "2" is the control address, and the communication mode is chosen as the public address, regardless of the channel. The address is set to 1.184(AT mode)and1.18C(COM mode) by default.

Reference: Operable address examples

PLC Address (HEX)	Parameter	Read/Write	Note
100H	PV(Measuring values)	Read	Example: 1.100; 2.100; 3.100
101H	E_SV(Setting values)	Read	Example: 1.101; 2.101; 3.101
184H	AT(Self tuning)	Write	0: Stop; 1: Execute
18CH	COM(Communication state)	Write	0: Local communication 1: COM Communication
...
8C2	The ninth step number of PID	Read/Write	1.8C2, 2.8C2, 3.8C2

Example: In address 1.184, "1" is the channel address, "2" is the control address, and the communication mode is chosen as the public address, regardless of the channel. The address is set to 1.184(AT mode) and 1.18C(COM mode) by default.



For other parameters, refer to 《mr13 communication protocol 》, at the sixth section of the communication data address table.

Notice:

1. When you set the parameter address of communication, the setting value must be the same as the station number of the corresponding PLC.
2. In the case of connecting multiple meters, a different parameter address value is required for each instrument to distinguish between different instruments.

◎ Cable Diagram**FP23**

FP23 programmable PID regulator of 8 point and 10 point must be shorted or communications failure

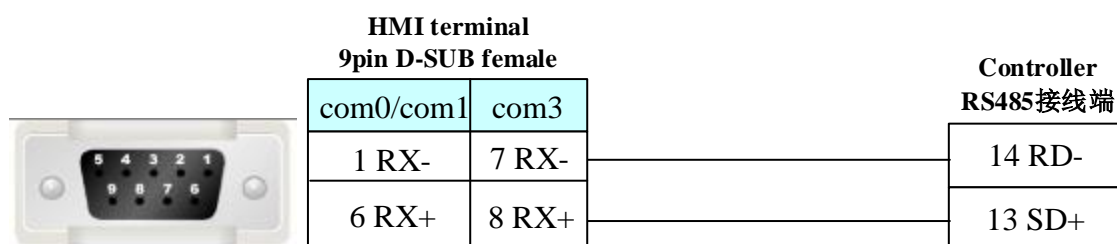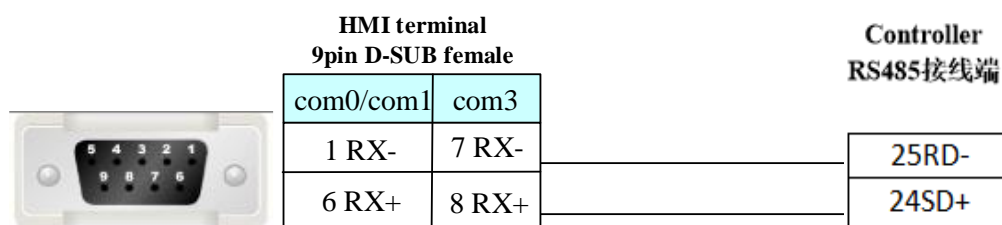RS485 communication cable**MR13****RS485:Communication cable**

4.83 SIEMENS

◎ Serial Communication

Series	CPU	Link Module	Driver
S7-200	CPU212 CPU214 CPU215 CPU216 CPU221 CPU222 CPU224 CPU226 CPU224 XP CN CPU226 XP CN	RS485 on the CPU unit	SIEMENS S7-200 (SMART)
S7-200 SMART	CR40 SR20	RS485 on the CPU unit	
S7-300	CPU312IFM CPU313 CPU313C CPU314 CPU314IFM CPU315 CPU315-2 DP CPU316 CPU316-2 DP CPU318-2	MPI port on the CPU unit	SIEMENS S7-300/400 (PC Adapter Direct) SIEMENS S7-300/400 (MPI Direct) *1
S7-400	CPU412-1 CPU412-2 DP CPU412-3H CPU413-1 CPU413-2 DP CPU414-1 CPU414-2 DP CPU414-3 DP CPU416-1 CPU416-2 DP CPU416-3 DP CPU417-4	MPI port on the CPU unit	

S7-300	CPU312IFM CPU313 CPU313C CPU314 CPU314IFM CPU315 CPU315-2 DP CPU316 CPU316-2 DP CPU318-2	MPI port on the CPU unit	SIEMENS MPI*2
--------	---------------------------------------------------------------------------------------------------------------------	--------------------------	---------------

NOTE

1. *1 :The protocol is suitable for the MT5020 series with MPI extended port. This protocol supports multi HMI to multi PLC communication
2. *2 : The protocol is suitable for the MT4000 series HMI in 2013 November factory. This protocol supports one HMI to one PLC communication

© Ethernet Communication (Direct online simulation disable)

Series	CPU	Link Module	Driver
SIMATIC S7-200	CPU222 CPU224 CPU224 XP CPU226	CP 243-1 IT CP 243-1	SIEMENS S7-200 Ethernet (TCP Slave)
SMART S7-200	CR40 SR20	Ethernet interface on CPU	SIEMENS S7-200 SMART Ethernet (TCP Slave)
SIMATIC S7-1200	CPU1211C CPU1212C CPU1214C	Ethernet interface on CPU	1.SIEMENS S7-1200/1500 Ethernet (TCP Slave) 2.SIEMENS TIAPortal Ethernet(TCP Slave)(Free tag Names) *1
SIMATIC S7-1500	CPU1511-1 PN CPU1513-1 PN CPU1515-2 PN	Ethernet interface on CPU	
SIMATIC S7-300	CPU315-2DP	CP 343-1 IT CP 343-1	SIEMENS S7-300 Ethernet (TCP Slave) SIEMENS S7-300 Ethernet-Network(TCP Slave) *1
	CPU315-2 PN/DP CPU317-2 PN/DP CPU319-3 PN/DP	Ethernet interface on CPU	
SIMATIC ET200	ET200SP ET200S	Ethernet interface on CPU	
SIMATIC S7-400	CPU412-1 CPU412-2 DP CPU412-3H CPU413-1 CPU413-2 DP CPU414-1 CPU414-2 DP	CP 443-1 IT CP 443-1	SIEMENS S7-400 Ethernet (TCP Slave)

	CPU414-3 DP CPU416-1 CPU416-2 DP CPU416-3 DP CPU417-4 CPU414-3 PN/DP CPU416-3 PN/DP		
	CPU414-3 PN/DP CPU416-3 PN/DP	Ethernet interface on CPU	
SIEMENS LOGO!	6ED1052-1MD00-0AB8	Ethernet interface on CPU	SIEMENS LOGO! Ethernet(TCP Slave)

NOTE

1. *1 This protocol is applicable to M2, G***E, G***E2, F series screens (not support GL**E series), and the rootfs version must be greater than or equal to 20604;

◎ BUS Communication

Please refer to [4.59 Profibus DP Slave](#).

◎ Serial System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
S7-200	CPU222 CPU224 CPU226 CPU224 XP CN CPU226 XP CN	RS485 on the CPU unit	RS232	Setting	Your owner cable
			RS485	Setting	Your owner cable
S7-200 SMART	CR40 SR20	RS485 on the CPU unit	RS485	Setting	Your owner cable
S7-300	CPU312IFM CPU313 CPU313C CPU314 CPU314IFM CPU315 CPU315-2 DP CPU316 CPU316-2 DP CPU318-2	MPI port on the CPU unit	RS232 S7-300/400 (PC Adapter Direct) protocol	Setting	Your owner cable
			RS485 S7-300/400 (MPI Direct) protocol	Setting	Your owner cable
			RS485 SIEMENS MPI protocol	Setting	Your owner cable
S7-400	CPU412-1 CPU412-2 DP CPU412-3H CPU413-1	MPI port on the CPU unit	RS232 S7-300/400 (PC Adapter Direct) protocol	Setting	Your owner cable

	CPU413-2 DP CPU414-1 CPU414-2 DP CPU414-3 DP CPU416-1 CPU416-2 DP CPU416-3 DP CPU417-4		RS485 S7-300/400 (MPI Direct) protocol	Setting	Your owner cable
--	-------------------------------------------------------------------------------------------------------------	--	----------------------------------------------	-------------------------	----------------------------------

◎ Ethernet System configuration

Series	CPU	Link Module	Connect Type	Parameter	Cable
SIMATIC S7-200	CPU222 CPU224 CPU224 XP CPU226	CP 243-1 IT CP 243-1	Ethernet	Setting	Your owner cable
SIMATIC S7-200 SMART	CR40 SR20	Ethernet interface on CPU	Ethernet	Setting	Your owner cable
SIMATIC S7-1200	CPU1211C CPU1212C CPU1214C	Ethernet interface on CPU	SIEMENS S7-1200/1500 Ethernet (TCP Slave)	Setting	Your owner cable
SIMATIC S7-1500	CPU1511-1 PN CPU1513-1 PN CPU1515-2 PN		SIEMENS TIAPortal Ethernet(TCP Slave)(Free tag Names)	Setting	Your owner cable
SIMATIC S7-300	CPU315-2DP	CP 343-1 IT CP 343-1	SIEMENS S7-300 Ethernet (TCP Slave)	Setting	Your owner cable
	CPU315-2 PN/DP CPU317-2 PN/DP CPU319-3 PN/DP	Ethernet interface on CPU	SIEMENS S7-300 Ethernet-Net work(TCP Slave)	Setting	Your owner cable
SIMATIC ET200	ET200SP ET200S	Ethernet interface on CPU	S7-300 Ethernet-Net work(TCP Slave)	Setting	Your owner cable
SIMATIC S7-400	CPU412-3H	CP 443-1 IT CP 443-1	Ethernet	Setting	Your owner cable

SIEMENS LOGO!	6ED1 052-1MD00-0AB8	Ethernet interface on CPU	Ethernet	Setting	Your owner cable
---------------	------------------------	---------------------------------	----------	-------------------------	----------------------------------

◎ Serial Communication Setting

SIEMENS S7-200 (SMART) protocol

Default communication parameters: 9600, 8, 1, even; station No.: 2.

NOTE: HMI Baudrate can reach to 187.5k, but don't support online simulate for 187.5K.

RS232 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 1 Setting' tab selected. The 'Type' is set to 'RS232'. The communication parameters are: Baud Rate: 9600, Data Bit: 8, Parity: even, Stop Bit: 1, and Slave No.: 0. On the right, a table lists PLC communication parameters: PLC Communication Time Out (3), Protocol Time Out 1(ms) (50), Protocol Time Out 2(ms) (3), Max interval of block pack(WORDS) (4), Max interval of block pack(BITS) (8), Max block package size(WORDS) (16), and Max block package size(BITS) (64). A 'Use Default Setting' button is at the bottom of the table. The dialog has 'OK' and 'Cancel' buttons at the bottom right.


Serial Port 1 Setting	Serial Port 0 Setting	Serial Port 2 Setting														
Type: RS232																
Baud Rate: 9600																
Data Bit: 8																
Parity: even																
Stop Bit: 1																
Slave No.: 0																
It takes effect when HMI as slave																
<table border="1"> <tbody> <tr> <td>PLC Communication Time Out</td> <td>3</td> </tr> <tr> <td>Protocol Time Out 1(ms)</td> <td>50</td> </tr> <tr> <td>Protocol Time Out 2(ms)</td> <td>3</td> </tr> <tr> <td>Max interval of block pack(WORDS)</td> <td>4</td> </tr> <tr> <td>Max interval of block pack(BITS)</td> <td>8</td> </tr> <tr> <td>Max block package size(WORDS)</td> <td>16</td> </tr> <tr> <td>Max block package size(BITS)</td> <td>64</td> </tr> </tbody> </table>			PLC Communication Time Out	3	Protocol Time Out 1(ms)	50	Protocol Time Out 2(ms)	3	Max interval of block pack(WORDS)	4	Max interval of block pack(BITS)	8	Max block package size(WORDS)	16	Max block package size(BITS)	64
PLC Communication Time Out	3															
Protocol Time Out 1(ms)	50															
Protocol Time Out 2(ms)	3															
Max interval of block pack(WORDS)	4															
Max interval of block pack(BITS)	8															
Max block package size(WORDS)	16															
Max block package size(BITS)	64															
Use Default Setting																

RS485 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 1 Setting' tab selected. The 'Type' is set to 'RS485-2'. The communication parameters are: Baud Rate: 9600, Data Bit: 8, Parity: even, Stop Bit: 1, and Slave No.: 0. On the right, a table lists PLC communication parameters: PLC Communication Time Out (3), Protocol Time Out 1(ms) (50), Protocol Time Out 2(ms) (3), Max interval of block pack(WORDS) (4), Max interval of block pack(BITS) (8), Max block package size(WORDS) (16), and Max block package size(BITS) (64). A 'Use Default Setting' button is at the bottom of the table. The dialog has 'OK' and 'Cancel' buttons at the bottom right.

Serial Port 1 Setting	Serial Port 0 Setting	Serial Port 2 Setting														
Type: RS485-2																
Baud Rate: 9600																
Data Bit: 8																
Parity: even																
Stop Bit: 1																
Slave No.: 0																
It takes effect when HMI as slave																
<table border="1"> <tbody> <tr> <td>PLC Communication Time Out</td> <td>3</td> </tr> <tr> <td>Protocol Time Out 1(ms)</td> <td>50</td> </tr> <tr> <td>Protocol Time Out 2(ms)</td> <td>3</td> </tr> <tr> <td>Max interval of block pack(WORDS)</td> <td>4</td> </tr> <tr> <td>Max interval of block pack(BITS)</td> <td>8</td> </tr> <tr> <td>Max block package size(WORDS)</td> <td>16</td> </tr> <tr> <td>Max block package size(BITS)</td> <td>64</td> </tr> </tbody> </table>			PLC Communication Time Out	3	Protocol Time Out 1(ms)	50	Protocol Time Out 2(ms)	3	Max interval of block pack(WORDS)	4	Max interval of block pack(BITS)	8	Max block package size(WORDS)	16	Max block package size(BITS)	64
PLC Communication Time Out	3															
Protocol Time Out 1(ms)	50															
Protocol Time Out 2(ms)	3															
Max interval of block pack(WORDS)	4															
Max interval of block pack(BITS)	8															
Max block package size(WORDS)	16															
Max block package size(BITS)	64															
Use Default Setting																

PLC Setting

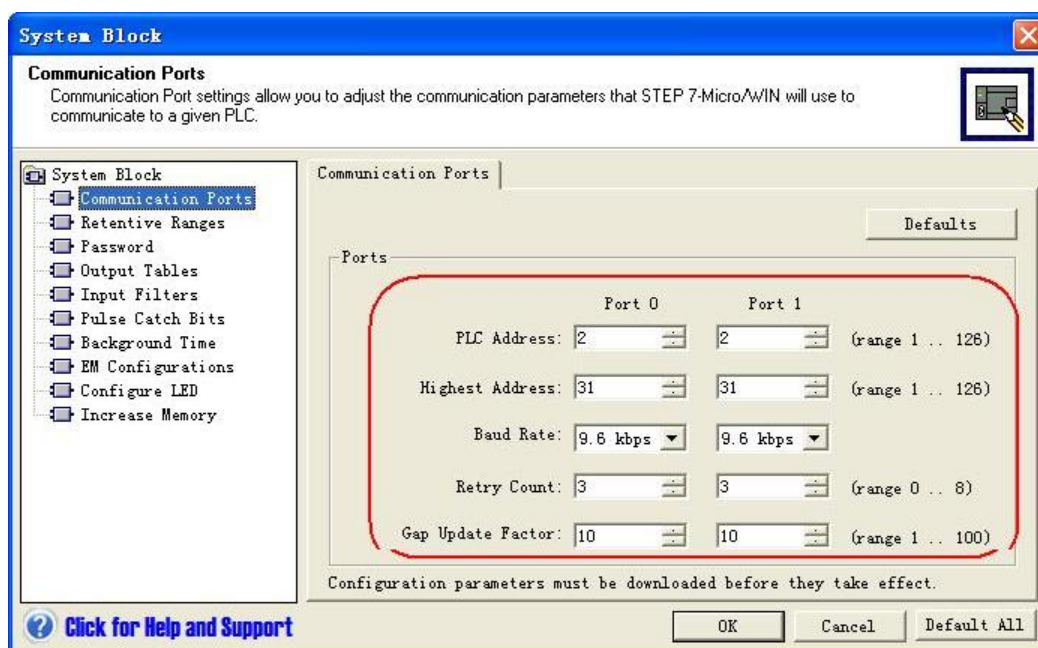


SIEMENS S7-300/400 (PC Adapter Direct) protocol

HMI Setting

Default communication parameters: 19200bps, 8, 2, odd; station: 2

RS232 communication

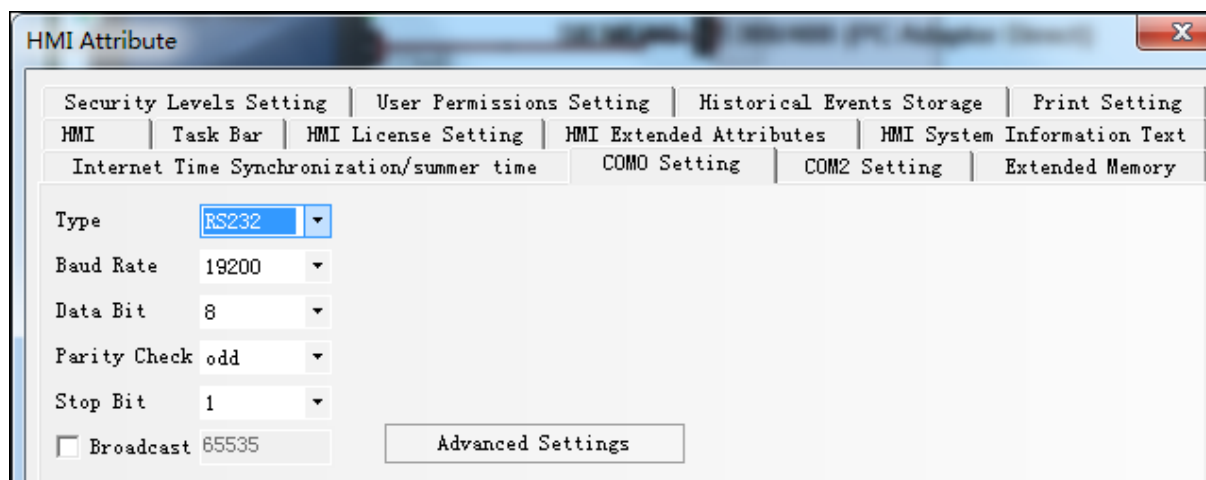


NOTE:


1. If you use MT5-S7-300 adapter to communicate, the baudrate of PLC must be 187.5K, and HMI must be 19.2K
2. If we use PC adapter, PLC station No. is not necessary, so the communication is one-to-one.
3. DB block must be created, otherwise the relevant registers can not write (DB.DBX, DB.DBW, DB.DBD). DBm.DBW, DBm.DBD address start must be an even number.

PLC Setting



1. Production of the adapter with KINCO, MPI transmission rate must be set 187.5K. 19.2K general users of the transmission rate, if the S7-300 MPI-side transmission rate is 19.2K, you need to change it into the Siemens adapter 187.5K (where changes in the hardware properties)

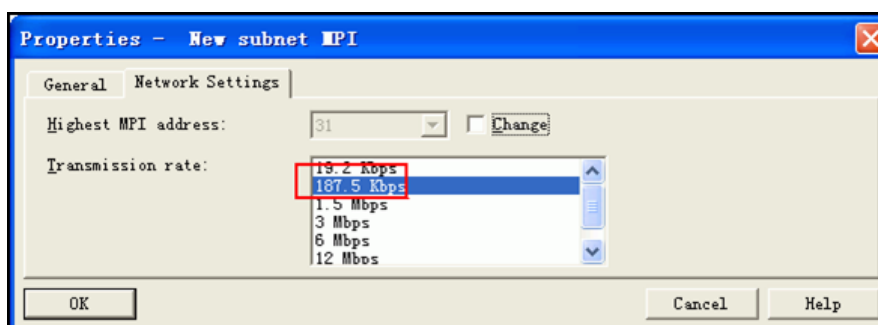

2. MPI address must be 2.

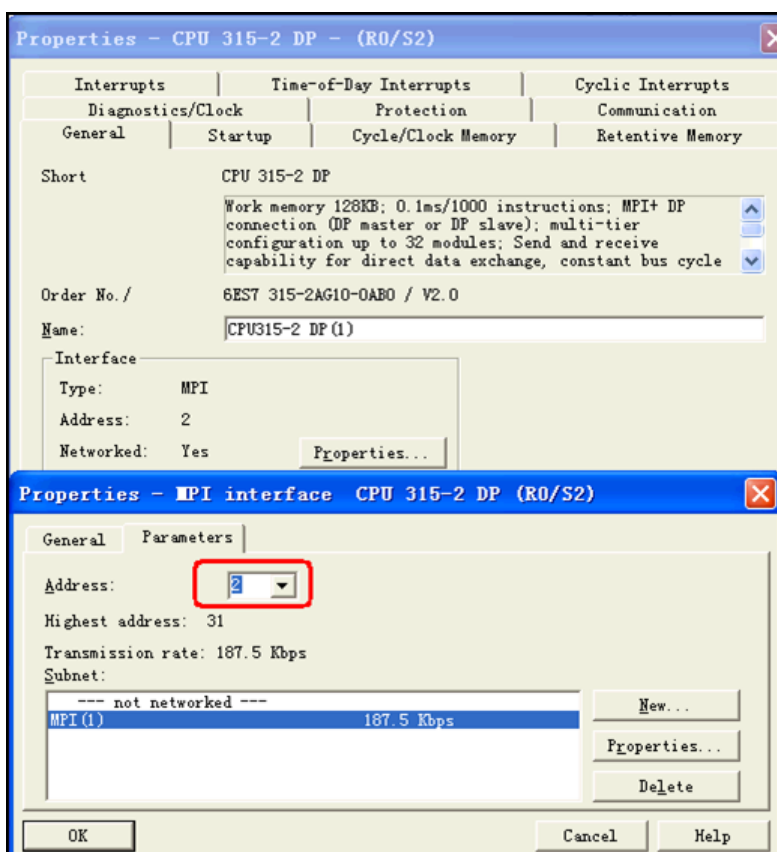



3. After the software change, downloaded to PLC, make sure the transmission rate of MPI is 187.5K, and then in the options set PG / PC interface, select PC Adapter (MPI), MPI-side of the transfer rate will be changed to 187.5K.

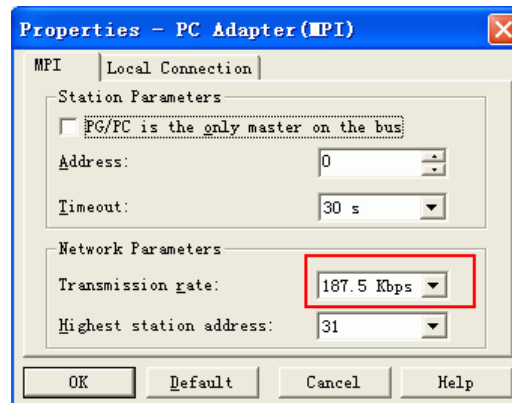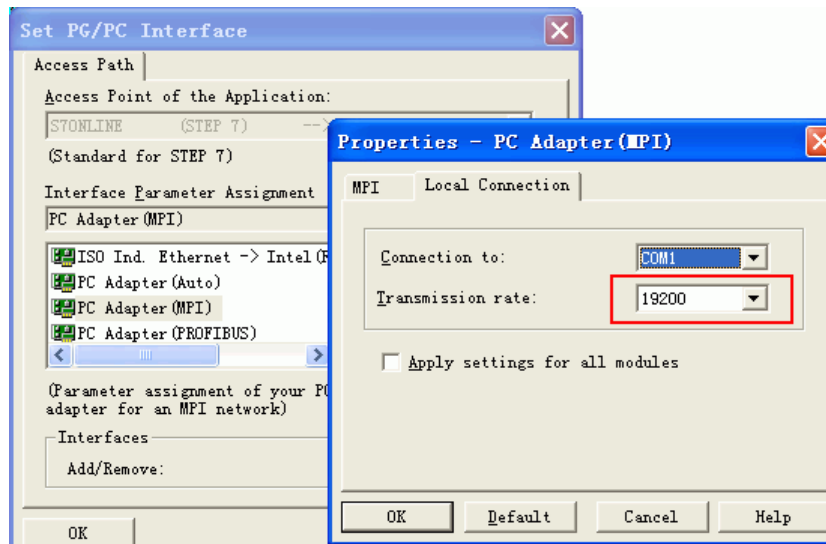

SIEMENS S7-300/400 (MPI Direct) protocol

HMI Setting

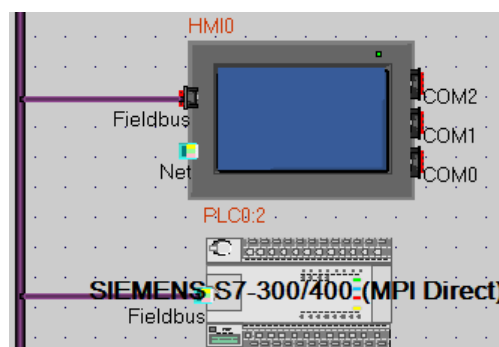


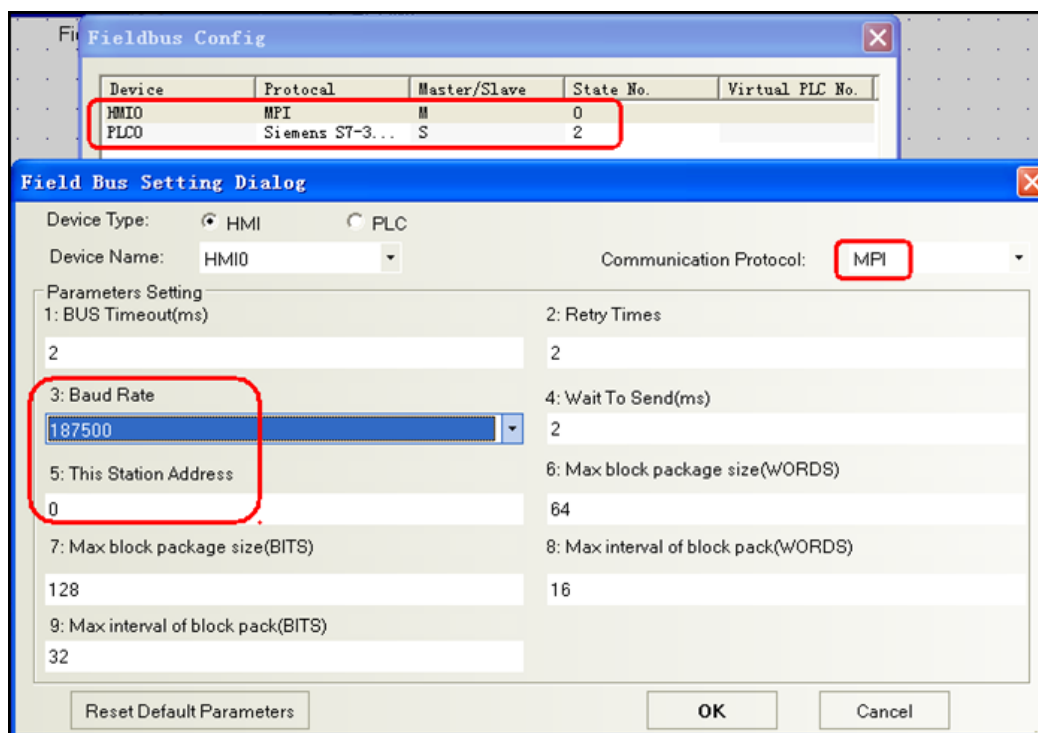**NOTE:**

1. This protocol is suitable for MT5020 series with MPI extended port.
2. This protocol supports multi-station communication, and the MPI is RS485 port, so we can use this protocol to communicate between many HMI and PLC, and then we must set the master station number.
3. HMI station No. can be 0~15, PLC station No. must be 0~15, the station No. of HMI and PLC can not be the same number.
4. PLC baud rate can be 187.5K or 19.2K.
5. You must set DB first, or register cannot write (DB.DBX, DB.DBW, DB.DBD. The initial address of DBm.DBW and DBm.DBD must be even number.
6. This protocol doesn't support direct simulation and indirect simulation.


PLC Setting

1. PLC station No. can be 0~15.
2. MPI baud rate can be 19.2k or 187.5k.

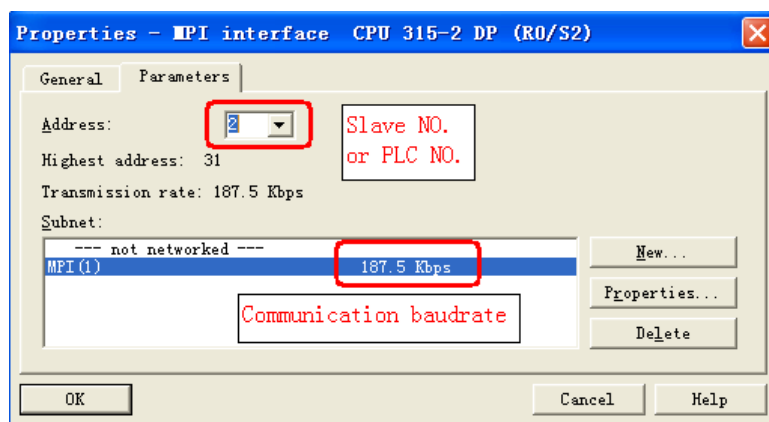**SIEMENS MPI Direct protocol**


HMI setting

Default parameter: 19200bps, 8, even, 1; station number: 2

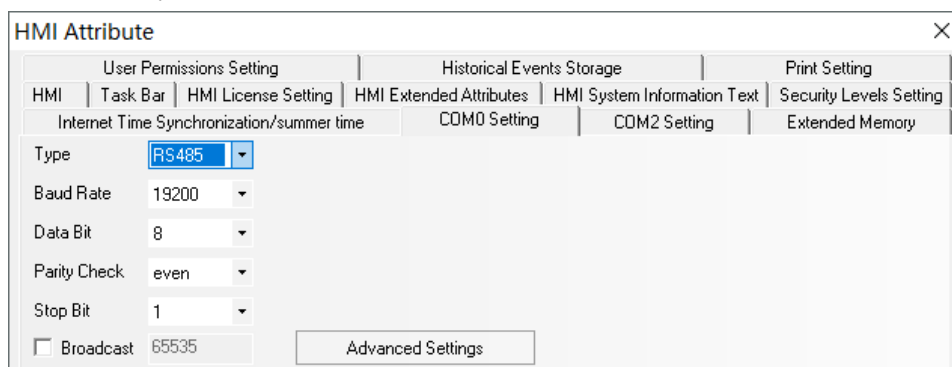

PLC setting

PLC station No. can be 2-15, MPI baud rate can be 19.2k or 187.5k

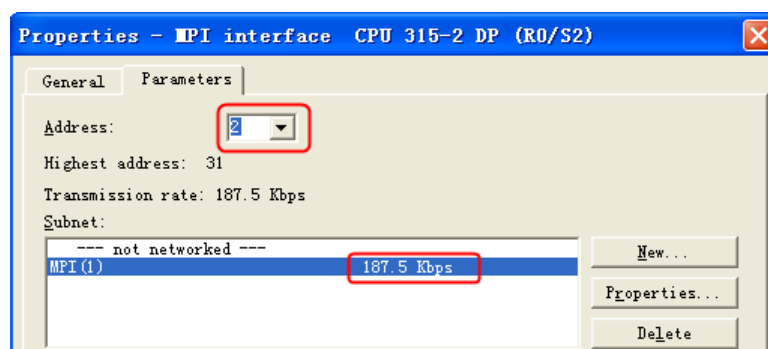

NOTE:

1. You should set DB block first, otherwise the registers as DB.DBX, DB.DBW and DB.DBD cannot write.
2. This protocol supports one HMI to one PLC communication

© Ethernet Communication Setting

SIEMENS S7-200 Ethernet (TCP Slave) protocol


Many(HMI)-to-One(PLC) commication

PLC Setting

The settings for the CP 243-1 are defined in STEP 7 Micro/WIN via the Ethernet Wizard. For assistance with all the information go to STEP 7 Micro/WIN Online Help via F1.

1. Starting the Ethernet Wizard

- Open STEP 7 Micro/WIN
- Start the Ethernet Wizard via "Tools > Ethernet Wizard...."
- Click on "Next"

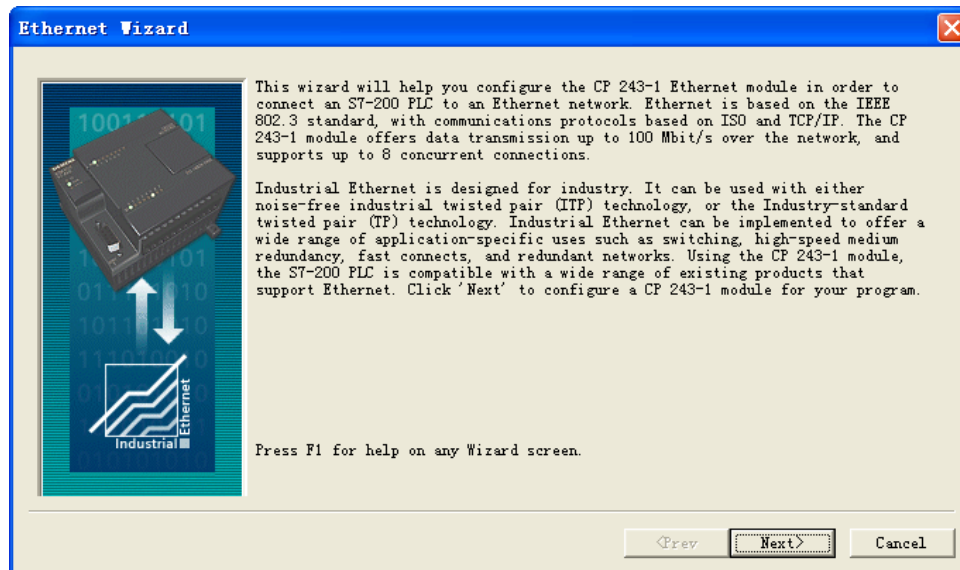


2. Specifying module position

If your PC is connected to the S7-200, click the **“Read modules”** button to determine the position of the CP 243-1 module automatically. Otherwise, the module position can also be entered manually.

Important:

The panel can only establish a connection with a Cp243-1 if the module is configured to “position 0”.

- Check if the CP is connected in the module position “ZERO” and change the module position if necessary.
- Identify or enter the module position “ZERO”.
- Click on “Next”.

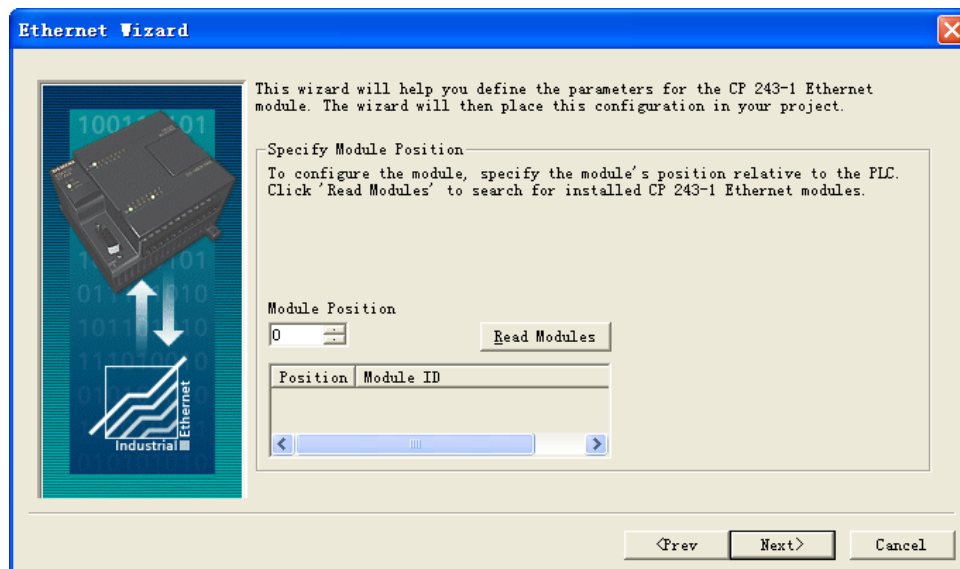


3. Specifying IP address

3.0 Define an IP address for the CP 243-1.

Caution: The IP address for this application may not be taken automatically from a server because the panel requires a fixed reference partner (CP 243-1) for the Ethernet communication.


Note: The communication connection type for this module can be defined by the “Automatic Setting”.

4.0 Click on **“Next”** to continue.

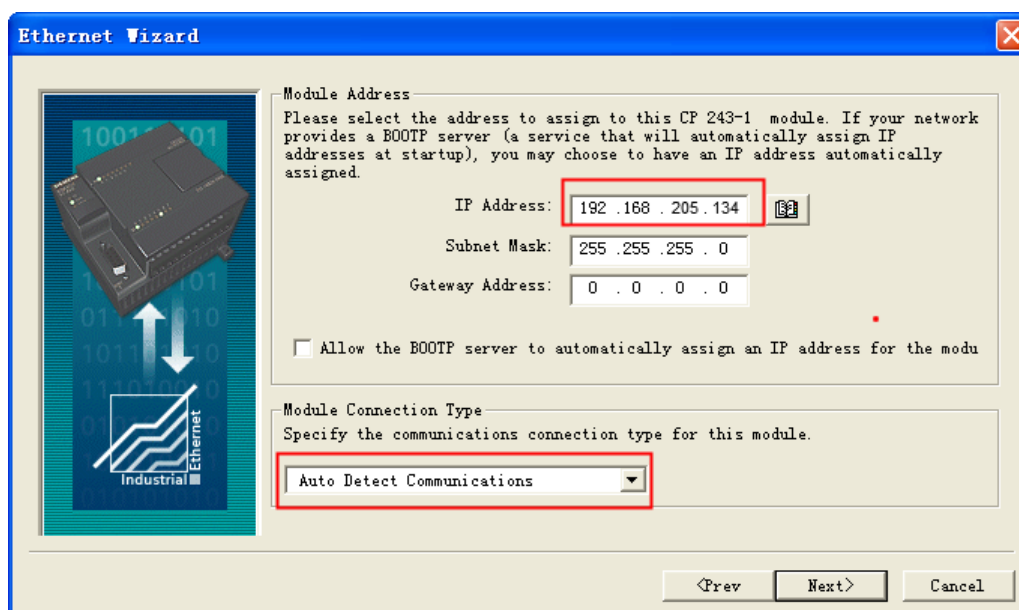


4. Parameterizing PtP connection

- 5.0 Specify the command byte for the module and the number of point-to-point connections with the CP 243-1.
- 6.0 Click on "Next"

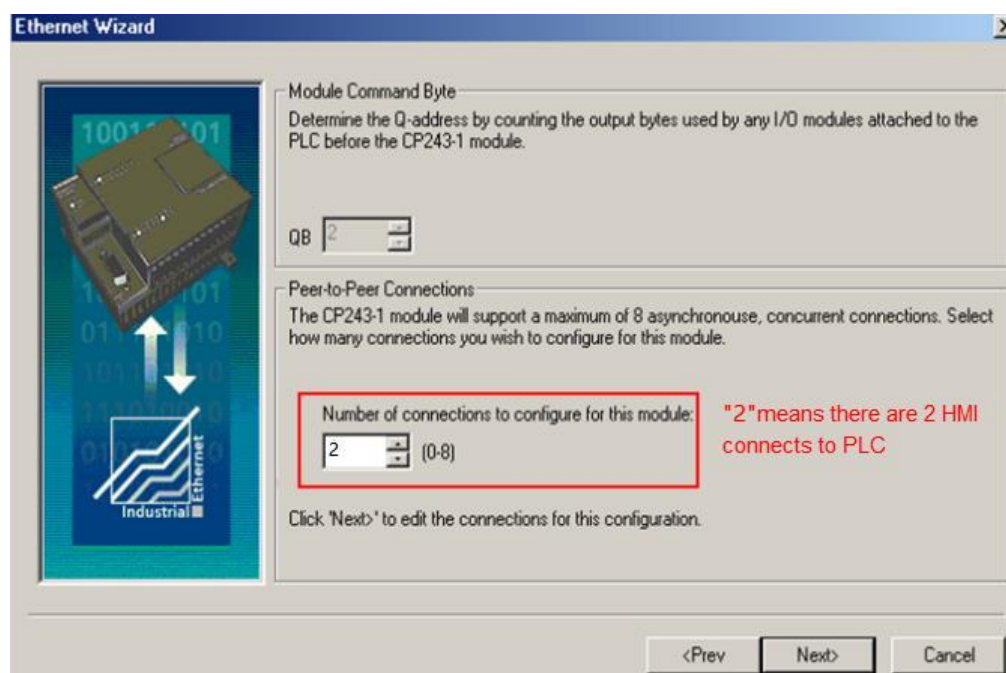


5. Configuration connection

- 7.0 The configuration for connecting the CP 243-1 to the panel is defined as in Fig..

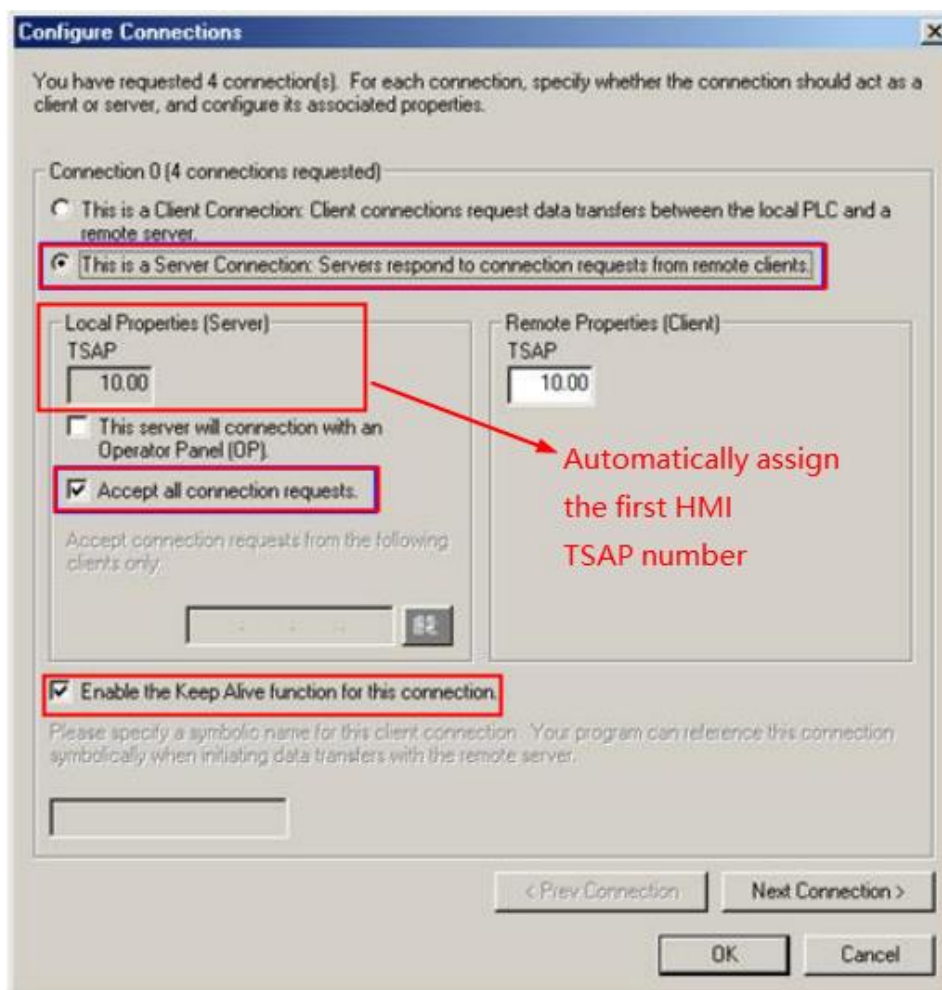

Click "Next Connection"

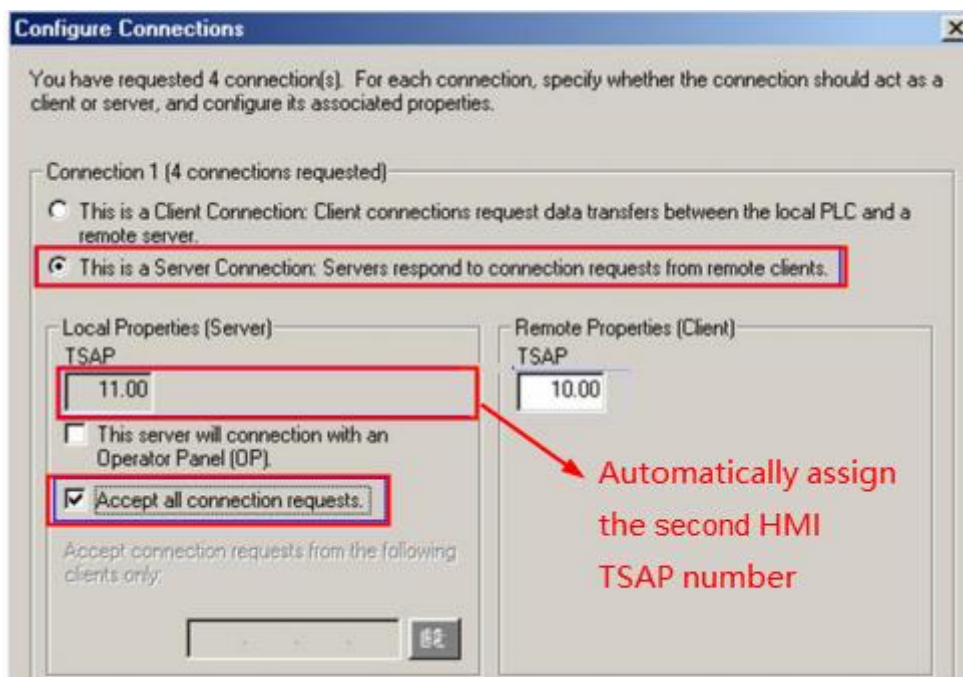


6. Using CRC protection

Set the CRC protection the way you want it. It is advisable to work without CRC protection first of all. The

“Keep Alive Interval” can be specified with the default time.

8.0 Activate the CRC protection and change the time of the “Keep Alive Interval” if required.

9.0 Click on “Next”.

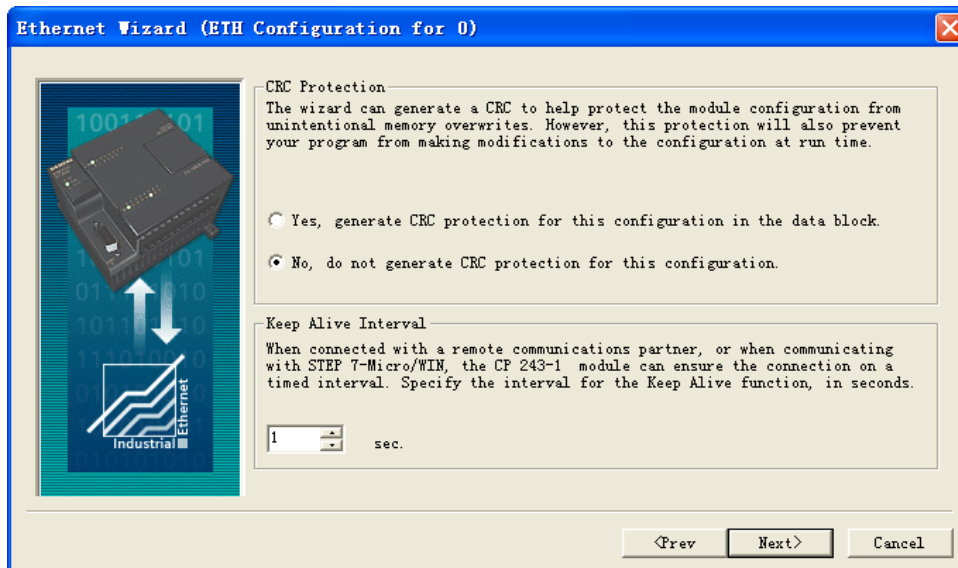


7. Assigning memory

10.0 Specify a memory area for the configuration of the CP 243-1.

Recommend: If you click on **Suggest address**, the Wizard can identify a variable memory area.

Note: The register used in the panel must be out of the memory area for the configuration.


11.0 Click on “Next”.

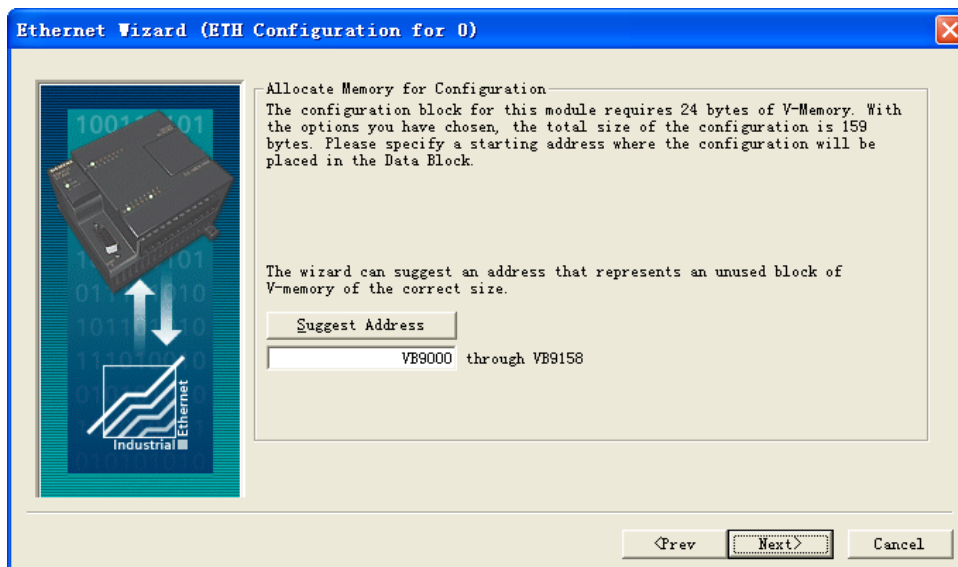

8. Creating project components


If you click on “Close”, the Ethernet Wizard generates the project components for the set configuration.

Among other things, subprograms and the variable memory are created in the data block.

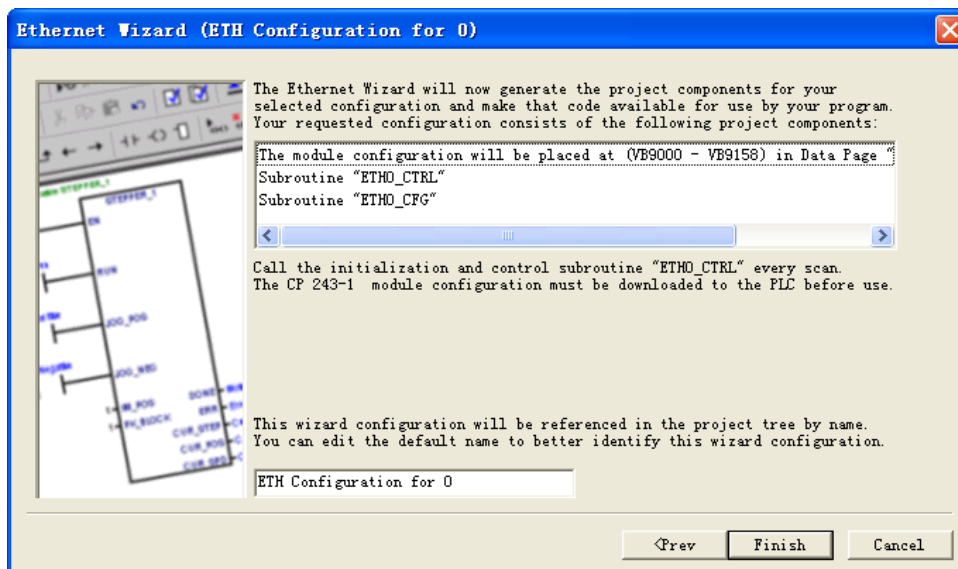

9. Confirm message


12.0 Click "Yes" to confirm the message that appears.

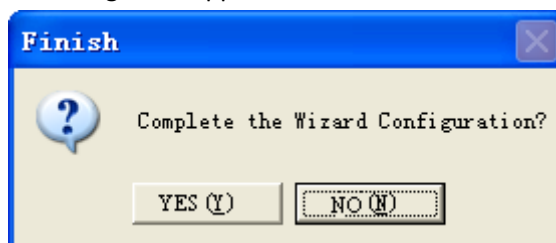

10. Call ETHO_CTRL


13.0 In your STEP 7 Micro/WIN program, you must call the ETHO_CTRL subroutine in each cycle.

14.0 Finally, load the entire configuration into the S7-200.


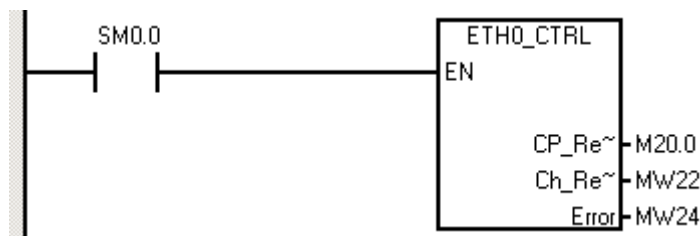


HMI Setting

Take the second HMI connection as an example


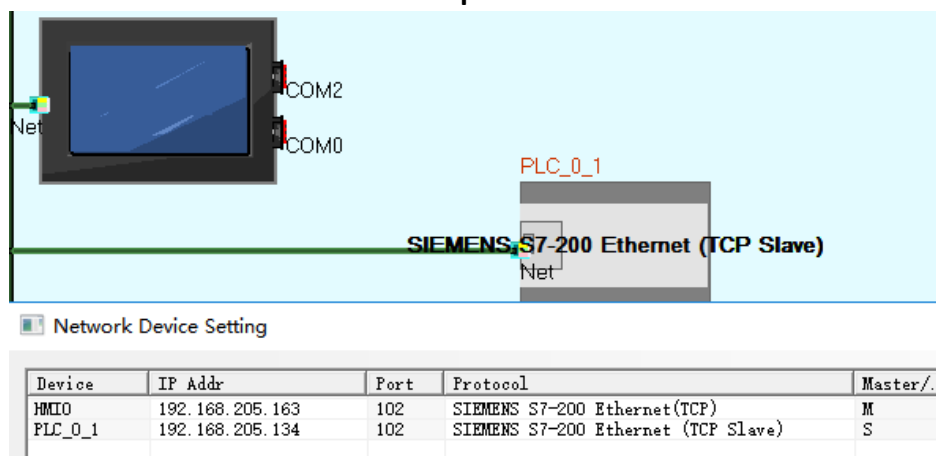


Note: The TSAP set in the PLC software needs to be filled in the protocol timeout here and converted into decimal, as shown in the figure.

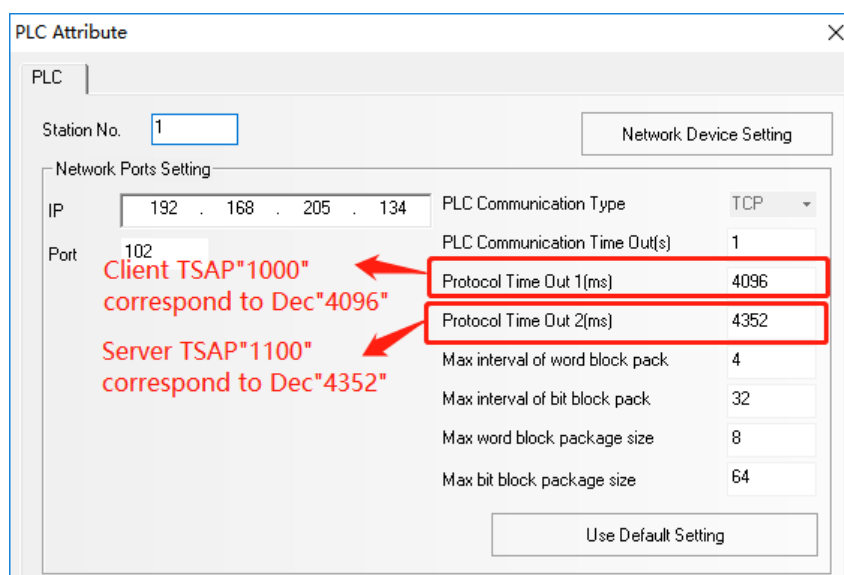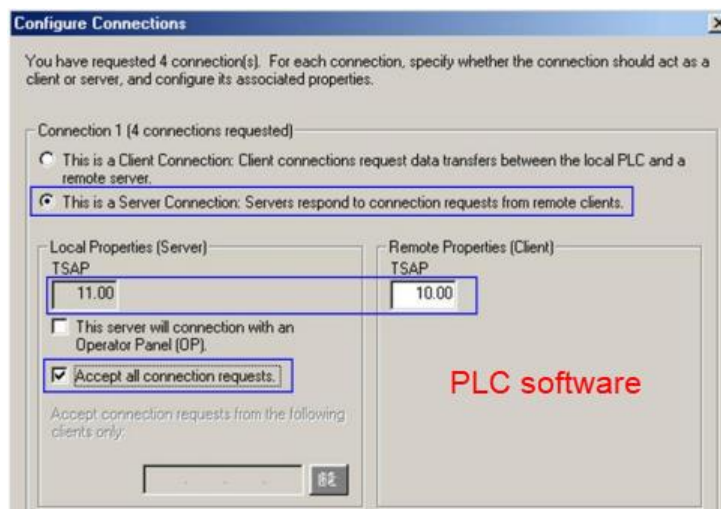


One-to-One communication

Other settings are consistent with many-to-one communication, but the number of connections and TSAP setting are different, as shown in the figure.

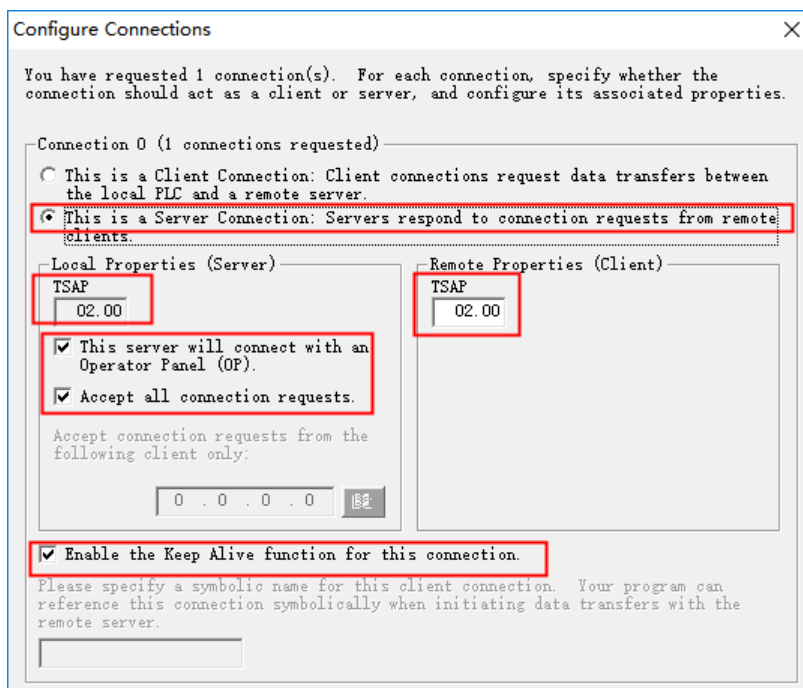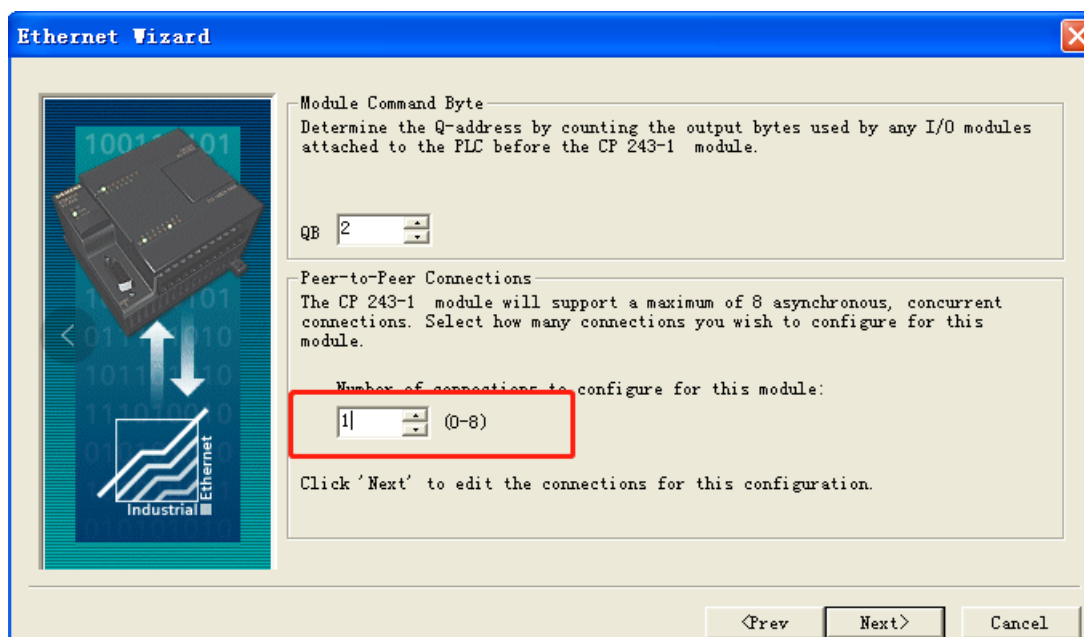

Warning: The TSAP must always be specified in four-digit format, with a leading zero (02.00).

HMI Setting

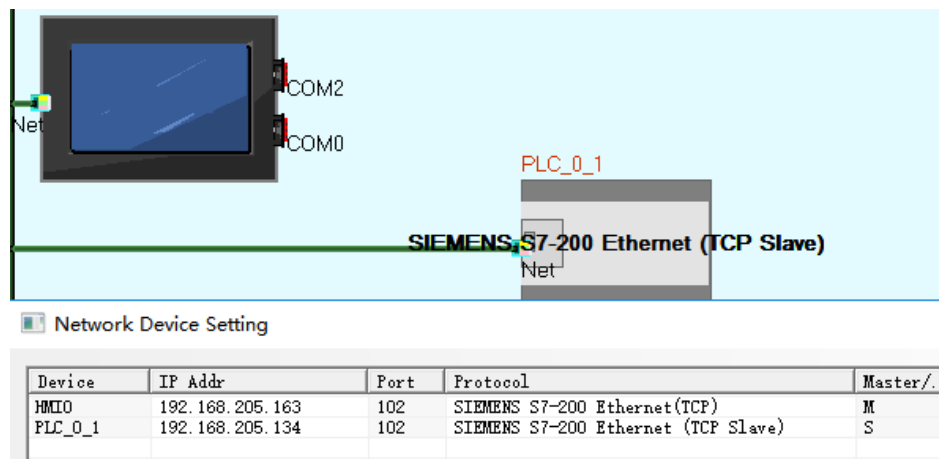

PLC Attribute

Station No. 1

Network Device Setting

Network Ports Setting

IP 192 . 168 . 205 . 134

Port 102

PLC Communication Type TCP

PLC Communication Time Out(s) 1

Protocol Time Out 1(ms) 1

Protocol Time Out 2(ms) 0

Max interval of word block pack 4

Max interval of bit block pack 32


Max word block package size 8


Max bit block package size 64

Use Default Setting

SIEMENS S7-200 SMART Ethernet (TCP Slave) protocol

HMI Setting

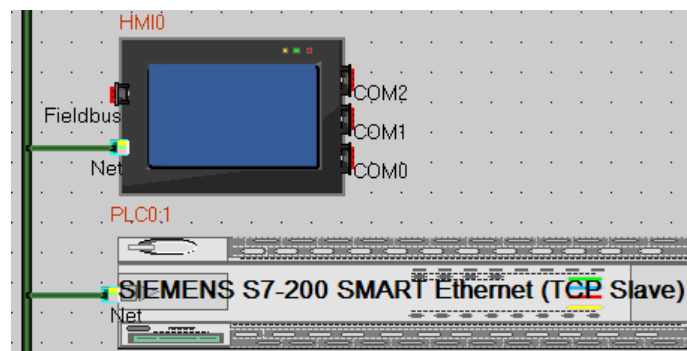


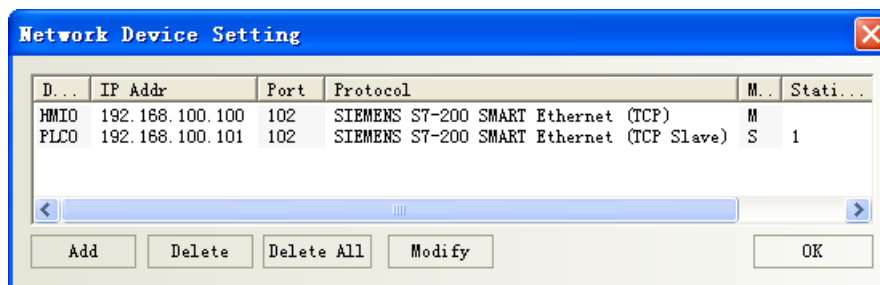


SIEMENS S7-1500 Ethernet(TCP Slave) protocol

Note: The maximum number of plc connections is 4.

SIEMENS S7-1200 Ethernet(TCP Slave) protocol


HMI Setting

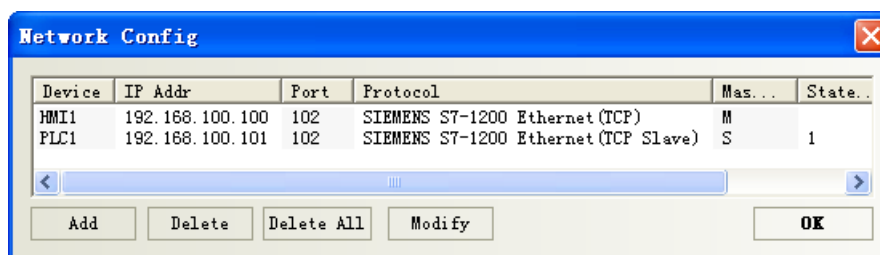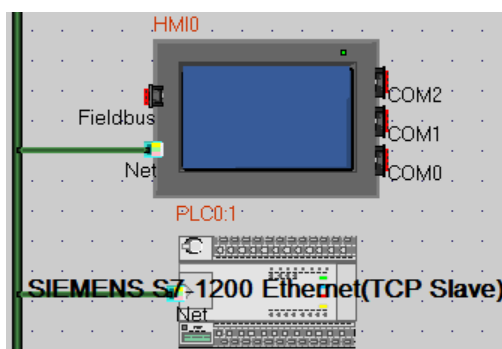


PLC Setting

1. Modify the IP address

a. Setting IP in "General" → "Profinet interface"

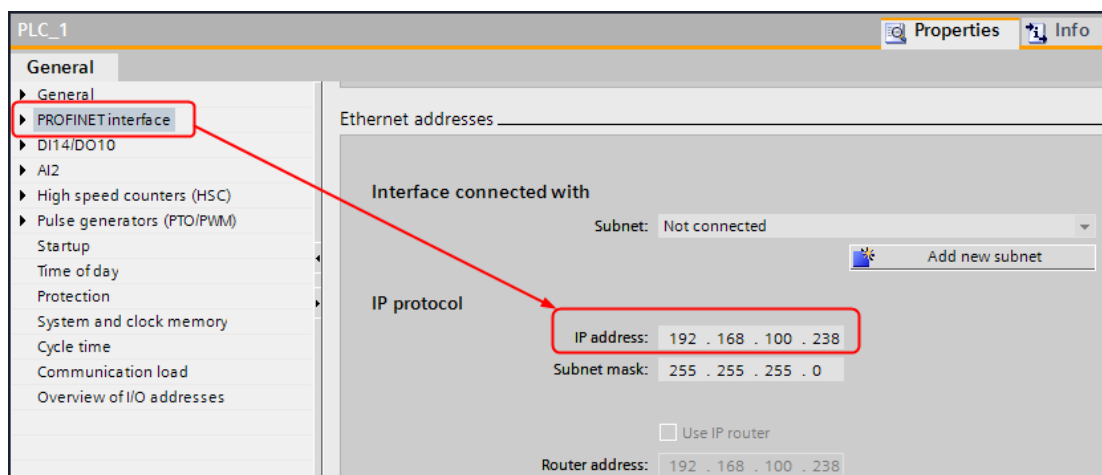

b. After configuration, download device. Download in the first time, select the "Extended download to device", in the dialog to select show all accessible devices.

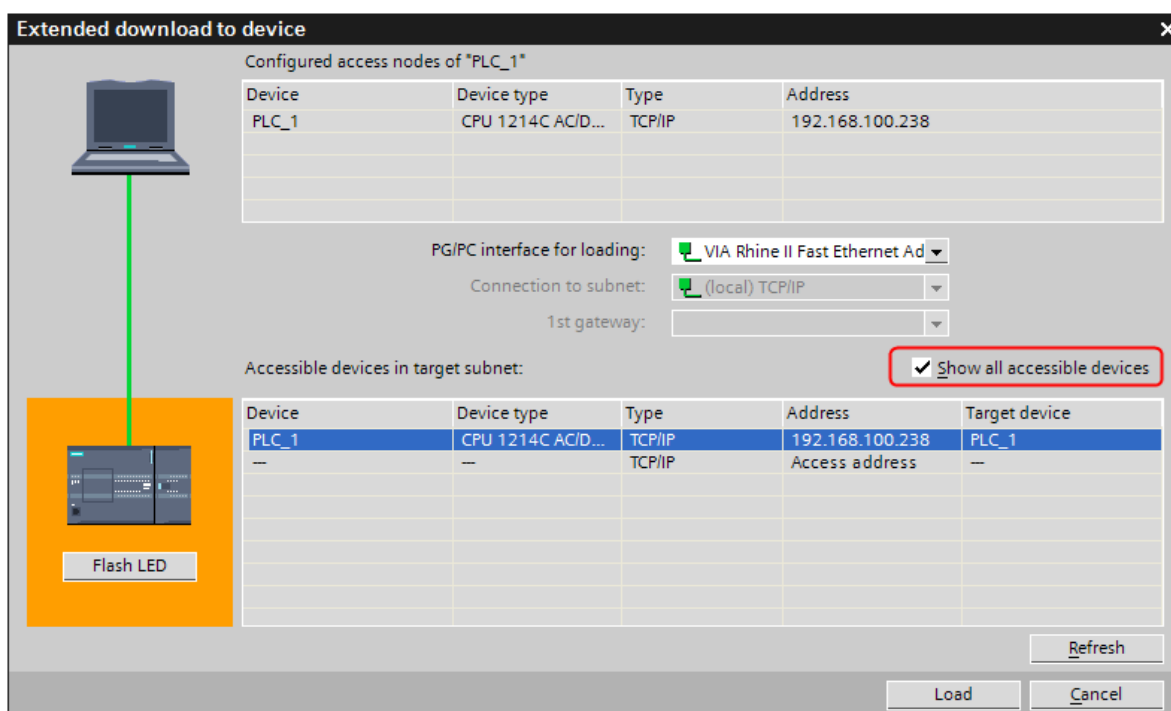


c. Select the device, press "Load".

2. Build the data block


Portal10:

Data block must be created, otherwise the relevant registers can not write (DB.DBX, DB.DBW, DB.DBD).

Double-click "Add new block"

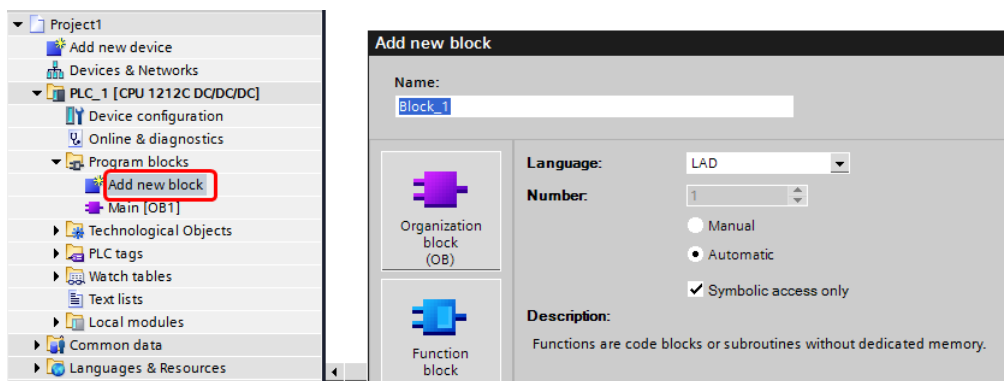

For example, add new block "DB10", setting as follow

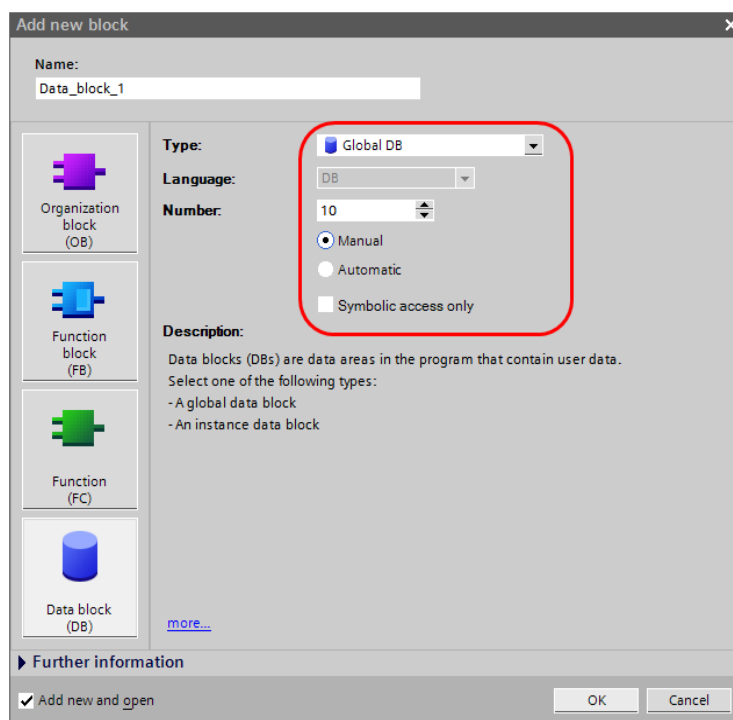**NOTE:**


1. Make sure the data type of PLC same as the HMI when defining the data block. For example, if the data type of PLC is REAL, then the data type of number input/display component must be float in HMI.
2. Make sure that the data block defined in PLC should be more than the data block used in HMI. For example, if DB5.DBW32 is used in HMI, user can't define the data block up to DB5.DBW32, but up to DB5.DBW34 or more.

Portal13:

1. Must disable "Optimized block access" in the DB block properties-[general]-[Attributes].




2. Must enable "Permit access with PUT/GET communication from remote partner (PLC, HMI, OPC, ...)" in the CPU properties-[General]-[Protection].

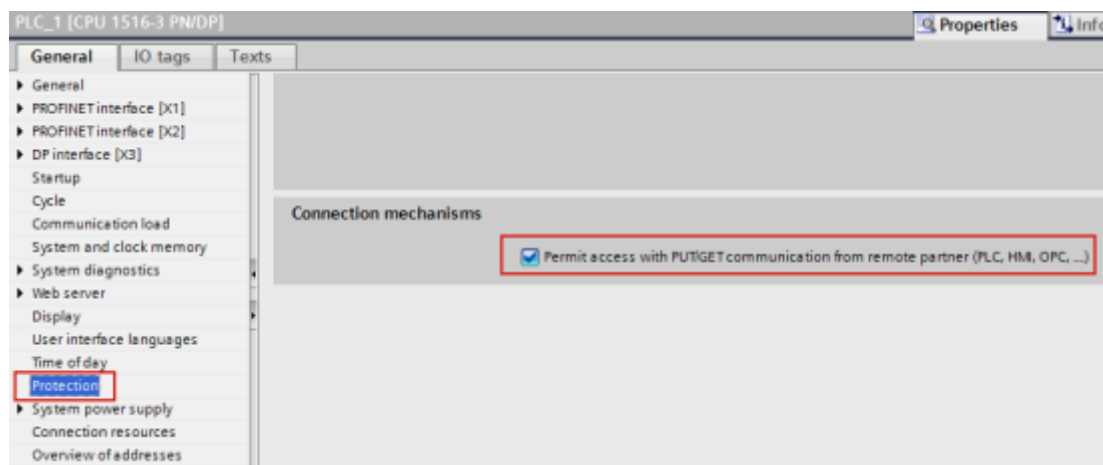


Import address tags using TIA portal

1.Export PLC tags (.xml format)

1) Add new tag table and create new tag in PLC tags;

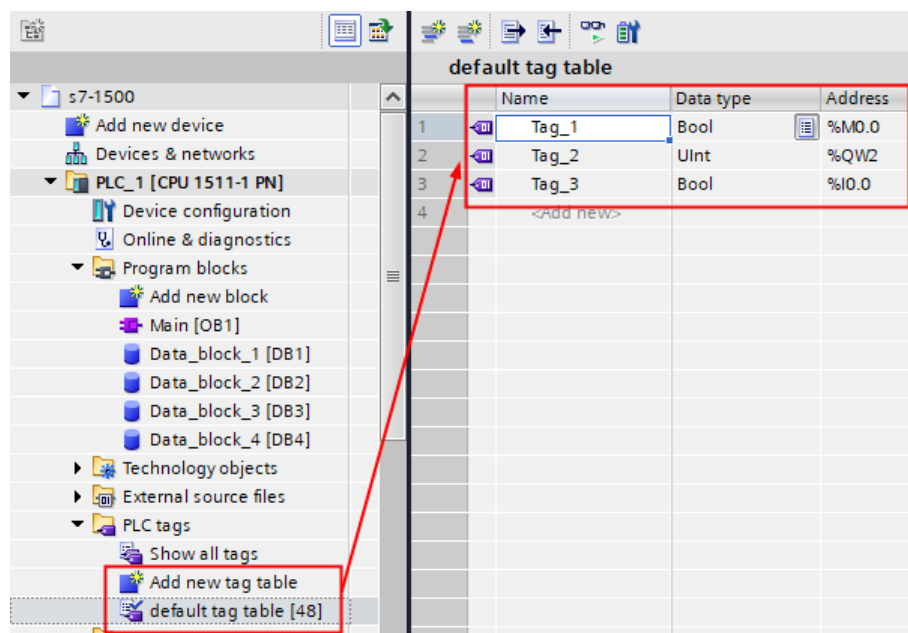


2) Check the tag table and click the export icon, then choose the path of export file and choose .xml format to save.

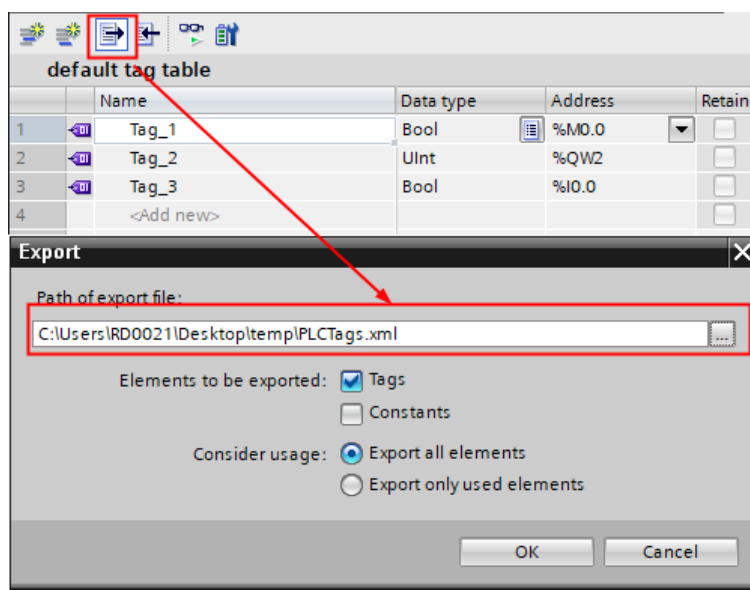


2. Export program blocks (.db format, the DB block should not check “Optimized block access”)

1) Create DB block under Program blocks, and click the right mouse on the data_block and then click [Generate source from blocks];

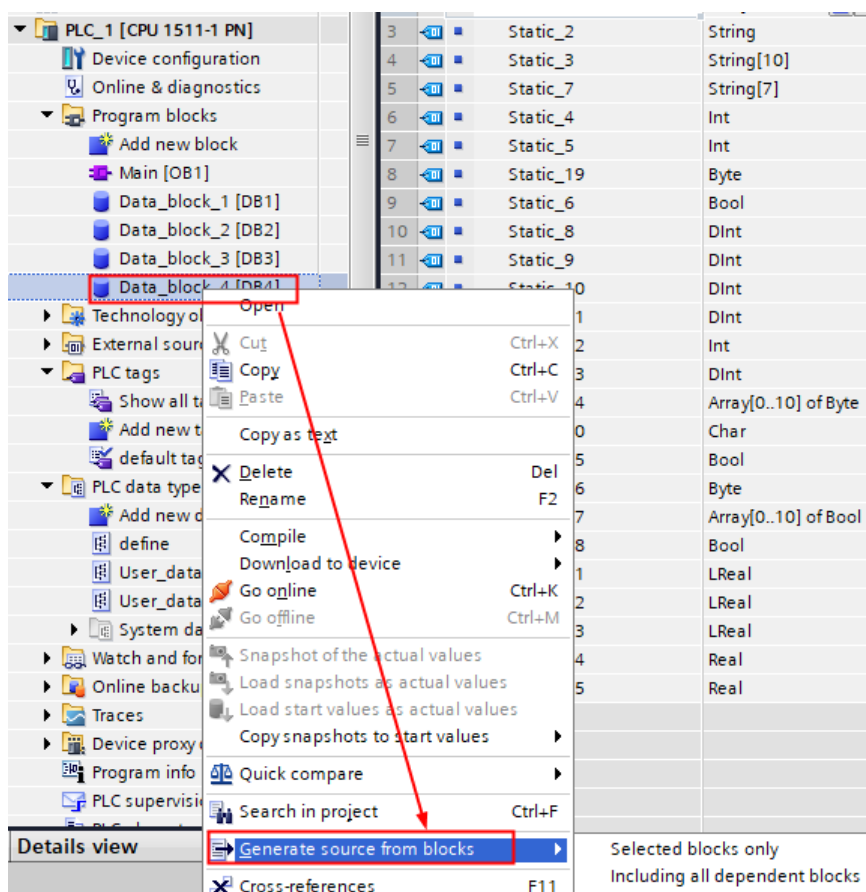


3. Export PLC data types (.udt format)


1) Add new data type under PLC data tags

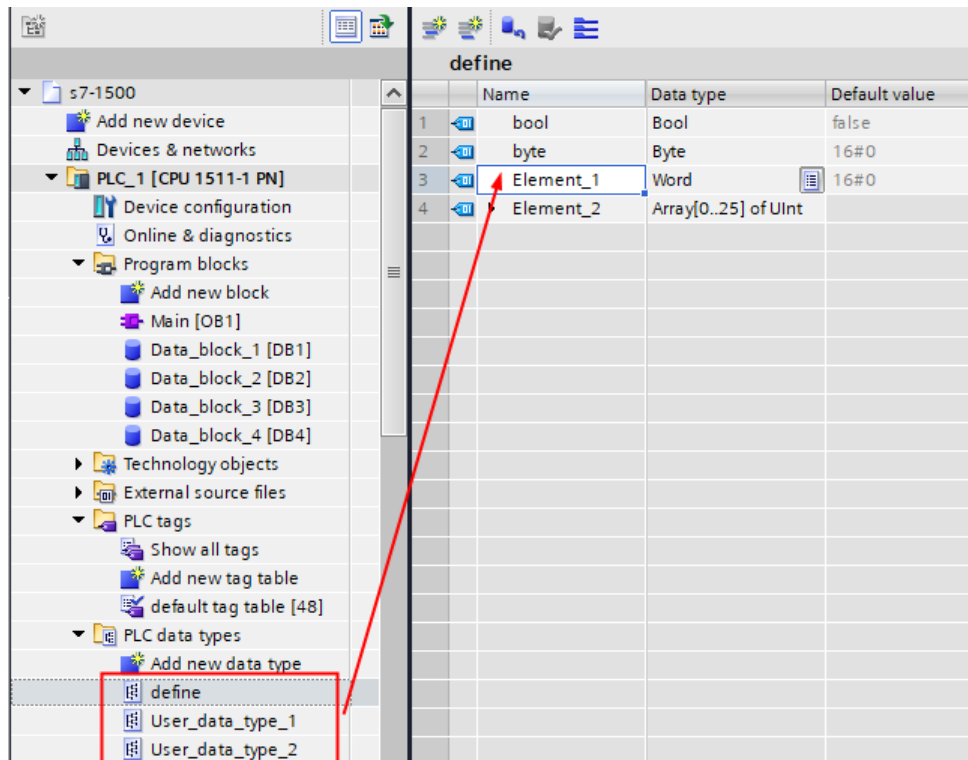

- 2) The define plc data types can use in the DB blocks;
- 3) Choose the define data type, and click the right mouse and click [Generate source from blocks] to export the .udt format file;

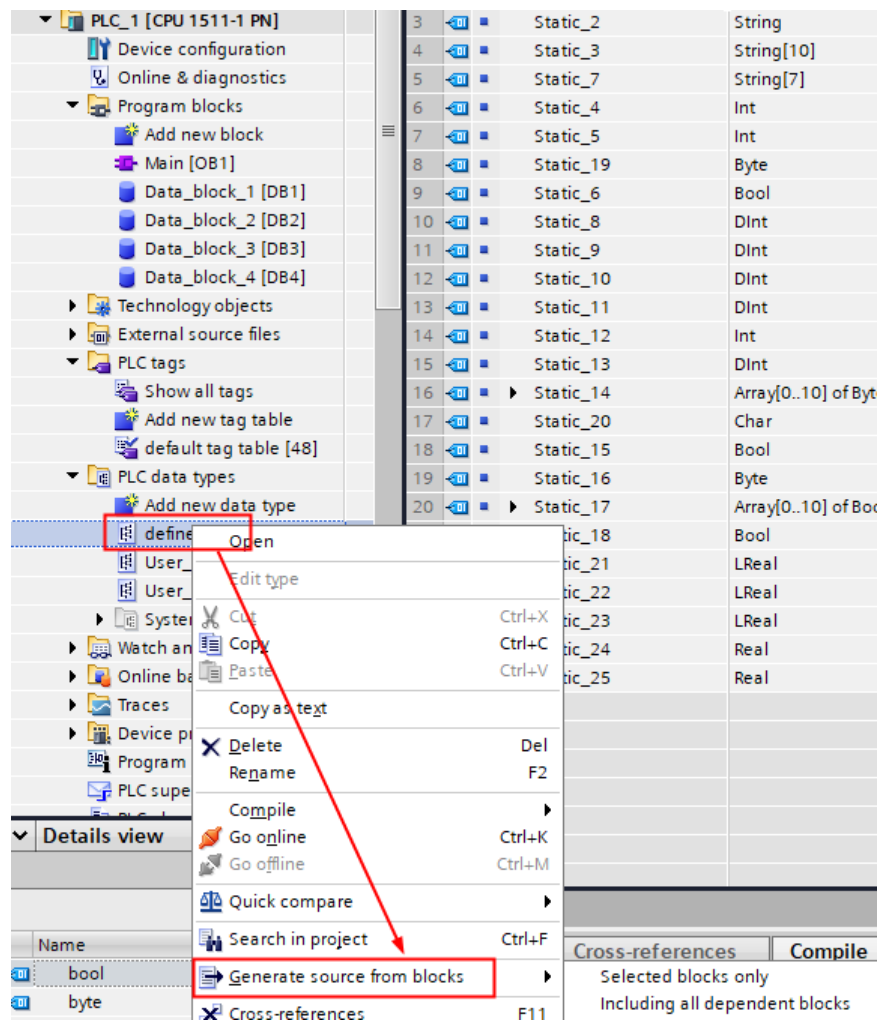


4.Import the PLC tags in DTools software;

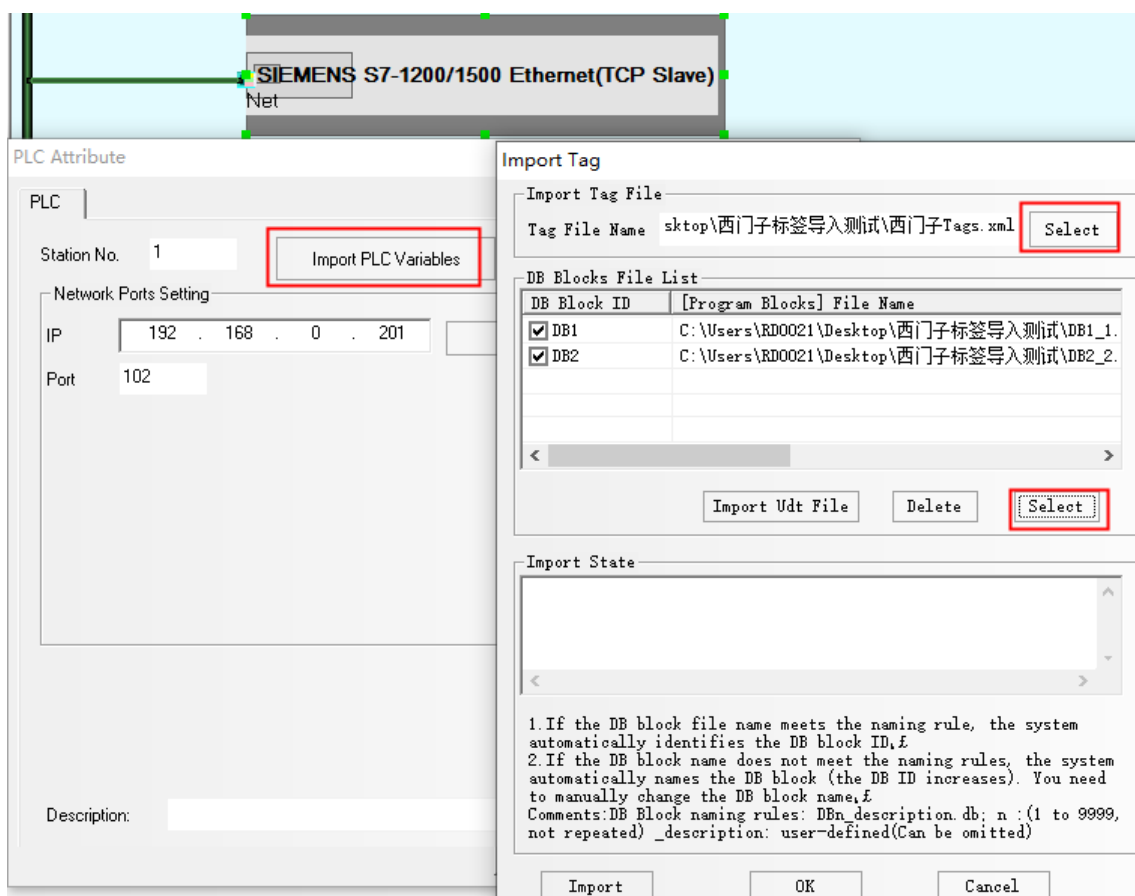

SIEMENS TIAPortal Ethernet(TCP Slave)(Free tag Names)

HMI Setting

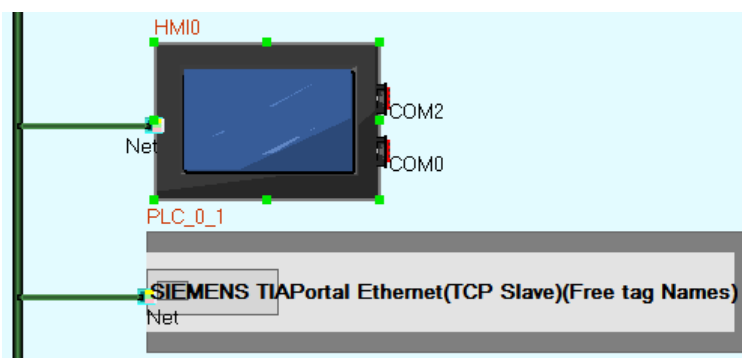

Network Device Setting

Device	IP Addr	Port	Protocol	Master/Slave	Station N...	Virtu
HMI0	192.168.205.150	102	SIEMENS TIAPortal Ethernet(TCP)(Free tag Names)	M		
PLC_0_1	192.168.205.51	102	SIEMENS TIAPortal Ethernet(TCP Slave)(Free tag Names)	S	1	

Add Delete Delete All Modify OK


Note: If one HMI is connected to multiple PLCs, the station number of PLC in the configuration software needs to be staggered, for example, PLC0 is set to 1, PLC2 is set to 2;

This protocol is applicable to G * * * E, G * * * E2, F series (no GL * * E series is supported), and the file system version must be greater than or equal to 20604;

The protocol software configuration supports up to 4 simultaneous communication on the screen, and up to 8 direct online simultaneous communication;


TIAPortal tags import:

Double-click to open the plc property box, click "cloud refresh" in the tag editor to directly obtain the tag variables of the PLC with the same IP settings on the network; or click "import", click browse in the import tag dialog box, and select the corresponding portal project .ap*;

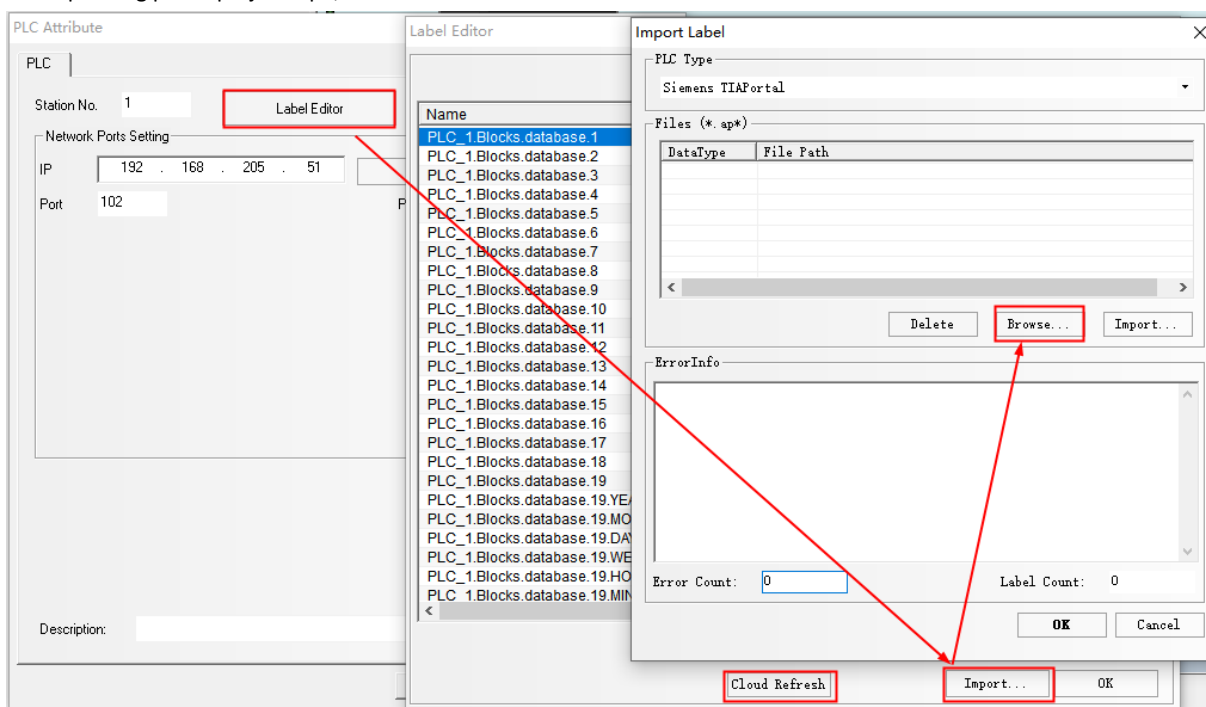

PLC Setting



1. Must enable "Permit access with PUT/GET communication from remote partner (PLC, HMI, OPC, ...)" in the CPU properties-[General]-[Protection].

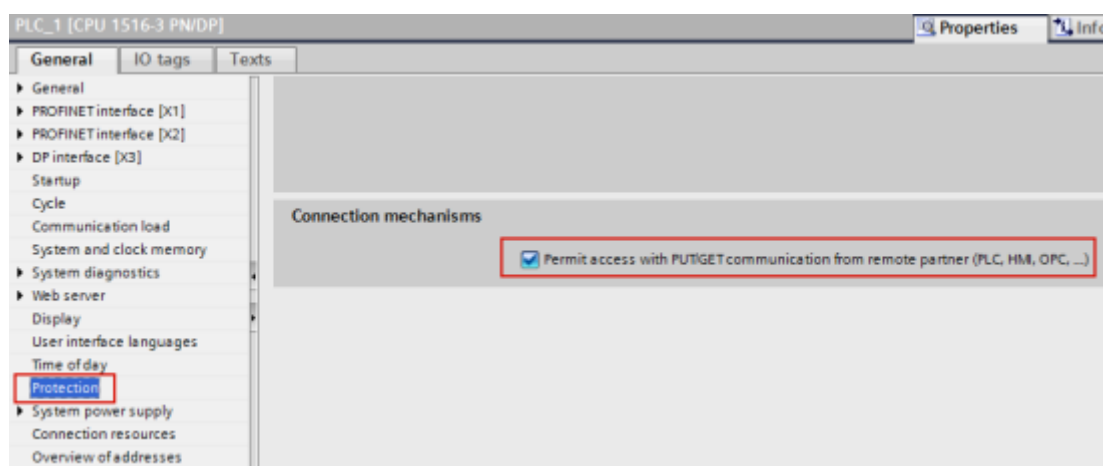

SIEMENS S7-300 Ethernet(TCP Slave) protocol


Note: The maximum number of plc connections is 4.

HMI Setting

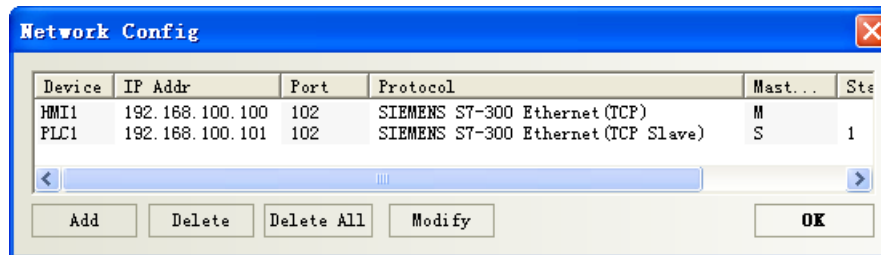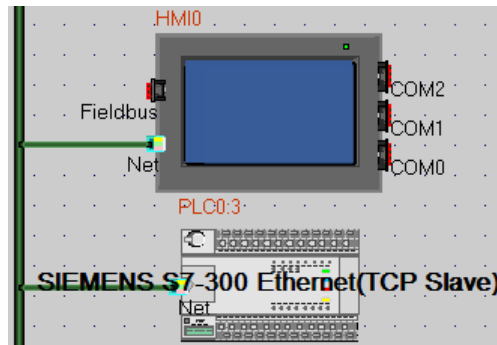


PLC Setting

1. In "HW configuration" insert CP300 industrial Ethernet.

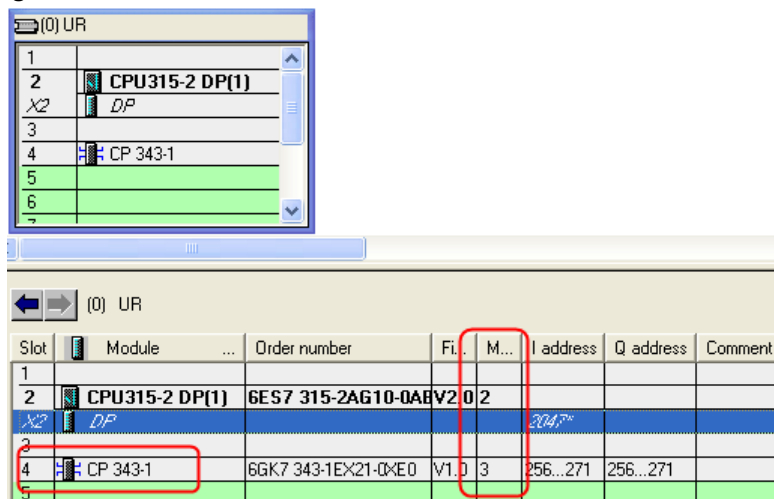


2. Set IP address in the Properties of CP343-1.

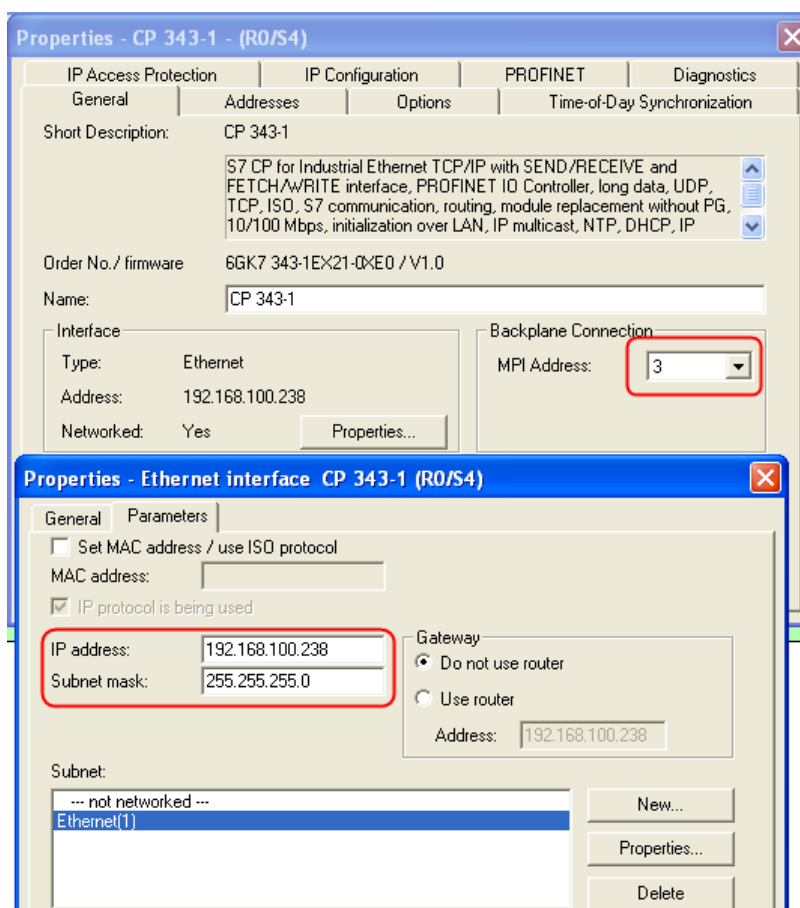

3. After HW configuration, download.

SIEMENS S7-300 Ethernet-Network(TCP Slave) protocol


HMI Setting

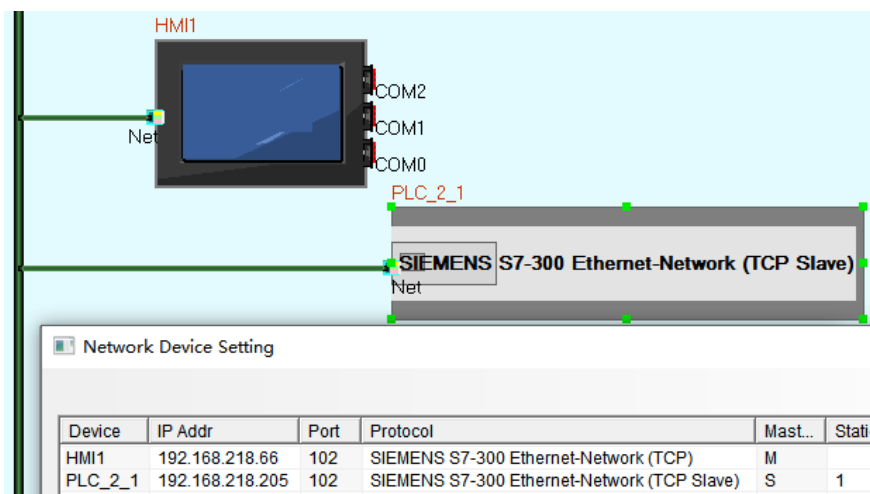

PLC Setting

Use the TIA Portal V17 software


1. Set the ip address of the PLC

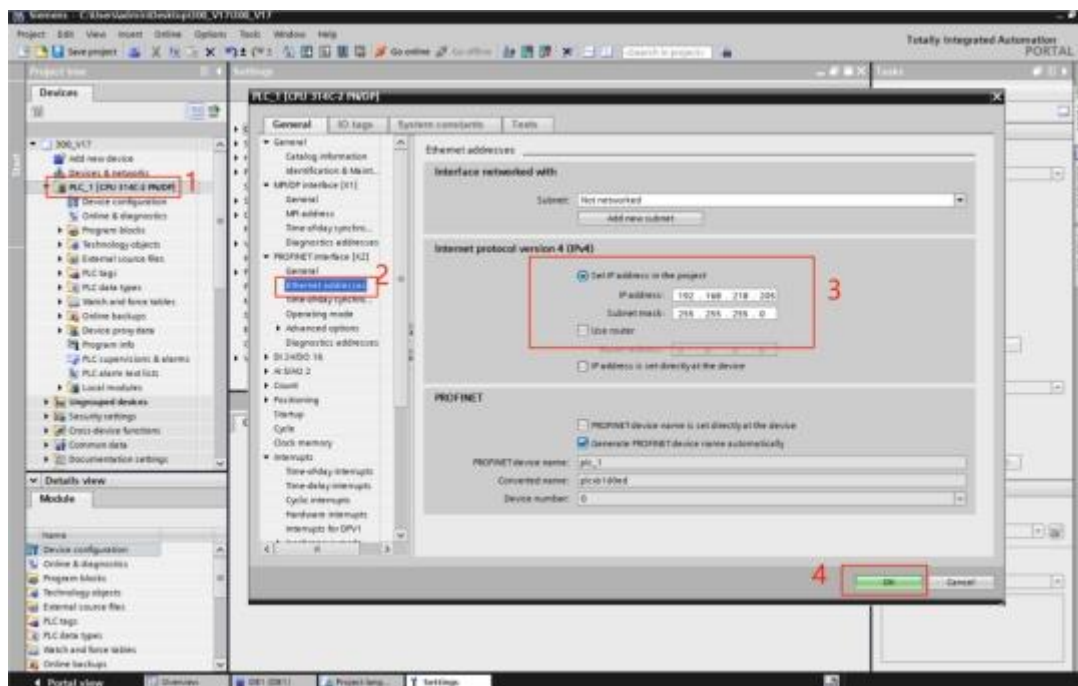


- (1) Select PLC_1(CPU 314C-2 PN/DP), right-click and select [Properties].
- (2) Click "PROFINET Interface", click "Ethernet address";
- (3) Set the ip of PLC;
- (4) After the Settings are complete, click OK. After the hardware configuration is complete, download it.

Use SIMATIC Manager STEP 7 V5.6


1. Set the ip address of the PLC and insert the industrial Ethernet module CP343-1 of the CP300

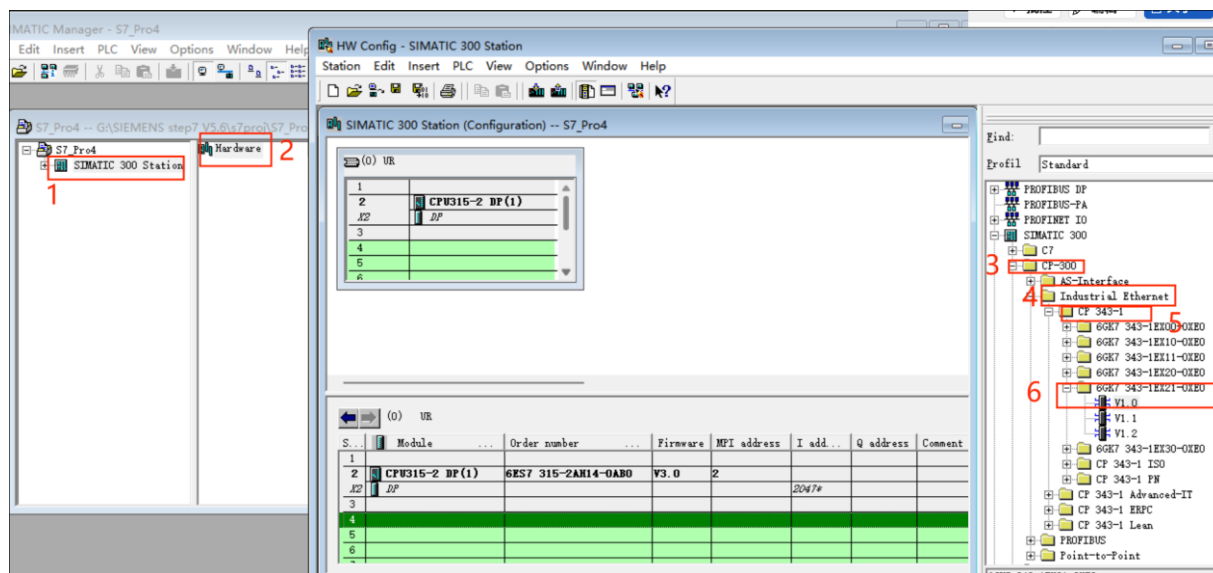

- (1) Double-click [SIMATIC 300 Station];
- (2) Double click [Hardware];
- (3) Select the [CP-300] series on the right;
- (4) Double click the [Industrial Ethernet] module;
- (5) Double-click [CP 343-1].

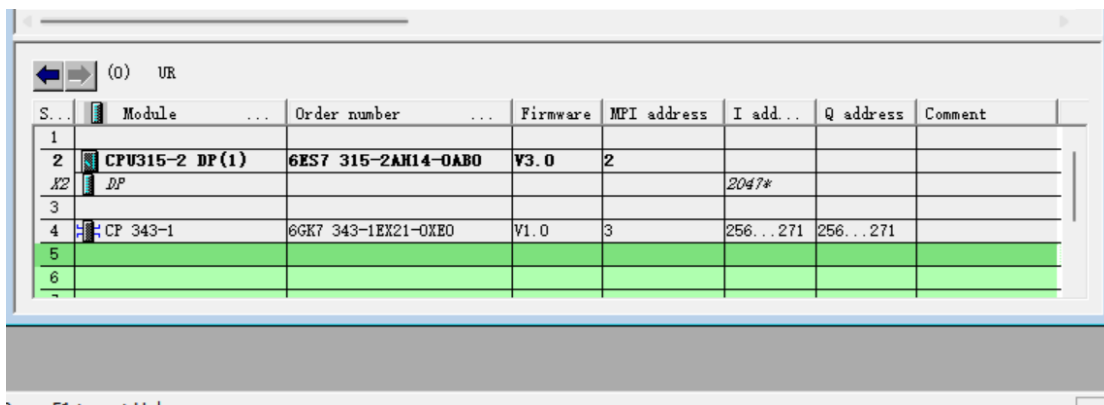


(6) Select the Ethernet module.


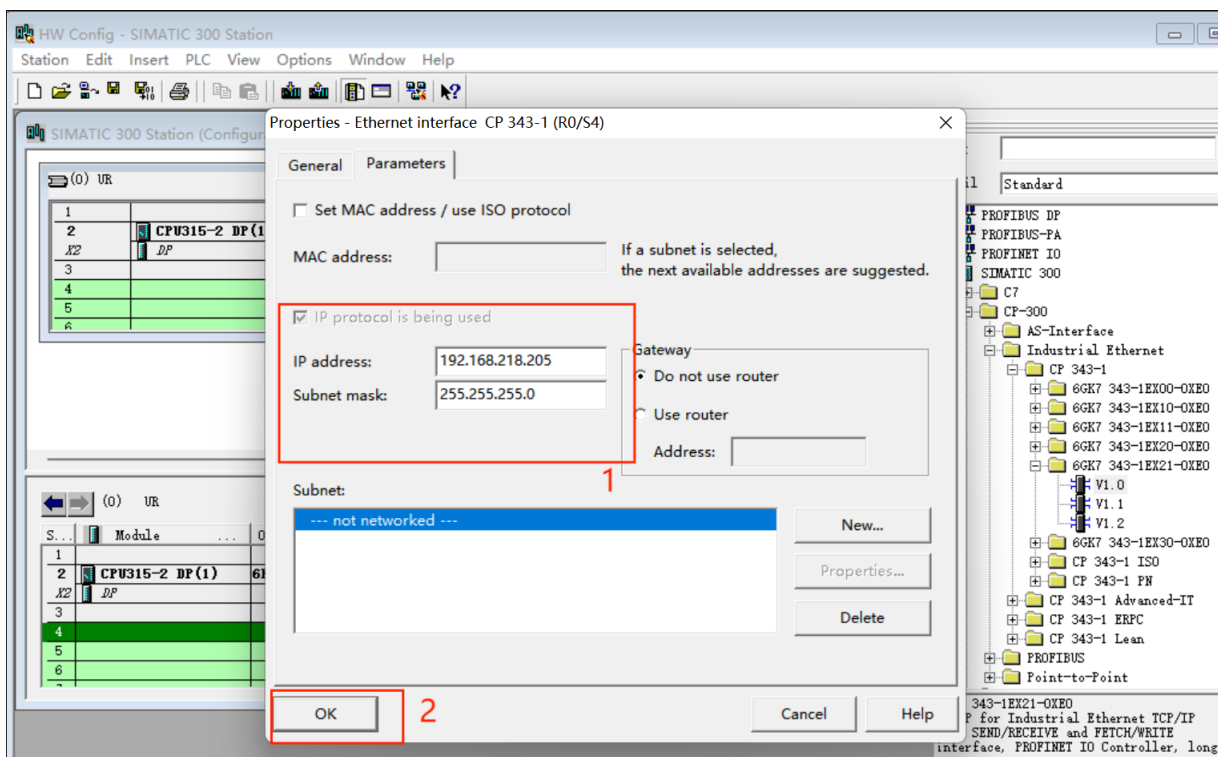


After the hardware configuration is complete, download it to the PLC.

SIEMENS S7-400 Ethernet(TCP Slave) protocol

HMI Setting

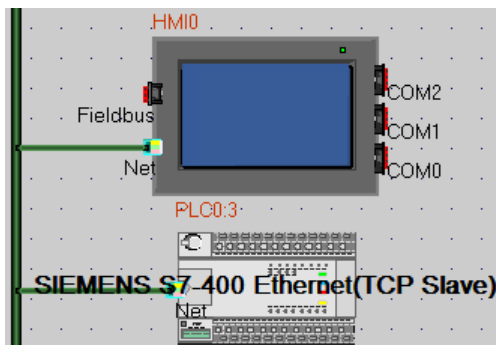

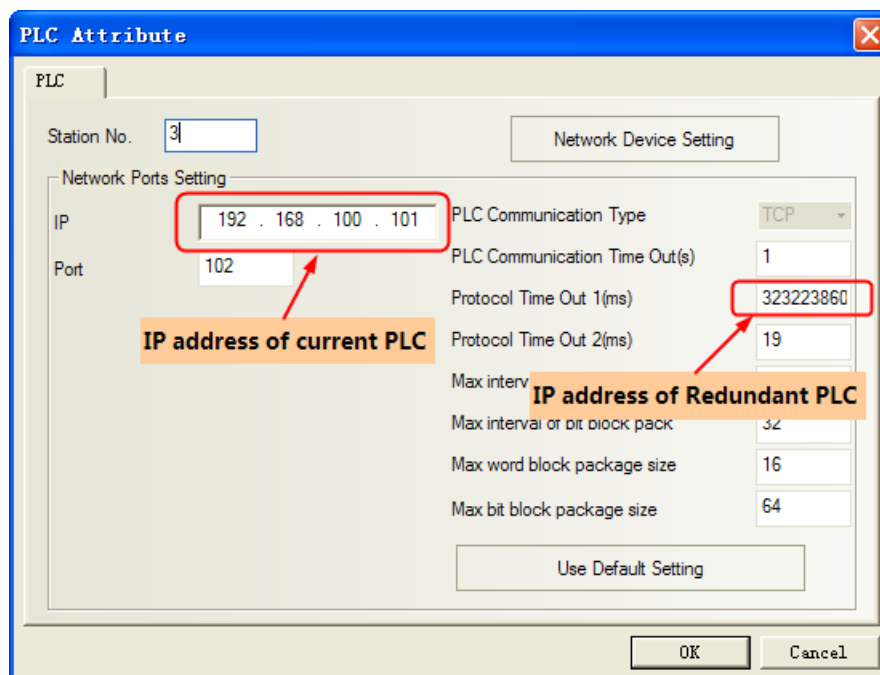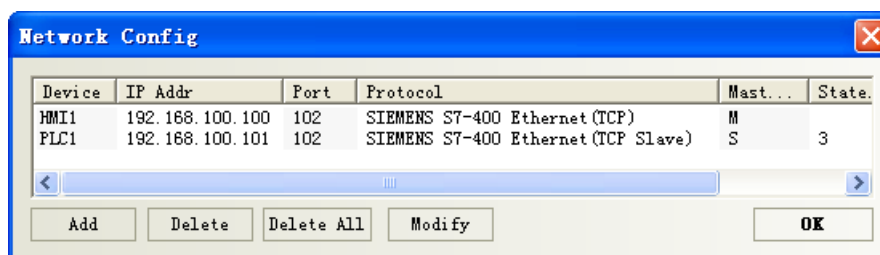

NOTE: Dual redundant parameters configuration of S7-400 Ethernet communication

15.0 The station No. is composed of two parts: track No. and slot No., and station No. is a byte, the track No. is the high 4 bits, and the slot No. is the low 4 bits. For example, the station No. is 0x03 in hex, that is to say, the track No. is 0 and CPU slot No. is 3.


16.0 Protocol timeout 1 stands for IP address of redundancy PLC. For example, if the IP address is 192.168.100.240, corresponding to the hex value 0xC0A864F8, then transfer this value to decimal, it is 3232261368.

17.0 Protocol timeout 2 stands for track No. and Slot No. of redundant PLC, for example, if the Protocol timeout 2 is 19, corresponding to the 0x13 in hex, that is to say the track No. is 1 and slot No. is 3.


18.0 When configuring PLC in HMI program, just need to configure one PLC but not two.

PLC Setting

1. In the hardware configuration, insert CP400 Ethernet module CP443-1:

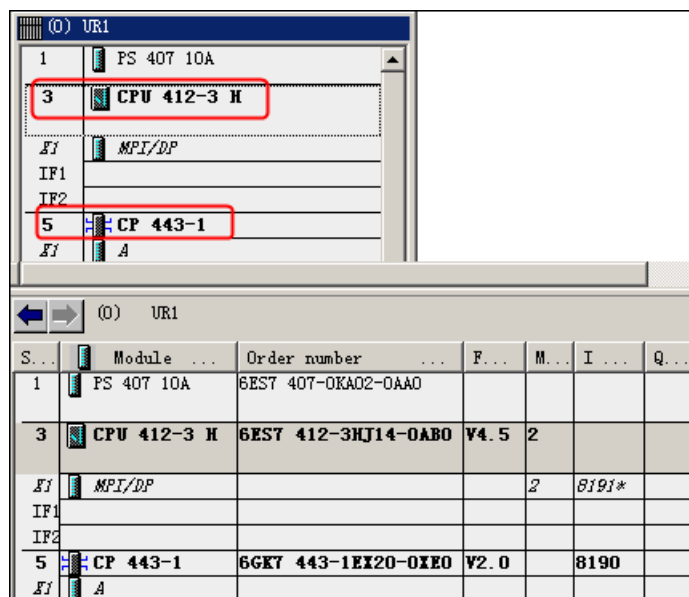

2. Open the Properties of CP443-1, set the IP address. No need to set MAC address.

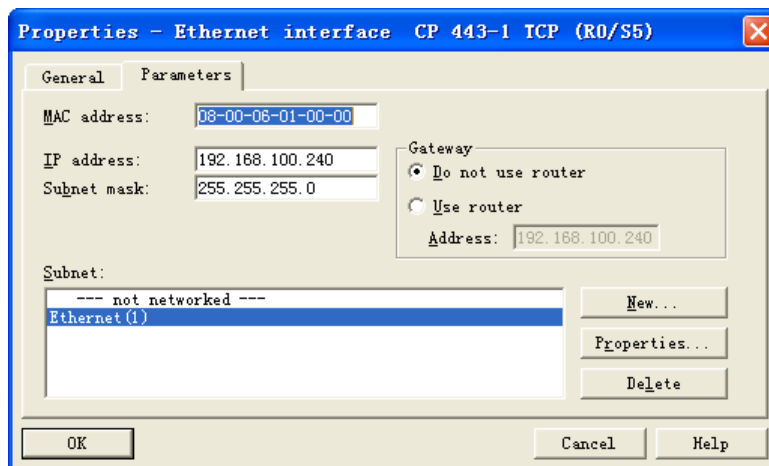

3. Download after finishing hardware configuration

SIEMENS LOGO! Ethernet(TCP Slave)

HMI Setting



Network Device Setting						
Device	IP Addr	Port	Protocol	Master/.	Stati.	Virtual..
HMI0	192.168.1.100	102	SIEMENS...	M		
PLC0	192.168.1.40	102	SIEMENS...	S	1	

PLC Setting

Set the same parameters as the HMI dose.

◎Supported Device

S7-200

Device	Bit Address	Word Address	Format
SCR	S.B 0.0-31.7	-----	DDD.O
Special memory Relay	SM.B 0.0-1535.7	-----	DDDD.O
Counter Relay	Cnt 0-255	-----	DDD.O
Timer Relay	Tim 0-255	-----	DDD.O
V Relay	V.B 0.0-20479.7	-----	DDDDD.O
Internal Memory Relay	M.B 0.0-31.7	-----	DDDDD.O
Discrete outputs and image Relay	Q.B 0.0-15.7	-----	DDDDD.O
Discrete inputs and image Relay	I.B 0.0-15.7	-----	DDDDD.O
Analog Outputs	-----	AQW 0-110	DD
Analog Inputs	-----	AIW 0-110	DD
SCR double word	-----	SD 0-28	DD
SCR	-----	SW 0-30	DD
Special memory double word	-----	SMD 0-1532	DDD
Special memory	-----	SMW 0-1534	DDD
Internal memory double word	-----	MD 0-28	DD
Internal memory	-----	MW 0-30	DD
Discrete outputs and image register double word	-----	QD 0-28	DD
Discrete outputs and image register	-----	QW 0-30	DD
Discrete inputs and image register double word	-----	ID 0-28	DD
Discrete inputs and image register	-----	IW 0-30	DD
Timer (Current Value)	-----	Cnt 0-255	DDD
Counter (Current Value)	-----	Tim 0-255	DDD
V memory double word	-----	VD 0-20478	DDDDD
V memory	-----	VW 0-20476	DDDDD
V memory	-----	VB 0-20476	DDDDD
Internal memory	-----	MB 0-30	DD

NOTE: VW、VD address must be an even number

SIEMENS S7-200 Ethernet(TCP Slave)

Device	Bit Address	Word Address	Format	Notes
V Relay	V.B 0.0-20479.7	-----	DDDD.O	
Internal Memory Relay	M.B 0.0-31.7	-----	DD.O	
Discrete outputs and image Relay	Q.B 0.0-31.7	-----	DD.O	
Discrete inputs and image Relay	I.B 0.0-31.7	-----	DD.O	

Special memory Relay	SM.B 0.0-1535.7	-----	DDDD.O	
SCR	S.B 0.0-31.7	-----	DD.O	
	T.FLAG 0-255	-----	DDD	
	C.FLAG 0-255	-----	DDD	
Internal memory double word	-----	MD 0-28	DD	
Internal memory	-----	MW 0-30	DD	
Discrete outputs and image register double word	-----	QD 0-28	DD	
Discrete outputs and image register	-----	QW 0-30	DD	
Discrete inputs and image register double word	-----	ID 0-28	DD	
Discrete inputs and image register	-----	IW 0-30	DD	
V memory double word	-----	VD 0-20478	DDDD	
V memory	-----	VW 0-20476	DDDD	
	-----	SMW 0-1534	DDDD	
	-----	SW 0-30	DD	
Timer	-----	TW 0-255	DDD	
Counter	-----	CW 0-255	DDD	
	-----	AIW 0-110	DDD	
	-----	AQW 0-110	DDD	
	-----	VB 0-20476	DDD	
	-----	MB 0-31	DD	

SIEMENS S7-200 SMART Ethernet(TCP Slave)

Device	Bit Address	Word Address	Format	Notes
V Relay	V.B 0.0-20479.7	-----	DDDD.O	
Internal Memory Relay	M.B 0.0-31.7	-----	DD.O	
Discrete outputs and image Relay	Q.B 0.0-31.7	-----	DD.O	
Discrete inputs and image Relay	I.B 0.0-31.7	-----	DD.O	
Special memory Relay	SM.B 0.0-1535.7	-----	DDDD.O	
SCR	S.B 0.0-31.7	-----	DD.O	
Internal memory double word	C.FLAG 0-255	-----	DDD	
Internal memory	T.FLAG 0-255	-----	DDD	
Discrete outputs and image register double word	-----	MD 0-28	DD	
Discrete outputs and image register	-----	MW 0-30	DD	
Discrete inputs and image register double word	-----	QD 0-28	DD	
Discrete inputs and image register	-----	QW 0-30	DD	

V memory double word	-----	ID 0-28	DD	
V memory	-----	IW 0-30	DD	
V Relay	-----	Cnt 0-255	DDD	
Internal Memory Relay	-----	Tim 0-255	DDD	
Discrete outputs and image Relay	-----	VD 0-20478	DDDD	
Discrete inputs and image Relay	-----	VW 0-20476	DDDD	
	-----	SMW 0-1534	DDDD	
	-----	SW 0-30	DD	
Timer	-----	T 0-255	DDD	
Counter	-----	C 0-255	DDD	
	-----	AIW 0-110	DDD	
	-----	AQW 0-110	DDD	
	-----	VB 0-20476	DDD	
	-----	MB 0-31	DD	

SIEMENS S7-300/400 (PC Adapter Direct)

Device	Bit Address	Word Address	Format	Notes
External Input node	I 0.0~511.7	-----	DDDD.O	
External Output node	Q 0.0~511.7	-----	DDDD.O	
Internal assistant node	M 0.0~4095.7	-----	DDDD.O	
Data Register Relay node	DBm.DBX 0~65535.7	-----	DDDDD.O	m:10~60
Data Register Relay	-----	DBm.DBW 0-65534	DDDDD	m:10~60
Data Register Relay (32 bit)	-----	DBm.DBD 0-65532	DDDDD	m:10~60
Internal Relay	-----	MW 0~9999	DDDD	
Internal Relay (32 bit)	-----	MD 0~9999	DDDD	
External Output Relay	-----	QW 0~9999	DDD	
External Output Relay (32 bit)	-----	QD 0~9999	DDD	
External Input Relay	-----	IW 0~9999	DDD	
External Input Relay (32 bit)	-----	ID 0~9999	DDD	

NOTE:

1. The initial address of DBm.DBW and DBm.DBD must be even number.
2. Make sure that the data block defined in PLC should be more than the data block used in HMI. For example, if DB5.DBW32 is used in HMI, user can't define the data block up to DB5.DBW32, but up to DB5.DBW34 or more.

SIEMENS S7-300/400 (MPI Direct)& SIEMENS MPI

Device	Bit Address	Word Address	Format	Notes
External Input node	I 0.0~255.7	-----	DDDD.O	
External Output node	Q 0.0~255.7	-----	DDDD.O	

Internal assistant node	M 0.0~8191.7	-----	DDDD.O	
Data Register Relay node	DBm.DBX 0.0~65533.7	-----	DDDDD.O	m:1~60
Data Register Relay node	DBn.DBX 100000.0~409665535.7	-----	DDDDD.O	n:1~4096
Counter	-----	C 0~2047	DDD	*1
Timer	-----	T 0~2047	DDD	
Internal Relay	-----	MW 0~8190	DDDD	
External Output Relay	-----	QW 0~254	DDD	
External Input Relay	-----	IW 0~254	DDD	
Internal Relay	-----	MD 0~8188	DDDD	
External Output Relay	-----	QD 0~252	DDD	
External Input Relay	-----	ID 0~252	DDD	
Data Register Relay	-----	DBm.DBW 0~65532	DDDDD	m:1~60
Data Register Relay (32 bit)	-----	DBm.DBD 0~65532	DDDDD	m:1~60
Data Register Relay	-----	DBn_DBW 100000-409665534	DDDDDDDDDD	n:1~4096
Data Register Relay (32 bit)	-----	DBn_DBD 100000-409665532	DDDDDDDDDD	n:1~4096

NOTE:

1. DBn_DBX, DBn_DBW, DBn_DBD is a custom block. First four data formats for data block number, the address after the five, less than five former address zeros. To DB20.DBX23.4 example, EV5000 software addresses to DBn_DBX: 2000023.4
2. The initial address of DBm.DBW, DBm.DBD must be an even number.
3. *1 T/C registers are read only.
4. Make sure that the data block defined in PLC should be more than the data block used in HMI. For example, if DB5.DBW32 is used in HMI, user can't define the data block up to DB5.DBW32, but up to DB5.DBW34 or more.

SIEMENS S7-1200 Ethernet(TCP Slave)

Device	Bit Address	Word Address	Format	Notes
External Input node	I 0.0~127.7	-----	DDDD.O	
External Output node	Q 0.0~127.7	-----	DDDD.O	
Internal assistant node	M 0.0~2047.7	-----	DDDD.O	
Data Register Relay node	DBn_DBX 100000.0~260065535.7	-----	DDDDDDDDDD.O	
Data Register Relay node	DBm_DBX 0.0~65535.7	-----	DDDDD.O	m:1~10
Data Register Relay	-----	DBn_DBW 100000-999965534	DDDDDDDDDD	n:1~9999
Data Register Relay (32 bit)	-----	DBn_DBD 100000-999965532	DDDDDDDDDD	n:1~9999
Data Register Relay	-----	DBm_DBW 0-65534	DDDDD	m:1~10

Data Register Relay (32 bit)	-----	DBm_DBD 0-65532	DDDDDD	
Internal Relay	-----	MW 0~8190	DDDD	
Internal Relay (32 bit)	-----	MD 0~8188	DDDD	
External Output Relay	-----	QW 0~1022	DDD	
External Output Relay (32 bit)	-----	QD 0~1020	DDD	
External Input Relay	-----	IW 0~1022	DDD	
External Input Relay (32 bit)	-----	ID 0~1020	DDD	
String	-----	DBn_String 100000-999965534	DDDDDDDDDD	n:1~9999
String	--	DBn_String_0 100000 —999965534	DDDDDDDDDD	n:1~9999
WString	--	DBn_WString_WCC 100000—999965534	DDDDDDDDDD	n:1~9999
WString	--	DBn_WString 100000 —999965534	DDDDDDDDDD	n:1~9999

NOTE:

1. EV5000 in the DB register corresponds to the definition of S7-1200 software, the absolute address of DB, rather than the global symbol DB.
2. DBn_DBX, DBn_DBW, DBn_DBD is a custom block. First four data formats for data block number, the address after the five, less than five former address zeros. To DB20.DBX23.4 example, EV5000 software addresses to DBn_DBX: 2000023.4
3. The initial address of DBm.DBW, DBm.DBD must be an even number.
4. Make sure that the data block defined in PLC should be more than the data block used in HMI. For example, if DB5.DBW32 is used in HMI, user can't define the data block up to DB5.DBW32, but up to DB5.DBW34 or more.
5. The DBn_String_0 register is not blank to read and write compared to DBn_String
6. The DBn_WString_WCC register is suitable for WINCC software monitoring, both read and write are consistent, using the register needs to check the high / low byte swap in the attribute settings

SIEMENS S7-300 Ethernet(TCP Slave)

Device	Bit Address	Word Address	Format	Notes
External Input node	I 0.0~2047.7	-----	DDDD.O	
External Output node	Q 0.0~2047.7	-----	DDDD.O	
Internal assistant node	M 0.0~8191.7	-----	DDDD.O	
Data Register Relay node	DBn_DBX 100000.0~25565535.7	-----	DDDDDDDD.O	
Data Register Relay node	DBm_DBX 0.0~65535.7	-----	DDDD.O	m:1~1 0
Data Register Relay	-----	DBn_DBW 100000-25565534	DDDDDDDD	n:1~25 5
Data Register Relay (32 bit)	-----	DBn_DBD 100000-25565532	DDDDDDDD	n:1~25 5

Data Register Relay	-----	DBm_DBW 0-65534	DDDDD	m:1~1
Data Register Relay (32 bit)	-----	DBm_DBD 0-65532	DDDDD	0
Internal Relay	-----	MW 0~8190	DDDD	
Internal Relay (32 bit)	-----	MD 0~2044	DDDD	
External Output Relay	-----	QW 0~2046	DDD	
External Output Relay (32 bit)	-----	QD 0~2044	DDD	
External Input Relay	-----	IW 0~2046	DDD	
External Input Relay (32 bit)	-----	ID 0~2044	DDD	
Internal Relay(byte)		MB 0~8191	DDDD	
External Input Relay(byte)		IB 0~2047	DDDD	
External Output Relay(byte)		QB 0~2047	DDDD	
Data Register Relay(byte)		DBm_DBB 0-65535	DDDDD	m:1~10
Data Register Relay(byte)		DBn_DBB100000-25565535	DDDDD	n:1~255

NOTE:

1. DBn_DBX, DBn_DBW, DBn_DBD is a custom block. First three data formats for data block number, the address after the five, less than five former address zeros. To DB20.DBX23.4 example, EV5000 software addresses to DBn_DBX: 2000023.4
2. The initial address of DBm.DBW, DBm.DBD must be an even number.
3. The data type of MB, IB, QB registers can't be set to signed int.
4. Make sure that the data block defined in PLC should be more than the data block used in HMI. For example, if DB5.DBW32 is used in HMI, user can't define the data block up to DB5.DBW32, but up to DB5.DBW34 or more.

SIEMENS S7-400 Ethernet(TCP Slave)

Device	Bit Address	Word Address	Format	Notes
External Input node	I 0.0~1023.7	-----	DDD.O	
External Output node	Q 0.0~1023.7	-----	DDD.O	
Internal assistant node	M 0.0~8191.7	-----	DDDD.O	
Data Register Relay node	DBn_DBX 100000.0~25565535.7	-----	DDDDDDDD.O	
Data Register Relay node	DBm_DBX 0.0~65535.7	-----	DDDDD.O	m:1~10
Data Register Relay	-----	DBn_DBW 100000-25565534	DDDDDDDD	
Data Register Relay (32 bit)	-----	DBn_DBD 100000-25565532	DDDDDDDD	
Data Register Relay	-----	DBm_DBW 0-65534	DDDDD	m:1~10
Data Register Relay (32 bit)	-----	DBm_DBD 0-65532	DDDDD	
Internal Relay	-----	MW 0~8190	DDDD	
Internal Relay (32 bit)	-----	MD 0~8188	DDDD	
External Output Relay	-----	QW 0~1022	DDD	
External Output Relay (32 bit)	-----	QD 0~1020	DDD	

bit)				
External Input Relay	-----	IW 0~1022	DDD	
External Input Relay (32 bit)	-----	ID 0~1020	DDD	

NOTE:

1. DBn_DBX, DBn_DBW, DBn_DBD is a custom block. First three data formats for data block number, the address after the five, less than five former address zeros. To DB20.DBX23.4 example, EV5000 software addresses to DBn_DBX: 2000023.4
2. The initial address of DBm.DBW, DBm.DBD must be an even number.
3. Make sure that the data block defined in PLC should be more than the data block used in HMI. For example, if DB5.DBW32 is used in HMI, user can't define the data block up to DB5.DBW32, but up to DB5.DBW34 or more.

SIEMENS LOGO! Ethernet(TCP Slave)

Device	Bit Address	Word Address	Format	Notes
Input	I_Bit 1-64	-----	DD	Read Only
Output	Q_Bit 1-64	-----	DD	
Flag Bit	M_Bit 1-112	-----	DDD	
Network Input	NI_Bit 1-128	-----	DDD	
Network Output	NQ_Bit 1-128	-----	DDD	
V Relay	V_Bit 0.0-1469.7	-----	DDDDo	
Analog Input	-----	AI_Word 1-16	DD	
Analog Output	-----	AQ_Word 1-16	DD	
Analog Mark	-----	AM_Word 1-64	DD	
Network Analog Input	-----	NAI_Word 1-64	DD	
Network Analog Onput	-----	NAQ_Word 1-32	DD	
V memory	-----	VW_Word 0-1468	DDDD	
V memory double word	-----	VD_Word 0-1466	DDDD	

NOTE: VD、VW address must be an even number


◎ Cable Diagram

SIEMENS S7-200 (SMART) protocol

RS232 communication

Siemens models using standard serial PC / PPI cable . Cable Baud Rate DIP switch settings are as follows:


- 1) with 5 DIP switch cable

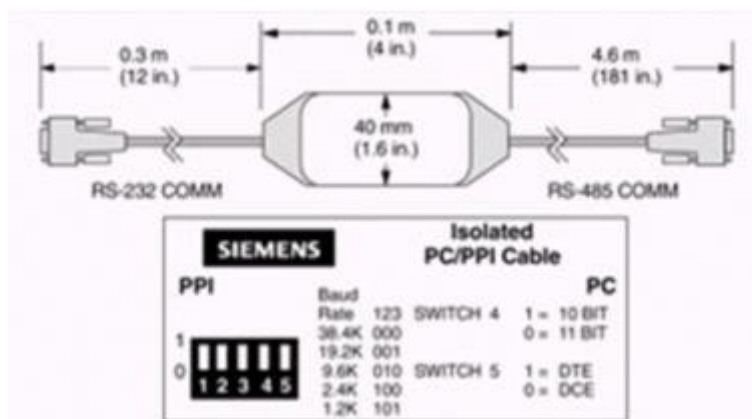

PC/PPI Cable switch to select the baud rate

Baud	SWITCH (1=on)
38400	000
19200	001
9600	010
4800	011
2400	100
1200	101

2) with 8 DIP switch cable

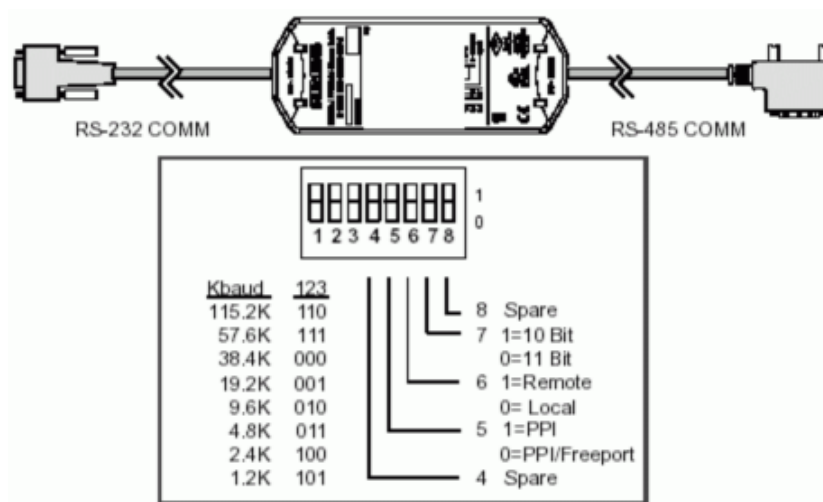


PC/PPI Cable switch to select the baud rate

Baud	SWITCH (1=on)
115200	110
57600	111
38400	000
19200	001
9600	010
4800	011
2400	100
1200	101

Note: The switch 5 is set to 0 , the selected item Freeport;the switch 6,7,8 is set to 0.

PC / PPI cable on the baud rate DIP switch settings, you must set the baud rate with the PLC and PC SET PG / PC Interface match the settings , Siemens S7-200 PLC baud rate can be programmed via STEP7-Micro/WIN software settings.

RS485 communication

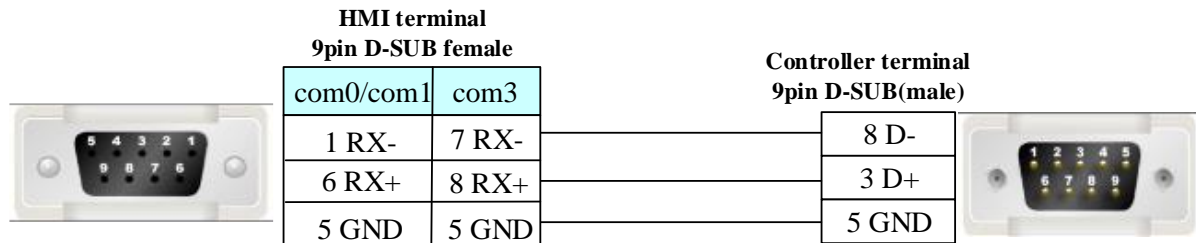


SIEMENS S7-300/400 (PC Adapter Direct) protocol

RS232 communication


MT5-S7-300 PC Adapter communication cable

Need to add a communication cable in adapter RS232 terminal

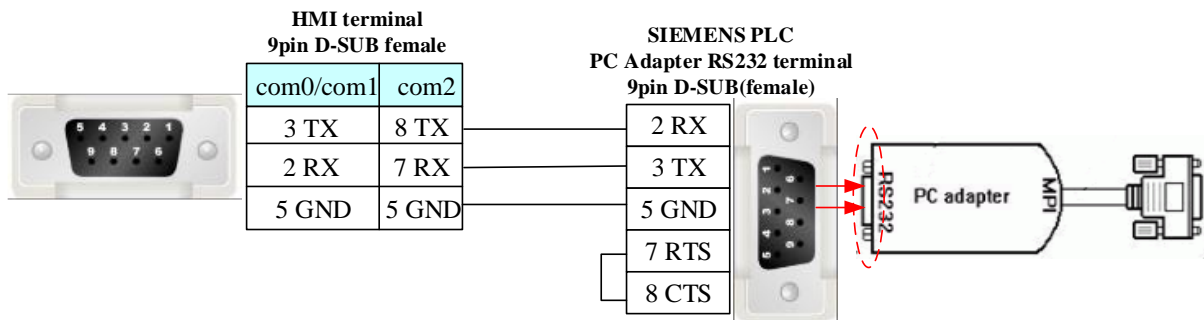


SIEMENS S7-300/400 (MPI Direct) protocol

RS485 communication

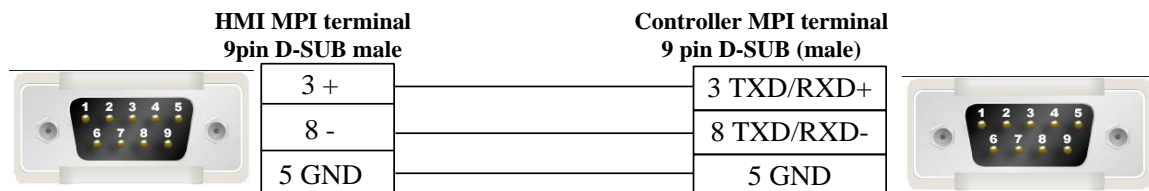


SIEMENS MPI protocol

RS485 communication

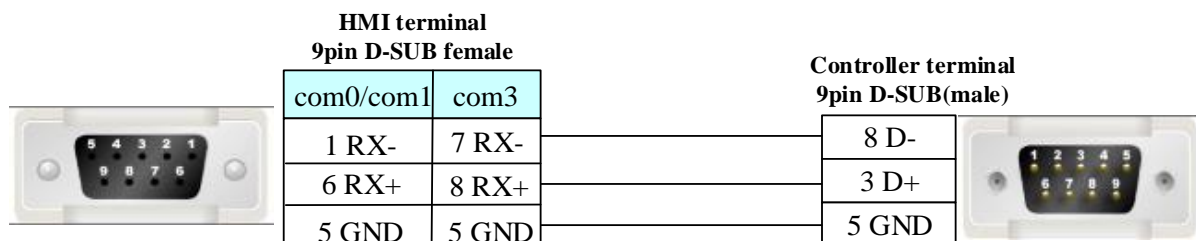

Long distance communication with MPI adapter:

The cable length must be 600m or less in the 187.5k, the 7 pin and 2 pin must connect with 24V power in the port of RS485, the 8 pin and 3 pin must connect with 120 Ω terminal resistance.

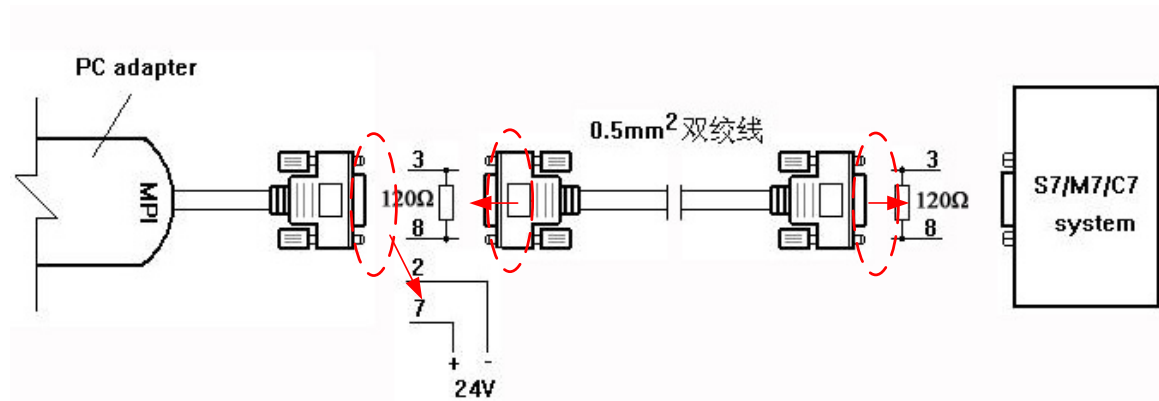

Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.84 SIKO AG05 SIKONETZ5

Serial Communication

Series	CPU	Link Module	Driver
Siko AG05	AG05	Port on CPU unit	SIKO AG05 SIKONETZ5


Serial System configuration

Series	CPU	Link Module	COM Type	Parameter	Cable
Siko AG05	AG05	CPU Direct	RS485	Setting	Your owner cable

Communication Setting

HMI Setting

Default parameter: 57600bps, 8, none, 1, station: 1

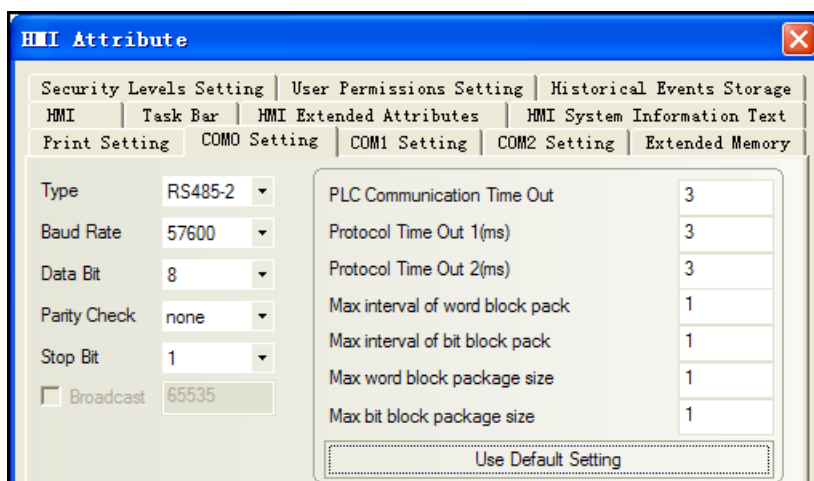

PLC Setting

Please reference to controller manual.


◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
Parameter No.	-----	ID 0-FF	HH	
SW	-----	SW 0-0	D	
CW	-----	CW 0-0	D	

Note Direct online simulation disable

◎ Cable Diagram

RS485

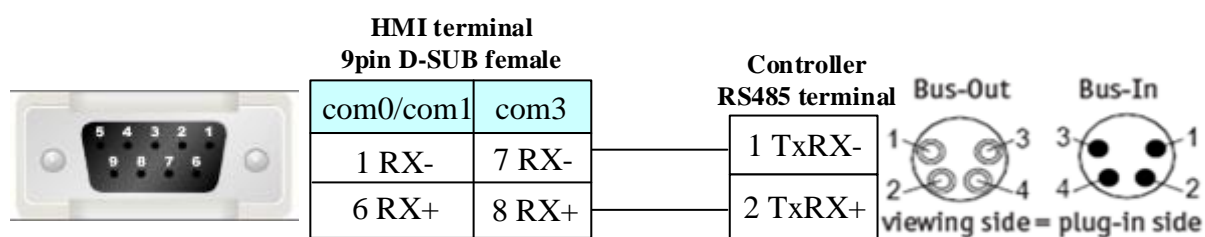

4.85 Sinocon Sc1n

◎ Serial Communication

Series	CPU	Link Module	Driver
SC1N	SC1N-30T-2AD2DA	RS232 on the CPU unit	Sinocon Sc1n

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
SC1N	SC1N-30T-2A D2DA	RS232 on the CPU unit	RS232/RS485	Setting	Your owner cable

© Communication Setting

HMI setting

Default parameter: 9600bps, 7, even, 1, station: 1

RS232

The screenshot shows the 'HMI Attribute' dialog box with the 'COMO Setting' tab selected. The 'Type' is set to 'RS232'. The 'Baud Rate' is 9600, 'Data Bit' is 7, 'Parity Check' is even, and 'Stop Bit' is 1. The 'Broadcast' checkbox is unchecked. The 'PLC Communication Time Out' is 1. The 'Protocol Time Out 1(ms)' is 10, and 'Protocol Time Out 2(ms)' is 0. The 'Max interval of word block pack' is 2, 'Max interval of bit block pack' is 2, 'Max word block package size' is 2, and 'Max bit block package size' is 128. A 'Use Default Setting' button is at the bottom.

RS485

The screenshot shows the 'HMI Attribute' dialog box with the 'COMO Setting' tab selected. The 'Type' is set to 'RS485-2'. The 'Baud Rate' is 9600, 'Data Bit' is 7, 'Parity Check' is even, and 'Stop Bit' is 1. The 'Broadcast' checkbox is unchecked. The 'PLC Communication Time Out' is 1. The 'Protocol Time Out 1(ms)' is 20, and 'Protocol Time Out 2(ms)' is 0. The 'Max interval of word block pack' is 2, 'Max interval of bit block pack' is 2, 'Max word block package size' is 2, and 'Max bit block package size' is 128. A 'Use Default Setting' button is at the bottom.


© Supported Device

Device	Bit Address	Word Address	Format	Notes
Input Relay	X 000-377	-----	OOO	
Output Relay	Y 000-377	-----	OOO	
Data Contact	D_bit 0.0-7999.F	-----	DDDD.F	
Internal Relay	M 0000-3071	-----	DDDD	
Timer Contact	T 000-255	-----	DDD	
Counter Contact	C 000-255	-----	DDD	
Special Internal Relay	SM 8000-8255	-----	DDDD	
State	S 000-999	-----	DDD	


Timer Value	-----	T_word 000-255	DDD	
Counter Value	-----	C_word 000-199	DDD	
Data Register	-----	D_word 0000-7999	DDDD	
Special Data Register	-----	SD_word 8000-8255	DDDD	
Counter Value	-----	C_dword 200-255	DDD	32 bit device

◎ Cable Diagram

RS232

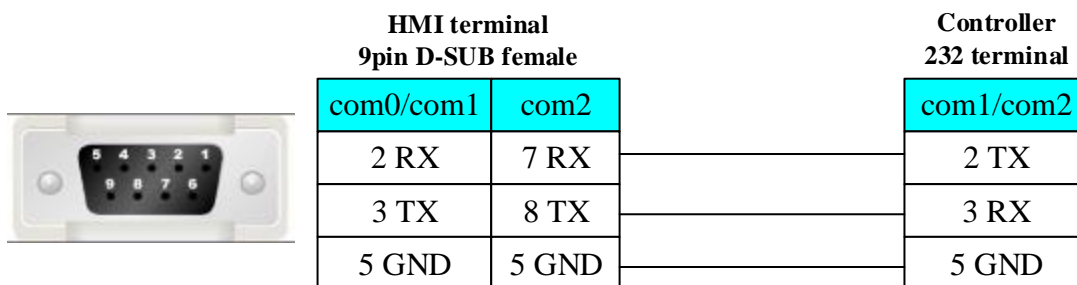

RS485

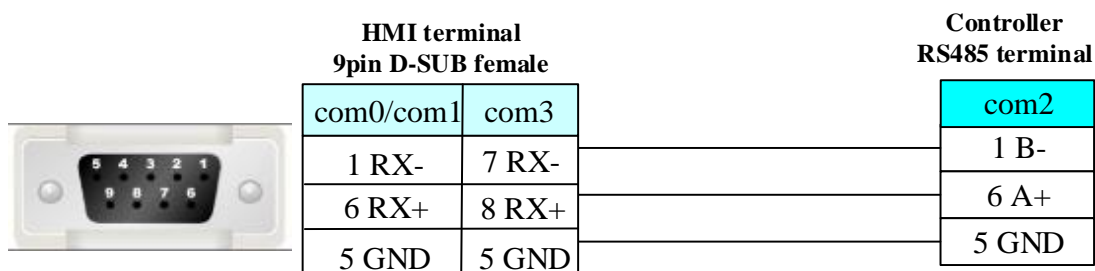

4.86 TECO TP03/AP Series

◎ Serial Communication

Series	CPU	Link Module	Driver
TECO	TOP3-30HR-A AP Series	RS232 on the CPU unit	TECO TP03/AP Series
		RS485 on the CPU unit	

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
TECO	TOP3-30HR-A AP Series	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485 on the CPU unit	RS485	Setting	Your owner cable

◎ Communication Setting

HMI Setting

Default communication: 19200, 8, none, 1; station: 1

RS232 communication

HMI Attribute

HMI | Task Bar | HMI Extend Attribute | Historic Event

Print Setting | Serial Port 0 Setting | Serial Port 1 Setting

Type: RS232

Baud Rate: 19200

Data Bit: 8

Parity: none

Stop Bit: 1

Slave No.: 1

PLC Communication Time Out: 1

Protocol Time Out 1(ms): 3

Protocol Time Out 2(ms): 3

Max interval of block pack(WORDS): 2

Max interval of block pack(BITS): 8

Max block package size(WORDS): 16

Max block package size(BITS): 64

Use Default Setting

OK Cancel

RS485 communication

HMI Attribute

HMI | Task Bar | HMI Extend Attribute | Historic Event | Print Setting

Serial Port 0 Setting | Serial Port 1 Setting | Serial Port 2 Setting

Type: RS485-2

Baud Rate: 19200

Data Bit: 8

Parity: none

Stop Bit: 1

Slave No.: 1

PLC Communication Time Out: 1

Protocol Time Out 1(ms): 3

Protocol Time Out 2(ms): 3

Max interval of block pack(WORDS): 2

Max interval of block pack(BITS): 8

Max block package size(WORDS): 16

Max block package size(BITS): 64

Use Default Setting

OK Cancel

©Supported Device


Device	Bit Address	Word Address	Format
Input Relay (receive external switch signal)	X0-377	-----	OOO
Output Relay	Y0-377	-----	OOO
Auxiliary Relay	M (0-7679) & (8000-8511)	-----	DDDD
Step Relay	S0-4096	-----	DDDD
Timer Relay	T0-511	-----	DDD
Counter Relay	C0-255	-----	DDD
Data Register	-----	D0-8511	DDDD
Data Register	-----	Z0-15	DD
Data Register	-----	V0-15	DD
Timer(Current value)	-----	T_Current_Word 0-511	DDD
Counter(Current value)	-----	C_Current_Word 0-199	DDD

Counter	-----	C_Current_Double 200-255	DDD
Timer(Preset value)	-----	T_Preset_Word 0-511	DDD
Counter(Preset value)	-----	C_Preset_Word 0-199	DDD
Counter	-----	C_Preset_Double 200-255	DDD


NOTE: Z, V is the turn of the write and read out. When testing a single word, max interval of word block pack and max word block package size are changed to 1.

◎ Cable Diagram

RS232 communication cable

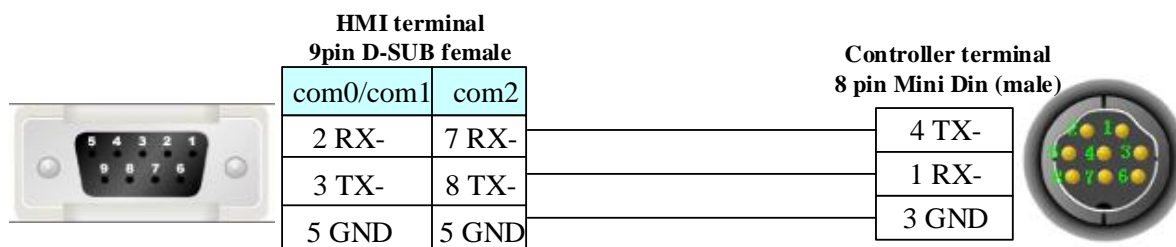

RS485 communication cable

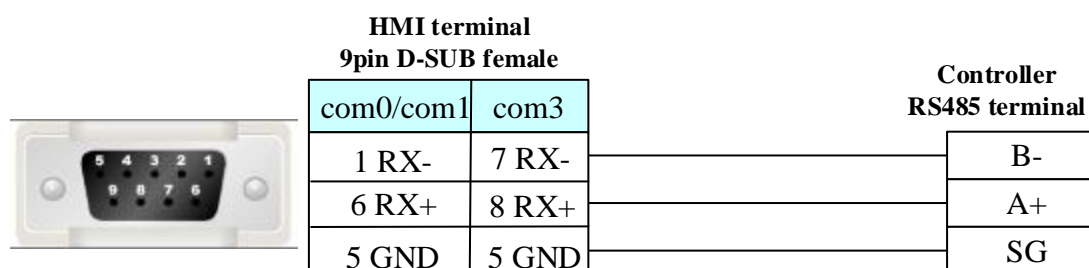

4.87 TMCM

◎ Serial Communication

Series	CPU	Link Module	Driver
TMCM_303		RS232 on the CPU unit	TMCM_303
TMCM-6110	TMCM-6110	RS485 on the CPU unit	TMCM_6110

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
TMCM_303		RS232 on the CPU unit	RS232	Setting	Your owner cable
TMCM-6110		RS485 on the CPU unit	RS485	Setting	Your owner cable

◎ Communication Setting

TMCM_303:

HMI Setting

Default communication: 9600, 8, none, 1; station: 1

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Print Setting' sub-tab is active, showing communication parameters for RS232. The parameters are: Type (RS232), Baud Rate (9600), Data Bit (8), Parity (none), Stop Bit (1), and Slave No. (1). On the right, a table lists PLC communication settings, all set to 1: PLC Communication Time Out, Protocol Time Out 1(ms) (30), Protocol Time Out 2(ms) (3), Max interval of block pack(WORDS), Max interval of block pack(BITS), Max block package size(WORDS), and Max block package size(BITS). A 'Use Default Setting' button is at the bottom of the table. 'OK' and 'Cancel' buttons are at the bottom right of the dialog.

Serial Port 0 Setting	
Type	RS232
Baud Rate	9600
Data Bit	8
Parity	none
Stop Bit	1
Slave No.	1

PLC Communication Time Out	1
Protocol Time Out 1(ms)	30
Protocol Time Out 2(ms)	3
Max interval of block pack(WORDS)	1
Max interval of block pack(BITS)	1
Max block package size(WORDS)	1
Max block package size(BITS)	1

TMCM_6110:

HMI Setting

Default communication parameters: 9600, 8, none, 1; station: 1


The screenshot shows the 'HMI Attribute' dialog box with the 'COM0 Setting' tab selected. The 'Print Setting' sub-tab is active, showing communication parameters for RS485-2. The parameters are: Type (RS485-2), Baud Rate (9600), Data Bit (8), Parity Check (none), Stop Bit (1), and a checked 'Broadcast' checkbox with value 65535. On the right, a table lists PLC communication settings, all set to 1: PLC Communication Time Out(s), Protocol Time Out 1(ms) (30), Protocol Time Out 2(ms) (3), Max interval of word block pack, Max interval of bit block pack, Max word block package size, and Max bit block package size. A 'Use Default Setting' button is at the bottom of the table. 'OK' and 'Cancel' buttons are at the bottom right of the dialog.

COM0 Setting	
Type	RS485-2
Baud Rate	9600
Data Bit	8
Parity Check	none
Stop Bit	1
<input checked="" type="checkbox"/> Broadcast	65535

PLC Communication Time Out(s)	1
Protocol Time Out 1(ms)	30
Protocol Time Out 2(ms)	3
Max interval of word block pack	1
Max interval of bit block pack	1
Max word block package size	1
Max bit block package size	1

PLC Setting

communication parameters setting:

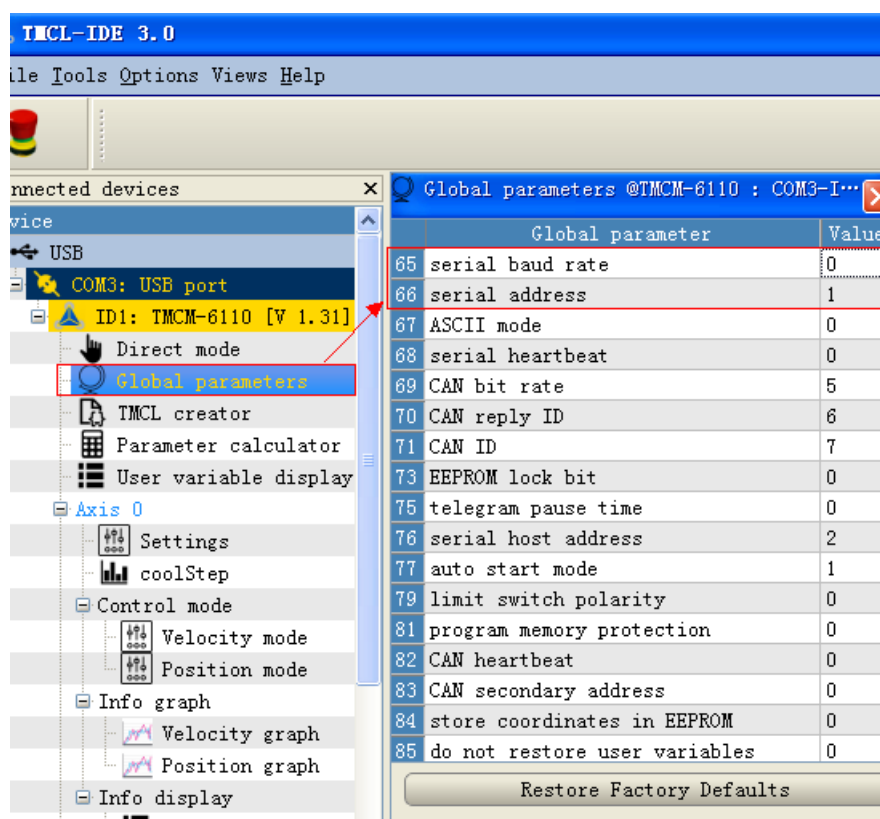

Serial baud rate value	Serial baud rate	
0	9600 baud	Default
1	14400 baud	
2	19200 baud	
3	28800 baud	
4	38400 baud	
5	57600 baud	
6	76800 baud	Not supported by Windows !
7	115200 baud	
8	230400 baud	
9	250000 baud	Not supported by Windows !
10	500000 baud	Not supported by Windows !
11	1000000 baud	Not supported by Windows !

© Supported Device

Please refer to TMCL Reference Manual for device details

TMCM_303

Device	Bit Address	Word Address	Format	Notes
ROR	-----	0-2	D	Write Only
ROL	-----	0-2	D	Write Only

MST	0-2	-----	D	Write Only
MVP	-----	0.0-2.7	DD.D	Write Only
SAP	0.008-0.013 1.008-1.013 2.008-2.013	0.0-2.213	DDDD.DDD	Write Only
GAP	0.008-0.013 1.008-1.013 2.008-2.013	0.0-2.213	DDDD.DDD	Read Only
STAP	0.0-2.213	-----	DDDD.DDD	Write Only
RSAP	0.0-2.213	-----	DDDD.DDD	Write Only
SGP	0.077 0.129	0.0-0.038 0.64-0.81 0.128-0.132 1.0-1.11 2.0-2.19	DDDD.DDD	Write Only
GGP	0.077 0.129	0.0-0.038 0.64-0.81 0.128-0.132 1.0-1.11 2.0-2.19	DDDD.DDD	Read Only
RFS	-----	DWord 0.0-2.2	DD.D	Write Only
SIO	0-7	-----	D	Write Only
GIO	0.0-0.10 2.0-2.07	1.0-1.7	DDD.DD	Read Only
CALC	-----	0-9	D	Write Only
COMP	-----	0	D	Write Only
JC	-----	0-9	DD	Write Only
JA	-----	0	D	Write Only
CSUB	-----	0	D	Write Only
RSUB	0	-----	D	Write Only
WAIT	-----	0.0-4.7	DD.D	Write Only
STOP	0	-----	D	Write Only

TMCM_6110


Device	Bit Address	Word Address	Format
STOP	0-0	-----	D
RSUB	0-0	-----	D
SIO	0-7	-----	D
RSGP	0.000-255.255	-----	DDD.DDD
STGP	0.000-255.255	-----	DDD.DDD

RSAP	0.000-255.255	-----	DDD.DDD
STAP	0.000-255.255	-----	DDD.DDD
MST	0-5	-----	D
WAIT	-----	0.000-4.255	D.DDD
CSUB	-----	0-0	D
JA	-----	0-0	D
JC	-----	0-12	DD
COMP	-----	0-0	D
CALC	-----	0-9	D
GIO	-----	0.000-255.255	DDD.DDD
RFS	-----	0.000-2.255	D.DDD
GGP	-----	0.000-255.255	DDD.DDD
SGP	-----	0.000-255.255	DDD.DDD
GAP	-----	0.000-255.255	DDD.DDD
SAP	-----	0.000-255.255	DDD.DDD
MVP	-----	0.000-2.255	D.DDD
ROL	-----	0-5	D
ROR	-----	0-5	D


NOTE: The address format of registers is [type].[motor].c

© Cable Diagram

RS232 Communication Cable

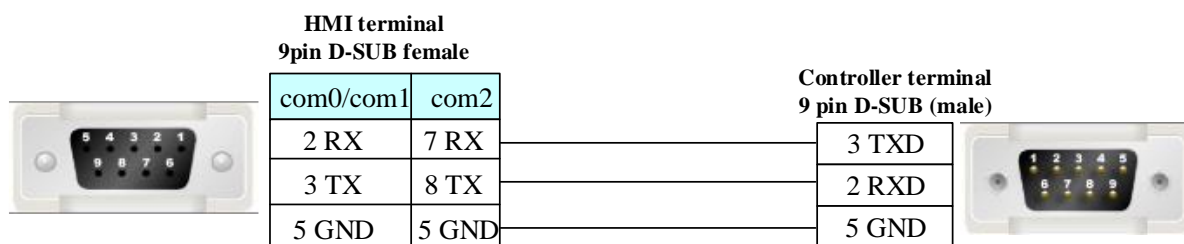

RS485 Communication Cable

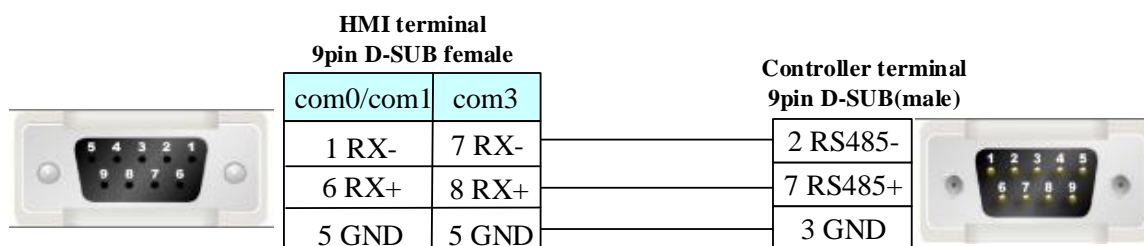

4.88 Toledo DLoadCell

◎ Serial Communication

Series	CPU	Link Module	Driver
D3CellTM	D3CellTM	RS422 on the CPU unit	DLoadCell


◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
D3CellTM	D3CellTM	RS485 on the CPU unit	RS422	Setting	Your owner cable

◎ Supported Device


For detailed device, please refer to the PLC manual.

◎ Communication Setting

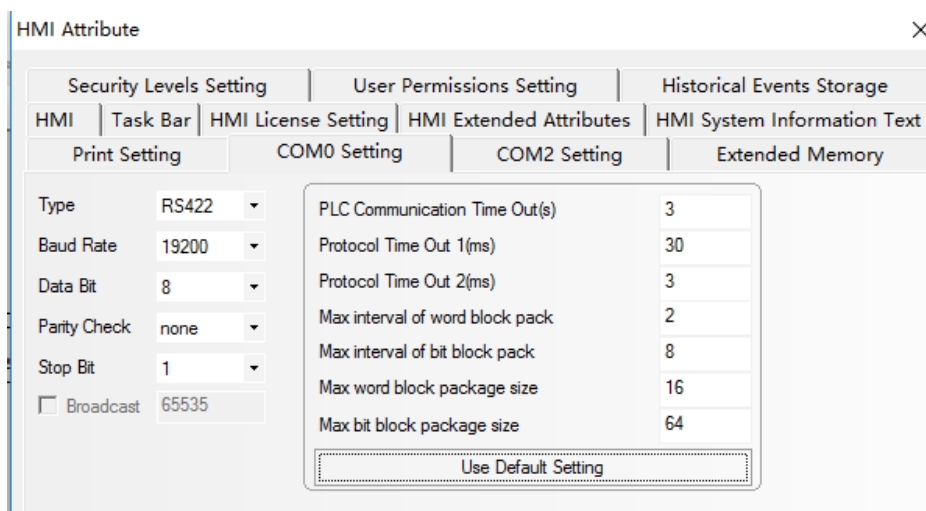

◎ Cable Diagram

RS422 Communication Cable

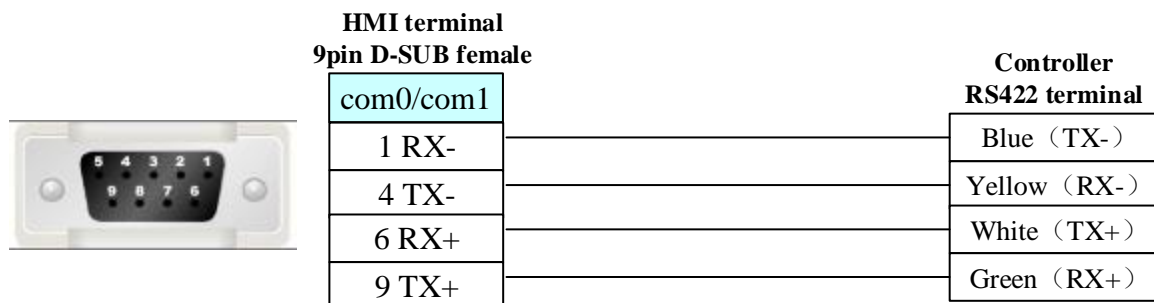

4.89 Toshiba

◎ Network Communication

Series	CPU	Link Module	Driver
V30	TCXMAIN1	Ethernet interface on CPU	Toshiba V30 Ethernet (TCP Slave)
V-series	S2PU72A	Ethernet interface on CPU	Toshiba S2PU72A Ethernet (TCP Slave)


◎ Network System configuration

Series	CPU	Connect Type	Parameter	Cable
ToShiBaV30	TCXMAIN1	Ethernet	Setting	Your owner cable
V-series	S2PU72A	Ethernet	Setting	Your owner cable


◎ Network Communication Setting

HMI setting

TCXMAIN1:

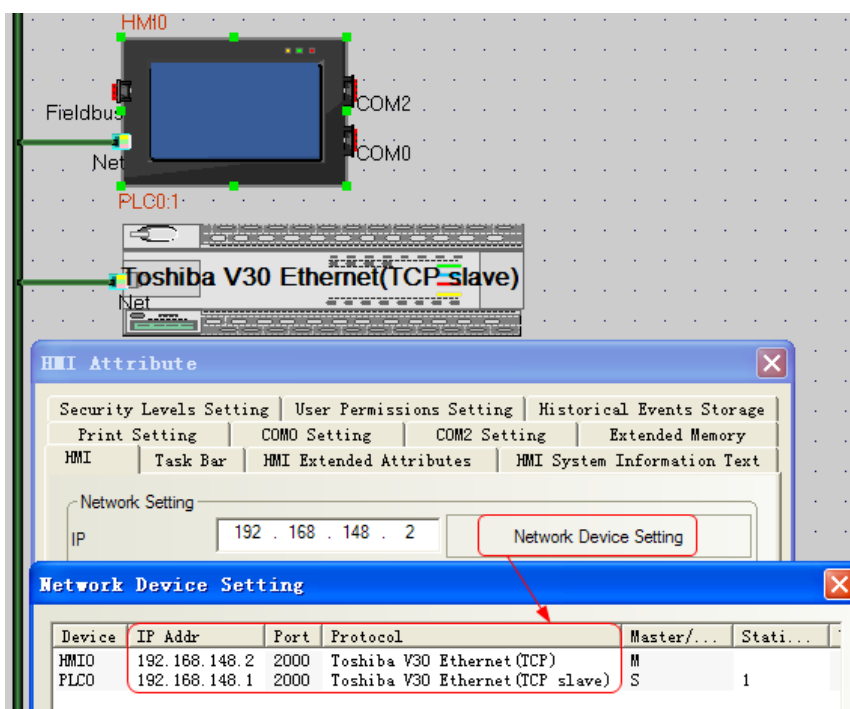

S2PU72A:

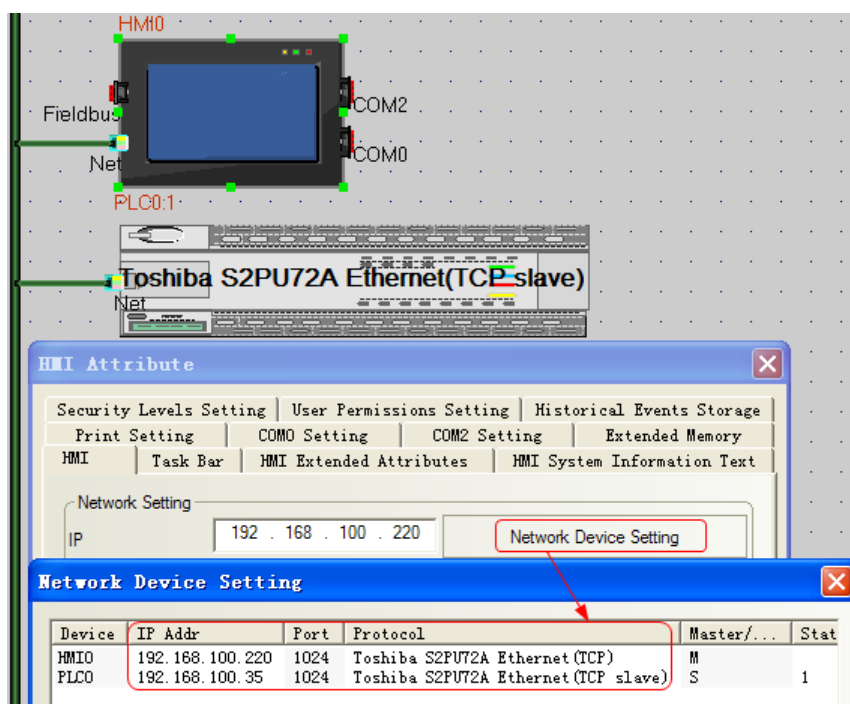

PLC setting

Please refer to the communication equipment related documentation to set the parameter.

© Supported Device

TCXMAIN1:

Device	Bit Address	Word Address	Format
0x00000000-0x0000FFFF	R00_B 0.00-FFFF.1F	-----	HHHH.HH
0x01000000-0x0100FFFF	R01_B 0.00-FFFF.1F	-----	HHHH.HH
0x02000000-0x0200FFFF	R02_B 0.00-FFF.1F	-----	HHH.HH
0x03000000-0x0300FFFF	R03_B 0.00-FFF.1F	-----	HHH.HH
0x04000000-0x0400FFFF	R04_B 0.00-FFF.1F	-----	HHH.HH
0x05000000-0x0500FFFF	R05_B 0.00-FFF.1F	-----	HHH.HH
0x06000000-0x0600FFFF	R06_B 0.00-FFF.1F	-----	HHH.HH
0x07000000-0x0700FFFF	R07_B 0.00-FFF.1F	-----	HHH.HH
0x08000000-0x0800FFFF	R08_B 0.00-FFFF.1F	-----	HHHH.HH
0x09000000-0x0900FFFF	R09_B 0.00-FFF.1F	-----	HHH.HH
0x0A000000-0x0A00FFFF	R0A_B 0.00-FFF.1F	-----	HHH.HH
0x0B000000-0x0B00FFFF	R0B_B 0.00-FFFF.1F	-----	HHHH.HH
0x0C000000-0x0C00FFFF	R0C_B 0.00-FFFF.1F	-----	HHHH.HH
0x0D000000-0x0D00FFFF	R0D_B 0.00-FFF.1F	-----	HHH.HH
0x0E000000-0x0E00FFFF	R0E_B 0.00-FFF.1F	-----	HHH.HH
0x0F000000-0x0F00FFFF	R0F_B 0.00-FFF.1F	-----	HHH.HH
0x10000000-0x1000FFFF	R10_B 0.00-FFF.1F	-----	HHH.HH
0x11000000-0x1100FFFF	R11_B 0.00-FFF.1F	-----	HHH.HH
0x12000000-0x1200FFFF	R12_B 0.00-FFFF.1F	-----	HHHH.HH
0x13000000-0x1300FFFF	R13_B 0.00-FFF.1F	-----	HHH.HH
0x14000000-0x1400FFFF	R14_B 0.00-FFF.1F	-----	HHH.HH

0x15000000-0x15000FFF	R15_B 0.00-FFF.1F	-----	HHH.HH
0x17000000-0x17007FFF	R17_B 0.00-7FFF.1F	-----	HHHH.HH
0x41000000-0x4100FFFF	R41_B 0.00-FFFF.1F	-----	HHHH.HH
0x51000000-0x5100FFFF	R51_B 0.00-FFFF.1F	-----	HHHH.HH
0x52000000-0x52000FFF	R52_B 0.00-FF.1F	-----	HH.HH
0x61000000-0x6107FFFF	R61_B 0.00-7FFF.1F	-----	HHHH.HH
0x62000000-0x62003FFF	R62_B 0.00-3FFF.1F	-----	HHHH.HH
0x63000000-0x63003FFF	R63_B 0.00-3FFF.1F	-----	HHHH.HH
0x64000000-0x64003FFF	R64_B 0.00-3FFF.1F	-----	HHHH.HH
0x65000000-0x65003FFF	R65_B 0.00-3FFF.1F	-----	HHHH.HH
0x66000000-0x66003FFF	R66_B 0.00-3FFF.1F	-----	HHHH.HH
0x67000000-0x67003FFF	R67_B 0.00-3FFF.1F	-----	HHHH.HH
0x68000000-0x68003FFF	R68_B 0.00-3FFF.1F	-----	HHHH.HH
0x69000000-0x69003FFF	R69_B 0.00-3FFF.1F	-----	HHHH.HH
0x6A000000-0x6A003FFF	R6A_B 0.00-3FFF.1F	-----	HHHH.HH
0x6B000000-0x6B003FFF	R6B_B 0.00-3FFF.1F	-----	HHHH.HH
0x6C000000-0x6C003FFF	R6C_B 0.00-3FFF.1F	-----	HHHH.HH
0x6D000000-0x6D003FFF	R6D_B 0.00-3FFF.1F	-----	HHHH.HH
0x6E000000-0x6E003FFF	R6E_B 0.00-3FFF.1F	-----	HHHH.HH
0x6F000000-0x6F000FFF	R6F_B 0.00-FFF.1F	-----	HHH.HH
0x00000000-0x0000FFFF	-----	R00 0-FFFF	HHHH
0x01000000-0x0100FFFF	-----	R01 0-FFFF	HHHH
0x02000000-0x02000FFF	-----	R02 0-FFF	HHH
0x03000000-0x03000FFF	-----	R03 0-FFF	HHH
0x04000000-0x04000FFF	-----	R04 0-FFF	HHH
0x05000000-0x05000FFF	-----	R05 0-FFF	HHH
0x06000000-0x06000FFF	-----	R06 0-FFF	HHH
0x07000000-0x07000FFF	-----	R07 0-FFF	HHH
0x08000000-0x0800FFFF	-----	R08 0-FFFF	HHHH
0x09000000-0x09000FFF	-----	R09 0-FFF	HHH
0x0A000000-0x0A000FFF	-----	R0A 0-FFF	HHH
0x0B000000-0x0B00FFFF	-----	R0B 0-FFFF	HHHH
0x0C000000-0x0C00FFFF	-----	R0C 0-FFFF	HHHH
0x0D000000-0x0D000FFF	-----	R0D 0-FFF	HHH
0x0E000000-0x0E000FFF	-----	R0E 0-FFF	HHH
0x0F000000-0x0F000FFF	-----	R0F 0-FFF	HHH
0x10000000-0x10000FFF	-----	R10 0-FFF	HHH
0x11000000-0x11000FFF	-----	R11 0-FFF	HHH
0x12000000-0x1200FFFF	-----	R12 0-FFFF	HHHH
0x13000000-0x13000FFF	-----	R13 0-FFF	HHH

0x14000000-0x14000FFF	-----	R14 0-FFF	HHH
0x15000000-0x15000FFF	-----	R15 0-FFF	HHH
0x17000000-0x17007FFF	-----	R17 0-7FFF	HHHH
0x41000000-0x4100FFFF	-----	R41 0-FFFF	HHHH
0x51000000-0x5100FFFF	-----	R51 0-FFFF	HHHH
0x52000000-0x52000FFF	-----	R52 0-FF	HH
0x61000000-0x6107FFFF	-----	R61 0-7FFF	HHHH
0x62000000-0x62003FFF	-----	R62 0-3FFF	HHHH
0x63000000-0x63003FFF	-----	R63 0-3FFF	HHHH
0x64000000-0x64003FFF	-----	R64 0-3FFF	HHHH
0x65000000-0x65003FFF	-----	R65 0-3FFF	HHHH
0x66000000-0x66003FFF	-----	R66 0-3FFF	HHHH
0x67000000-0x67003FFF	-----	R67 0-3FFF	HHHH
0x68000000-0x68003FFF	-----	R68 0-3FFF	HHHH
0x69000000-0x69003FFF	-----	R69 0-3FFF	HHHH
0x6A000000-0x6A003FFF	-----	R6A 0-3FFF	HHHH
0x6B000000-0x6B003FFF	-----	R6B 0-3FFF	HHHH
0x6C000000-0x6C003FFF	-----	R6C 0-3FFF	HHHH
0x6D000000-0x6D003FFF	-----	R6D 0-3FFF	HHHH
0x6E000000-0x6E003FFF	-----	R6E 0-3FFF	HHHH
0x6F000000-0x6F000FFF	-----	R6F 0-FFF	HHH

S2PU72A:

Device	Bit Address	Word Address	Format
XX	0.0-3071.F	-----	DDDD.F
RR	0.0-4095.F	-----	DDDD.F
SS	0.0-511.F	-----	DDD.F
X_WORD	-----	0-3071	DDDD
R_WORD	-----	0-4095	DDDD
S_WORD	-----	0-511	DDD

© Cable Diagram

Refer to [3.3 Download by Network Ethernet](#)

4.90 Trio motion controller

© Serial Communication

Series	CPU	Link Module	Driver
Euro	Euro 205x	RS232 on the CPU unit	TRIO
			Modbus RTU Extend
MC	MC405	RS232 on the CPU unit	Trio (mode7)

◎ Network communication

Series	CPU	Link Module	Driver
MC	MC405	Ethernet on the CPU	Trio TCP-IP(TCP Slave)
		Ethernet on the CPU	Trio TCP-IP(modde7)

◎ Serial System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
TRIO	Euro 205x	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485 on the CPU unit	RS422	Setting	Your owner cable
Modbus RTU Extend	Euro 205x	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485 on the CPU unit	RS422	Setting	Your owner cable
Trio (mode7)	MC405	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485 on the CPU unit	RS422	Setting	Your owner cable

◎ Network System configuration

Series	CPU	Link Module	Connect Type	Parameter	Cable
Trio	MC405	Ethernet on the CPU	Ethernet	Setting	Your owner cable
Trio (mode7)	MC405	Ethernet on the CPU	Ethernet	Setting	Your owner cable

◎ Serial Communication SettingVE

TRIO protocol

HMI Setting

Default communication: 9600, 7, even, 2; station: 1

RS232 communication

HMI Attribute

Print Setting | Serial Port 0 Setting | Serial Port 1 Setting

Type: RS232
 Baud Rate: 9600
 Data Bit: 7
 Parity: even
 Stop Bit: 2
 Slave No.: 0

PLC Communication Time Out: 3
 Protocol Time Out 1(ms): 50
 Protocol Time Out 2(ms): 3
 Max interval of block pack(WORDS): 8
 Max interval of block pack(BITS): 16
 Max block package size(WORDS): 16
 Max block package size(BITS): 64


Use Default Setting

OK Cancel

Controller internal setting:

```
HLS_NODE=1
HLS_MODEL=$FA
SETCOM(9600,7,2,2,1,5)
```

RS422 communication

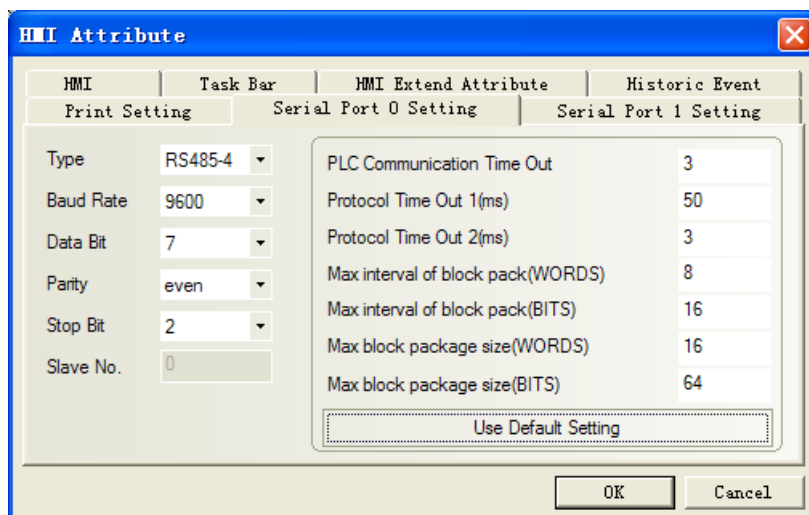

Controller internal setting:

```
HLS_NODE=1
HLS_MODEL=$FA
SETCOM(9600,7,2,2,2,5)
```

PLC Setting

Select the HOST LINK protocol in the PLC program software

1. Define HOST LINK slave node

HLS_NODE=1

2. Define HOST LINK slave model

HLS_MODEL=\$FA

3. Set up HOST LINK slave for port2.

Trio controller setting: SETCOM(baudrate, databits, stopbits, parity, port, 5)

SETCOM (9600, 7, 2, 2, 2, 5)

RS232 communication

```
HLS_NODE=1
HLS_MODEL=$FA
SETCOM(9600,7,2,2,1,5)
```

RS422 communication

```
HLS_NODE=1
HLS_MODEL=$FA
SETCOM(9600,7,2,2,2,5)
```

Modbus RTU Extend protocol

HMI Setting

Default communication: 9600, 8, even, 1; station: 1

RS232 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS232'. The 'Baud Rate' is '9600', 'Data Bit' is '8', 'Parity' is 'even', 'Stop Bit' is '1', and 'Slave No.' is '0'. On the right, the 'PLC Communication Time Out' is '3', 'Protocol Time Out 1(ms)' is '3', 'Protocol Time Out 2(ms)' is '3', 'Max interval of block pack(WORDS)' is '2', 'Max interval of block pack(BITS)' is '8', 'Max block package size(WORDS)' is '16', and 'Max block package size(BITS)' is '64'. There is a 'Use Default Setting' button and 'OK' and 'Cancel' buttons at the bottom.

RS422 communication

The screenshot shows the 'HMI Attribute' dialog box with the 'Serial Port 0 Setting' tab selected. The 'Type' is set to 'RS485-4'. The 'Baud Rate' is '9600', 'Data Bit' is '8', 'Parity' is 'even', 'Stop Bit' is '1', and 'Slave No.' is '0'. On the right, the 'PLC Communication Time Out' is '3', 'Protocol Time Out 1(ms)' is '3', 'Protocol Time Out 2(ms)' is '3', 'Max interval of block pack(WORDS)' is '2', 'Max interval of block pack(BITS)' is '8', 'Max block package size(WORDS)' is '16', and 'Max block package size(BITS)' is '64'. There is a 'Use Default Setting' button and 'OK' and 'Cancel' buttons at the bottom.

PLC Setting

Modbus Protocol:

ADDRESS=1


SETCOM (9600,8,1,2,1,4)

Trio(mode7) protocol


HMI Setting

Default communication: 9600, 8, even, 1; station: 1

RS232 communication

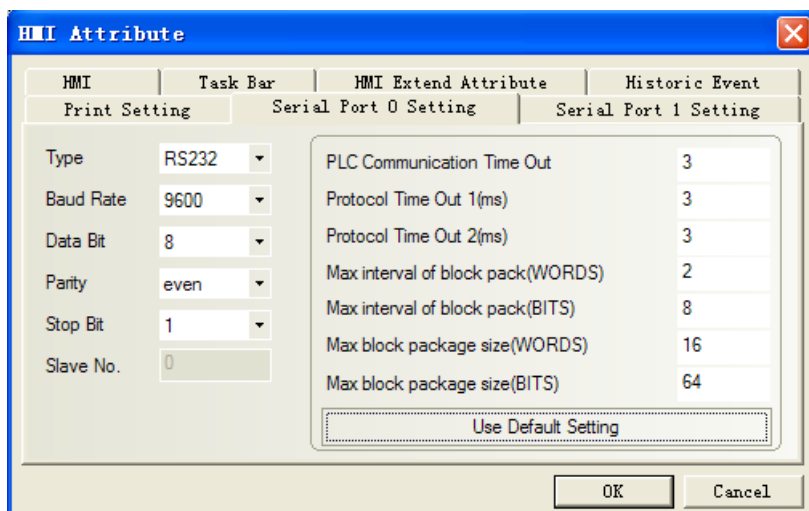



RS422 communication

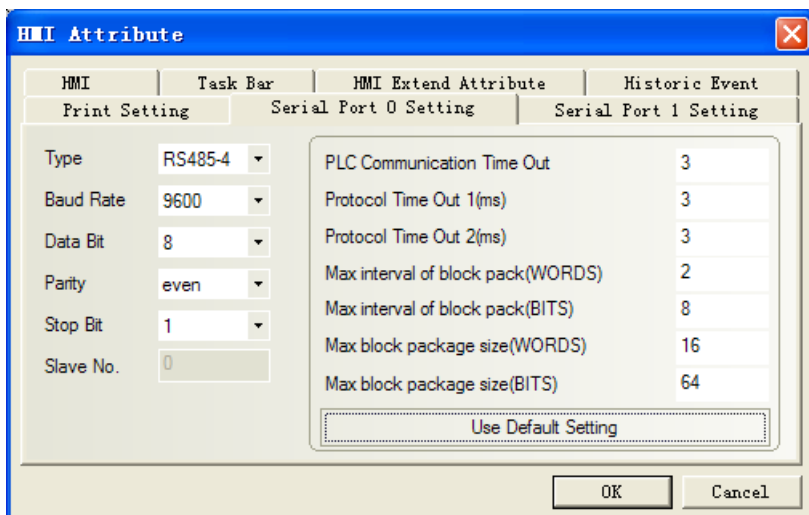


PLC Setting

1. ADDRESS=1
2. Serial Interface Configuration :Chose VR ,32BIT IEEE floating point;Right click “STARTUP” to generate Serial port 1’ s project ; and click RUN

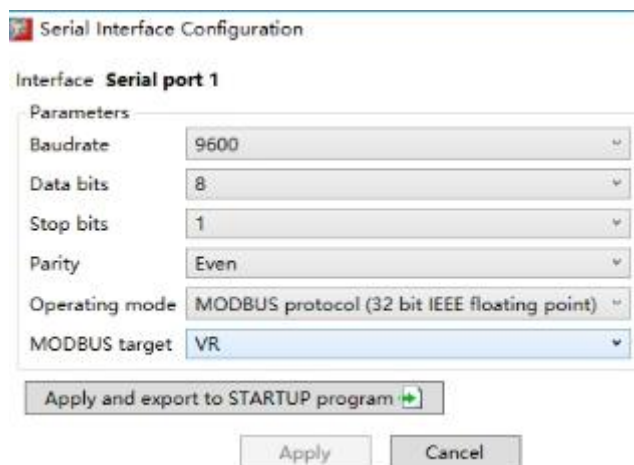

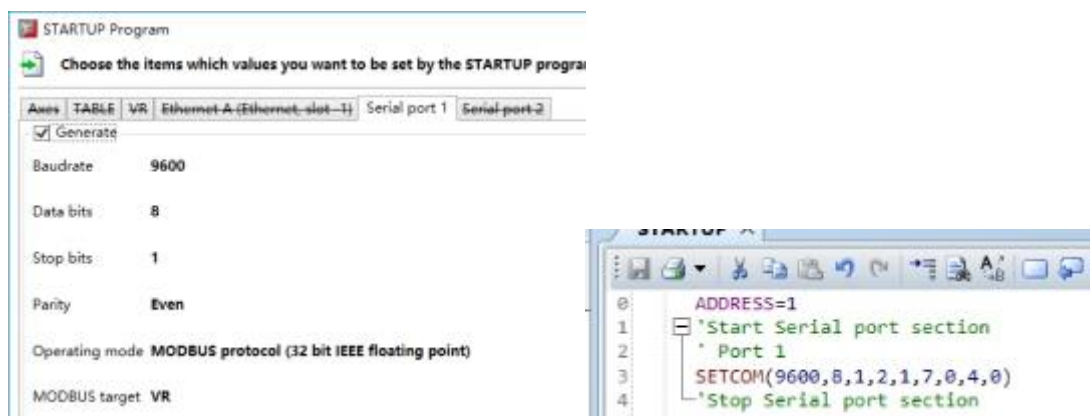

3. Next,Chose “VR” register in HMI software, data type is float, then it can shows decimal,like 12.89;
If chose “VR_INT”, data type use unsigned INT,it can only shows Integer part,like12. Table register is the same
4. If u chose 32 bit long word:

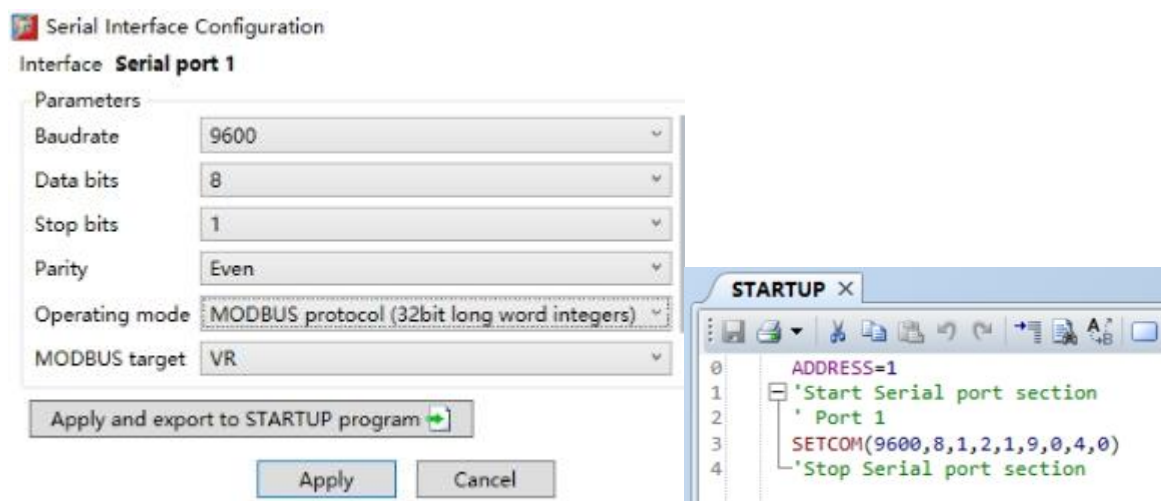



Then u can chose “VR” register, data type is unsigned INT, it can only shows Integer part;Table register is the same.

© Network Communication Setting



Trio TCP/IP protocol

HMI Setting

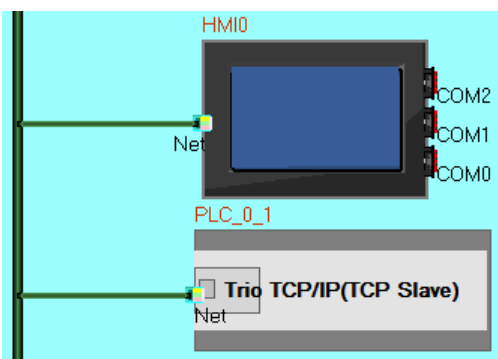

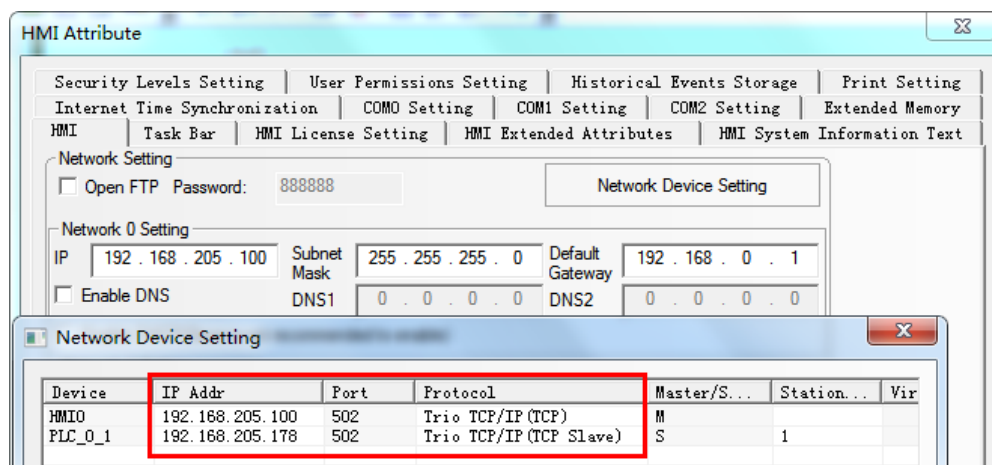


PLC Setting

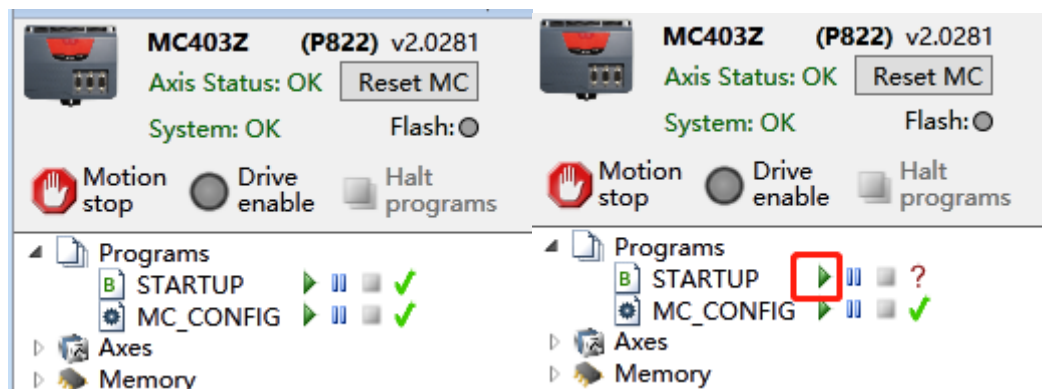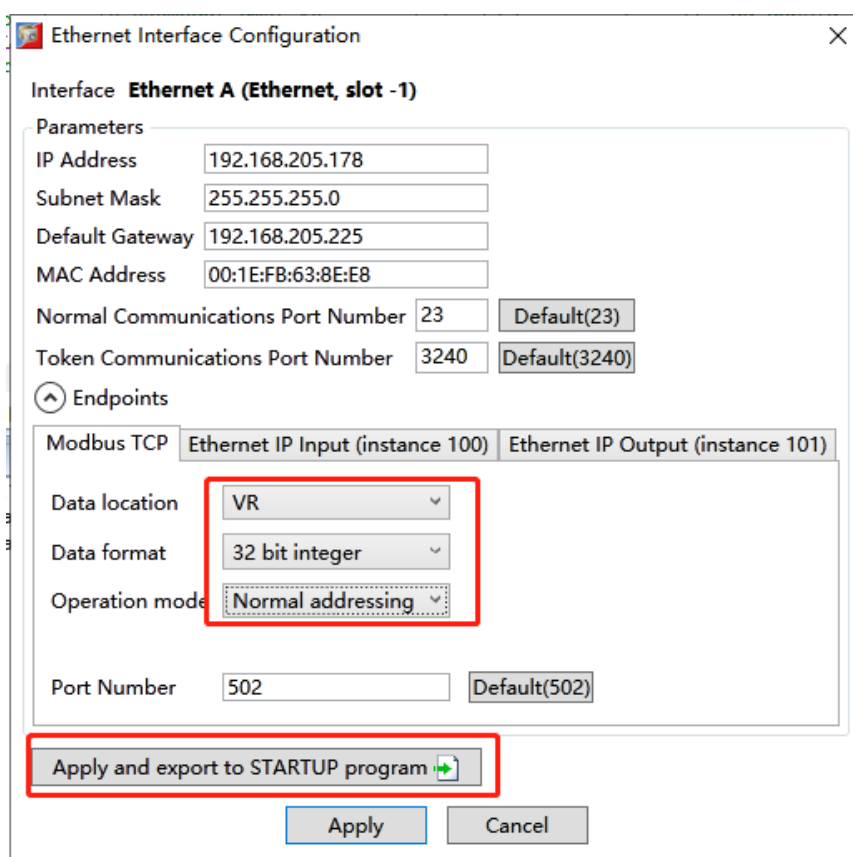

Trio TCP/IP (mode7) protocol

HMI Setting

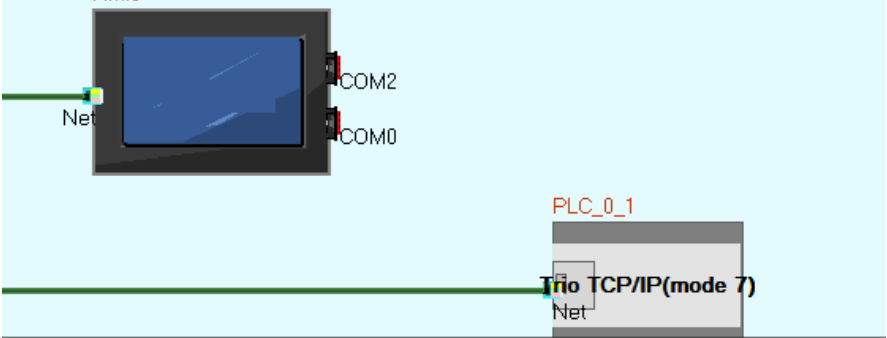

Network Device Setting

Device	IP Addr	Port	Protocol	Master/Slave	Station
HMI0	192.168.205.145	502	Trio TCP/IP(mode 7)	M	
PLC_0_1	192.168.205.178	502	Trio TCP/IP(mode 7)	S	1

PLC Setting

Ethernet Interface Configuration

Interface **Ethernet A (Ethernet, slot -1)**

Parameters

IP Address: 192.168.205.178

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.205.225

MAC Address: 00:1E:FB:63:8E:E8

Normal Communications Port Number: 23 (Default(23))

Token Communications Port Number: 3240 (Default(3240))

Endpoints

Modbus TCP: Ethernet IP Input (instance 100) | Ethernet IP Output (instance 101)

Data location: VR


Data format: 32 bit floating point

Operation mode: Address halving

Port Number: 502 (Default(502))

Apply and export to STARTUP program

Apply Cancel

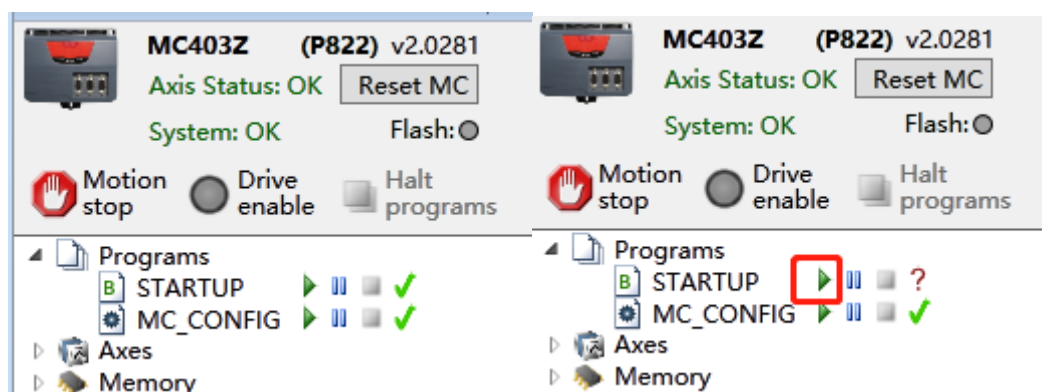

© Supported Device

TRIO TCP/IP

Device	Bit Address	Word Address	Format	Notes
I/O and Internal Auxiliary Relay	IR 0.0-4095.15	-----	DDDD.DD	
Link Relay	LR 0.0-4095.15	-----	DDDD.DD	
Assistant Relay	AR 0.0-4095.15	-----	DDDD.DD	
Holding Relay	HR 0.0-4095.15	-----	DDDD.DD	
Data Memory	-----	DM 0-30000	DDDDD	
Timer/Counter	-----	TC 0-255	DDD	

NOTE: Address correspondence: IRn.m-->the m Trio VR (n); DMn->Table (n). Example IR1.02 corresponds to the 2nd bit of VR1.

TRIO TCP/IP (mode7)

Device	Bit Address	Word Address	Format	Notes
VR	-----	0-4096	DDDD	
VR_INT	-----	0-4096	DDDD	
VR_BIT	0.00-31999.31	-----	DDDD.DD	
VR_INT_BIT	0.00-31999.31	-----	DDDD.DD	
Table	-----	0-31999	DDDDD	
Table_INT	-----	0-31999	DDDDD	
Table_BIT	0.00-31999.31	-----	DDDDD.DD	
Table_INT_BIT	0.00-31999.31	-----	DDDDD.DD	

Modbus RTU Extend

Device	Bit Address	Word Address	Format	Notes
Data register bit	4X_bit 0.0-1023.15	-----	DDDD.DD	
Data register	-----	4X 0-1023	DDDDD	

NOTE: Address correspondence: 4x corresponds to VR; 4x_bit corresponds to VR's bit. Address difference between one position, e.g. 4x (501) corresponds to VR (500); 4x_bit (67.1) corresponds to the first bit of VR (66).

Trio (mode 7)

Device	Bit Address	Word Address	Format	Notes
Table_INT_Bit	0.0-30000.31	-----	DDDDD.DD	
Table_Bit	0.0-30000.31	-----	DDDDD.DD	
VR_INT_Bit	0.0-4095.31	-----	DDDD.DD	
VR_Bit	0.0-4095.31	-----	DDDD.DD	
Table_INT	-----	0-30000	DDDDD	
Table	-----	0-30000	DDDDD	
VR_INT	-----	0-4095	DDDD	When the PLC software sets the serial port protocol to 32 long integer, this register is used for configuration at this time, and the type is integer
VR	-----	0-4095	DDDD	When the PLC software sets the serial port protocol to 32 floating point, VR register is used at this time, and the type is single precision floating point


Trio TCP-IP(TCP Slave)

Device	Bit Address	Word Address	Format	Notes
VR_Bit	0.00-4095.15	-----	DDDD.DD	
Table_Bit	0.00-4095.15	-----	DDDD.DD	
VR	-----	0-4095	DDDD	When selecting this register for configuration, the type needs to be set to integer. If the PLC value is 1.2, the screen will display 1, but the decimal point cannot be displayed.
Table	-----	0-4095	DDDD	


© Cable Diagram

NOTE: In the controller, A port is programming port, B port is communication port


Programming Cable

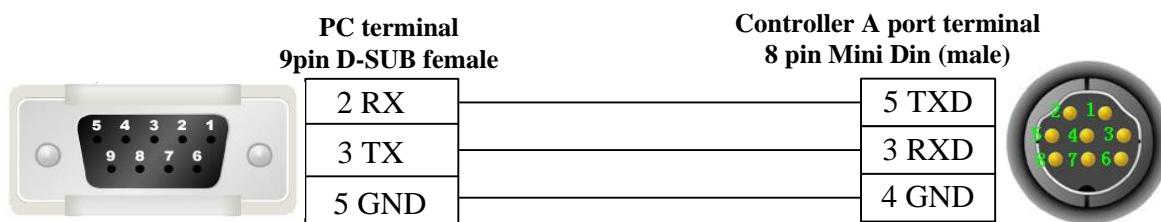

RS232 Communication Cable

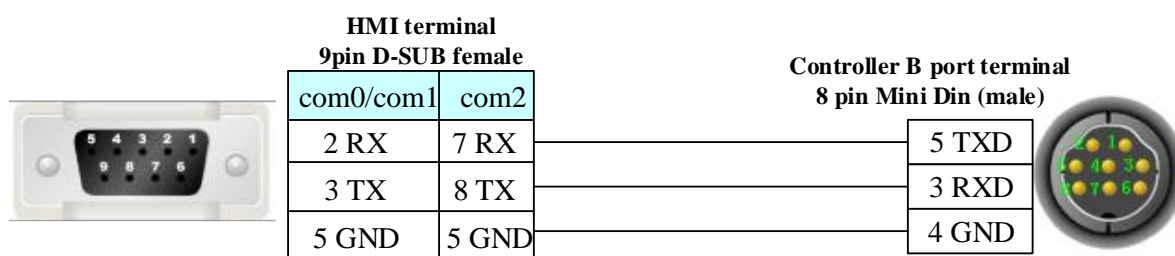

RS422 Communication Cable

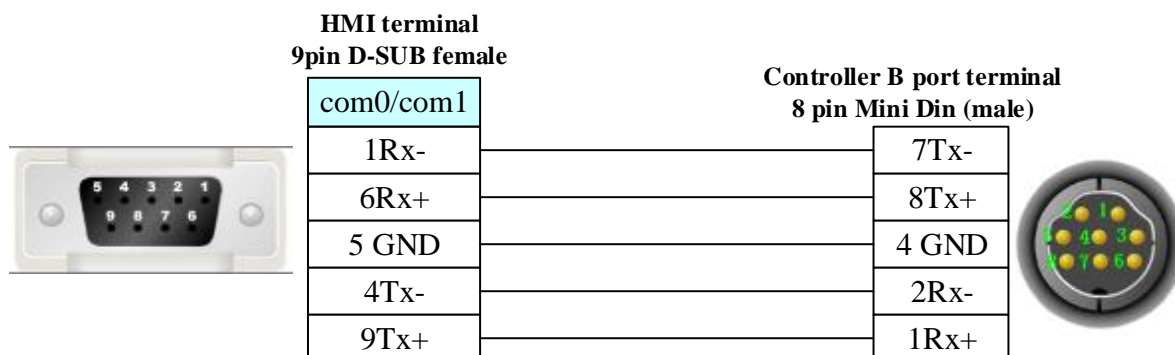

Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub
Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.91 Unitronics

◎Serial Communication

Series	CPU	Link Module	Driver
Vision 130	V130-33-B1	RS232 on the CPU unit	Unitronics
		RS485 on the CPU unit	

◎Network Communication

Series	CPU	Link Module	Driver
Vision 130	V130-33-B1	Ethernet I/F on CPU Unit	Unitronics Ethernet(TCP Slave)

◎Serial System configuration

Series	CPU	Link Module	COM Type	Parameter	Cable
Vision 130	V130-33-B1	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS485 on the CPU unit	RS485	Setting	Your owner cable

◎Network System configuration


Series	CPU	Link Module	Connect Type	Parameter	Cable
--------	-----	-------------	--------------	-----------	-------

Vision 130	V130-33-B1	Ethernet I/F on CPU Unit	Ethernet	Setting	Your owner cable
------------	------------	--------------------------	----------	-------------------------	----------------------------------


◎ Serial Communication Setting

HMI Setting


RS232 default communication: 57600, 8, 1, none; station: 1

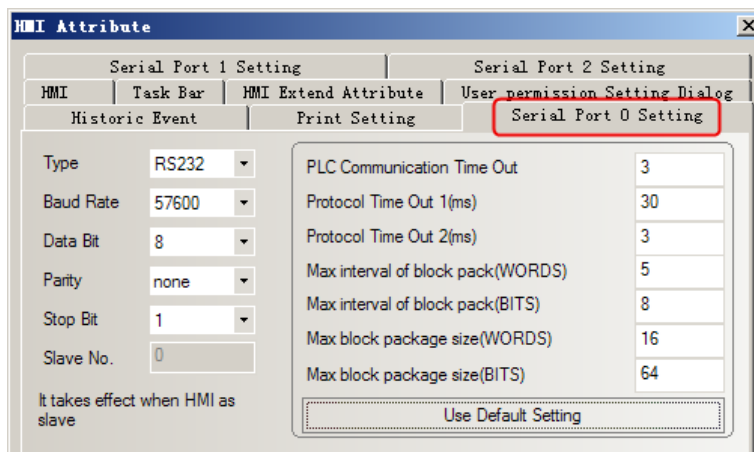

PLC Setting

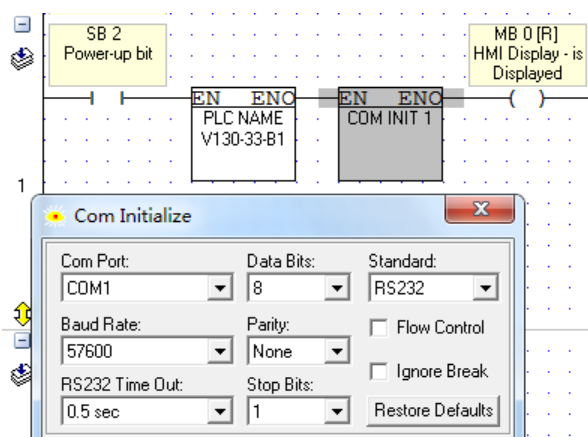


RS485 default communication: 57600, 8, 1, none; station: 64

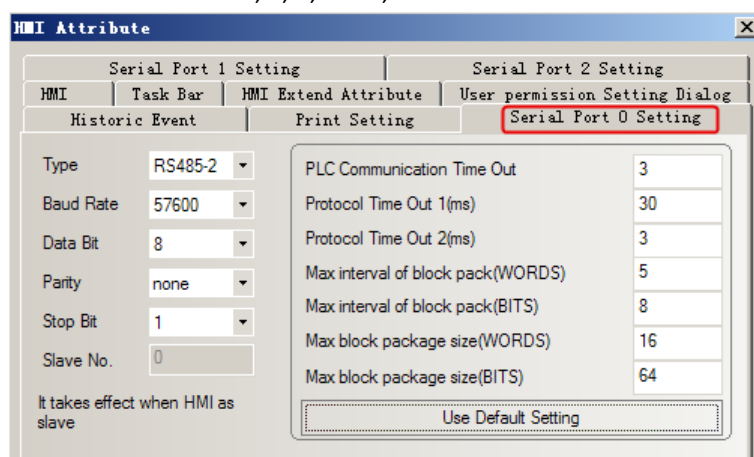


PLC Setting

1. COM Initialize in the program software by RS485 communication.

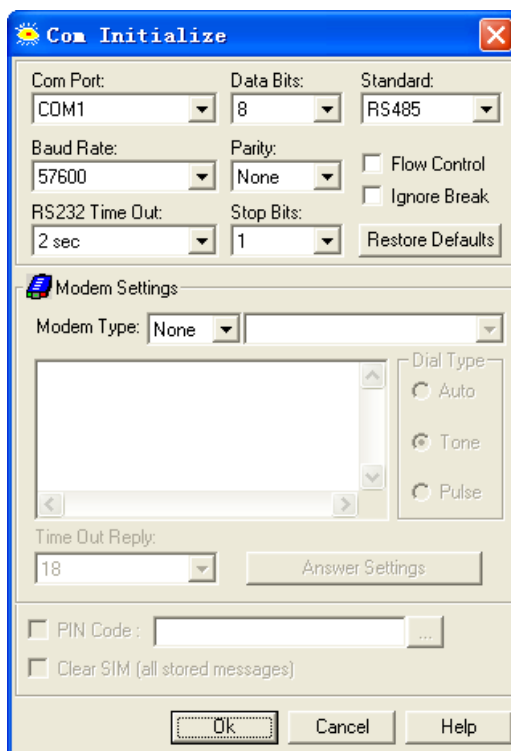



2. Initialize ID, and program as below, download to controller.

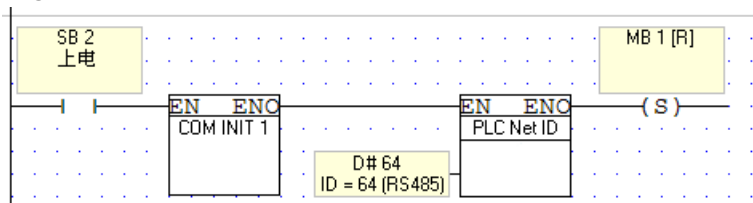


3. Change the jumper position and choose RS485 communication.

◎ Network Communication Setting

HMI Setting

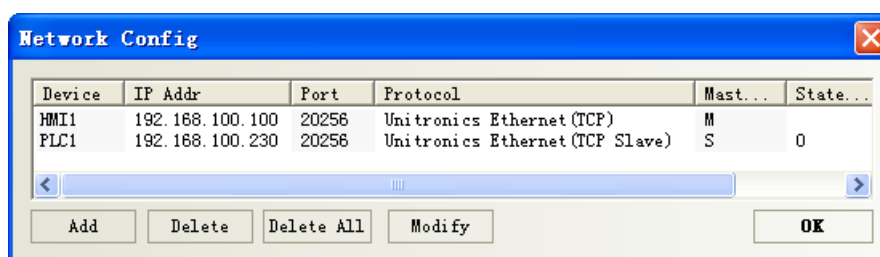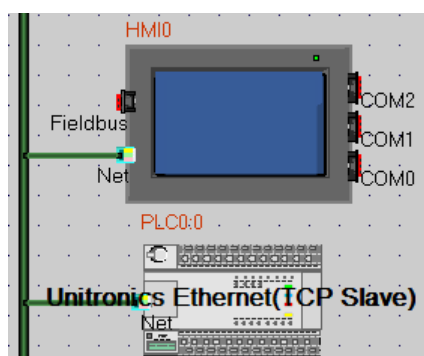

PLC Setting

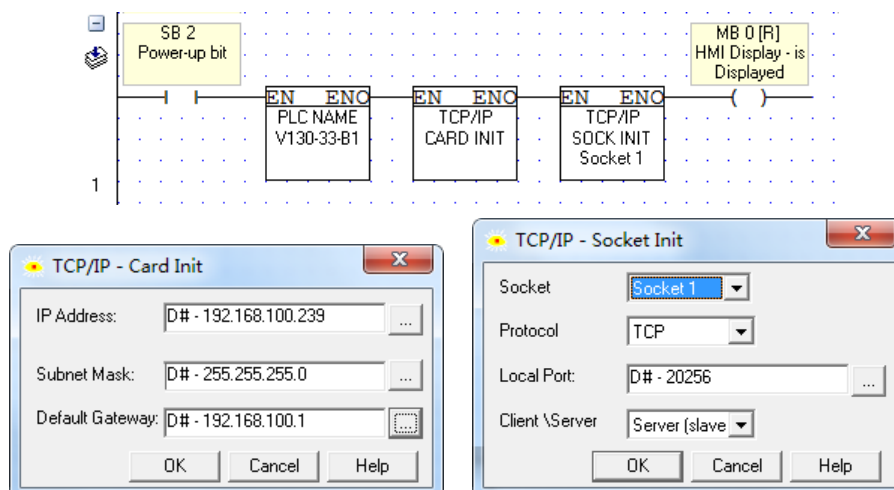


Supported Device


Device	Bit Address	Word Address	Format	Notes
Inputs	I 0~999	-----	DDD	Read only
Outputs	O 0~999	-----	DDD	
Memory Bits	MB 0~8191	-----	DDDD	
System Bits	SB 0~999	-----	DDD	
Timers	T 0~383	-----	DDD	Read only
Counters	C 0~31	-----	DD	Read only
Memory Integer	-----	MI 0~4095	DDDD	
Memory Longer	-----	ML 0~511	DDD	
Double Word	-----	DW 0~255	DDD	
Memory Float	-----	MF 0~63	DD	
System Integer	-----	SI 0~999	DDD	
System Longer	-----	SL 0~199	DDD	
System Double Word	-----	SDW 0~199	DDD	
Timers Preset	-----	T_C 0~383	DDD	Read only
Timers Current	-----	T_P 0~383	DDD	Read only
Counters Preset	-----	C_C 0~31	DD	Read only
Counters Current	-----	C_P 0~31	DD	Read only

Cable Diagram

RS232 communication cable

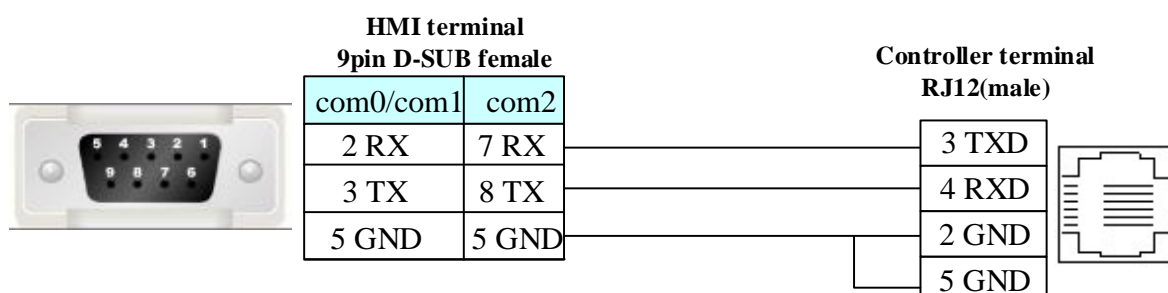

RS485 communication cable

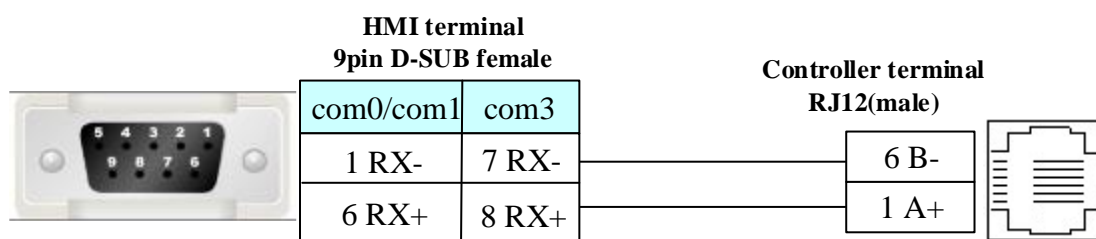

PLC RJ12 pins are defined as follow:

Pin Number	Function
1	A signal (+)
2	(RS232 signal) GND
3	(RS232 signal) TXD
4	(RS232 signal) RXD
5	(RS232 signal) GND
6	B signal (-)

Pin #1 is indicated by an arrow pointing to the first pin of the RJ12 connector shown in the diagram.

Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.92 Universal Slave

◎ Serial Communication

Series	CPU	Link Module	Driver
Universal ASCII Slave	Universal ASCII Slave	RS232 on the CPU unit	Universal ASCII Slave
Universal HEX Slave	Universal HEX Slave	RS232 on the CPU unit	Universal HEX Slave


◎ System configuration

Series	CPU	Link Module	COM Type	Parameter	Cable
Universal ASCII Slave	Universal ASCII Slave	RS232 on the CPU unit	RS232	Setting	Your owner cable
Universal HEX Slave	Universal HEX Slave	RS232 on the CPU unit	RS232	Setting	Your owner cable

◎ Communication Setting

HMI Setting

Default communication: 9600, 8, 1, none; station: 1

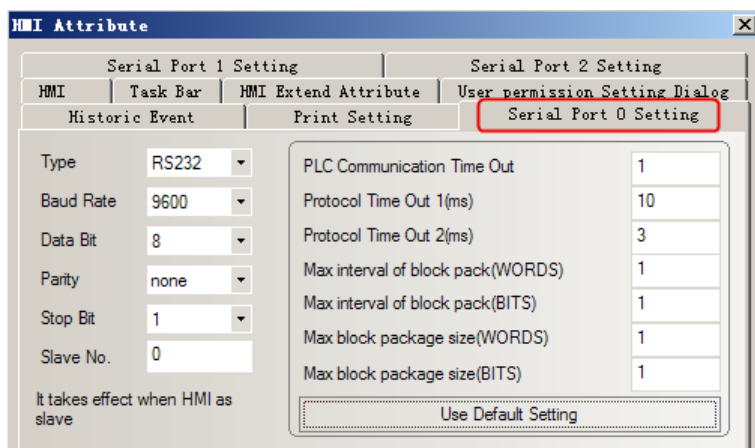

◎ Supported Device

Universal ASCII Slave

Device	Bit Address	Word Address	Format	Notes
send	LB 0	-----	D	Correspond to COM0
clear	LB1	-----	D	
Send data buffer	-----	LW 0~99	DD	
Receive data buffer	-----	LW 100~199	DDD	
send	LB2	-----	D	Correspond to COM1
clear	LB3	-----	D	
Send data buffer	-----	LW 200~299	DD	
Receive data buffer	-----	LW 300~399	DDD	
send	LB 4	-----	D	Correspond to COM2
clear	LB5	-----	D	
Send data buffer	-----	LW400~499	DD	
Receive data buffer	-----	LW 500~599	DDD	
send	LB 6	-----	D	Correspond to COM3
clear	LB7	-----	D	
Send data buffer	-----	LW600~699	DD	
Receive data buffer	-----	LW 700~799	DDD	


Universal HEX Slave

Device	Bit Address	Word Address	Format	Notes
send	LB 0	-----	D	Correspond to COM0
clear	LB1	-----	D	
Send data buffer	-----	LW 0~99	DD	
Receive data buffer	-----	LW 100~199	DDD	
send	LB2	-----	D	Correspond to COM1
clear	LB3	-----	D	
Send data buffer	-----	LW 200~299	DD	
Receive data buffer	-----	LW 300~399	DDD	
send	LB 4	-----	D	Correspond to

clear	LB5	-----	D	COM2
Send data buffer	-----	LW400~499	DD	
Receive data buffer	-----	LW 500~599	DDD	
send	LB 6	-----	D	Correspond to COM3
clear	LB7	-----	D	
Send data buffer	-----	LW600~699	DD	
Receive data buffer	-----	LW 700~799	DDD	

◎ Cable Diagram

RS232 communication cable

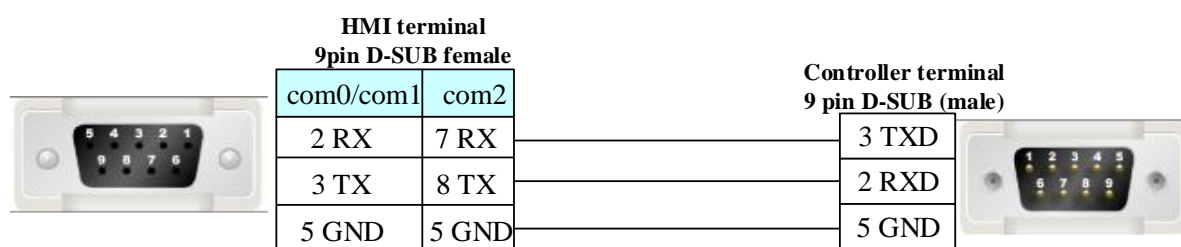

4.93 Vigor Corporation

◎ Serial Communication

Series	CPU	Link Module	Driver
VH	VH-14MR	RS232 on the CPU unit	Vigor
VB0	VB0-14MR	RS232 on the CPU unit	
VS1	VS1-10MT-D	RS485 CP1	Vigor VS


◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
VH	VH-14MR	RS232 on the CPU unit	RS232	Setting	Your owner cable
VB0	VB0-14MR	RS232 on the CPU unit	RS232	Setting	Your owner cable
VS1	VS1-10MT-D	RS485 CP1	RS485	Setting	Your owner cable

◎ Communication Setting

Vigor Protocol:

Default communication: 19200, 7, even, 1; station: 0

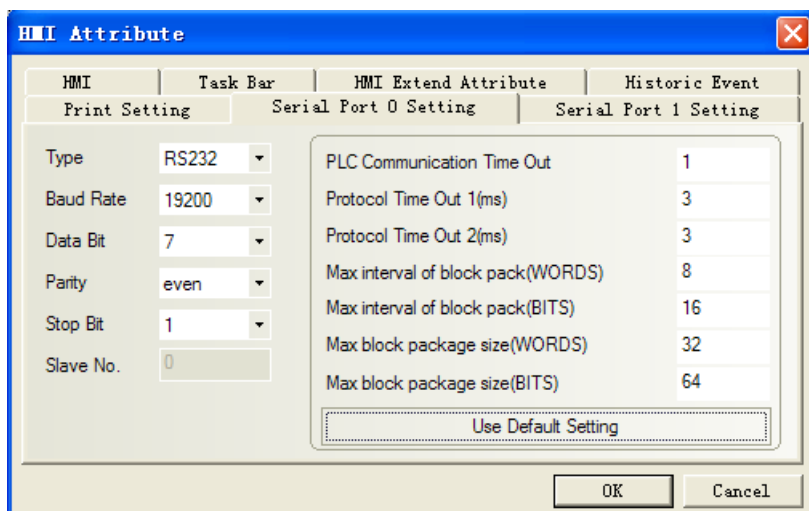


NOTE: CP1* baudrate 19200bps.

*: CP1 programming port is USB(RS232).

Vigor VS Protocol:

RS485: Default parameter: 19200, 8,1, None; Station No: 0

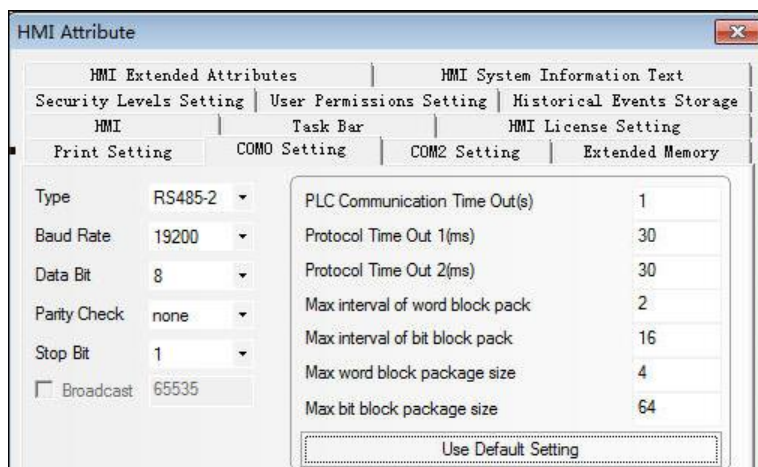

PLC Setting

Set the same parameters as the HMI does.

© Supported Device

Vigor Protocol

Device	Bit Address	Word Address	Format	Notes
Input Relay	X 0-777	-----	OOO	
Output Relay	Y 0-777	-----	OOO	
Internal Relay	M 0-5119	-----	DDDD	
Special Relay	SM 9000-9255	-----	DDDD	
Timer Relay	T_bit 0-255	-----	DDD	
Counter Relay	C_bit 0-255	-----	DDD	
Timer	-----	T_word 0-255	DDD	

Counter	-----	C_word 0-199	DDD	
Counter double word	-----	C_dword 200-255	DDD	
Data Register	-----	D 0-8191	DDDD	
Special Data Register	-----	SD 9000—9255	DDDD	

Vigor VS Protocol


Device	Bit Address	Word Address	Format	Notes
Input Relay	X 0-377	-----	OOO	
Output Relay	Y 0-377	-----	OOO	
Internal Relay	M 0-8191	-----	DDDD	
Special Relay	SM 0-511	-----	DDD	
Data Register D (bit)	D_BIT 0.0-8999.F	-----	DDDD.H	
Data Register R (bit)	R_BIT 0.0-25999.F	-----	DDDDD.H	
Step Relay	S 0-4095	-----	DDDD	
Timer Coil	T_XQ 0-511		DDD	
Timer Contact	T_JD 0-511		DDD	
Counter Coil	C_XQ 0-255		DDD	
Counter Contact	C_JD 0-255		DDD	
Timer	-----	T_WORD 0-511	DDD	
Counter	-----	C_WORD 0-199	DDD	
Counter (32 bit)	-----	C_DWORD 200-255	DDD	
Data Register D	-----	D_WORD 0-8999	DDDD	
Special Data Register	-----	SD_WORD 0-511	DDDD	
Data Register R	-----	R_WORD 0-25999	DDDDD	

Cable Diagram


VH-14MR RS232 communication cable

1. Communication via USB programming port


Connection with HMI by programming cable of Vigor

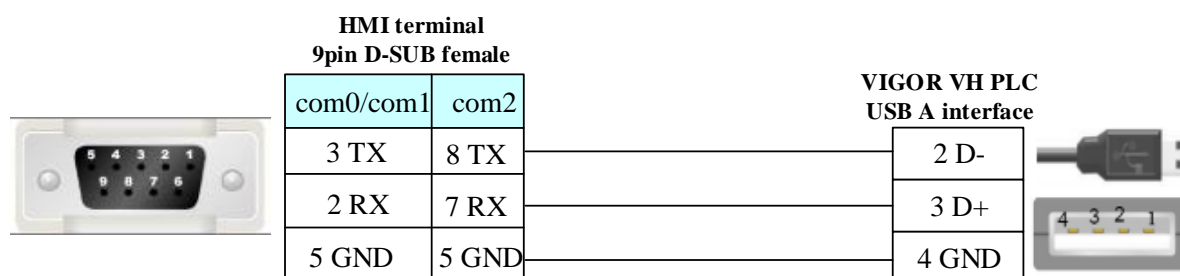

2. Communication via auxiliary interface of programming device:

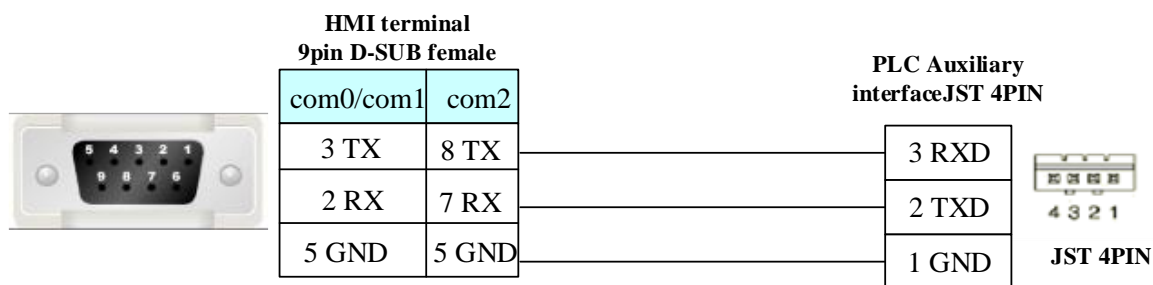

3. RS485 communication cable

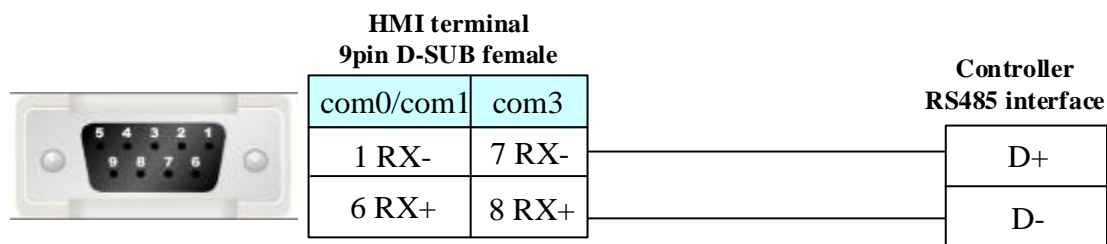

4.94 VEICHI VC

◎ Serial Communication

Series	CPU	Link Module	Driver
VEICHI VC	VC1	RS232 on the CPU unit	VEICHI VC Series RTU
	VC2		
	VC3	RS485 on the CPU port	
	VC5		
	VC1S		

◎ Ethernet Communication

Series	CPU	Link Module	Driver
VEICHI VC	VC1	Ethernet on CPU Unit	VEICHI VC Series Ethernet(TCP Slave)
	VC2		
	VC3		
	VC5		
	VC1S		

◎ Serial System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
VEICHI VC	VC1 VC2	RS232 on the CPU unit	RS232	Setting	Your owner cable

	VC3 VC5 VC1S	RS485 on the CPU port	RS485	Setting	Your owner cable
--	--------------------	--------------------------	-------	-------------------------	----------------------------------

◎ Ethernet Communication Parameters and Cables Production

Series	CPU	Link Module	SIO Type	Parameter	Cable
Modbus TCP Slave(Zero-based Addressing)	VC1 VC2 VC3 VC5 VC1S	Ethernet on CPU Unit	Ethernet	Setting	Your owner cable

◎ Serial Communication Setting

Use VEICHI VC Series RTU protocol

HMI setting

HMI default communication parameters: 19200bps, 8, even check, 1;PLC station no. : 1

RS232 communication

HMI Attribute

User Permissions Setting		Historical Events Storage		Print Setting
HMI	Task Bar	HMI License Setting	HMI Extended Attributes	HMI System Information Text
Internet Time Synchronization/summer time		COM0 Setting	COM2 Setting	Security Levels Setting
Extended Memory				

Type: **RS232** ☐ Use Serial Parameters

Baud Rate: 19200

Data Bit: 8

Parity Check: even

Stop Bit: 1

☐ Broadcast 65535

Advanced Settings

RS485 communication

HMI Attribute

User Permissions Setting		Historical Events Storage		Print Setting
HMI	Task Bar	HMI License Setting	HMI Extended Attributes	HMI System Information Text
Internet Time Synchronization/summer time		COM0 Setting	COM2 Setting	Security Levels Setting
Extended Memory				

Type: **RS485** ☐ Use Serial Parameters

Baud Rate: 19200

Data Bit: 8

Parity Check: even

Stop Bit: 1


☐ Broadcast 65535

Advanced Settings


PLC setting

1.For communication between plc and pc, click on the menu bar tools, PLC communication, connection

settings

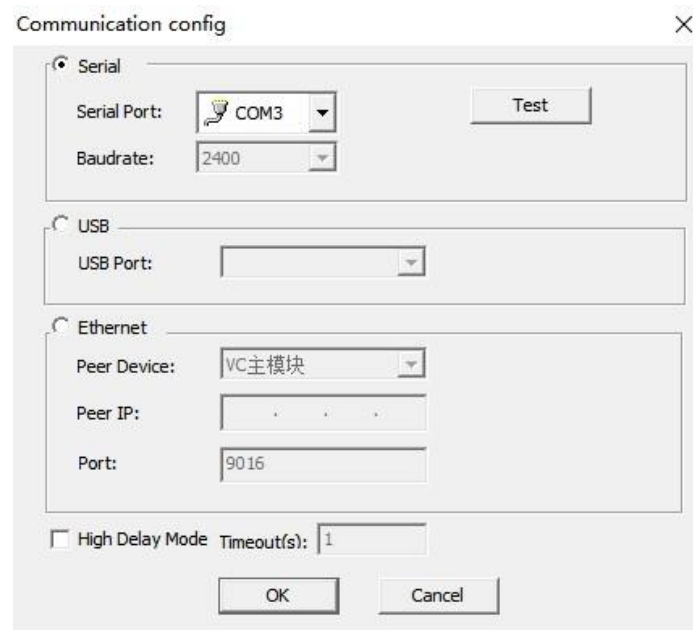


2.Set communication parameters

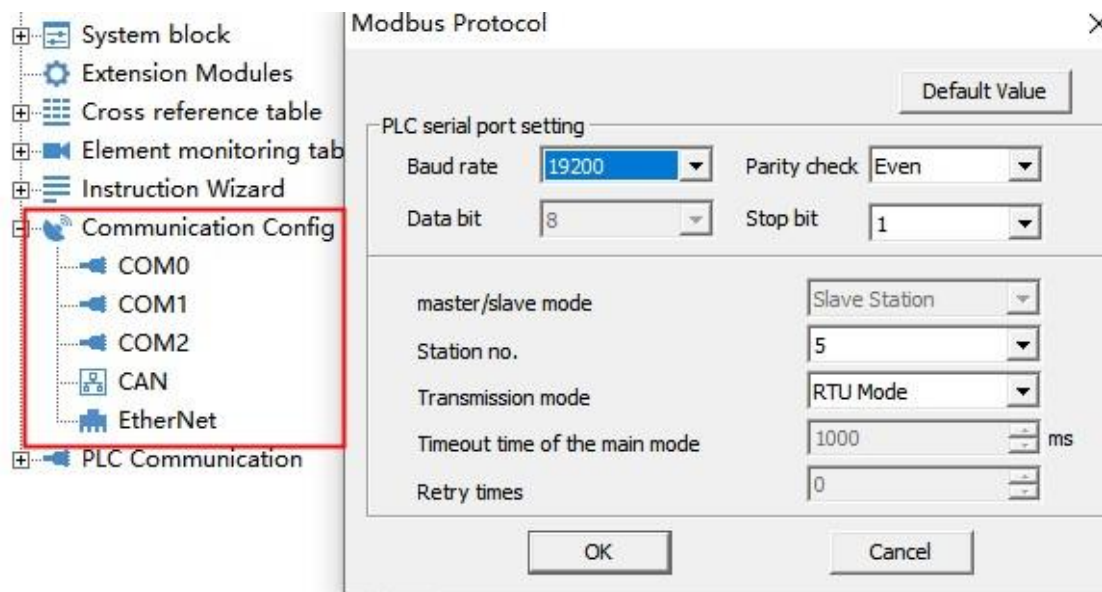

© Ethernet Communication Parameters

Use VEICHI VC Series Ethernet(TCP Slave) protocol

[HMI setting](#)

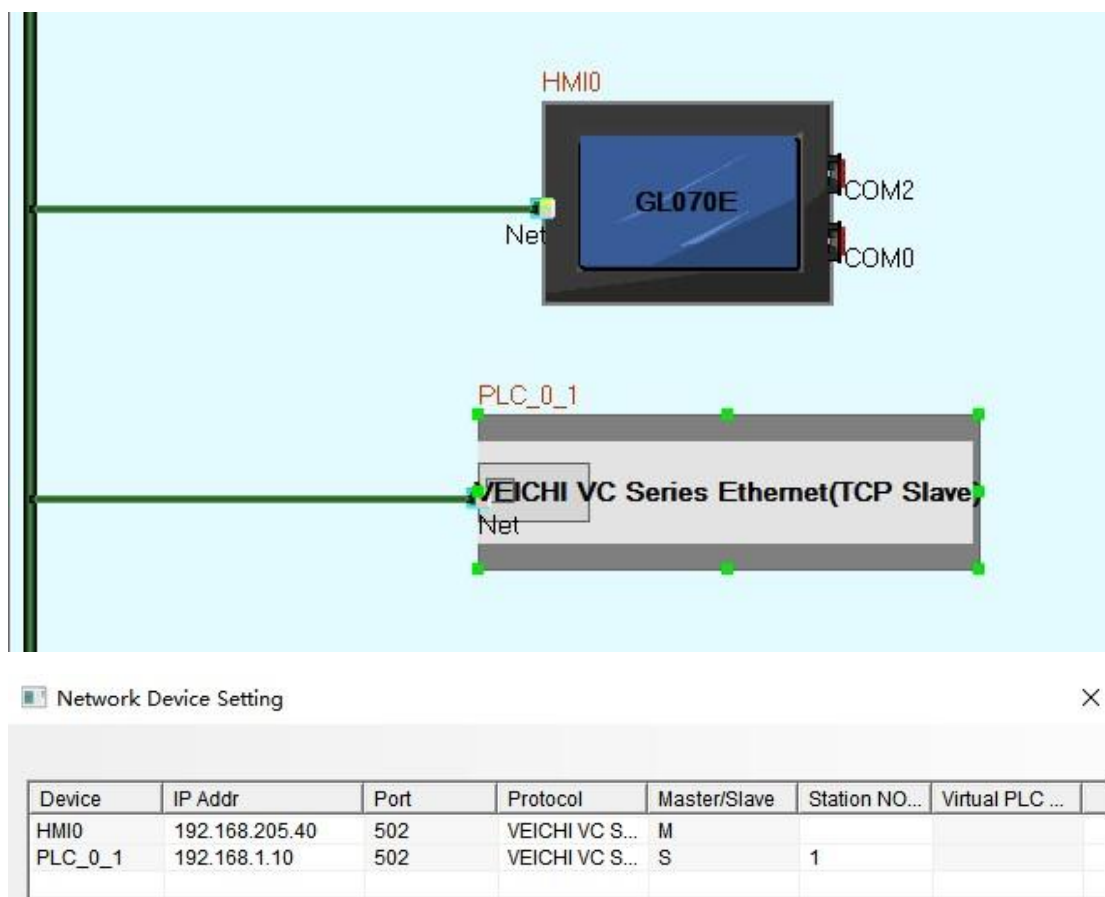

PLC setting

1. For communication between plc and pc, click on the menu bar tools, PLC communication, connection settings

Communication config

☒ **Serial**

Serial Port: COM3

Baudrate: 2400

Test

☐ **USB**

USB Port:

☐ **Ethernet**

Peer Device: VC主模块


Peer IP:

Port: 9016

☐ High Delay Mode Timeout(s): 1

OK Cancel

2. Set communication parameters

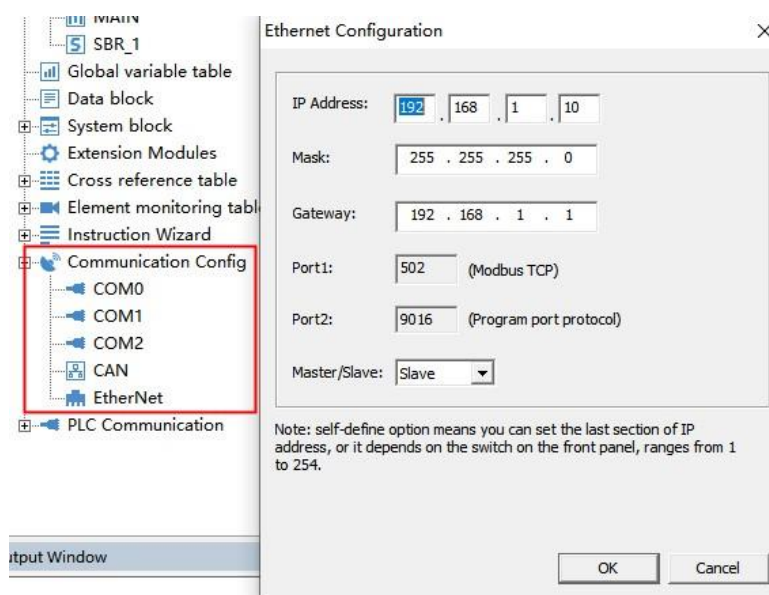


© Supported Device


Device	Bit Address	Word Address	Format	Notes
Counter(16bit)	C1 0-255	-----	DDD	
Counter(16bit)	C2 256-511	-----	DDD	
Timer	T1 0-255	-----	DDD	
Timer	T2 256-511	-----	DDD	
Status	S1 0-1023	-----	DDDD	
Status	S2 1024-4095	-----	DDDD	
Special	SM1 0-255	-----	DDD	
Special	SM2 256-1023	-----	DDDD	
Supplemental	M1 0-2047	-----	DDDD	
Supplemental	M2 2048-10239	-----	DDDDD	
Input	X 0-777	-----	000	
Output	Y 0-777	-----	000	
Counter	-----	CD1 200-255	DDD	
Counter	-----	CD2 256-263	DDD	
Date Register	-----	R 0-32767	DDDDD	
Counter(16bit)	-----	C 0-199	DDD	
Timer	-----	T1 0-255	DDD	
Timer	-----	T2 256-511	DDD	
Internal	-----	Z 0-15	DD	
Date Register	-----	D 0-7999	DDDD	
Special	-----	SD1 0-255	DDD	
Special	-----	SD2 256-1023	DDDD	

◎ Cable Diagram

RS232 communication cable

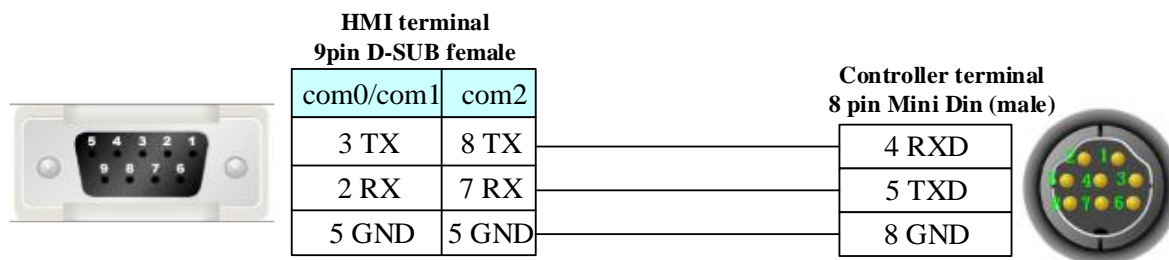

RS485 communication cable

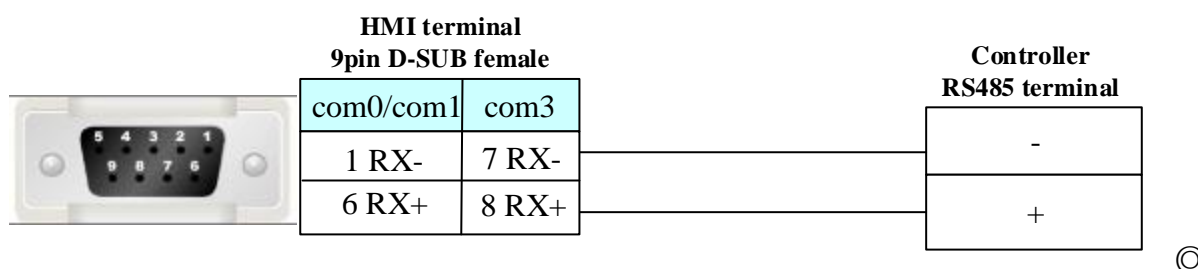

Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub
Refer to 3.3 Download by Network Ethernet for method of making connection cable.

4.95 Wecon

◎ Serial Communication

Series	CPU	Link Module	Driver
Wecon LX5V RTU	5v-2416MT-A	RS485/422 on the CPU unit	Wecon LX5V RTU

◎ System configuration


Series	Link Module	COMM Type	Parameter	Cable
Wecon LX5V RTU	RS485 on the CPU unit	RS485	Setting	Your owner cable
	RS422 on the CPU unit	RS422	Setting	Your owner cable

◎ Communication Setting


HMI Setting

Default communication parameters: 9600bps, 8, even, 1; station: 1


RS485 communication

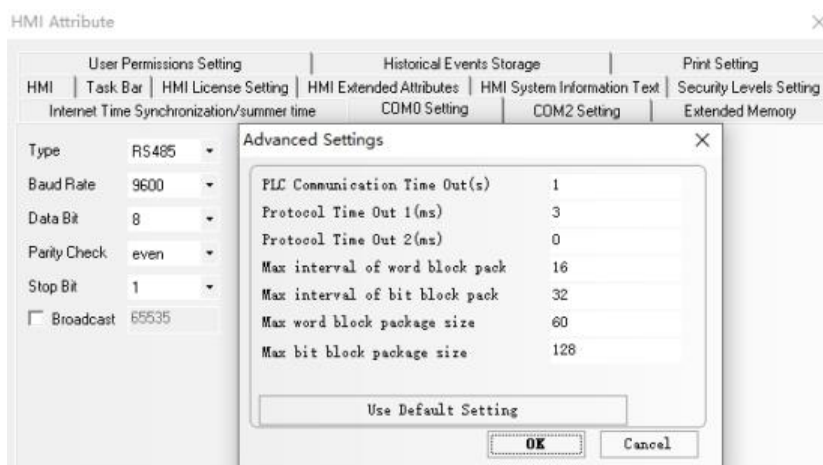

RS422 communication

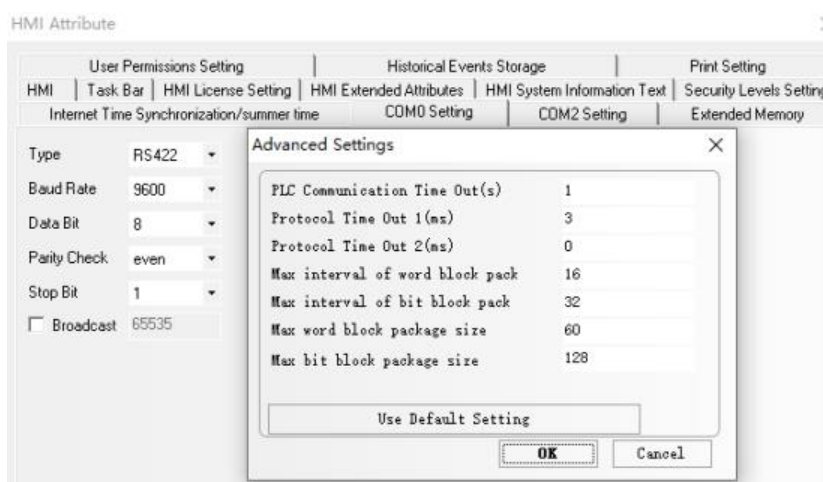

PLC Setting

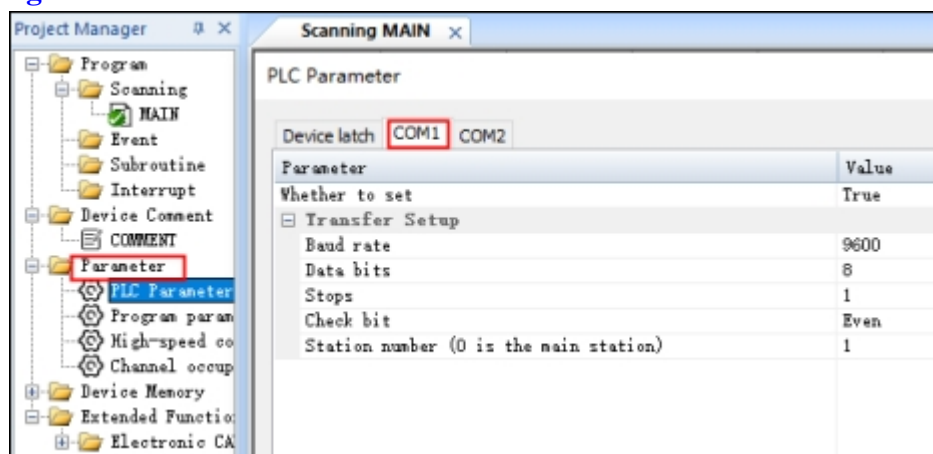


©Supported Device

Device	Bit Address	Word Address	Format	Notes
Timer	T0-511	----	DDD	----
Counter(16bit)	C0-255	----	DDD	----
Counter(32bit)	LC0-255	----	DDD	----
High-speed-counter	HSC0-15	----	DD	----


Supplemental	M0-7999	----	DDDD	----
Special	SM0-4095	----	DDDD	----
Status	S0-4095	----	DDDD	----
Output	Y0-1777	----	0000	----
Input	X0-1777	----	0000	----
Internal	---	Z0-7	D	----
Internal	---	V0-7	D	----
Timer	---	T0-511	DDD	----
Counter(16bit)	---	C0-255	DDD	----
Counter(32bit)	---	LC0-255	DDD	----
High-speed-counter	---	HSC0-15	DD	----
Date Register	---	D0-7999	DDDD	----
Special	---	SD0-4095	DDDD	----
Date Register	---	R0-29999	DDDDD	----

◎ Cable Diagram

RS485 communication cable

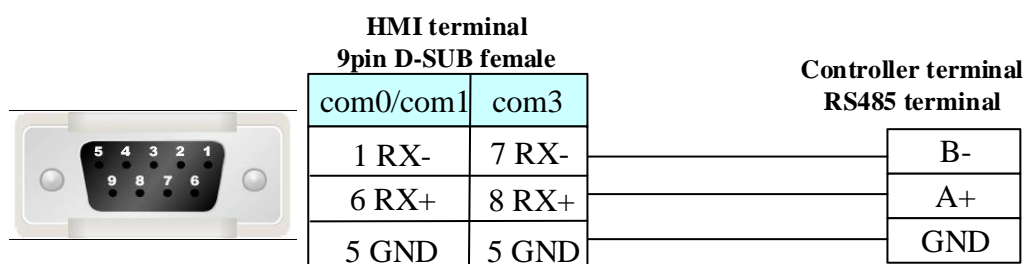

RS422 communication cable

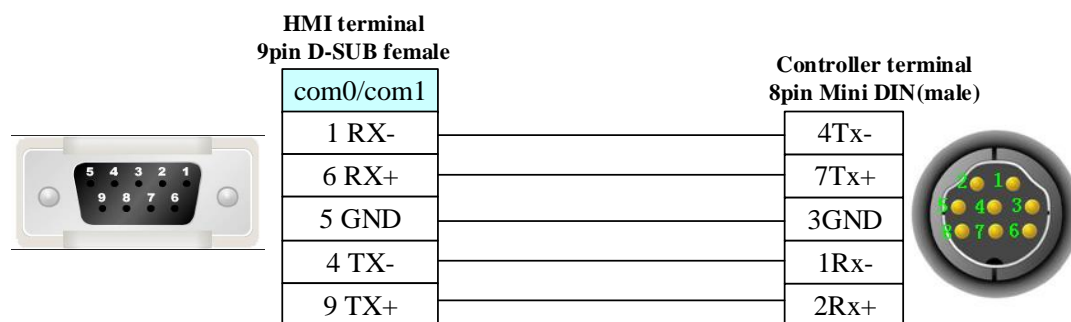

4.96 XINJE Controller

◎ Serial Communication

Series	CPU	Link Module	Driver
XINJE XC	XC3-32R-E	RS232 on the CPU unit	Modbus RTU
			XINJE XC Series
XINJE XDM	XDM-60T10-E	RS232 on the Port 1	XINJE XDM Series

		RS485 on the Port 2	
--	--	---------------------	--

◎ Network communication

Series	CPU	Link Module	Driver
XINJE XD	XD5/XDM/XDC/XD5E/XL5/ XL5E/XLME	CPU Direct	XINJE XD Series(MODBUS-TCP)
			XINJE XD Series(X-NET)

◎ Serial System configuration

Series	CPU	Link Module	COM Type	Parameter	Cable
XINJE XC	XC3-32R-E	RS232 on the CPU unit	RS232	Setting	Your owner cable
XINJE XDM	XDM-60T10-E	RS232 on the Port 1	RS232	Setting	Your owner cable
		RS485 on the Port 2	RS485	Setting	Your owner cable

◎ Network System configuration


Series	CPU	Link Module	Connect Type	Protocol	Parameter	Cable
XINJE XD	XD5/XDM/XDC/ XD5E/XL5/XL5E /XLME	CPU Direct	Ethernet	MODBUS -TCP	Setting	Your owner cable
				X-NET	Setting	Your owner cable

◎ Serial Communication Setting

XINJE XC Series protocol

HMI Setting

Default communication: 19200, 8, even, 1; station: 1

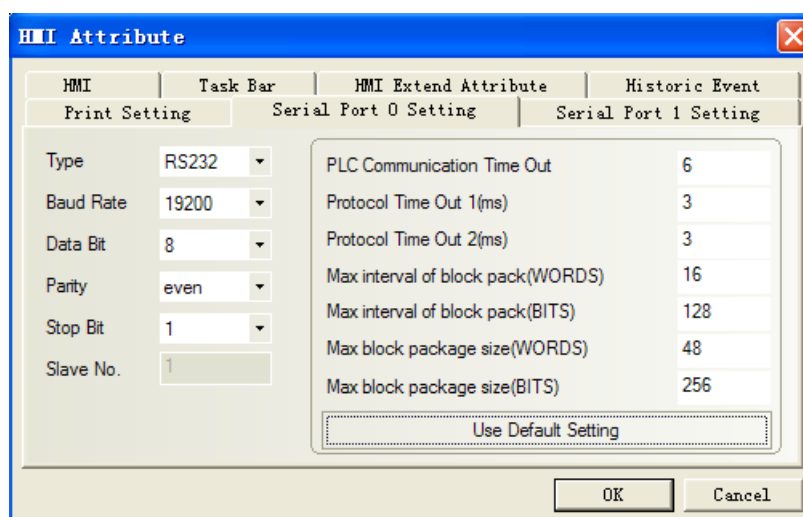


XINJE XDM Series protocol


HMI Setting

Default communication: 19200, 8, even, 1; station: 1

RS232

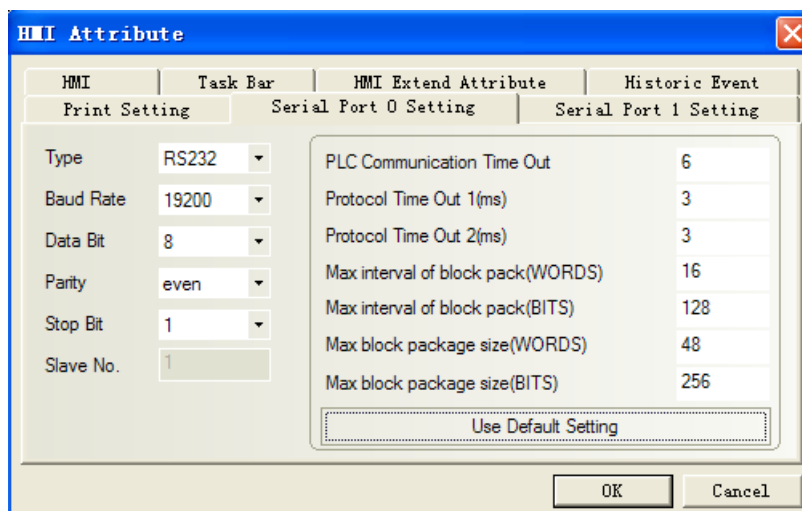


RS485

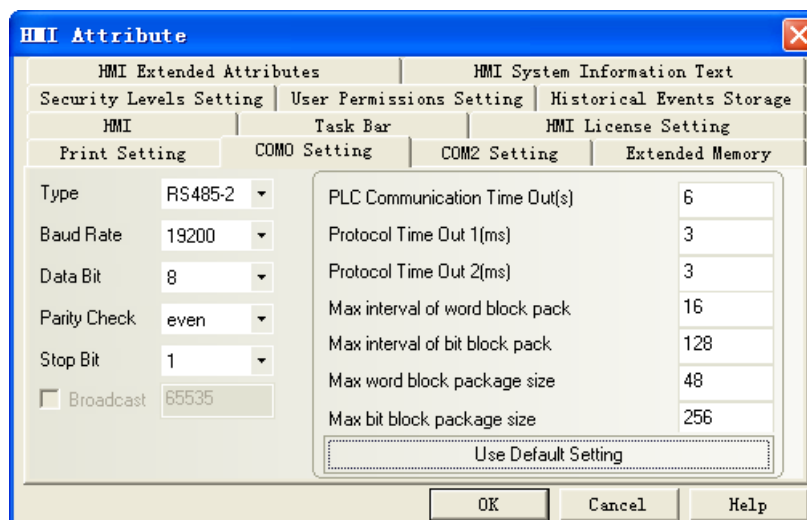


© Network Communication Setting

XINJE XD Series(MODBUS-TCP) protocol

HMI Setting

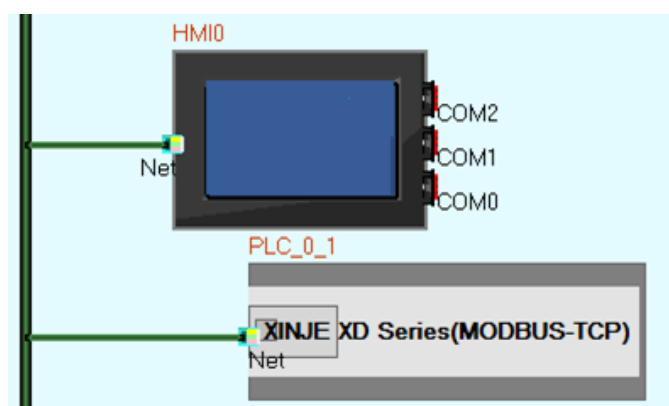

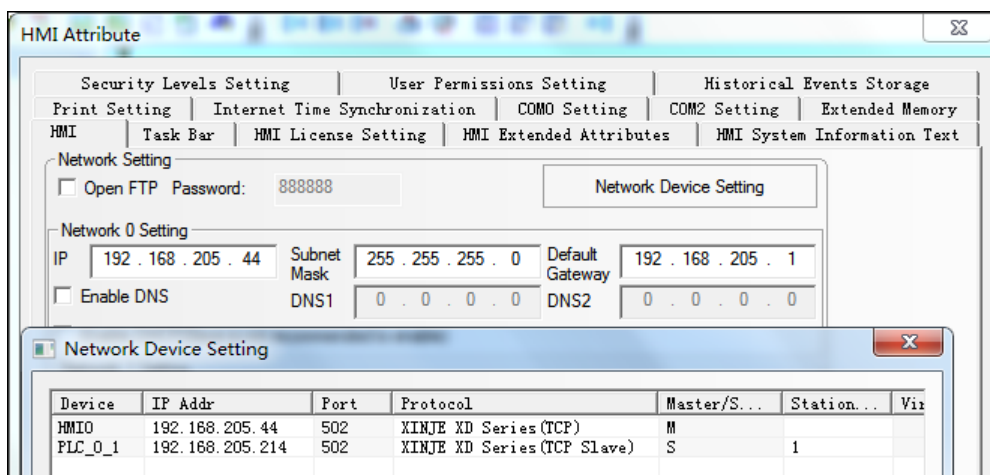


PLC configuration

1. Open the Xinjie XNetConfig Tool , and then select PLC
2. Connection protocol selects: XNet, finding port selects: AutoTry, check the ID search, enter the ID on the PLC machine (eg: 292-080-047-DC2E-1617), and then click Find Device
3. After clicking Find Device, the plc configuration will pop up. The following two configurations will appear:
 - 1) If you choose to obtain the IP address automatically, click the Read button at the bottom.
 - 2) If you choose to use the following IP address, enter your own IP address, and then click on the write button at the bottom to complete the connection with plc
4. Finally open the Xinjie PLC programming tool software, click on the configuration software communication, you can directly use the specified address, enter the previously set IP address, click the OK button

XINJIE XD Series (X-NET) protocol

HMI setting

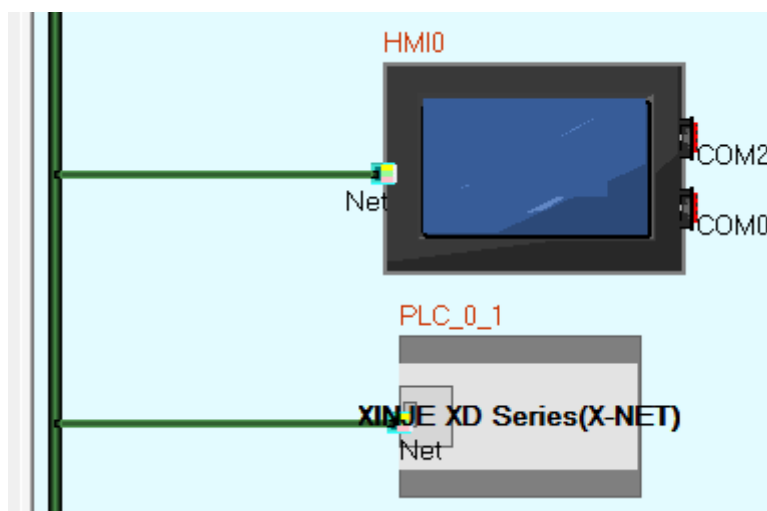

Device	IP Addr	Port	Protocol	Master/Slave	Station N...
HMI0	192.168.0.100	531	XINJE XD Series(X-NET)	M	
PLC_0_1	192.168.0.2	531	XINJE XD Series(X-NET)	S	1

PLC configuration

1. Open the Xinjie XNetConfig Tool , and then select PLC
- 2.Connection protocol selects: XNet, finding port selects: AutoTry, check the ID search, enter the ID on the PLC machine (eg: 292-080-047-DC2E-1617), and then click Find Device
- 3.After clicking Find Device, the plc configuration will pop up. The following two configurations will appear:
 - 1) If you choose to obtain the IP address automatically, click the Read button at the bottom.
 - 2) If you choose to use the following IP address, enter your own IP address, and then click on the write button at the bottom to complete the connection with plc
- 4.Finally open the Xinjie PLC programming tool software, click on the configuration software communication, you can directly use the specified address, enter the previously set IP address, click the OK button

◎Supported Device

XINJE XC Series

Device	Bit Address	Word Address	Format	Notes
Internal Relay	M 0~7999	-----	DDDDD	
	M8 0-767	-----	DDD	
Input Relay	X 0.0~30323.7	-----	000000.O	
Output Relay	Y 0.0~30323.7	-----	000000.O	
State Relay	S 0~99999	-----	DDDDD	
Special Relay	M 8000~99999	-----	DDDDD	
Timer Relay	T 0~99999	-----	DDDDD	
Counter Relay	C 0~99999	-----	DDDDD	
Data register	-----	D 0~7999	DDDDD	
Timer	-----	TD 0~9999	DDDDD	
Counter	-----	CD 0~9999	DDDDD	
Special Data Register	-----	D 8000~9999	DDDDD	
	-----	D8 0-1023		
FlashROM Register	-----	FD0~FD5000	DDDDD	
		FD8 0-1023	DDDD	
Special FlashROM Register	-----	FD8000~FD 9999	DDDDD	
Internal extend register	-----	ED 0~36863	DDDDD	
Input register	-----	ID 0~9999	DDDD	
Output Register	-----	QD 0~9999	DDDD	

NOTE:

1. **O** indicates **OCT**, **D** indicates **HEX**.
2. Example: X\Y address: 1 in the controller corresponds with 0.1 in the HMIWare; X\Y address: 17 in the controller correspond with 1.7 in the HMIWare.

MODBUS RTU protocol

Register address in programmable controller correspond with address in modbus protocol, as follows:

Coil Area:

bits Addr	MODBUS addr (Decimal K)
M0~M7999	0X 1~0X 8000
X0~X511	0X 16385~0X 16714
Y0~Y511	0X 18433~0X 18762
S0~S1023	0X 20481~0X 21504
M8000~M8511	0X 24577~0X 25088
T0~T618	0X 25601~0X 26219
C0~C634	0X 27649~0X 28283

Register Area:

words Addr	MODBUS addr (Decimal K)
D0~D7999	4X 1~4X8000
TD0~TD618	4X 12289~4X12907
CD0~CD634	4X 14337~4X 14971
D8000~D8511	4X 16385~4X 16896
FD0~FD1535	4X 18433~4X19968
FD8000~FD8511	4X 26625~4X 27136

XINJE XDM Series

Device	Bit Address	Word Address	Format	Notes
Counter	HSC 0-39	-----	DD	
Counter	HC 0-1023	-----	DDDD	
Timer task	HT 0-1023	-----	DDDD	
State relay	HS 0-999	-----	DDD	
Auxiliary relay	HM 0-6143	-----	DDDD	
Order function block	SEM 0-127	-----	DDD	
Timer task	ET 0-39	-----	DD	
Counter	C 0-4095	-----	DDDD	
Timer task	T 0-4095	-----	DDDD	
Auxiliary relay	SM 0-4095	-----	DDDD	
State relay	S 0-7999	-----	DDDD	
Output relay	Y3 0-77	-----	OO	
Output relay	Y2 0-277	-----	OOO	
Output relay	Y1 0-1777	-----	OOOO	
Output relay	Y 0-77	-----	OO	
Input relay	X3 0-77	-----	OO	
Input relay	X2 0-277	-----	OOO	

Input relay	X1 0-1777	-----	OOOO	
Input relay	X 0-77	-----	OO	
Auxiliary relay	M 0-20479	-----	DDDDD	
Confidentiality register	-----	FS 0-47	DD	
Flash register	-----	SFD 0-4095	DDDD	
Flash register	-----	FD 0-8191	DDDD	
Counter	-----	HSCD 0-39	DD	
Counter	-----	HCD 0-1023	DDDD	
Timer task	-----	HTD 0-1023	DDDD	
Dater register	-----	HSD 0-1023	DDDD	
Dater register	-----	HD 0-6143	DDDDD	
Counter	-----	ETD 0-39	DD	
Timer task	-----	CD 0-4095	DDDD	
Timer task	-----	TD 0-4095	DDDD	
Dater register	-----	SD 0-4095	DDDD	
Functional module	-----	QD3 0-99	DD	
Functional module	-----	QD2 0-299	DDD	
Functional module	-----	QD1 0-1599	DDDD	
Functional module	-----	QD 0-99	DD	
Functional module	-----	ID3 0-99	DD	
Functional module	-----	ID2 0-299	DDD	
Functional module	-----	ID1 0-1599	DDDD	
Functional module	-----	ID 0-99	DD	
Dater register	-----	D 0-20479	DDDDD	

XINJE XD Series(MODBUS-TCP)

Device	Bit Address	Word Address	Format	Notes
Internal relay node	M 0~20479	-----	DDDDD	
Input relay node	X 0~77	-----	OO	
Input relay node	X1 0~1777	-----	OOOO	
Input relay node	X2 0~277	-----	OOO	
Input relay node	X3 0~77	-----	OO	
Output relay node	Y 0~77	-----	OO	
Output relay node	Y1 0~1777	-----	OOOO	
Output relay node	Y2 0~277	-----	OOO	
Output relay node	Y3 0~77	-----	OO	

State node	S 0~7999	-----	DDDD	
HSC register	HSC0~39	-----	DD	
Timer node	T 0~4095	-----	DDDD	
Counter node	C 0~4095	-----	DDDD	
HC register	HC0~1023	-----	DDDD	
HT register	HT0~1023	-----	DDDD	
HS register	HS0~999	-----	DDD	
SEM register	SEM0~127	-----	DDD	
ET register	ET0~39	-----	DD	
SM register	SM0~4095	-----	DDDD	
HM register	HM0~6143	-----	DDDD	
Data register	-----	D 0~20479	DDDDD	
Timer	-----	TD 0~4095	DDDD	
Counter	-----	CD 0~4095	DDDD	
FlashROM register	-----	FD 0~8191	DDDD	
Internal extension register	-----	ED 0~36863	DDDDD	
Input register	-----	ID 0~30099	DDDDD	
Output register	-----	QD 0~30099	DDDDD	
FS register	-----	FS0~47	DD	
SFD register	-----	SFD0~4095	DDDD	
HSCD register	-----	HSCD0~39	DD	
HCD register	-----	HCD0~1023	DDDD	
HTD register	-----	HTD0~1023	DDDD	
HSD register	-----	HSD0~1023	DDDD	
HD register	-----	HD0~6143	DDDD	
ETD register	-----	ETD0~39	DD	
SD register	-----	SD0~4095	DDDD	


XINJE XD Series(X-NET)

Device	Bit Address	Word Address	Format	Notes
Internal relay node	M 0~74999	-----	DDDDD	
Input relay node	X 0~72575	-----	DDDDD	
Output relay node	Y 0~72575	-----	DDDDD	
State node	S 0~7999	-----	DDDD	
HSC register	HSC 0~39	-----	DD	
Timer node	T 0~4999	-----	DDDD	
Counter node	C 0~4999	-----	DDDD	
HC register	HC 0~1999	-----	DDDD	


HT register	HT 0~1999	-----	DDDD	
HS register	HS 0~999	-----	DDD	
SEM register	SEM 0~127	-----	DDD	
ET register	ET 0~39	-----	DD	
SM register	SM 0~4999	-----	DDDD	
HM register	HM 0~11999	-----	DDDDD	
Data register	-----	D 0~69999	DDDDD	
Timer	-----	TD 0~4999	DDDD	
Counter	-----	CD 0~4999	DDDD	
FlashROM register	-----	FD 0~8191	DDDD	
Internal extension register	-----	ETD 0~39	DD	
Input register	-----	ID 0~30099	DDDDD	
Output register	-----	QD 0~30099	DDDDD	
FS register	-----	FS 0~47	DD	
SFD register	-----	SFD 0~5999	DDDD	
HSCD register	-----	HSCD 0~39	DD	
HCD register	-----	HCD 0~1999	DDDD	
HTD register	-----	HTD 0~1999	DDDD	
HSD register	-----	HSD 0~1999	DDDD	
HD register	-----	HD 0~24999	DDDDD	
ETD register	-----	ETD 0~39	DD	
SD register	-----	SD 0~4999	DDDD	

◎ Cable Diagram

RS232 Communication

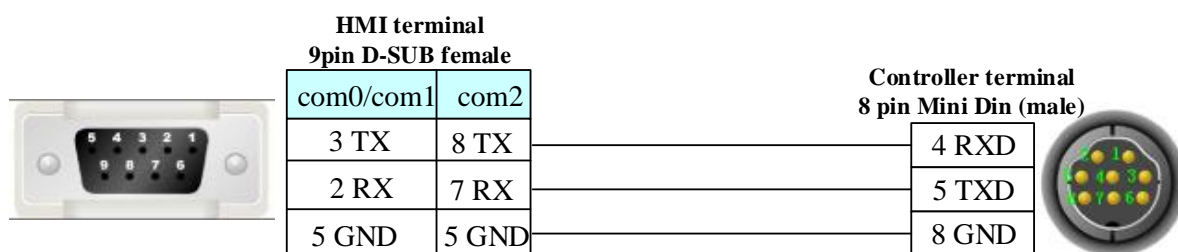

RS485 Communication

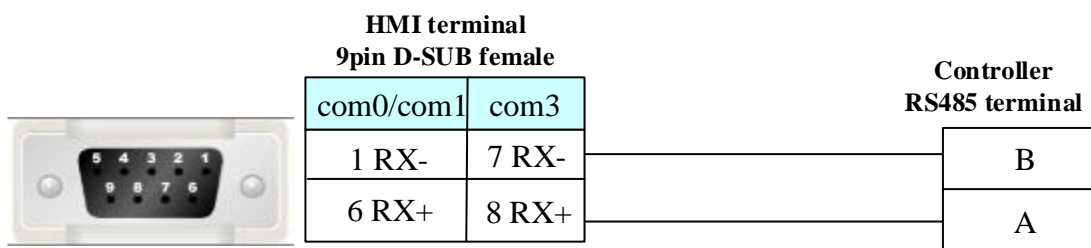

Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub
Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.97 XiLin Inverter

◎ Serial Communication

Series	CPU	Link Module	Driver
XiLin	EH600	RS485 on the CPU unit	XiLin EH600


◎ System configuration

Series	CPU	Link Module	COM Type	Parameter	Cable
XiLin	EH600	RS485 on the CPU unit	RS485	Setting	Your owner cable

◎ Communication Setting

HMI Setting

Default Communication: 9600, 8, even, 1; station: 1

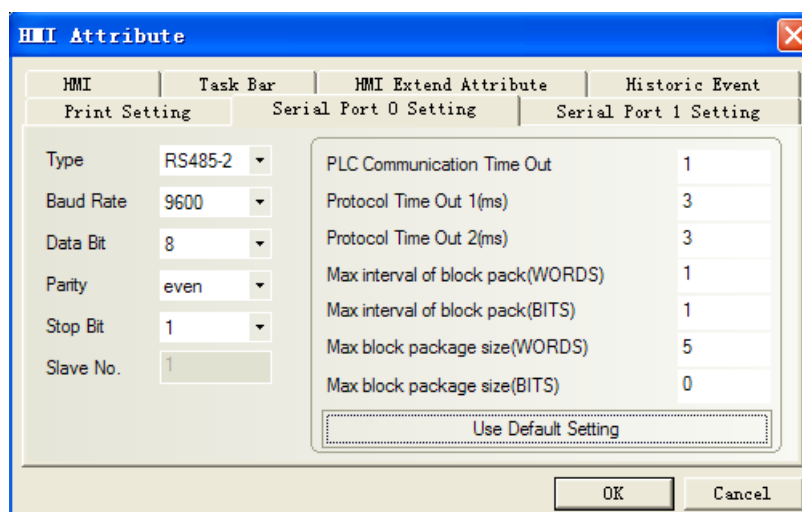

◎ Supported Device


Device	Bit Address	Word Address	Format	Notes
--------	-------------	--------------	--------	-------

Addr communication parameter	-----	Addr	HHHH	
A FWD	-----	A 0	D	
B REV	-----	B 0	D	
C FJOG	-----	C 0	D	
D RJOG	-----	D 0	D	
E Free halt	-----	E 0	D	
F Slow down	-----	F 0	D	
G Reset failures	-----	G 0	D	

PLC Setting

Please refer to XILIN frequency converter manual for details about device address.

◎ Cable Diagram

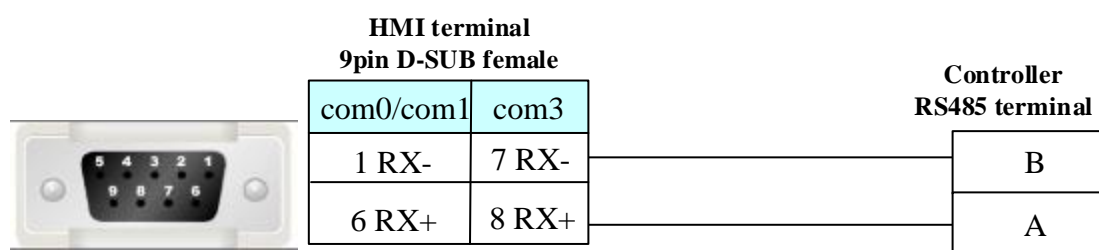

4.98 Yamatake Corporation

◎ Serial Communication

Series	CPU	Link Module	Driver
DCP30	P30A□□□□□□2□□	RS485 on the CPU unit	Yamatake DCP30
SDC35/36	C35□□□□□□2□□ C35□□□□□□4□□ C36□□□□□□2□□ C36□□□□□□4□□	RS485 on the CPU unit	Yamatake SDC/DMC
DMC	DMC10D□□□□□□□□ DMC10S□□□□□□□□	RS485 on the CPU unit	

◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
DCP30	P30A□□□□□□2□□	RS485 on the CPU unit	RS485	Setting	Your owner cable
SDC35/36	C35□□□□□□2□□ C35□□□□□□4□□ C36□□□□□□2□□ C36□□□□□□4□□	RS485 on the CPU unit	RS485	Setting	Your owner cable
DMC	DMC10D□□□□□□□□	RS485 on the CPU	RS485	Setting	Your owner

	DMC10S□□□□□□□□	unit			cable
--	----------------	------	--	--	-----------------------

◎ Communication Setting

HMI Setting

Yamatake DCP30 protocol

Default communication: 9600, 8, even, 1; station: 1

HMI Attribute			
HMI	Task Bar	HMI Extend Attribute	Historic Event
Print Setting	Serial Port 0 Setting	Serial Port 1 Setting	
Type	RS485-2	PLC Communication Time Out	5
Baud Rate	9600	Protocol Time Out 1(ms)	100
Data Bit	8	Protocol Time Out 2(ms)	3
Parity	even	Max interval of block pack(WORDS)	1
Stop Bit	1	Max interval of block pack(BITS)	1
Slave No.	0	Max block package size(WORDS)	16
		Max block package size(BITS)	1
Use Default Setting			
		OK	Cancel

Yamatake SDC/DMC protocol


SDC

Default communication: 9600, 8, none, 1; station: 1

HMI Attribute			
HMI	Task Bar	HMI Extend Attribute	Historic Event
Print Setting	Serial Port 0 Setting	Serial Port 1 Setting	
Type	RS485-2	PLC Communication Time Out	1
Baud Rate	9600	Protocol Time Out 1(ms)	3
Data Bit	8	Protocol Time Out 2(ms)	3
Parity	none	Max interval of block pack(WORDS)	1
Stop Bit	1	Max interval of block pack(BITS)	8
Slave No.	0	Max block package size(WORDS)	1
		Max block package size(BITS)	64
Use Default Setting			
		OK	Cancel


DMC

Default communication: 19200, 8, even, 1; station: 6

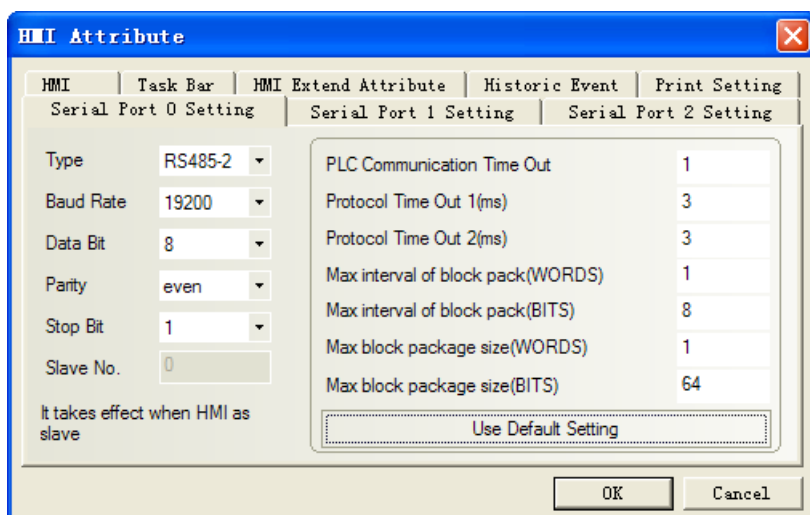

PLC Setting

1. Set modbus RTU in the SLP-D10, and then download.

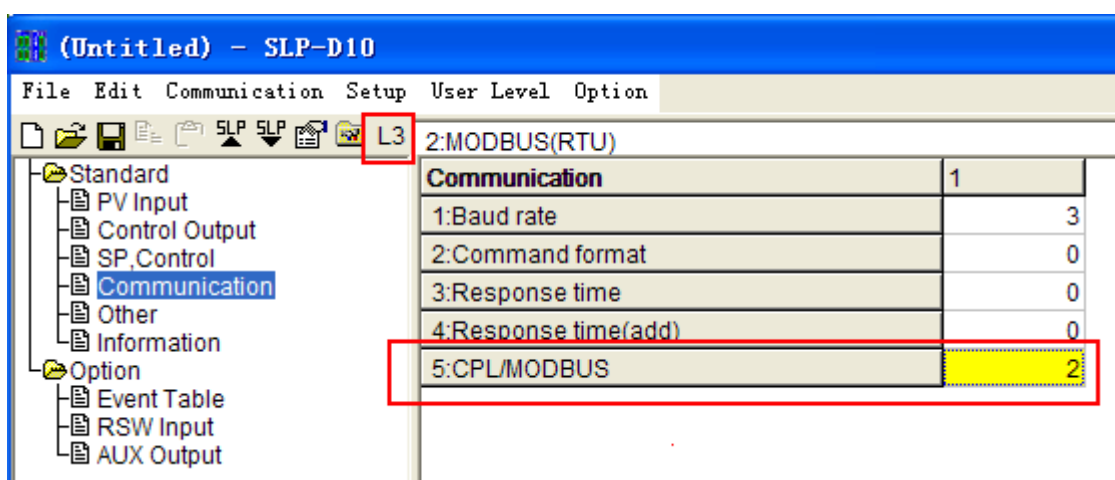

2. Station match with the switch on the device.

© Supported Device

DCP30

Device	Bit Address	Word Address (Parameter code)	Format	Notes
RUN Status	-----	1-26	DDD	
PARA	-----	1-33	DDD	
EU	-----	1-13	DDD	
PID	-----	1-80	DDD	
SET	-----	1-99	DDD	
TBL	-----	1-22	DDD	
CNST	-----	1-26	DDD	
FO_R	1-19	-----	DDD	
FO_W	1-19	-----	DDD	
FC	1-19	-----	DDD	
FD	1-19	-----	DDD	
FBR1_R	-----	1.0-30.22	DDD.DD	

FBR2_R	-----	1.0-30.22	DDD.DD	
FBR3_R	-----	1.0-30.22	DDD.DD	
FBR4_R	-----	1.0-30.22	DDD.DD	
FBR5_R	-----	1.0-30.22	DDD.DD	
FBR6_R	-----	1.0-30.22	DDD.DD	
FBR7_R	-----	1.0-30.22	DDD.DD	
FBR8_R	-----	1.0-30.22	DDD.DD	
FBR9_R	-----	1.0-30.22	DDD.DD	
FBR10_R	-----	1.0-30.22	DDD.DD	
FBR11_R	-----	1.0-30.22	DDD.DD	
FBR12_R	-----	1.0-30.22	DDD.DD	
FBR13_R	-----	1.0-30.22	DDD.DD	
FBR14_R	-----	1.0-30.22	DDD.DD	
FBR15_R	-----	1.0-30.22	DDD.DD	
FBR16_R	-----	1.0-30.22	DDD.DD	
FBR17_R	-----	1.0-30.22	DDD.DD	
FBR18_R	-----	1.0-30.22	DDD.DD	
FBR19_R	-----	1.0-30.22	DDD.DD	

Please refer to the communication protocol for details.

NOTE:

1、SET C85 ----- Transmission rate, data type

0: 9600, even, stopbit 1;

1: 9600, none, stopbit 2;

2: 4800, even, stopbit 1;

3: 4800, none, stopbit 2.

2、SET C84 -----setting station No. **The value of C84 must be the same as the PLC's station No.**

When connecting multiple instruments, for distinguishing instruments, each instrument must be set C84 value with a different parameter. .

3、Must press "FUNC+PARA" to set the parameter;

4、PROG. have **19 numbers** and SEG have **30 numbers**, press DOWN key (sub) and PROG key (add) to change program number;

5、Press "FUNC+PROG" to change the program.----every program must be set firstly and then communicate will be ok, or else "PLC Response Error" will print;

6、After "RUN/HLD" light on, many parameters can't be modified(e.g. SET) In order to reset, press "PROG+RUN/HOLD" .

Modify the parameter at the state of "DISP", not at the state of "INPUT";

7、On the temperature controller, time parameters show number with sexagesimal.

(Example it shows 2222 on the screen, but on the controller panel shows $37.02 \times 60 + 2 = 2222$)

8、PROG's address setting:

FBR1_R indicates prog 1. (e.g. PROG 1) format: DDD.DD. Main address DDD indicates seg No, subaddress DD indicates parameter value, the correspondence as follows

(Example: FBR1_R address 11.10 indicates PROG 1,SEG 1,T1 2nd)

Sub addr DD correspond to temperature controller:

Sub Addr	Parameter	Sub Addr	Parameter
.0	SP	.12	T2 2nd
.1	TM	.13	T3 1st
.2	None (Skip)	.14	T3 2nd
.3	EV1	.15	T4 1st
.4	Blank	.16	T4 2nd
.5	EV2	.17	T5 1st
.6	Blank	.18	T5 2nd
.7	EV3	.19	PID
.8	Blank	.20	None (Skip)
.9	T1 1st	.21	9.5.
.10	T1 2nd	.22	9.5.to
.11	T2 1st		


SDC36 (Please refer to the manual of yamatake SDC36 for details)

Device	Bit Address	Word Address	Format	Notes
Data Register	-----	4X 0-65535	DDDDD	




DMC (Please refer to the manual of DMC-SPL for details, in 10-8 communication parameters)

Device	Bit Address	Word Address	Format	Notes
Data Register	-----	4X 1002-65535	DDDDD	Address add 1 to the list of communication parameters

Example: CH1 PV is according to 4X1005 in the HMIWare.

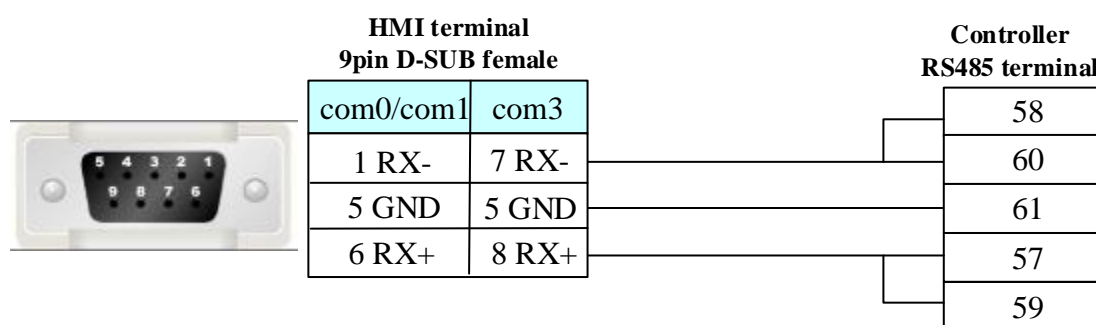◎ Cable Diagram**DCP 30 series****RS485 communication cable****RS232 communication cable**

Need to use **RS-232 to RS-422/485** converter

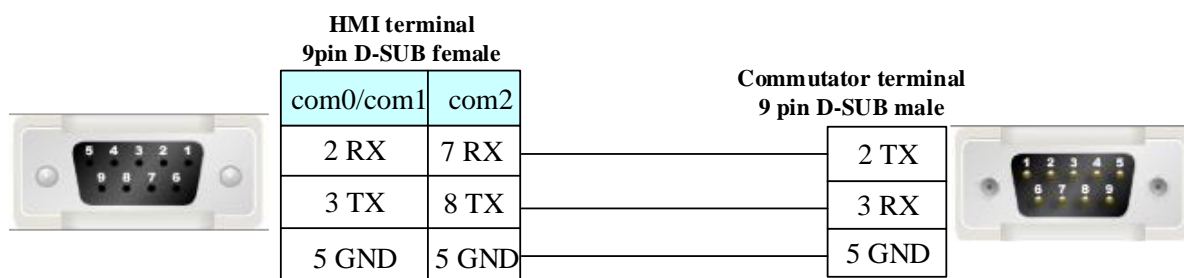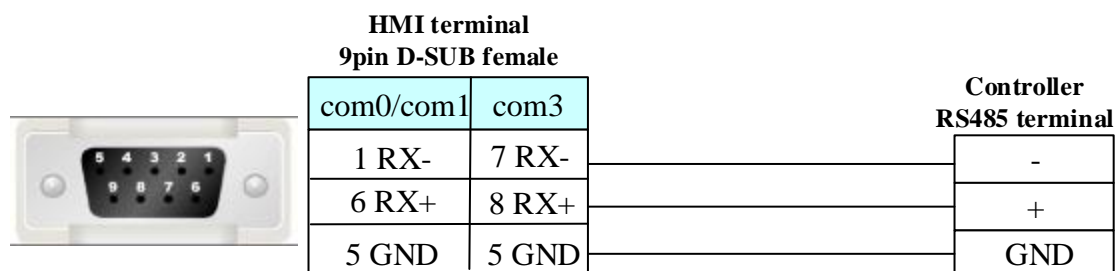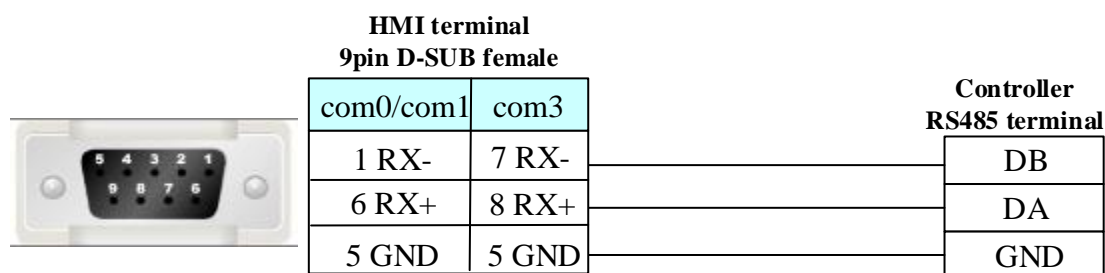**SDC36 series****RS485 communication cable****DMC series****RS485 communication cable****4.99 Yaskawa Electric Corporation****◎Serial Communication**

Series	CPU	Link Module	Driver
V (Inverter)	CIMR-JT2A0 001BAA	RS485 on the CPU unit	Yaskawa AH Modbus RTU
MP (Motion Controller)	MP2200 MP2300 MP2310 MP2300S	RS232 on the CPU unit	Yaskawa MP2300
$\Sigma II / \Sigma II$ Plus (Servo Controller)	SGDM	RS232 on the CPU unit	Yaskawa SGDM
	SGDV	RS232 on the CPU unit	Yaskawa SGDV

		RS422 on the CPU unit	
--	--	-----------------------	--

◎ Network communication (support indirect online and direct online)

Series	CPU	Link Module	Driver
MP series	MP2400 MP3300	ETH on the CPU unit	Yaskawa Ethernet(UDP Slave)
MP series	MP3300	ETH on the CPU unit	Yaskawa MP3000 Series-Extension Ethernet

◎ Serial System configuration

Series	CPU	Link Module	COM Type	Parameter	Cable
V	CIMR-JT2A00 01BAA	RS485 on the CPU unit	RS485	Setting	Your owner cable
MP	MP2300	RS232 on the CPU unit	RS232	Setting	Your owner cable
Σ II / Σ II Plus	SGDM	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS422 on the CPU unit	RS422	Setting	Your owner cable
	SGDV	RS232 on the CPU unit	RS232	Setting	Your owner cable
		RS422 on the CPU unit	RS422	Setting	Your owner cable

◎ Network System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
MP series	MP2400 MP3300	ETH on the CPU unit	ETH	Setting	Your owner cable
MP	MP3300	ETH on the CPU unit	ETH	Setting	Your owner cable

◎ Serial Communication Setting

HMI Setting

Yaskawa AH Modbus RTU protocol

Default communication: 9600, 8, even, 1; station: 1

HMI Attribute

Serial Port 1 Setting | Serial Port 2 Setting

HMI | Task Bar | HMI Extend Attribute | User permission Setting Dialog

Historic Event | Print Setting | Serial Port 0 Setting

Type: RS485-2
Baud Rate: 9600
Data Bit: 8
Parity: even
Stop Bit: 1
Slave No.: 0

PLC Communication Time Out: 1
Protocol Time Out 1(ms): 3
Protocol Time Out 2(ms): 3
Max interval of block pack(WORDS): 16
Max interval of block pack(BITS): 32
Max block package size(WORDS): 64
Max block package size(BITS): 256

Use Default Setting

PLC Setting

19.0 change the inverter panel button "up" or "down", adjustment to the parameter mode


20.0 then adjust to H5-01 by the button "up" or "down", according to the required parameter set

No.	Name	Scope	Parameter description	Setting
H5-01	Secondary station address	0~FFH	Secondary station number	1F
H5-02	The choice of the communication speed	0~5	0: 1200bps 1: 2400bps 2: 4800bps 3: 9600bps 4: 19200bps 5: 38400bps	3
H5-03	The choice of the communication check	0~2	0: no check 1: even check 2: odd check	0

NOTE: the inverter should be restarted to be effective.

Yaskawa MP2300 protocol


Default communication: 19200, 8, even, 1; station: 1

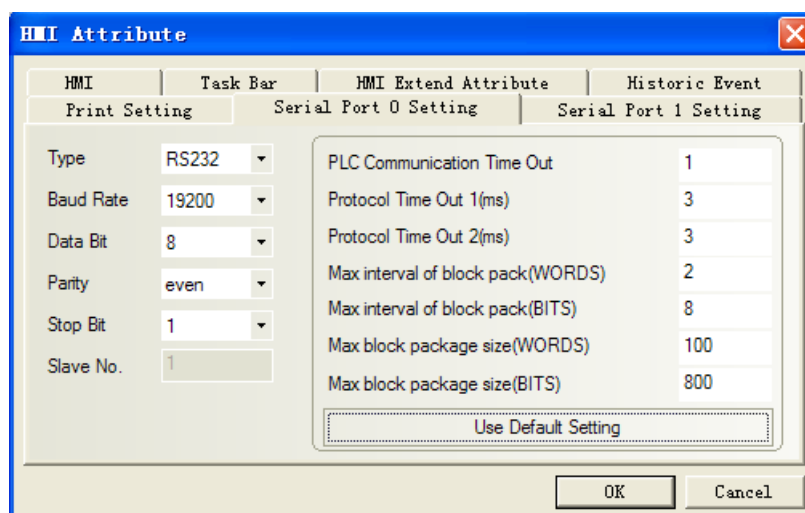


Yaskawa SGDM protocol

Default communication: 9600, 7, even, 1; station: 0

[RS232 communication](#)

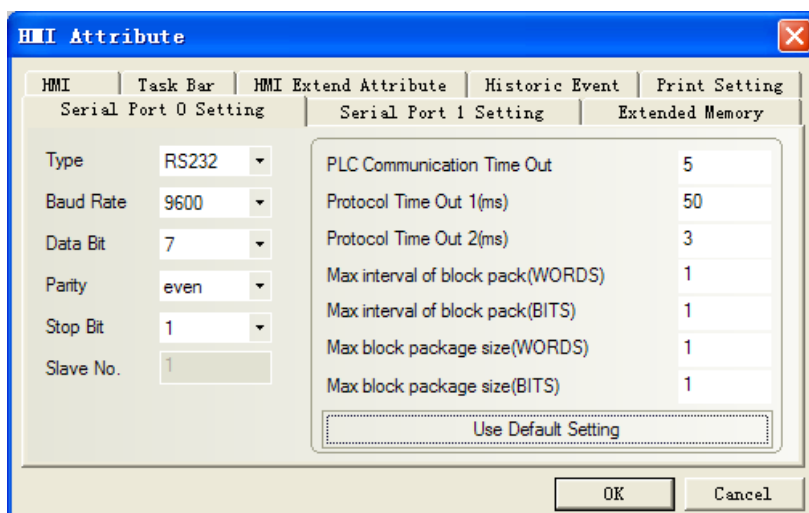

RS422 communication

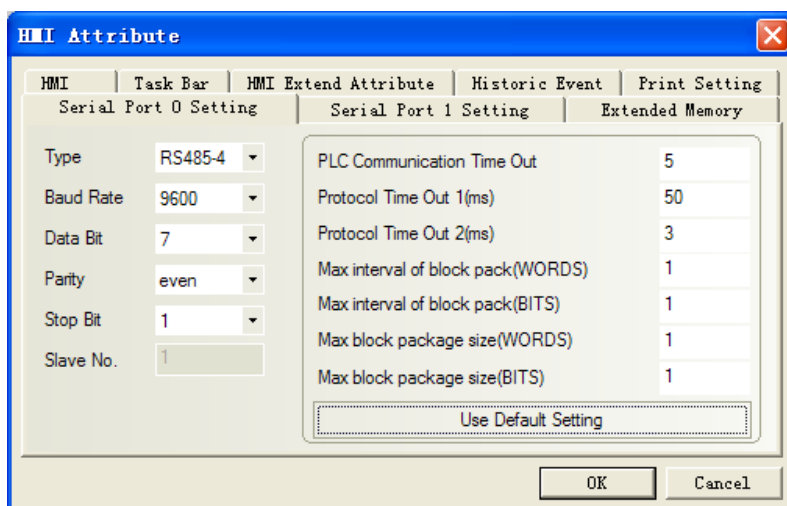

PLC Setting

Related parameters Settings refer to the communication equipment description.

Yaskawa SGD V protocol

RS232 communication

HMI Setting

Default communication: 19200, 8, even, 1; station: 0

NOTE: Set max word block package size as 2

HMI Attribute

Security Levels Setting | User Permissions Setting | Historical Events Storage
HMI | Task Bar | HMI Extended Attributes | HMI System Information Text
Print Setting | **COM0 Setting** | COM1 Setting | COM2 Setting

Type: RS232
Baud Rate: 19200
Data Bit: 8
Parity Check: even
Stop Bit: 1
☐ Broadcast 65535

PLC Communication Time Out: 5
Protocol Time Out 1(ms): 50
Protocol Time Out 2(ms): 3
Max interval of word block pack: 2
Max interval of bit block pack: 1
Max word block package size: 2
Max bit block package size: 1

Use Default Setting

OK Cancel

RS422 communication

HMI Attribute


Security Levels Setting | User Permissions Setting | Historical Events Storage
HMI | Task Bar | HMI Extended Attributes | HMI System Information Text
Print Setting | **COM0 Setting** | COM1 Setting | COM2 Setting | Extended Memory

Type: RS485-4
Baud Rate: 19200
Data Bit: 8
Parity Check: even
Stop Bit: 1
☐ Broadcast 65535

PLC Communication Time Out: 5
Protocol Time Out 1(ms): 50
Protocol Time Out 2(ms): 3
Max interval of word block pack: 2
Max interval of bit block pack: 1
Max word block package size: 2
Max bit block package size: 1


Use Default Setting

OK Cancel

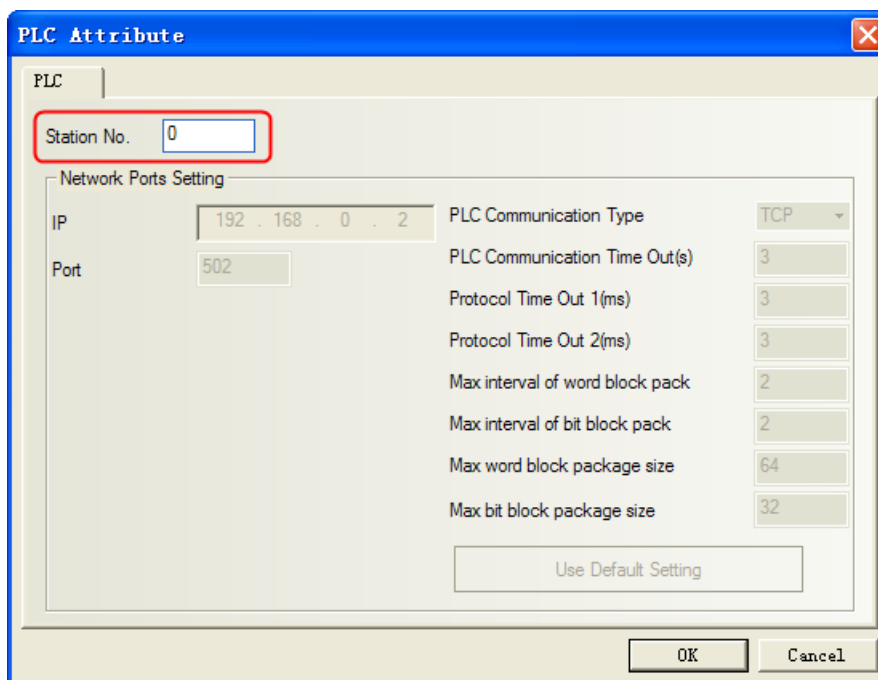

NOTE: Station No. is a decimal number corresponding to axis address of servo controller.

PLC Setting

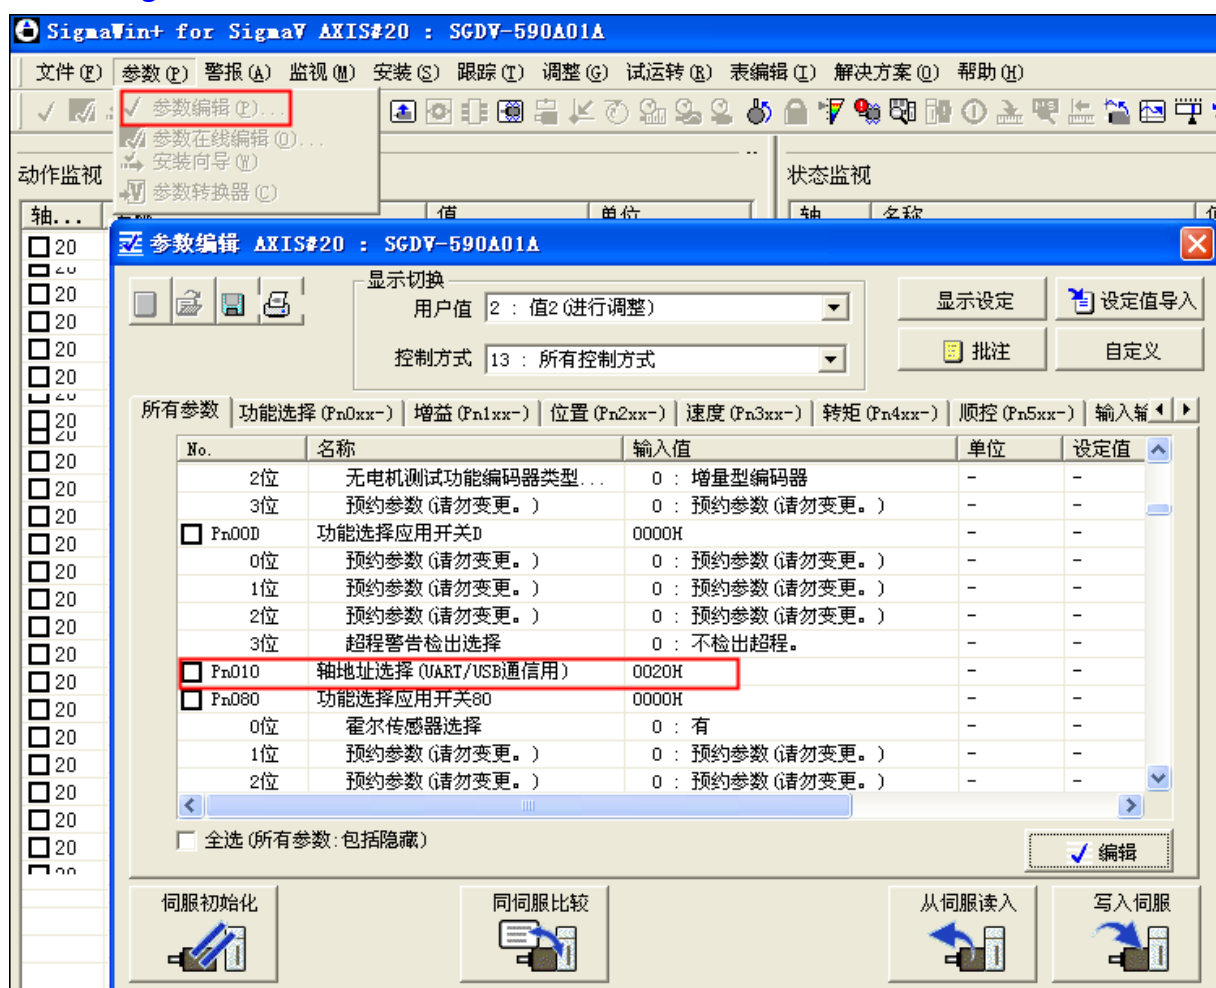



NOTE:

1. axis address 0020H is the station number of PLC, here is hexadecimal, HMI is the decimal system;
- 2.if you change the axis address, Parameters will be displayed unless you restart

◎ Network Communication Setting

Yaskawa Ethernet(UDP Slave) protocol

HMI Setting

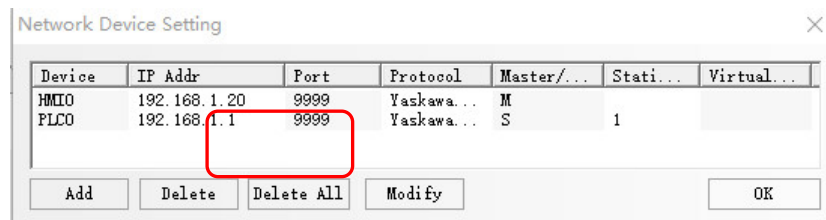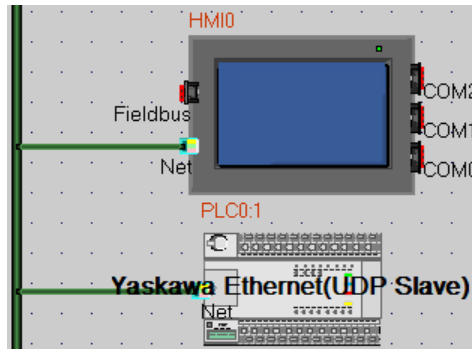


NOTE:The port number must be set to 9999 in HMI software otherwise hmi can not communicate with controller.

PLC Setting

- 1.If you do not know the IP in MP2400, you can first put INIT and CNFG ON in SW1, then power ON the controller, and then the default IP: 192.168.1.1.




- 2.Open the software MPE720 ver.7 and select the model MP2400.
- 3.Change the IP of the computer to be the same network segment with the controller , for example: the computer IP is 192.168.1.33,then click the connection icon in the MPE software, and after the connection, control is online state.

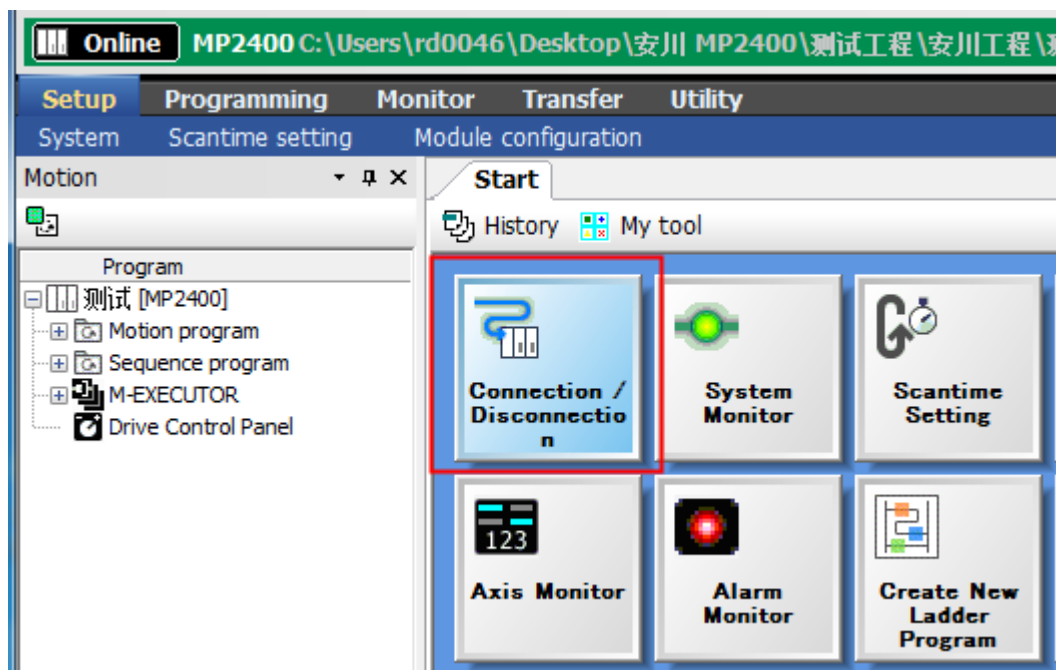


4. Click Setup, and select module configuration to set IP and connect to your device.




5. In the following window, double-click 218IFA.

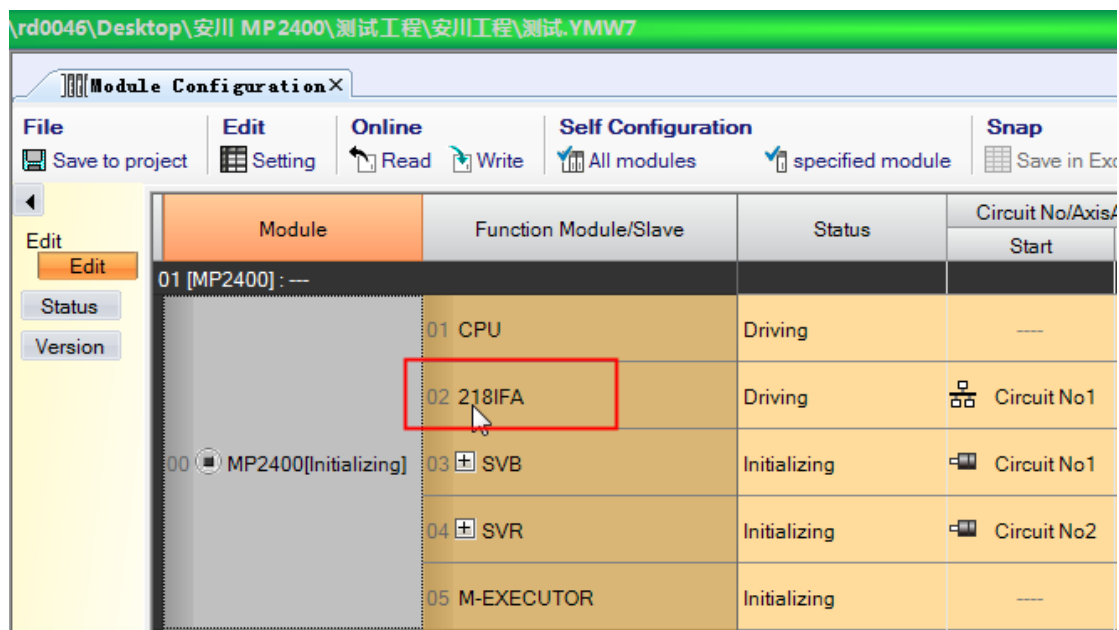

6. You can modify IP, port number and other parameters.

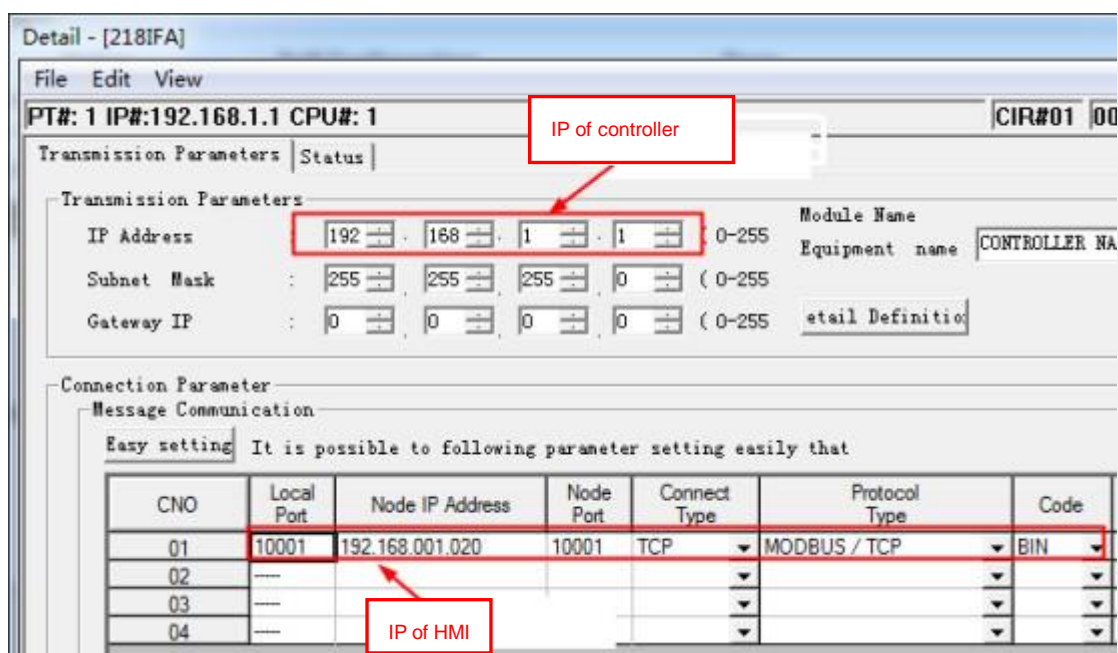
**NOTE:**

- ①. IP address of controller MP2400:192.168.1.1 port number 10001.
 - ②. HMI IP address: 192.168.1.20 port number 10001.
 - ③. Select MODBUS TCP protocol.
7. After modification, click save, and download to the controller, select online -- write into controller.

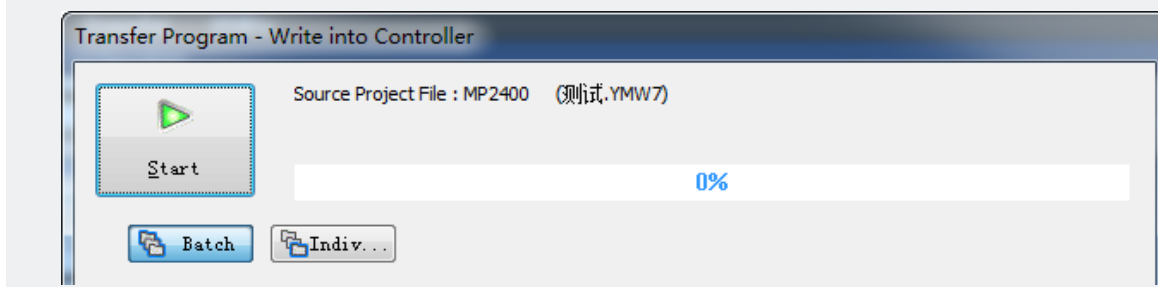

7. Pull all SW1's dials to OFF, restart the controller (parameter effected)

Yaskawa MP3000 Series-Extension Ethernet protocol**HMI Setting**

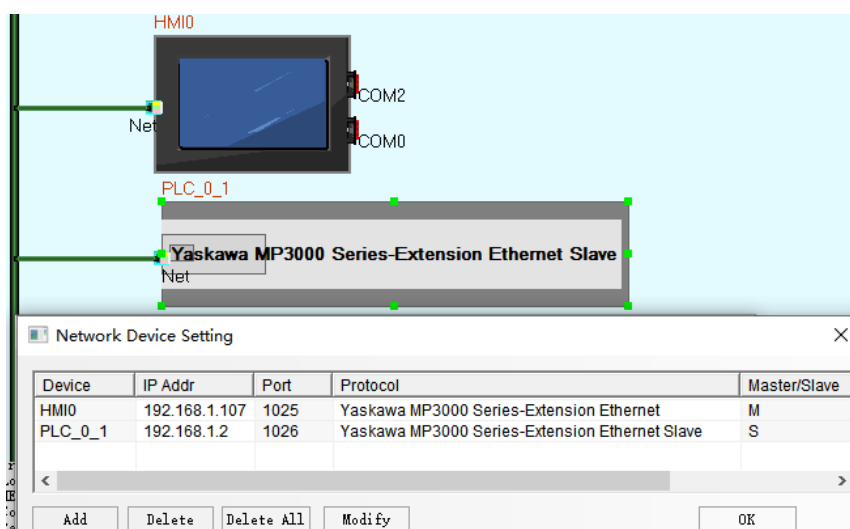


NOTE: 1. HMI Port is the Node Port;


2. PLC Port is the Local Port;

PLC Setting


1. MEMOBUS; In the module configuration window - [detailed], [Transmission Parameters] to set IP, connection parameters, connect type must be set to UDP, the code is BIN, and the protocol type is extended MEMOBUS;

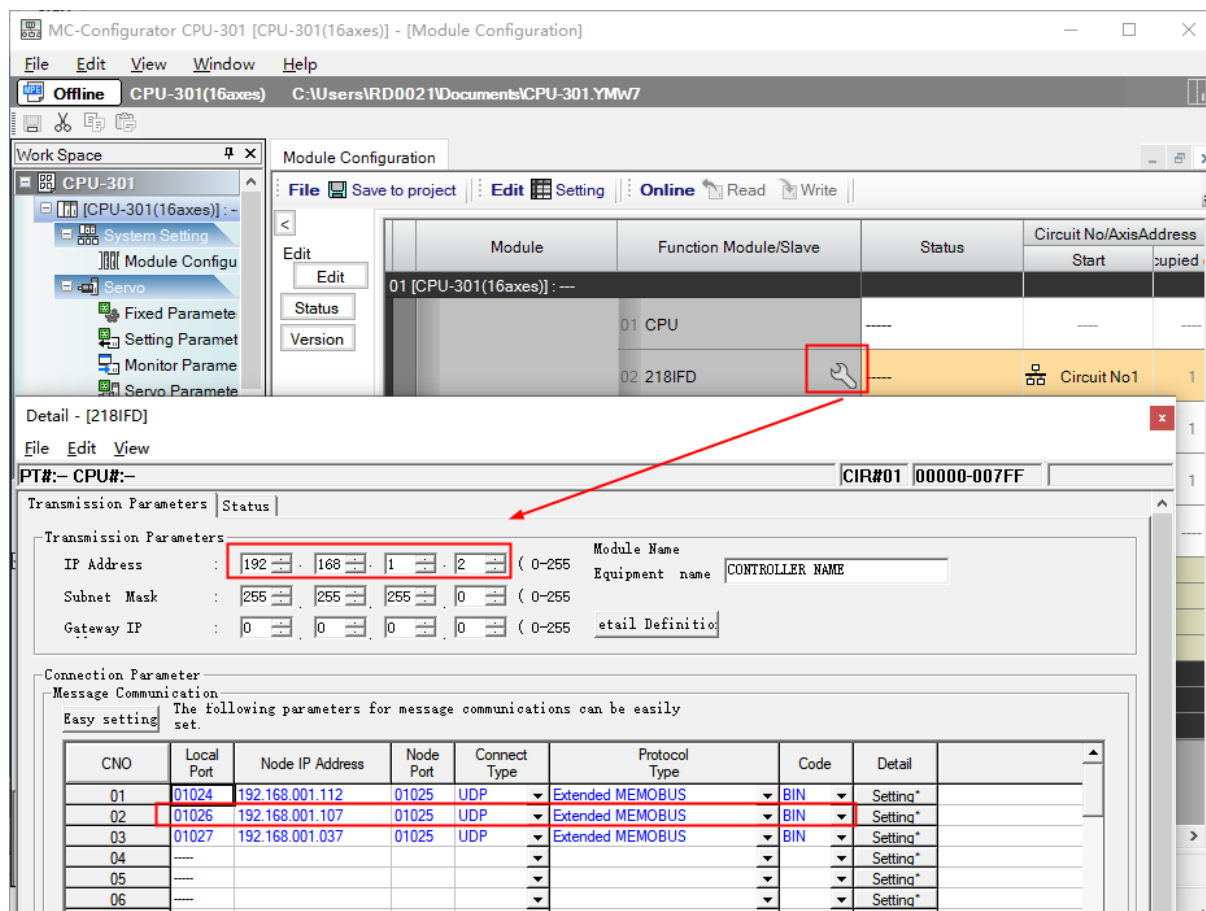

2. [Detail Setting] window, select "Enable";

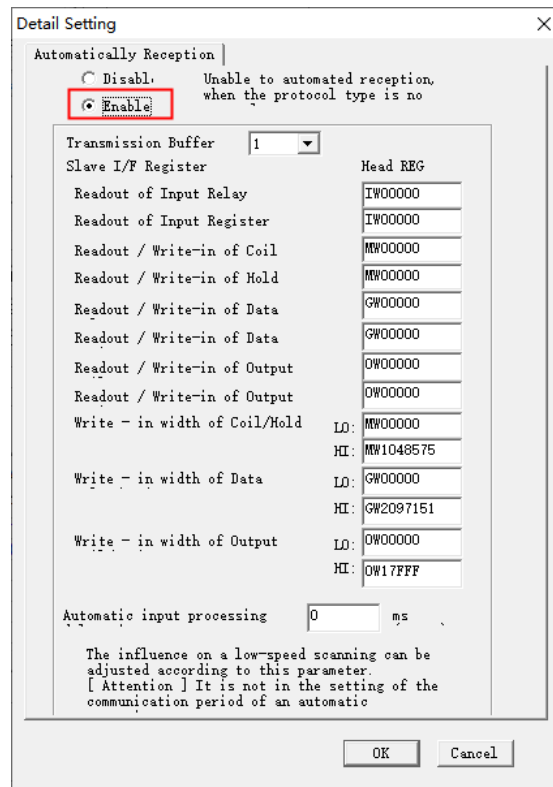

3. Then Write to Controller and save to flash;

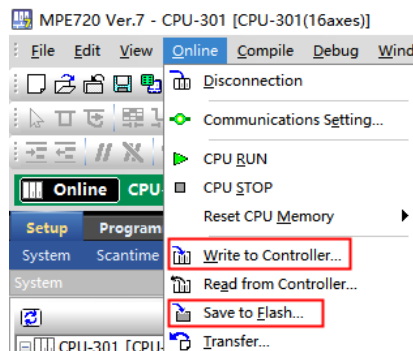

4. After write, restart the controller and CPU RUN;

◎ Supported Device

V inverter

Device	Bit Address	Word Address	Format	Notes
Internal/external output node	0X1-65535	-----	DDDDD	
Internal/external input node	1X1-65535	-----	DDDDD	
Simulant input data register	-----	3X1-65535	DDDDD	
data register	-----	4X1-65535	DDDDD	

NOTE:

- 1 this drive can not provide write batch of word part;
- 2 Address correspondence: MEMOBUS+1=4X

Eg: b1-01 (frequency instruction selection), MEMOBUS register address is 080 H; the corresponding screen is 4X 385

MP2300

Device	Bit Address	Word Address	Format	Notes
Coil	MB0.0-4095.F	-----	DDDD.H	
Input Relay	IB 0.0-FFF.F	-----	HHHH.H	
Hold Register	-----	MW 0-65534	DDDDD	
Input Register	-----	IW 0-7FFF	HHHH	

NOTE: IB0.0-0.F are occupied by the system; IW0 is occupied by the system.

SGDM

Device	Bit Address	Word Address	Format	Notes
Function Selection Basic Switches	-----	Pn000 ~ Pn003	HHH	
Speed Loop Gain and so on	-----	Pn100 ~ Pn118	HHH	
Position Control Reference	-----	Pn200 ~ Pn205	HHH	
Speed Control Reference	-----	Pn300 ~ Pn308	HHH	
Torque Control Reference	-----	Pn400 ~ Pn407	HHH	
Sequence Reference	-----	Pn500 ~ Pn510	HHH	
Other	-----	Pn600 ~ Pn601	HHH	
Monitor mode	-----	Un000 ~ Un00D	HHH	

SGDV

Device	Bit Address	Word Address	Format
Function Selection	-----	(Pn000~Pn002) & (Pn006~Pn009) (Pn00B~Pn00D) & Pn010 & Pn080	HHH
Gain	-----	(Pn100~Pn106) & (Pn109~Pn10F) & Pn11F (Pn121~Pn125) & (Pn131~Pn132) & (Pn135~Pn136) (Pn139 & Pn13D) & (Pn140~Pn14B) Pn14F & (Pn160~Pn165) & Pn170 & Pn190	HHH
Position	-----	Pn200 & Pn205 & Pn207 & Pn20A & Pn20E Pn210 & Pn212 & (Pn216~Pn218) & Pn22A & Pn281	HHH
Speed	-----	(Pn300~Pn307) & (Pn310~Pn312) & Pn324	HHH
Touque	-----	(Pn400~Pn410) & Pn412 & Pn415 & (Pn423~Pn425) Pn456 & Pn460 & (Pn481~Pn482) & (Pn486~Pn488) Pn490 & (Pn493~Pn495) & Pn498	HHH
Sequential Control	-----	(Pn501~Pn503) & (Pn506~Pn509) & Pn51B Pn51E & Pn520 & Pn522 & Pn524 & Pn526 (Pn528~Pn52C) & (Pn52F~Pn531) & (Pn533~Pn536) (Pn550~Pn553) & (Pn560~Pn561) & (Pn600~Pn601)	HHH
Input/Output signal	-----	(Pn50A~Pn513) & (Pn515~Pn517)	HHH

UDP

Device	Bit Address	Word Address	Format	Notes
Input register node	IB0000.0-FFFF.F	-----	HHHHH.H	
Output register node	OB0000.0-FFFF.F	-----	HHHHH.H	
holding register node	MB00000.0-1048575.F	-----	DDDDDDD.H	
System relay	SB 0.0-65534.F	-----	DDDD.H	
Data elay	GB 0-2097151.F	-----	DDDDDDD.H	
Input register	-----	IW0000-FFFF	HHHH	
Output register	-----	OW0000-FFFF	HHHH	
Holding register	-----	MW00000-1048575	DDDDDDD	
System register	-----	SW 0-65534	DDDDD	
Data register	-----	GW 0-2097151	DDDDDDD	

NOTE: In the HMIWare, bit address format is HHHH.H, but there is no point in the controller. E.g.: In the EV5000 software, the bit address is MB65534.F, but there is no point in the controller, and it is MB65534F. We set the I/O address as large as enough, and we found the big address can't be written, but it is the same effect with the monitoring.


Yaskawa MP3000 Series-Extension Ethernet

Device	Bit Address	Word Address	Format	Notes
Input register node	IB0000.0-27FFFF.F	-----	HHHHH.H	
Output register node	OB0000.0-27FFFF.F	-----	HHHHH.H	
holding register node	MB00000.0-1048575.F	-----	DDDDDDD.H	
System relay	SB 0.0-65534.F	-----	DDDD.H	
Data elay	GB 0-2097151.F	-----	DDDDDDD.H	
Input register	-----	IW0000-27FFFF	HHHH	
Output register	-----	OW0000-27FFFF	HHHH	
Holding register	-----	MW00000-1048575	DDDDDDD	
System register	-----	SW 0-65534	DDDDD	
Data register	-----	GW 0-2097151	DDDDDDD	

© Cable Diagram




V series inverter

RS485 communication cable

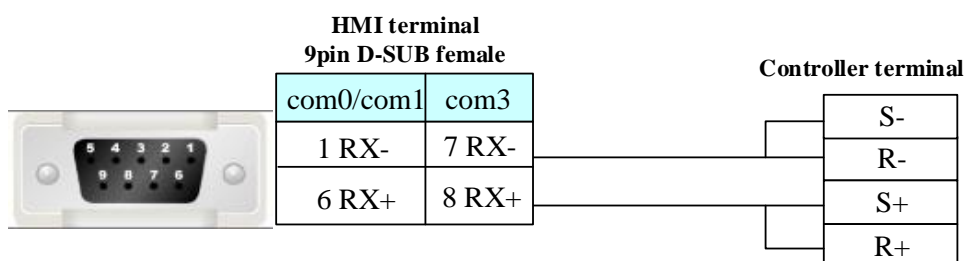

MP2300

RS232 communication cable

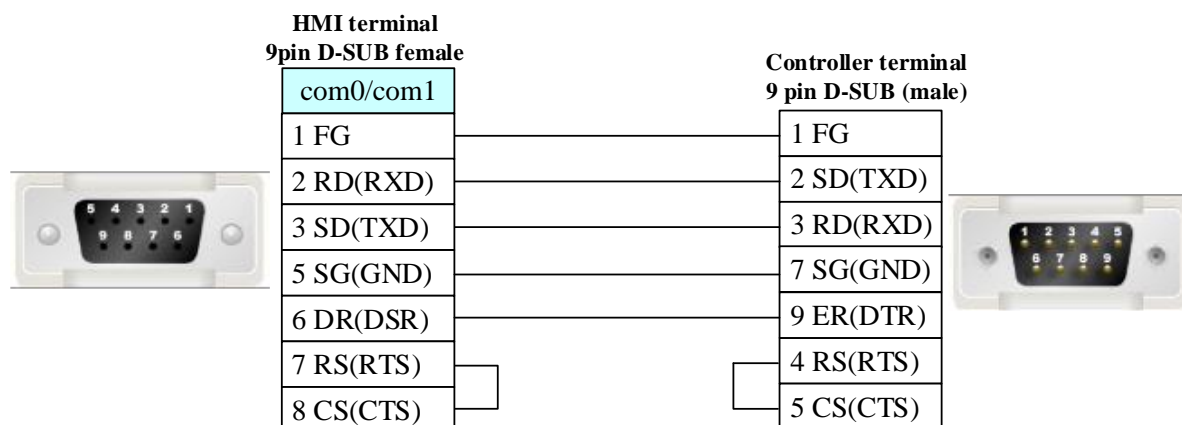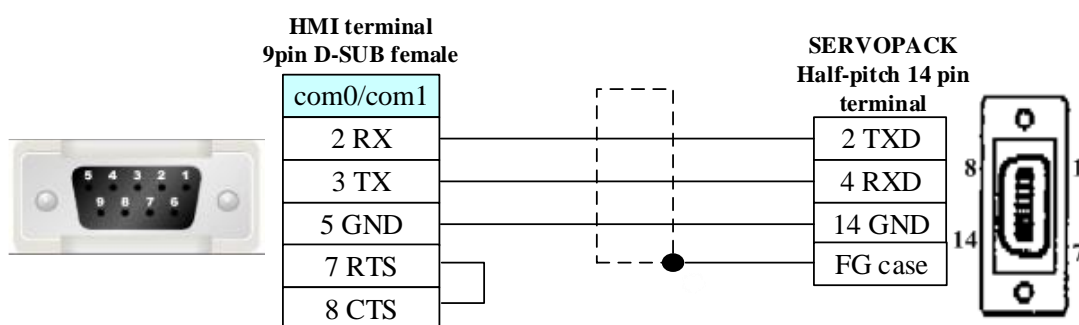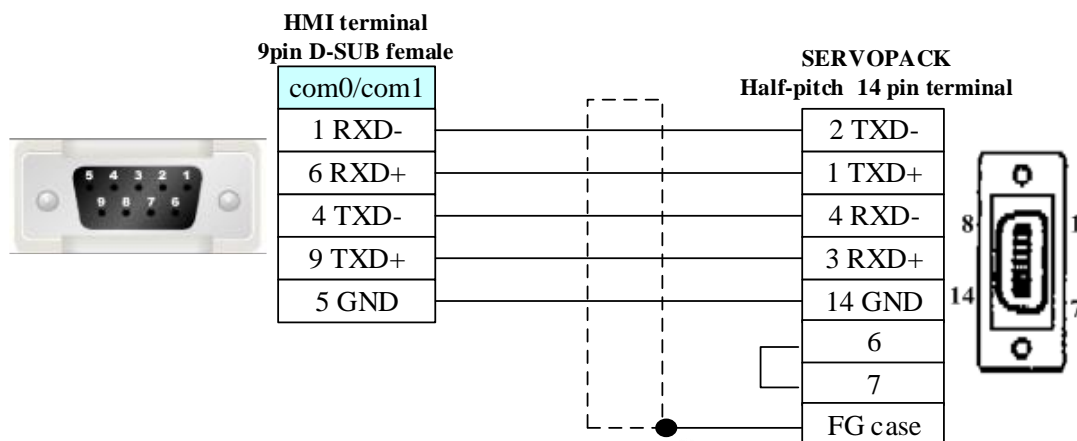**SGDM/SGDV****RS232 communication cable****RS422 communication cable****Ethernet communication protocol cable**

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.100 Yokogawa Electric Corporation**©Serial Communication**

Series	CPU	Link Module	Driver
--------	-----	-------------	--------

FA-M3	F3SP21-0N F3SP25-2N F3SP28-3N F3SP35-5N F3SP38-6N F3SP53-4H F3SP58-6H F3SP28-3S F3SP38-6S F3SP53-4S F3SP58-6S F3SP59-7S	CPU Direct	Yokogawa FA-M3
	F3SP20-0N F3SP21-0N F3SP25-2N F3SP28-3N F3SP30-0N F3SP35-5N F3SP38-6N F3SP53-4H F3SP58-6H F3SP36-3N F3SP28-3S F3SP38-6S F3SP53-4S F3SP58-6S F3SP59-7S F3SP66-4S F3SP67-6S	F3LC11-1N F3LC11-1F F3LC11-2F F3LC12-1F F3LC11-2N	

© **Network Communication** (direct online simulation disable)

Series	CPU	Link Module	Driver
--------	-----	-------------	--------

FA-M3	F3SP21-0N F3SP25-2N F3SP28-3N F3SP35-5N F3SP38-6N F3SP53-4H F3LE01-5T F3LE11-0T F3SP58-6H F3SP28-3S F3SP38-6S F3SP53-4S F3SP58-6S F3SP59-7S	F3LE01-5T F3LE11-0T	Yokogawa FA-M3 Ethernet(TCP Slave)
	F3SP66-4S F3SP67-6S	Ethernet I/F on CPU Unit	

◎ Serial System configuration

Series	CPU	Link Module	COM Type	Parameter	Cable
FA-M3	F3SP21-0N F3SP25-2N F3SP28-3N F3SP35-5N F3SP38-6N F3SP53-4H F3SP58-6H F3SP28-3S F3SP38-6S F3SP53-4S F3SP58-6S F3SP59-7S	RS232 on the CPU unit	RS232	Setting	Your owner cable
	F3SP20-0N F3SP21-0N F3SP25-2N F3SP28-3N F3SP30-0N F3SP35-5N	RS422/485(4Wire) port on F3LCLL-2F	RS422	Setting	Your owner cable

	F3SP38-6N F3SP53-4H F3SP58-6H F3SP36-3N F3SP28-3S F3SP38-6S F3SP53-4S F3SP58-6S F3SP59-7S F3SP66-4S F3SP67-6S	RS422/485(2Wire) port on F3LCLL-2F	RS485	Setting	Your owner cable
--	---------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------	-------	-------------------------	----------------------------------


◎ Network System configuration

Series	CPU	Link Module	Connect Type	Parameter	Cable
FA-M3	F3SP21-0N F3SP25-2N F3SP28-3N F3SP35-5N F3SP38-6N F3SP53-4H F3LE01-5T F3LE11-0T F3SP58-6H F3SP28-3S F3SP38-6S F3SP53-4S F3SP58-6S F3SP59-7S	F3LE01-5T F3LE11-0T	Ethernet	Setting	Your owner cable
	F3SP66-4S F3SP67-6S	Ethernet I/F on CPU Unit			


◎ Serial Communication Setting

HMI Setting


RS232 default communication: 9600, 8, 1, even; station: 0 (station number disable)

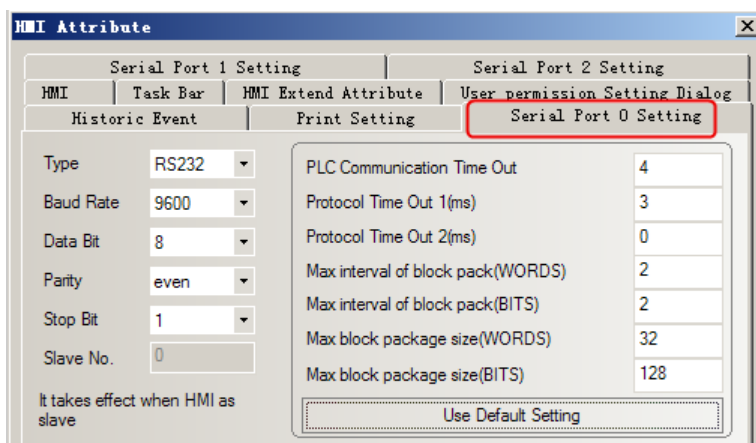

RS422 default communication: 19200, 8, 1, none; station: 1

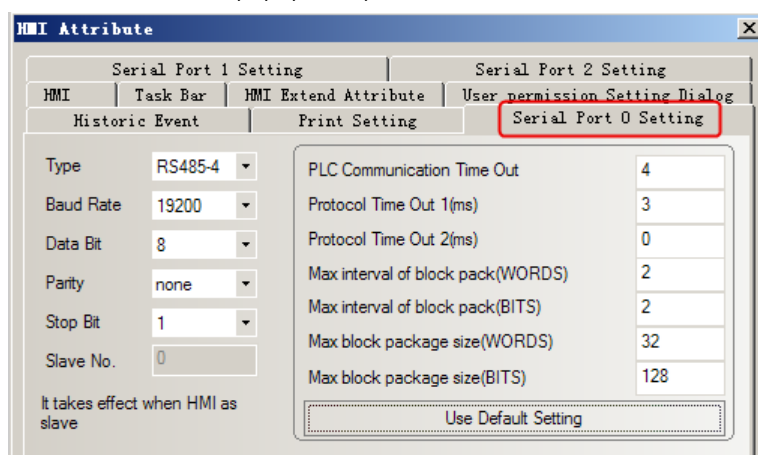

RS485 default communication: 19200, 8, 1, none; station: 1

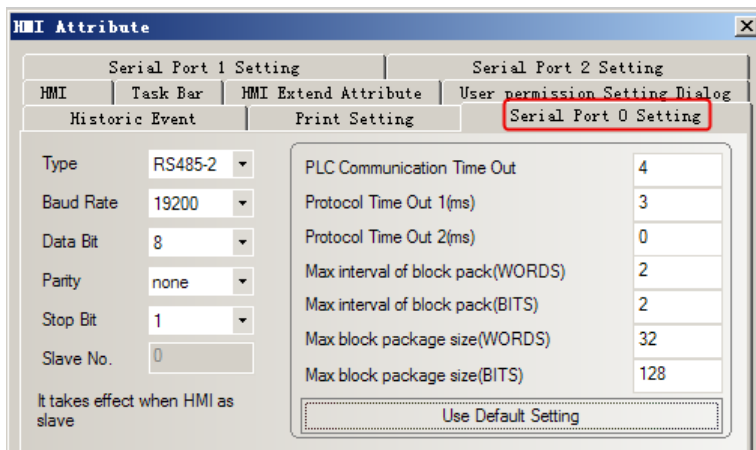

PLC Setting

RS422 communication configuration

Set the 485 communication module on the right as below.

1. Transmission Speed Setting Switch: SW1=7
2. Data Code Setting Switch: SW2

Bit	Settings	Setup Description
1	ON	Data Length

2	OFF	Parity Bit
3	OFF	--
4	OFF	Stop Bit
5	OFF	Exist Sum Check
6	ON	Exist Terminator
7	OFF	Protect
8	OFF	Always OFF

3. Station No. setting 1

4. Set the termination resistance switch of only the module which terminates the connection to 4- WIRE

RS485 communication configuration

Set the 485 communication module on the right as below.

1. Transmission Speed Setting Switch: SW1=7

2. Data Code Setting Switch: SW2



Bit	Settings	Setup Description
1	ON	Data Length
2	OFF	Parity Bit
3	OFF	--
4	OFF	Stop Bit
5	OFF	Exist Sum Check
6	ON	Exist Terminator
7	OFF	Protect
8	OFF	Always OFF

3. Station No. setting 1

4. Set the termination resistance switch of only the module which terminates the connection to 2- WIRE.

◎ Network Communication Setting


HMI Setting

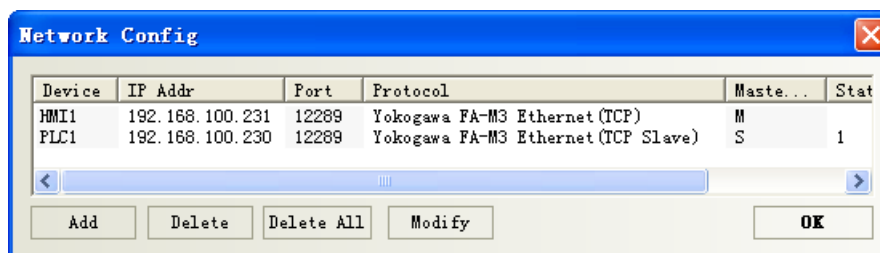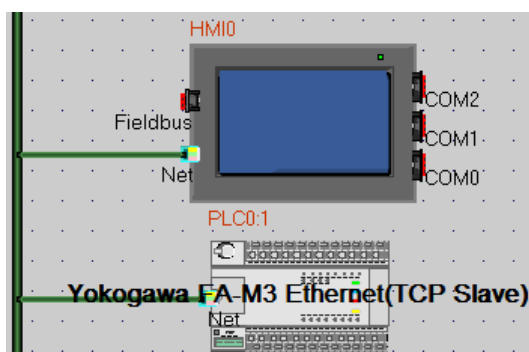

PLC setting

Use the switchees on the right side of Ethernet module for setting the External Device.

1. Set all condition setup switch off.
2. Set IP Address: 192.168.100.230.

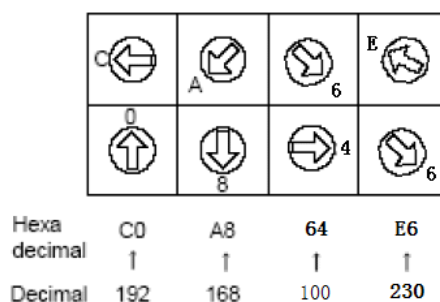


◎Supported Device

Device	Bit Address	Word Address	Format	Notes
Link Relay	L 1~256	-----	DDD	
Special Relay	M 1~256	-----	DDD	
Internal Relay	I 1~256	-----	DDDD	
Output Relay	Y (233~264)&(333~364)	-----	DDD	
Input Relay	X (201~232)&(301~332)	-----	DDD	Read only
Special Register	-----	Z_word 1~256	DDDD	
Link Register	-----	W_word 1~256	DDD	
Index Register	-----	V_word 1~64	DD	
File Register	-----	B_word 1~256	DD	
Data Register	-----	D_word 1~256	DDD	


◎Cable Diagram

RS232 communication cable


Yokogawa programming cable

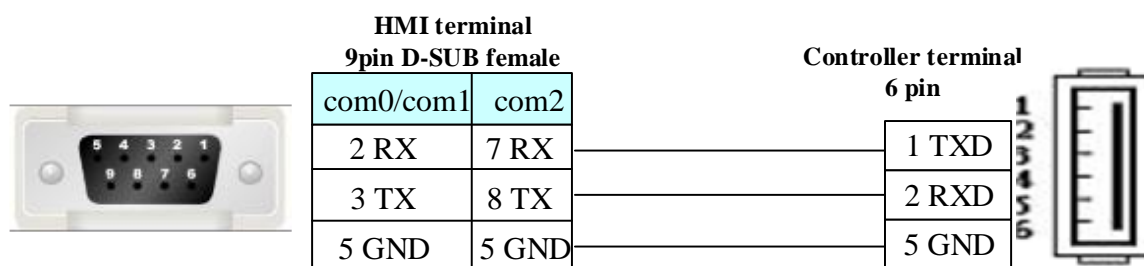

RS422 communication cable

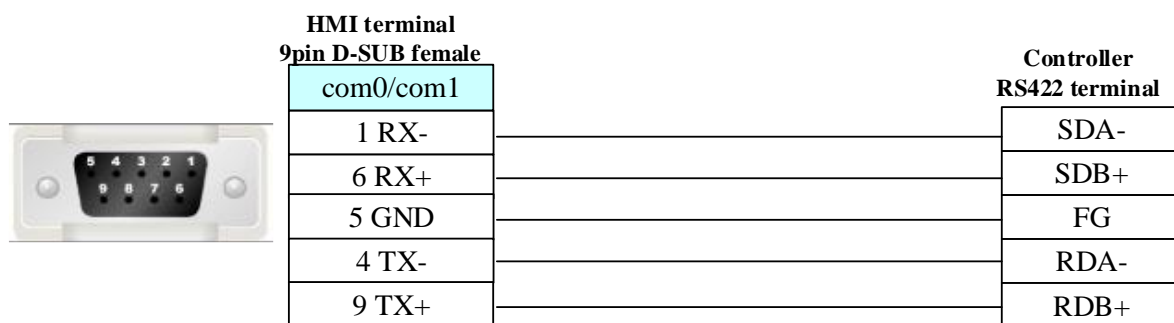

RS485 communication cable

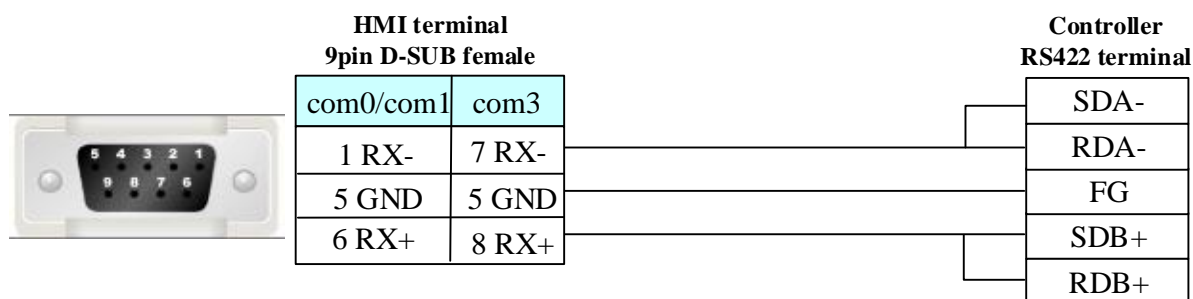

Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.101 YuDian AI

◎ Serial Communication

Series	CPU	Link Module	Driver
AI	AI-518	RS485 on the CPU unit	YuDian AI Single_Loop
	AI-701		
	AI-7048	RS485 on the CPU unit	YuDian AI 4_Loop


◎ System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
AI	AI-518	RS485 on the CPU unit	RS485	Setting	Your owner cable
	AI-701				
	AI-7048	RS485 on the CPU unit	RS485	Setting	Your owner cable

◎ Communication Setting

HMI Setting

Default communication: 9600, 8, none, 1; station: 1

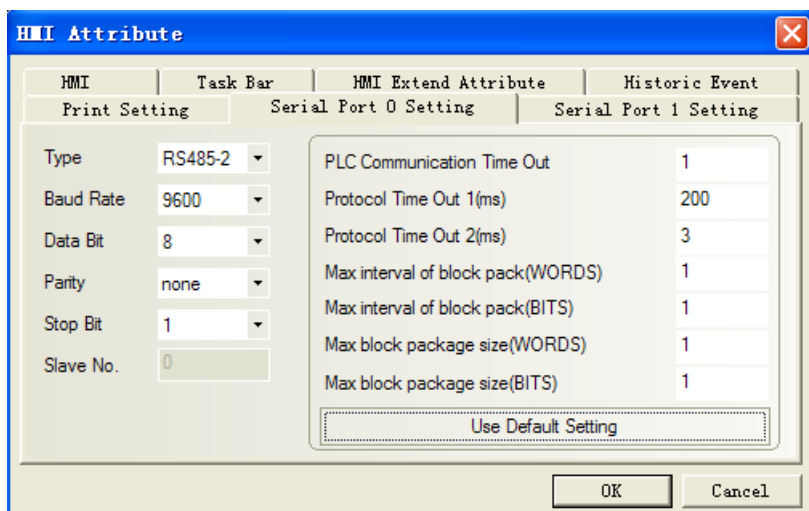

◎ Supported Device

YuDian AI Single_Loop

Device	Bit Address	Word Address (参数代号)	Format	Notes
HiAL	0	-----	D	Read only
LoAL	0	-----	D	Read only
dHAL	0	-----	D	Read only
dLAL	0	-----	D	Read only
orAL	0	-----	D	Read only
AL1	0	-----	D	Read only
AL2	0	-----	D	Read only
PV	-----	0	D	Read only
MV	-----	0	D	
SV	-----	0	D	
ALARM	-----	0	D	Read only
Reference	-----	86	DD	Address correspond to AI parameters code

NOTE:

- 1、When setting the parameter of ADDR, it match the PLC Station Number .
- 2、If connecting many devices, you should set different ADDR values.

YuDian AI 4_Loop

AI-7048

Device	Bit Address	Word Address (参数代号)	Format	Notes
HiAL	0.0-3.0	-----	D.D	Read only
LoAL	0.0-3.0	-----	D.D	Read only
dHAL	0.0-3.0	-----	D.D	Read only
dLAL	0.0-3.0	-----	D.D	Read only
orAL	0.0-3.0	-----	D.D	Read only
AL1	0.0-3.0	-----	D.D	Read only
AL2	0.0-3.0	-----	D.D	Read only

PV	-----	0.0-3.0	D.D	Read only
MV	-----	0.0-3.0	D.D	
SV	-----	0.0-3.0	D.D	
ALARM	-----	0.0-3.0	D.D	Read only
Reference	-----	0.0-3.086	D.DDD	Address correspond to AI parameters code

NOTE:

- 1、When setting the parameter of ADDR, it match the PLC Station Number.
- 2、If connecting many devices, you should set different ADDR values.
- 3、AI-7048 has 4 loops, so it occupies 4 address, For instance, Addr=5, address 5~8 were used by this controller, other controller can't use address 5~8.

EXAMPLE

Take HIAL for example, look up table and then know that HIAL parameters code is 1, so HIAL for 4 channels correspond to address in HMI should be Reference0.01, Reference1.01, Reference2.01, Reference3.01. If station number is 2, Reference0.01 is HIAL address of channel 2(station No. 2 + main address 0), Reference1.01 is HIAL address of channel 2(station No. 2 + main address 1), and so on.

Thereinto the setting of station number is very important, it denotes start address of the controller (viz. instrument address in instrument parameter), and main address just denotes 4 channels. When main address is 0, it denotes channel (station number+0)

TABLE

Table 1

Parameter Code	Adjustor		Inspection instrument	
	AI-518/708/808/518P/708P/808P	AI-519/719/719P	AI-501/701	AI-702M/704M/706M
0	SV /SteP	SV /SteP	N/A	N/A
1	HIAL	HIAL	HIAL	HIAL
2	LoAL	LoAL	LoAL	LoAL
3	dHAL	HdAL	HdAL	N/A
4	dLAL	LdAL	LdAL	N/A
5	dF	CHYS	AHYS	dF
6	Ctrl	Ctrl	N/A	N/A
7	M5	P	N/A	N/A
8	P	I	N/A	N/A
9	t	d	N/A	N/A
10	Ctl	Ctl	N/A	N/A
11	Sn	InP	InP	Sn
12	dIP	dPt	dPt	dIP
13	dIL	SCL	SCL	dIL
14	dIH	SCH	SCH	dIH
15	ALP	AOP	AOP	ALP

16	Sc	Scb	Scb	Sc
17	OP1	OPt	OPt	OPn
18	oPL	OPL	N/A	oPL
19	oPH	OPH	N/A	oPH
20	CF	AF	N/A	Cn
21	Feature codes/Program control words(Run:0 Pause:4 Stop:12)	Feature codes/Program control words(Run:0 Pause:4 Stop:12)	Feature codes(the same to SV, and it can be modified)	Feature codes
22	Add. (R/W)	Add. (R/W)	Add. (R/W)	Add. (R/W)
23	dL	FILt	FILt	dL
24	run	A-M	N/A	nonc
25	Loc	Loc	Loc	Loc
26	C01(set the MV when writing AI-808)	C01(set the MV when writing AI-519/719)		
27	t01	t01		
28	C02	C02		
29	t02	t02		
30	C03	C03		
31	t03	t03		
32	C04	C04		
33	t04	t04		
34	C05	C05		
35	t05	t05		
36	C06	C06		
37	t06	t06		
38	C07	C07		
39	t07	t07		
40	C08	C08		
41	t08	t08		
42	C09	C09		
43-85	t09-C30	t09-C30		
86	Run time of current program	Run time of current program		

Table 2


Parameter Code		Flow totalizer	AI-301M	4 loop PID adjustor
DEC	HEX	(AI-708H/Y/808H)	Frequency measurement/switching value	AI-7048
0	00H	SV	SV	SP
1	01H	FHIA	HIAL	HIAL

2	02H	FloA	LoAL	LoAL
3	03H	SPE	dHAL	
4	04H	Act	dLAL	
5	05H	Sn	dF	AHYS
6	06H	FSc	Ctrl	At
7	07H	PdIH	M5	P
8	08H	CSc	P	I
9	09H	CdIH	t	d
10	0AH	Cut	Ctl	
11	0BH	FdIH	Frd	InP
12	0CH	FdIP	dIP	dPt
13	0DH	PA	dIL	SCL
14	0EH	Po	dIH	SCH
15	0FH	Co	ALP	AOP
16	10H	Frd	switch state	Scb
17	11H	CF	oP1	
18	12H	bC	OPL	
19	13H	IoL	OPH	OPH
20	14H	FoH	CF	AF
21	15H	Feature codes	Feature codes	Feature codes
22	16H	Add. (R/W)	Add. (R/W)	Add. (R/W)
23	17H	IoH	dL	FILt
24	18H	FdL	run	Nonc
25	19H	Loc	Loc	Loc
26	1AH	N/A	MV	Cn
27	1BH	FdF		
28	1CH	CHIA		
29	1DH	CLoA		
30	1EH	PHIA		
31	1FH	PLoA		
32	20H	ALP		
33	21H	FSb		
34	22H	CdIP		
35	23H	PdIP		
36	24H	PSc		
37	25H	CLn		
38	26H	FLJH		
39	27H	FLJL		
40	28H	EJH		
41	29H	EJL		
42	2AH	Mass accumulation value of zero position		

43-85	2BH-55H			
86	56H			


◎ Cable Diagram

RS485 communication cable

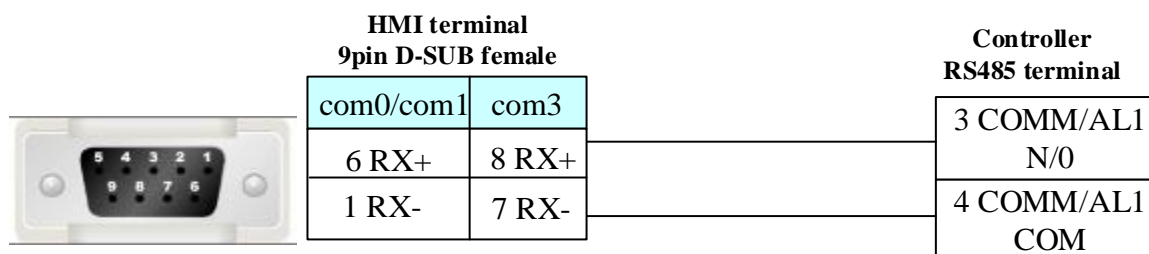

RS232 communication cable

Need to use *RS-232 to RS-422/485* converter

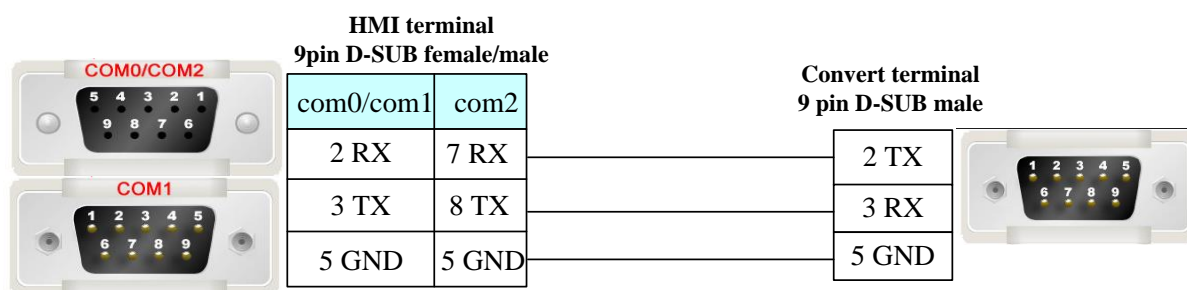

4.102 ZiGuang Ethernet

◎ Network Communication



Series	CPU	Link Module	Driver
ZiGuang Ethernet	UNIS-600C	Ethernet	ZiGuang Ethernet Slave

◎ Network System configuration

Series	CPU	Link Module	COMM Type	Parameter	Cable
ZiGuang Ethernet	UNIS-600C	Ethernet	Ethernet	Setting	Your owner cable

◎ Ethernet Communication Setting


HMI Setting

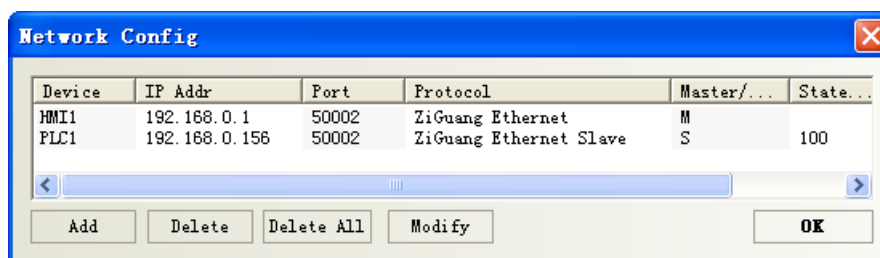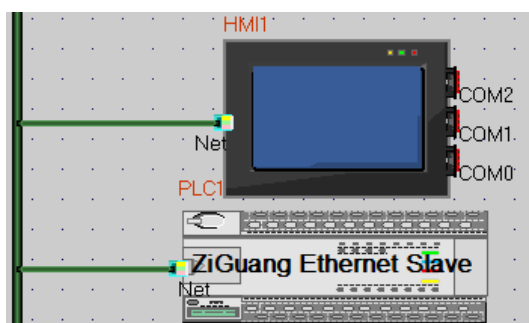



PLC Setting

1. Settings in the software as follows:


(1) System basic configuration: Set the controller number, IP address, and the PC IP address.

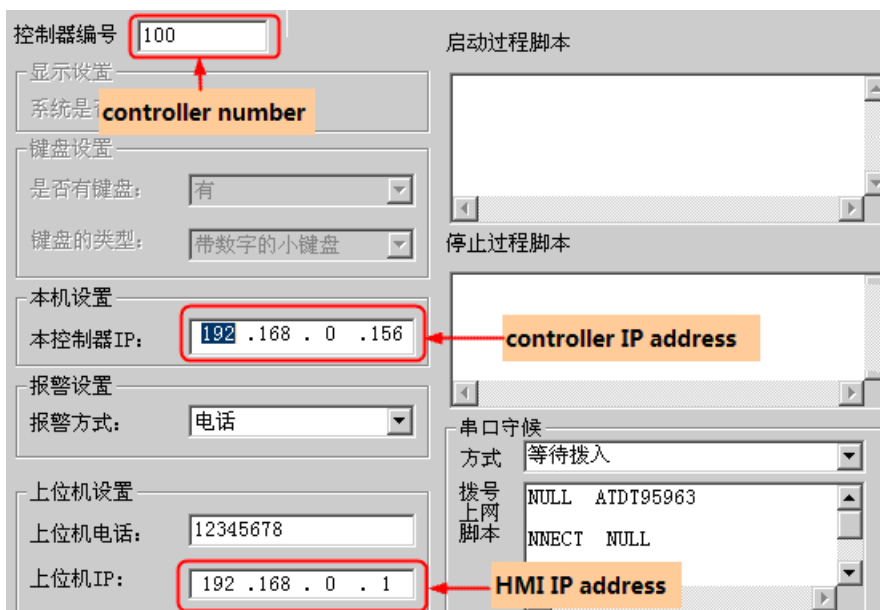


(2) Configuration of data tag: set the parameters according to the actual I/O card. The PLC register address should be the same as the ID number of the data tag.

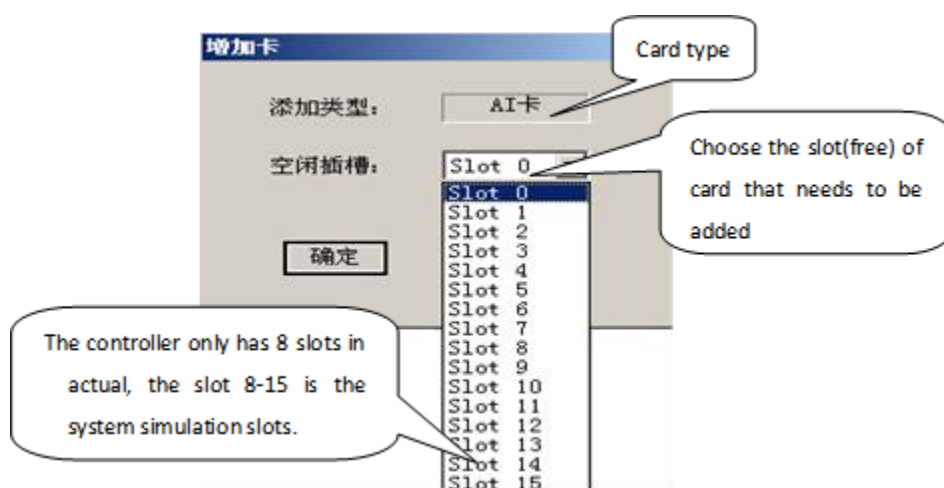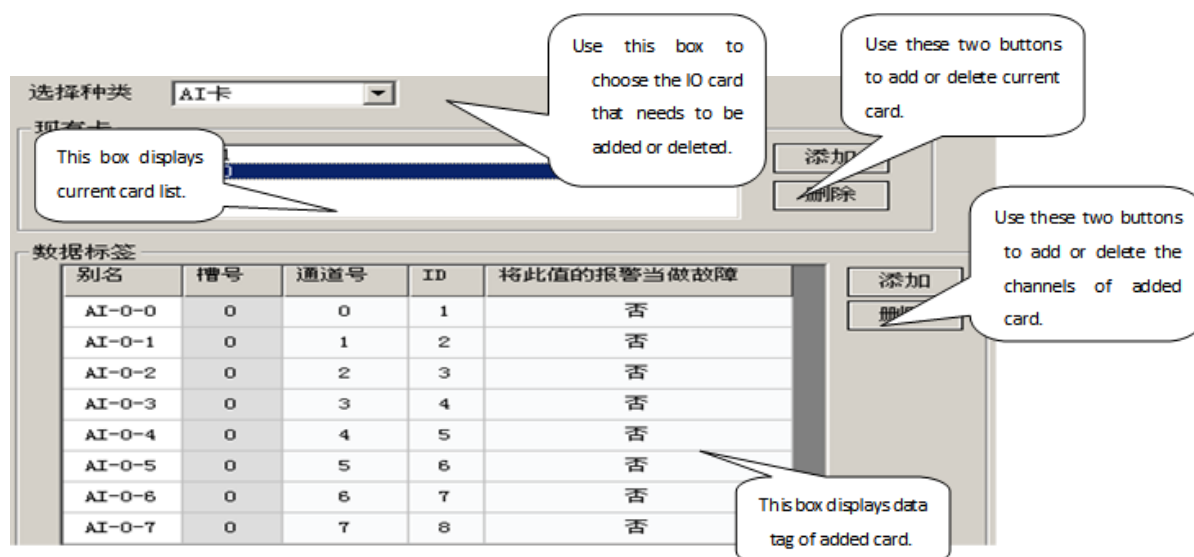


(3) Update and get configuration: After finish the system basic configuration and data tag configuration, choose the **Update Configuration** in the **Tool** menu or click the icon to update the configurations in the controller. Choose the **Get Configuration** in the **Tool** menu or click the icon to get the configuration in the controller.

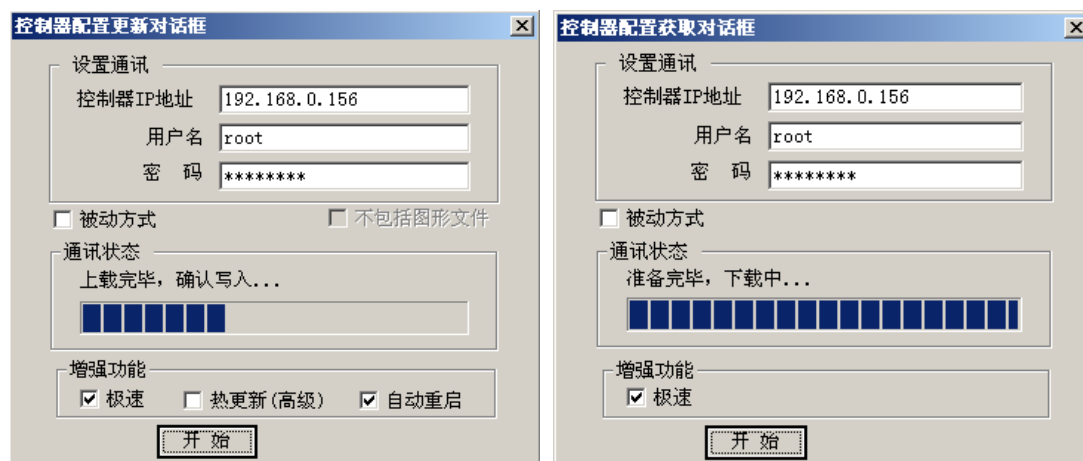

(4) Click  icon after updating controller configuration, then it will pop up WinEmu window, real-time control of script debugging window and none-real time control of script debugging window.

WinEmu window monitors the internal data of controller, real-time control of script debugging window and none-real time control of script debugging window provide environment for customer secondary development.

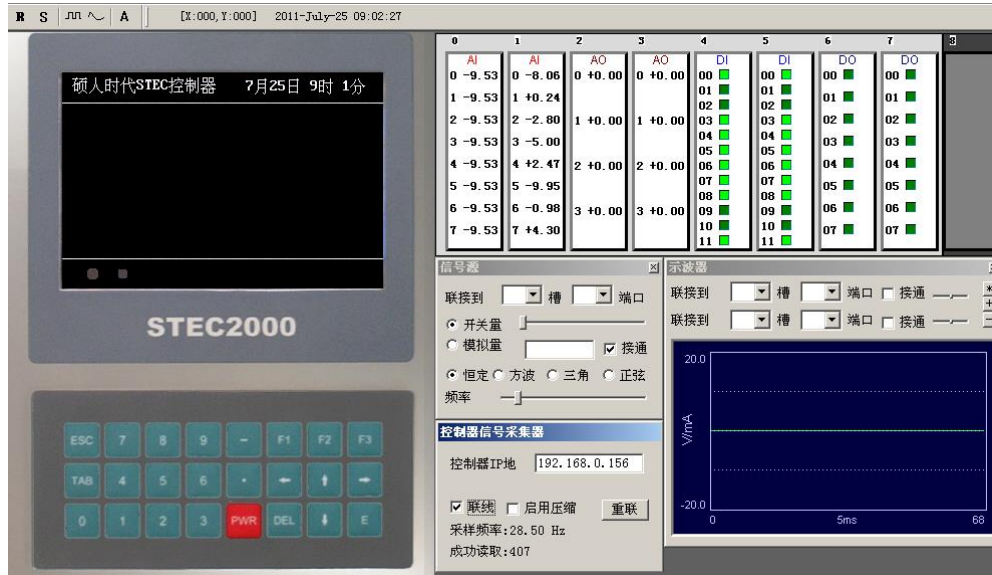

◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
Bool_Read	Bool_Read 0-65535	-----	DDDDD	Read only
Bool_Write	Bool_Write 0-65535	-----	DDDDD	Write only
Float_Read	-----	Float_Read 0-65535	DDDDD	Read only
Int_Read	-----	Int_Read 0-65535	DDDDD	Read only
Float_Write	-----	Float_Write 0-65535	DDDDD	Write only
Int_Write	-----	Int_Write 0-65535	DDDDD	Write only
	-----	Time 0-2	D	

NOTE: The name and address of registers in HMI must be same as register in Zigang controller when defining in HMI.

◎ Cable Diagram

Ethernet communication protocol cable

Cross-connection or crossover network cable can be used as communication cable via the hub

Refer to [3.3 Download by Network Ethernet](#) for method of making connection cable.

4.103 ZHIMEI CB920X

◎ Serial Communication

Series	CPU	Link Module	Driver
--------	-----	-------------	--------

CB920X	CB920X-10	RS485 on the CPU unit	ZHIMEI CB920X
--------	-----------	-----------------------	---------------

◎ System configuration


Series	CPU	Link Module	Connect Type	Parameter	Cable
CB920X	CB920X-10	RS485 on the CPU unit	RS485	Setting	Your owner cable

◎ Communication Setting

HMI Setting

Default communication: 9600, 7, even, 1; station: 1

RS485

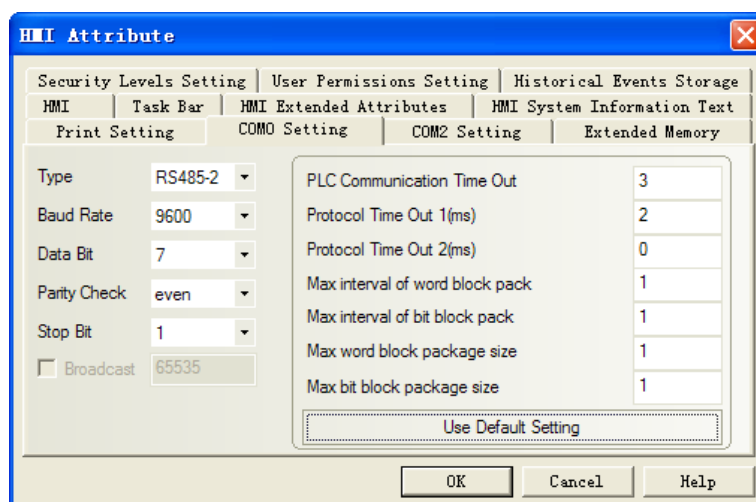

PLC Setting


Please refer to the manual of controller.

◎ Supported Device

Device	Bit Address	Word Address	Format	Notes
	-----	FUNC1-FUNC42	DD	
	-----	READ0	D	

注意

1. The controller station can set 1~99, don't support station 0.
2. The FUNC parameter cannot be arbitrarily set, please refer to the controller manual. If the settings in the HMI value is not in the allowed range, it will retain a valid value
3. FUNC registers, when in use, select "Hex data type".
4. Weighing register READ is read-only register, and only 0 address is effective. When in use, select the text display component, 4 words.

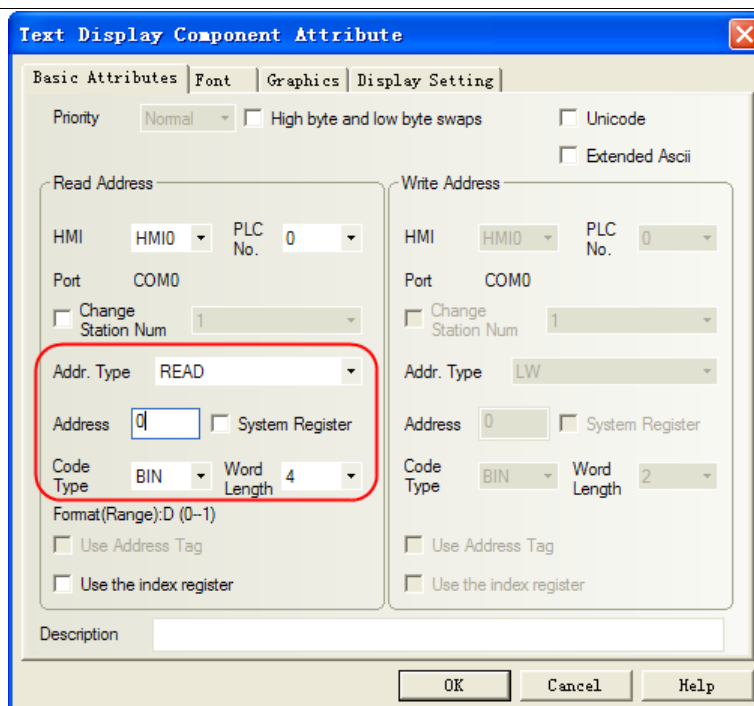

5. Suggest place the FUNC and READ registers in the different configuration window, because the FUNC is the functional setting register, when in a functional setting condition, the RS485 interface will always send instructions, and you cannot read the weight register.

© Cable Diagram

RS485

